

Switching Regulator IC for Buck Converter

Current Mode Control w/ 40V/8A MOSFET


■ GENERAL DESCRIPTION

The **NJW4158** is a current mode controlled buck converter with **40V/8A MOSFET** that operates wide input range from 6V to 35V. The **NJW4158** can realize a buck converter with minimal external components that it includes compensation circuit.


The **NJW4158** is able to stable startup by soft start function. Also, it has over current protection and thermal shutdown circuit.

It is suitable for supplying power to an Office Automation Equipment, Industrial Instrument, Amusement, Wireless Base Station Applications and so on.

■ PACKAGE OUTLINE



1 2 3 4



NJW4158F

NJW4158FL


PIN CONFIGURATION

1. V^+
2. SW
3. GND
4. IN-

■ FEATURES

- Current Mode Control
- Wide Input Range: 6V to 40V
- Switching Current 10.5A min.
- PWM Control
- Built-in Compensation Circuit
- Oscillating Frequency: 150kHz typ.
- Soft Start Function 10ms typ.
- UVLO (Under Voltage Lockout)
- Over Current Protection
- Thermal Shutdown Function
- Package Outline TO-220F-4pin

■ BLOCK DIAGRAM

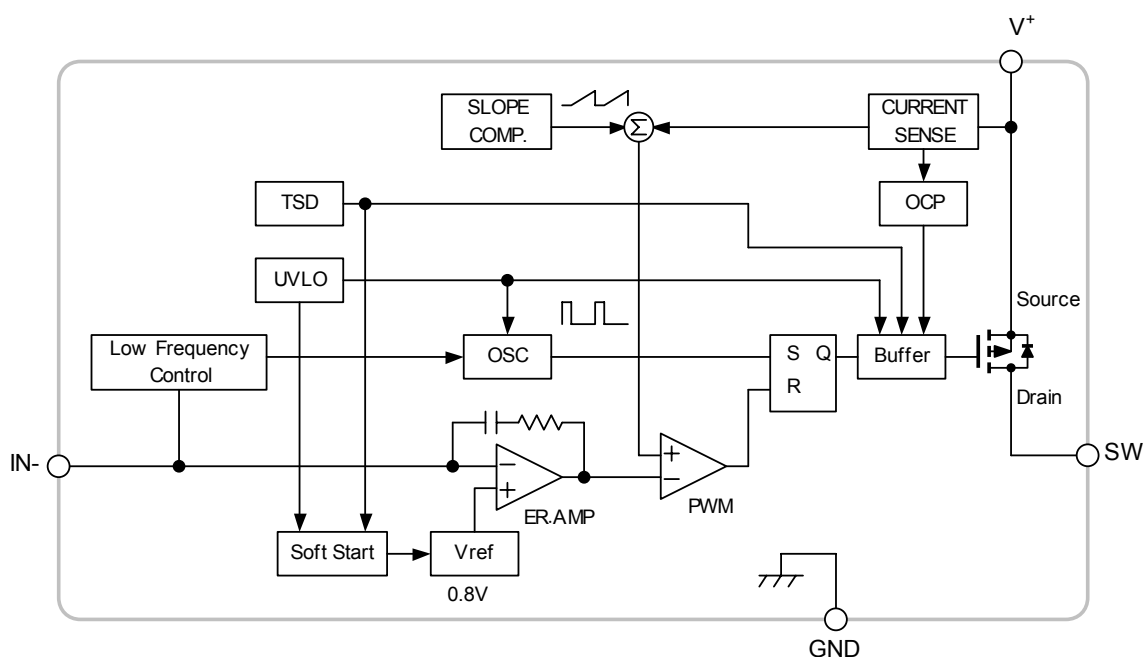

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Supply Voltage	V^+	+45	V
Drain – Source pin Voltage	V_{DSS}	-50	V
IN- pin Voltage	V_{IN-}	-0.3 to +6	V
Power Dissipation	P_D	2.1 (Device itself)	W
Junction Temperature Range	T_j	-40 to +150	°C
Operating Temperature Range	T_{opr}	-40 to +85	°C
Storage Temperature Range	T_{stg}	-40 to +150	°C


■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V^+	6	12	40	V
IN- pin Voltage	V_{IN-}	0	–	5.5	V

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	THERMAL RESISTANCE	UNIT
Junction-to-Ambient Temperature	θ_{ja}	59.5	°C/W
Junction-to-Case	ψ_{jt}	7.5	°C/W

■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

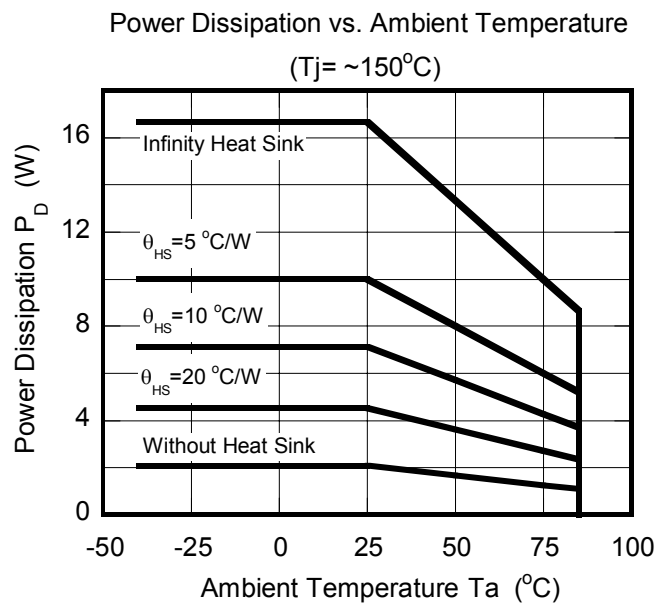

■ ELECTRICAL CHARACTERISTICS

(Unless otherwise noted, $V^+=12V$, $T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
-----------	--------	----------------	------	------	------	------

Under Voltage Lockout Block

ON Threshold Voltage	V_{T_ON}	$V^+=L \rightarrow H$	5.2	5.4	5.6	V
OFF Threshold Voltage	V_{T_OFF}	$V^+=H \rightarrow L$	4.4	4.6	4.8	V
Hysteresis Voltage	V_{HYS}		400	800	—	mV

Soft Start Block

Soft Start Time	T_{SS}	$V_B=0.75V$	5	10	20	ms
-----------------	----------	-------------	---	----	----	----

Oscillator Block

Oscillation Frequency	f_{OSC}	$V_{IN}=0.7V$	135	150	165	kHz
Oscillation Frequency (Low Frequency Control)	f_{OSC_LOW}	$V_{IN}=0.4V$	—	50	—	kHz
Oscillation Frequency deviation (Supply voltage)	f_{DV}	$V^+=6V$ to $40V$	—	1	—	%
Oscillation Frequency deviation (Temperature)	f_{DT}	$T_a=-40^\circ C$ to $+85^\circ C$	—	5	—	%

Error Amplifier Block

Reference Voltage	V_B		-1.0%	0.8	+1.0%	V
Input Bias Current	I_B		-0.1	—	+0.1	μA

PWM Compare Block

Maximum Duty Cycle	$M_{AX}D_{UTY}$	$V_{IN}=0.7V$	85	90	—	%
Minimum ON Time	T_{ON_min}		—	660	850	ns

Over Current Protection

Cool Down Time	t_{COOL}		—	24	—	ms
----------------	------------	--	---	----	---	----

Output Block


Output ON Resistance	R_{ON}	$I_{SW}=8A$	—	55	80	$m\Omega$
Switching Current Limit	I_{LIM}		10.5	12.5	15	A
Switching Current Limit 2	I_{LIM2}	$V^+=30V$	10.5	12.5	15	A
Switching Leak Current	I_{LEAK}	$V^+=45V$, $V_{SW}=0V$	—	—	20	μA

General Characteristics


Quiescent Current	I_{DD}	$R_L=no\ load$, $V_{IN}=0.7V$	—	7	9.5	mA
-------------------	----------	--------------------------------	---	---	-----	----

NJW4158

■ MARK SPECIFICATION

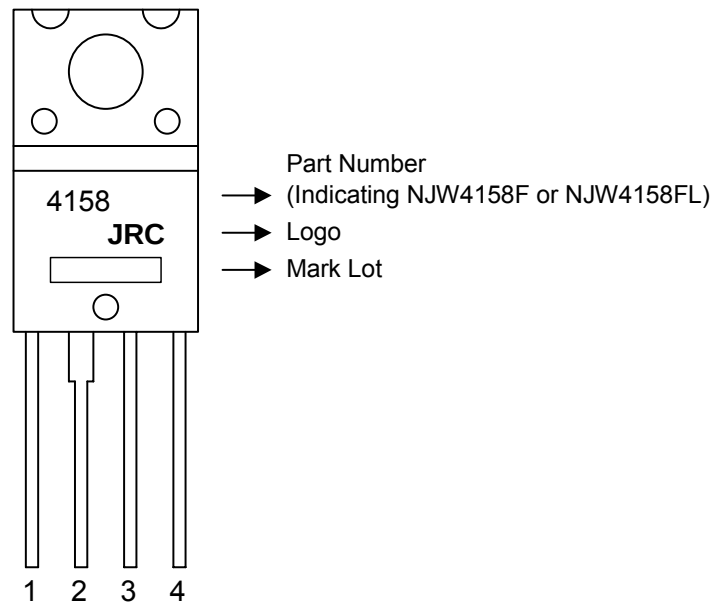


■ TYPICAL APPLICATIONS

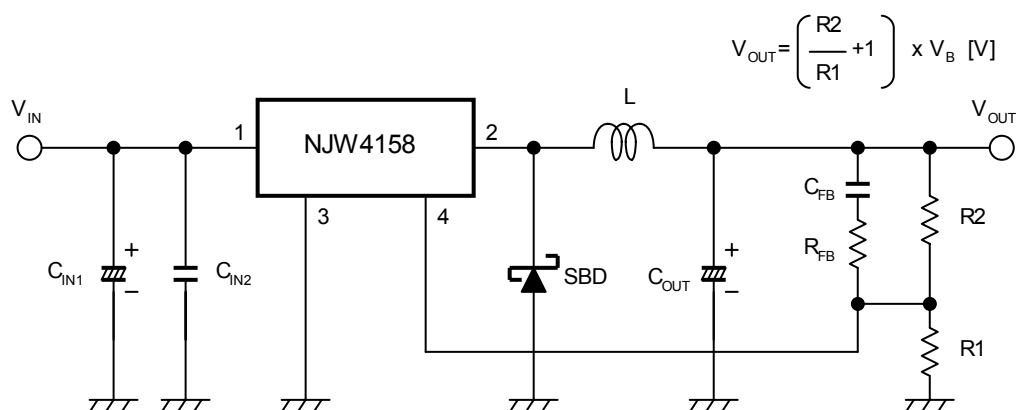


*When large current flows, V_{IN} line may be unstable. Therefore, you should put C_{IN} on near IC as much as possible.

■ TYPICAL CHARACTERISTICS


Oscillation Frequency vs. Supply Voltage
($V_{IN}=0.7V$, $T_a=25^\circ C$)

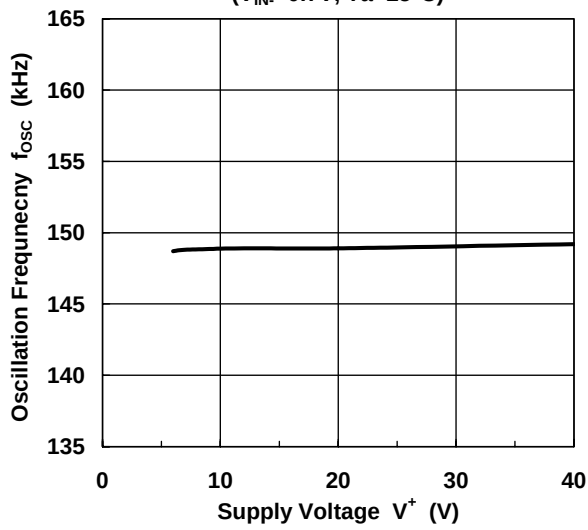

Reference Voltage vs. Supply Voltage
($T_a=25^\circ C$)

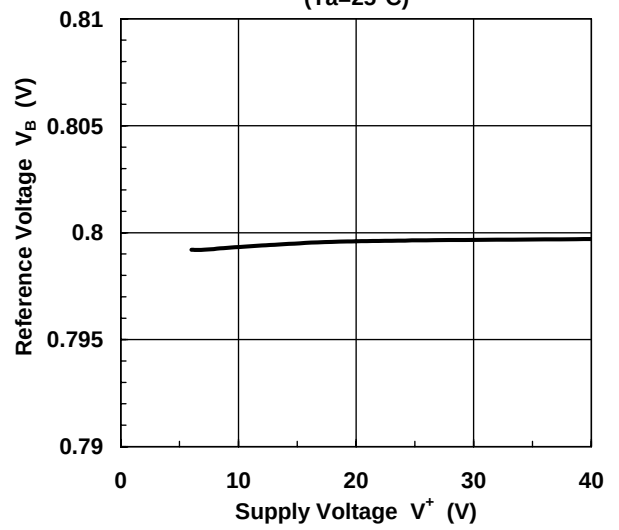


Quiescent Current vs. Supply Voltage
($R_L=no\ load$, $V_{IN}=0.7V$, $T_a=25^\circ C$)

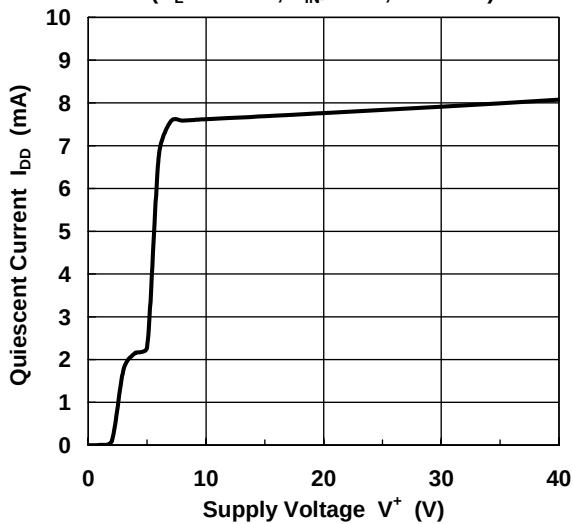


■ TYPICAL CHARACTERISTICS


Oscillation Frequency vs. Temperature
($V^+=12V$, $V_{IN}=-0.7V$)

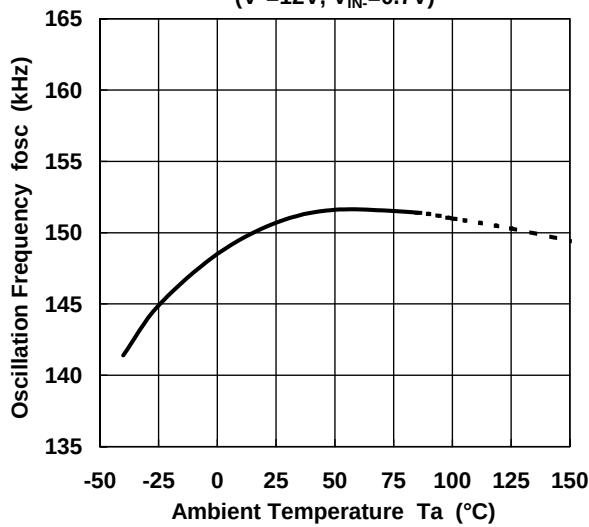


Reference Voltage vs. Temperature
($V^+=12V$)

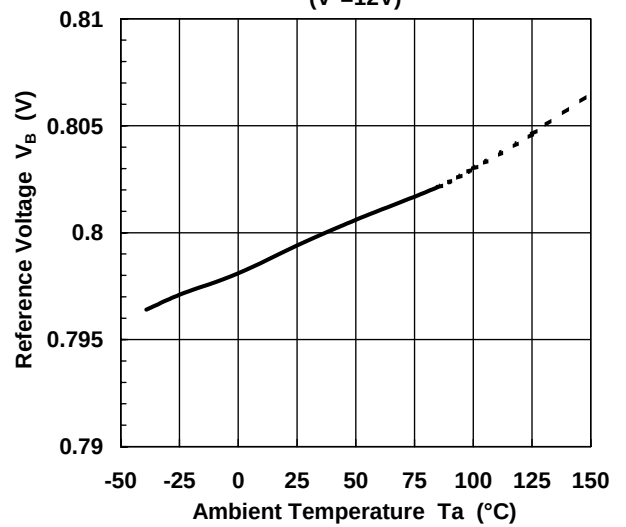


Switching Current Limit vs. Temperature
($V^+=12V$)

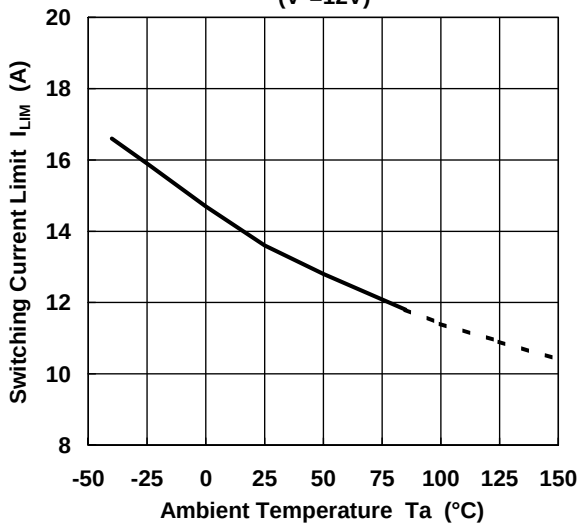


Switching Current Limit 2 vs. Temperature
($V^+=30V$)

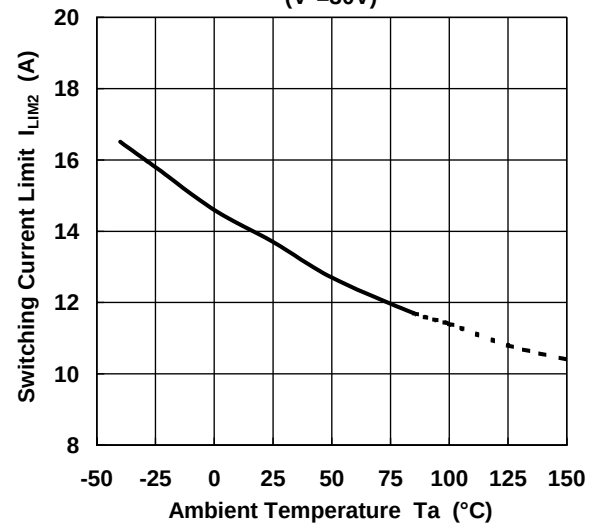






Output ON Resistance vs. Temperature
($I_{SW}=8A$)

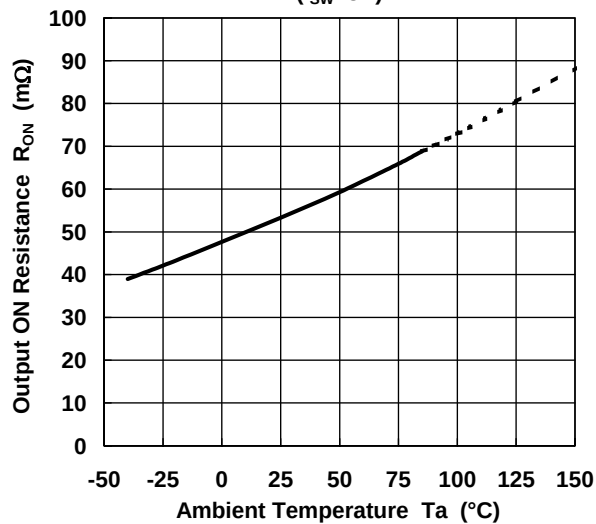

Switching Leak Current vs. Temperature
($V^+=45V$, $V_{SW}=0V$)

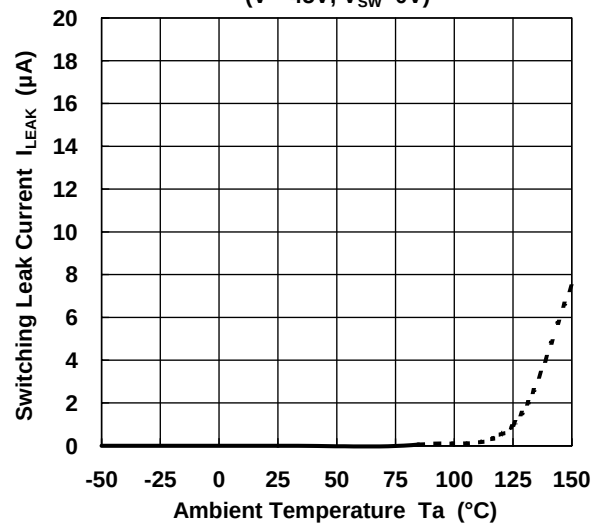

■ TYPICAL CHARACTERISTICS

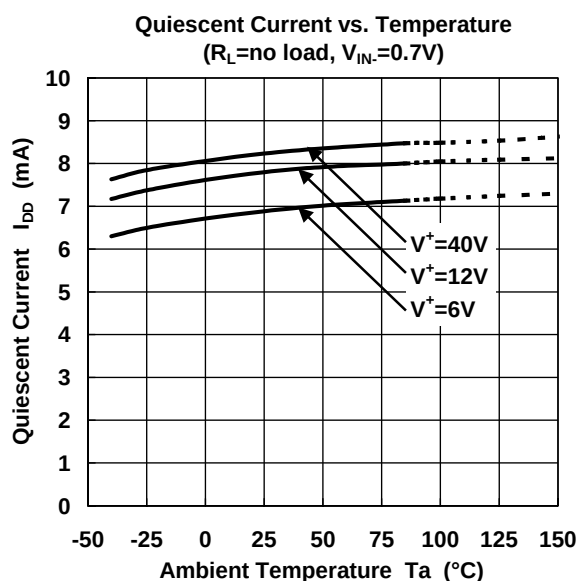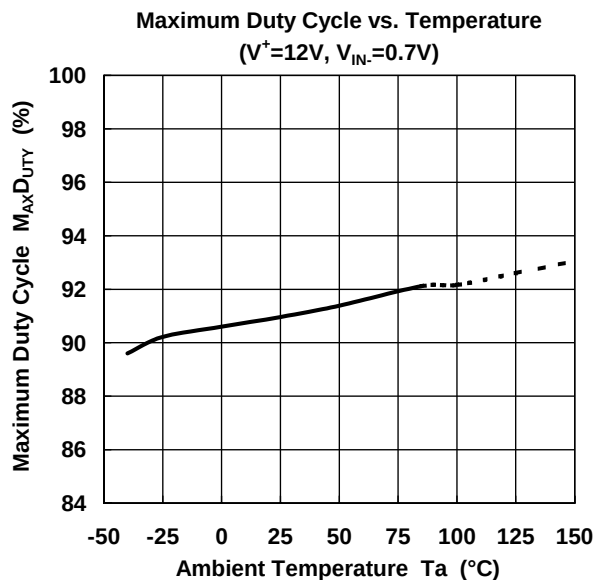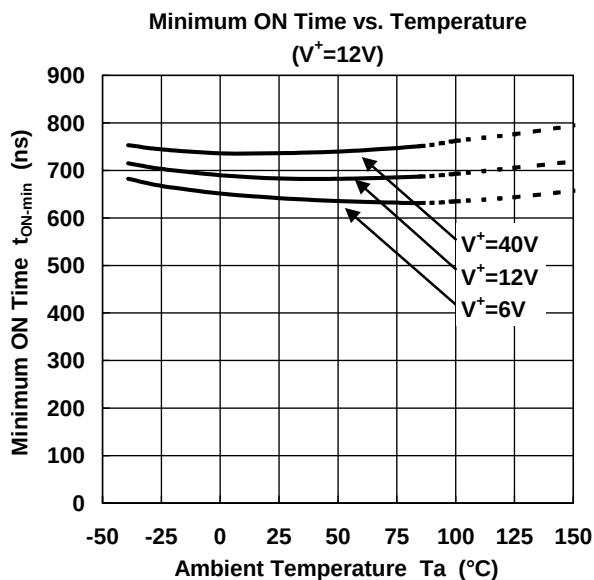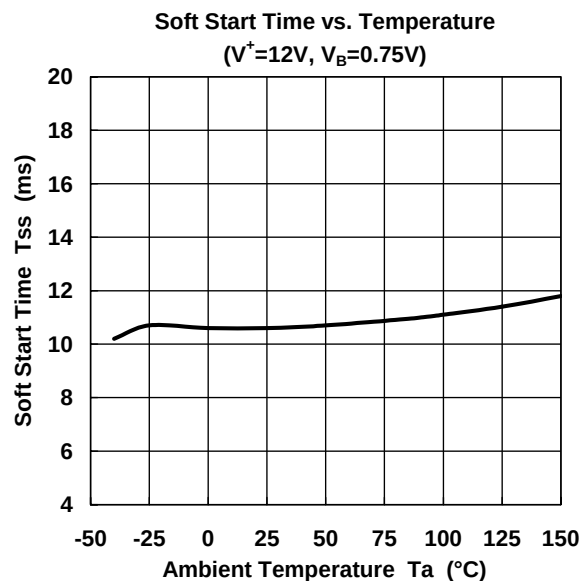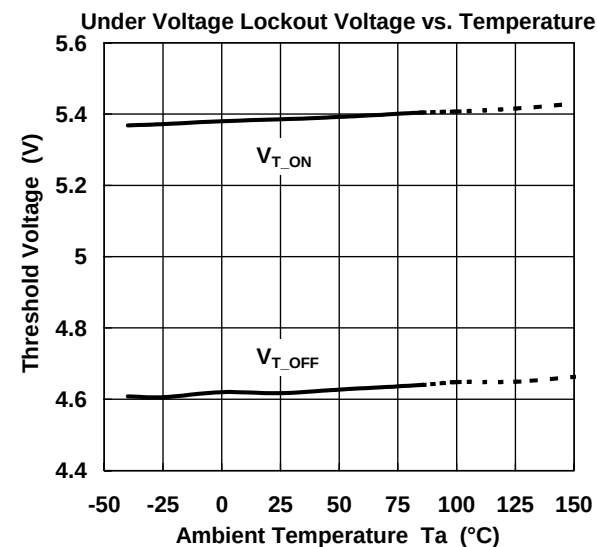

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJW4158F](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.