

**VIP-2/SC/FLK14/PLC**

Order No.: 2315214

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2315214>

VARIOFACE interface module for 8 channels

**Commercial data**

EAN	4046356312967
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.0973 KG
Catalog page information	Page 228 (IF-2009)

**Product notes**WEEE/RoHS-compliant since:  
09/02/2008

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Nominal voltage $U_N$	60 V AC/DC
Max. current carrying capacity per branch	1 A
Max. total current of voltage supply	2 A
Number of positions	14

Width	39.8 mm
Height	56 mm
Depth	65.5 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	Field level
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3
Connection 2	Control system level
Number of connections	1
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14

#### Certificates / Approvals



Certification

CSA, CUL, UL

**CSA**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
AWG/kcmil	30-12

**CUL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
AWG/kcmil	30-12

**UL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
AWG/kcmil	30-12

**Accessories**

Item	Designation	Description
<b>Cable/conductor</b>		
2314040	FLK 14-EZ-DR-HF/...	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: Variable
2295729	FLK 14/EZ-DR/ 30/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 0.3 m
2288901	FLK 14/EZ-DR/ 50/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 0.5 m
2296977	FLK 14/EZ-DR/ 50/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 0.5 m
2288914	FLK 14/EZ-DR/ 100/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 1 m
2296980	FLK 14/EZ-DR/ 100/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 1 m
2288927	FLK 14/EZ-DR/ 150/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 1.5 m
2288930	FLK 14/EZ-DR/ 200/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 2 m
2297002	FLK 14/EZ-DR/ 200/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 2 m

2288943	FLK 14/EZ-DR/ 250/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 2.5 m
2288956	FLK 14/EZ-DR/ 300/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 3 m
2299013	FLK 14/EZ-DR/ 300/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 3 m
2288969	FLK 14/EZ-DR/ 350/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 3.5 m
2288972	FLK 14/EZ-DR/ 400/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 4 m
2299026	FLK 14/EZ-DR/ 400/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 4 m
2290847	FLK 14/EZ-DR/ 450/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 4,5 m
2290834	FLK 14/EZ-DR/ 500/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 5 m
2290850	FLK 14/EZ-DR/ 550/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 5,5 m
2290863	FLK 14/EZ-DR/ 600/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 6 m
2299039	FLK 14/EZ-DR/ 600/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 6 m
2299563	FLK 14/EZ-DR/ 800/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 8 m
2299042	FLK 14/EZ-DR/ 800/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 8 m
2299576	FLK 14/EZ-DR/1000/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 10 m
2299055	FLK 14/EZ-DR/1000/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 10 m
2305952	FLK 14/EZ-DR/HF/ 50/KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 0.5 m
2305965	FLK 14/EZ-DR/HF/ 100/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 1 m


2305978	FLK 14/EZ-DR/HF/ 150/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 1.5 m
2305981	FLK 14/EZ-DR/HF/ 200/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 2 m
2305994	FLK 14/EZ-DR/HF/ 250/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable. Length of cable: 2.5 m
2304759	FLK 14/EZ-DR/HF/ 300/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 3 m
2304762	FLK 14/EZ-DR/HF/ 400/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 4 m
2304717	FLK 14/EZ-DR/HF/ 500/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 5 m
2306003	FLK 14/EZ-DR/HF/ 600/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 6 m
2314011	FLK 14/EZ-DR/HF/ 700/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 7 m
2314024	FLK 14/EZ-DR/HF/ 800/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 8 m
2314037	FLK 14/EZ-DR/HF/1000/ KONFEK	Assembled <b>halogen-free</b> round cable, with two 14-pos. socket strips (1:1 connection), to transfer 8 channels, for example. Halogen-free refers exclusively to the 14-pos. cable.Length of cable: 10 m
2295046	FLK EZ-DR-S.../.../...	Round cable, with preassembly, shielded, variable cable length
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length
<b>General</b>		
5147777	BLUEMARK X1	Printers with UV technology for printing plastic labels in UniCard format.

**Marking**

0818111	UC-TM 4	UniCard sheets, for labeling terminal blocks using a Zack marker strip groove, 120-section, can be labeled with BLUEMARK X1 and CMS-P1-PLOTTER, color: White
0818085	UC-TM 6	UniCard sheets, for labeling terminal blocks using Zack marker strip groove, 80-section, labeling with BLUEMARK X1 and CMS-P1-PLOTTER, color: White
0811862	ZB 22:UNBEDRUCKT	Zack marker strip, unprinted: 4-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 22 mm, color: White
0809793	ZB 5,08:UNBEDRUCKT	Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks per pack

**Diagrams/Drawings**

Circuit diagram

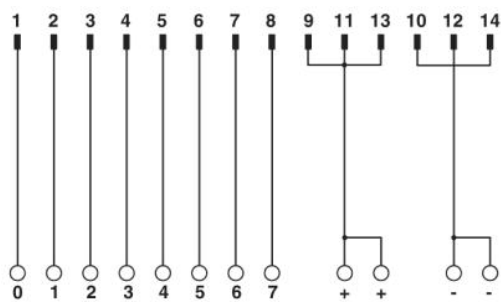

VIP-2/SC/FLK14/PLC connection scheme

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.