

### FEATURES

- Adjustable output common-mode voltage
- Low harmonic distortion
  - 94 dBc SFDR @ 5 MHz
  - 85 dBc SFDR @ 20 MHz
  - 3 dB bandwidth of 320 MHz,  $G = +1$
- Fast settling to 0.01% of 16 ns
- Fast overdrive recovery of 4 ns
- Low input voltage noise of 5 nV/ $\sqrt{\text{Hz}}$
- Low power 90 mW on 5 V

### ENHANCED PRODUCT FEATURES

- Supports defense and aerospace applications (AQEC)
- Extended temperature range  $-55^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$
- Controlled manufacturing baseline
- One assembly/test site
- One fabrication site
- Enhanced product change notification
- Qualification data available on request

### APPLICATIONS

- ADC drivers
- Single-ended-to-differential converters
- IF and baseband gain blocks
- Differential buffers
- Line drivers

### GENERAL DESCRIPTION

The AD8138-EP is a major advancement over op amps for differential signal processing. The AD8138-EP can be used as a single-ended-to-differential amplifier or as a differential-to-differential amplifier. The AD8138-EP is as easy to use as an op amp and greatly simplifies differential signal amplification and driving. Manufactured on Analog Devices, Inc., proprietary XFCB bipolar process, the AD8138-EP has a –3 dB bandwidth of 320 MHz and delivers a differential signal with the lowest harmonic distortion available in a differential amplifier. The AD8138-EP has a unique internal feedback feature that provides balanced output gain and phase matching, suppressing even order harmonics. The internal feedback circuit also minimizes any gain error that would be associated with the mismatches in the external gain setting resistors.

### PIN CONFIGURATION




Figure 1.

### TYPICAL APPLICATION CIRCUIT

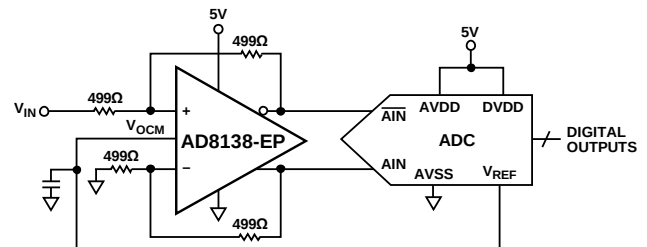


Figure 2.

The AD8138-EP's differential output helps balance the input to the differential ADCs, maximizing the performance of the ADC.

The AD8138-EP eliminates the need for a transformer with high performance ADCs, preserving the low frequency and dc information. The common-mode level of the differential output is adjustable by a voltage on the  $V_{\text{OCM}}$  pin, easily level-shifting the input signals for driving single-supply ADCs. Fast overload recovery preserves sampling accuracy.

The AD8138-EP distortion performance makes it an ideal ADC driver for communication systems, with distortion performance good enough to drive state-of-the-art 10-bit to 16-bit converters at high frequencies. The AD8138-EP's high bandwidth and IP3 also make it appropriate for use as a gain block in IF and baseband signal chains. The AD8138-EP offset and dynamic performance make it well suited for a wide variety of signal processing and data acquisition applications. The AD8138-EP is available in the MSOP package for operation over  $-55^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$  temperatures.

Full details about this enhanced product are available in the [AD8138](#) data sheet, which should be consulted in conjunction with this data sheet.

#### Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

|                                               |   |                                                  |    |
|-----------------------------------------------|---|--------------------------------------------------|----|
| Features .....                                | 1 | V <sub>OCM</sub> to ±OUT Specifications.....     | 6  |
| Enhanced Product Features .....               | 1 | Absolute Maximum Ratings .....                   | 7  |
| Applications.....                             | 1 | Thermal Resistance .....                         | 7  |
| General Description .....                     | 1 | Maximum Power Dissipation .....                  | 7  |
| Pin Configuration.....                        | 1 | ESD Caution.....                                 | 7  |
| Typical Application Circuit .....             | 1 | Maximum Output Voltage Swing.....                | 8  |
| Revision History .....                        | 2 | Pin Configuration and Function Descriptions..... | 9  |
| Specifications.....                           | 3 | Outline Dimensions .....                         | 10 |
| ±D <sub>IN</sub> to ±OUT Specifications.....  | 3 | Ordering Guide .....                             | 10 |
| V <sub>OCM</sub> to ±OUT Specifications ..... | 4 |                                                  |    |
| ±D <sub>IN</sub> to ±OUT Specifications.....  | 5 |                                                  |    |

REVISION HISTORY

4/10—Revision 0: Initial Version

## SPECIFICATIONS

### $\pm D_{IN}$ TO $\pm OUT$ SPECIFICATIONS

At 25°C,  $V_S = \pm 5\text{ V}$ ,  $V_{OCM} = 0\text{ V}$ ,  $G = +1$ ,  $R_{L, dm} = 500\ \Omega$ , unless otherwise noted. All specifications refer to single-ended input and differential outputs, unless otherwise noted.

Table 1.

| Parameter                         | Conditions                                                                      | Min  | Typ          | Max  | Unit                         |
|-----------------------------------|---------------------------------------------------------------------------------|------|--------------|------|------------------------------|
| <b>DYNAMIC PERFORMANCE</b>        |                                                                                 |      |              |      |                              |
| –3 dB Small Signal Bandwidth      | $V_{OUT} = 0.5\text{ V p-p}$ , $C_F = 0\text{ pF}$                              | 290  | 320          |      | MHz                          |
|                                   | $T_{MIN}$ to $T_{MAX}$ <sup>1</sup>                                             | 256  |              |      | MHz                          |
|                                   | $V_{OUT} = 0.5\text{ V p-p}$ , $C_F = 1\text{ pF}$                              |      | 225          |      | MHz                          |
| Bandwidth for 0.1 dB Flatness     | $V_{OUT} = 0.5\text{ V p-p}$ , $C_F = 0\text{ pF}$                              |      | 30           |      | MHz                          |
| Large Signal Bandwidth            | $V_{OUT} = 2\text{ V p-p}$ , $C_F = 0\text{ pF}$                                |      | 265          |      | MHz                          |
| Slew Rate                         | $V_{OUT} = 2\text{ V p-p}$ , $C_F = 0\text{ pF}$                                |      | 1150         |      | V/ $\mu\text{s}$             |
| Settling Time                     | 0.01%, $V_{OUT} = 2\text{ V p-p}$ , $C_F = 1\text{ pF}$                         |      | 16           |      | ns                           |
| Overdrive Recovery Time           | $V_{IN} = 5\text{ V}$ to $0\text{ V}$ step, $G = +2$                            |      | 4            |      | ns                           |
| <b>NOISE/HARMONIC PERFORMANCE</b> |                                                                                 |      |              |      |                              |
| Second Harmonic                   | $V_{OUT} = 2\text{ V p-p}$ , 5 MHz, $R_{L, dm} = 800\ \Omega$                   |      | –94          |      | dBc                          |
|                                   | $V_{OUT} = 2\text{ V p-p}$ , 20 MHz, $R_{L, dm} = 800\ \Omega$                  |      | –87          |      | dBc                          |
|                                   | $V_{OUT} = 2\text{ V p-p}$ , 70 MHz, $R_{L, dm} = 800\ \Omega$                  |      | –62          |      | dBc                          |
| Third Harmonic                    | $V_{OUT} = 2\text{ V p-p}$ , 5 MHz, $R_{L, dm} = 800\ \Omega$                   |      | –114         |      | dBc                          |
|                                   | $V_{OUT} = 2\text{ V p-p}$ , 20 MHz, $R_{L, dm} = 800\ \Omega$                  |      | –85          |      | dBc                          |
|                                   | $V_{OUT} = 2\text{ V p-p}$ , 70 MHz, $R_{L, dm} = 800\ \Omega$                  |      | –57          |      | dBc                          |
| IMD                               | 20 MHz                                                                          |      | –77          |      | dBc                          |
| IP3                               | 20 MHz                                                                          |      | 37           |      | dBm                          |
| Voltage Noise (RTI)               | $f = 100\text{ kHz}$ to 40 MHz                                                  |      | 5            |      | nV/ $\sqrt{\text{Hz}}$       |
| Input Current Noise               | $f = 100\text{ kHz}$ to 40 MHz                                                  |      | 2            |      | pA/ $\sqrt{\text{Hz}}$       |
| <b>INPUT CHARACTERISTICS</b>      |                                                                                 |      |              |      |                              |
| Offset Voltage                    | $V_{OS, dm} = V_{OUT, dm}/2$ ; $V_{DIN+} = V_{DIN-} = V_{OCM} = 0\text{ V}$     | –2.5 | $\pm 1$      | +2.5 | mV                           |
|                                   | $T_{MIN}$ to $T_{MAX}$ <sup>1</sup>                                             | –4.8 |              | +4.8 | mV                           |
| Input Bias Current                |                                                                                 |      | 3.5          | 7    | $\mu\text{A}$                |
|                                   | $T_{MIN}$ to $T_{MAX}$ variation                                                |      | –0.01        |      | $\mu\text{A}/^\circ\text{C}$ |
| Input Resistance                  | Differential                                                                    |      | 6            |      | M $\Omega$                   |
|                                   | Common mode                                                                     |      | 3            |      | M $\Omega$                   |
| Input Capacitance                 |                                                                                 |      | 1            |      | pF                           |
| Input Common-Mode Voltage         |                                                                                 |      | –4.7 to +3.4 |      | V                            |
| CMRR                              | $\Delta V_{OUT, dm}/\Delta V_{IN, cm}$ ; $\Delta V_{IN, cm} = \pm 1\text{ V}$ , |      | –77          | –70  | dB                           |
|                                   | $T_{MIN}$ to $T_{MAX}$ <sup>1</sup>                                             |      |              | –69  | dB                           |
| <b>OUTPUT CHARACTERISTICS</b>     |                                                                                 |      |              |      |                              |
| Output Voltage Swing <sup>2</sup> | Maximum $\Delta V_{OUT}$ , single-ended output                                  |      | 7.75         |      | V p-p                        |
| Output Balance Error              | $\Delta V_{OUT, cm}/\Delta V_{OUT, dm}$ ; $\Delta V_{OUT, dm} = 1\text{ V}$     |      | –66          |      | dB                           |

<sup>1</sup> Specified to  $\pm 6$  sigma over the  $-55^\circ\text{C}$  to  $+105^\circ\text{C}$  operating temperature range.

<sup>2</sup> Output swing capabilities vary over operating temperature. See Figure 4 for more information.

# AD8138-EP

## V<sub>OCM</sub> TO $\pm$ OUT SPECIFICATIONS

At 25°C, V<sub>S</sub> =  $\pm$ 5 V, V<sub>OCM</sub> = 0 V, G = +1, R<sub>L, dm</sub> = 500  $\Omega$ , unless otherwise noted. All specifications refer to single-ended input and differential outputs, unless otherwise noted.

Table 2.

| Parameter                    | Conditions                                                                                                                               | Min       | Typ       | Max       | Unit                   |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|------------------------|
| DYNAMIC PERFORMANCE          |                                                                                                                                          |           |           |           |                        |
| –3 dB Bandwidth              |                                                                                                                                          |           | 250       |           | MHz                    |
| Slew Rate                    |                                                                                                                                          |           | 330       |           | V/ $\mu$ s             |
| INPUT VOLTAGE NOISE (RTI)    | f = 0.1 MHz to 100 MHz                                                                                                                   |           | 17        |           | nV/ $\sqrt{\text{Hz}}$ |
| DC PERFORMANCE               |                                                                                                                                          |           |           |           |                        |
| Input Voltage Range          |                                                                                                                                          |           | $\pm 3.8$ |           | V                      |
| Input Resistance             |                                                                                                                                          |           | 200       |           | k $\Omega$             |
| Input Offset Voltage         | V <sub>OS, cm</sub> = V <sub>OUT, cm</sub> ; V <sub>DIN+</sub> = V <sub>DIN–</sub> = V <sub>OCM</sub> = 0 V                              | –3.5      | $\pm 1$   | +3.5      | mV                     |
|                              | T <sub>MIN</sub> to T <sub>MAX</sub> <sup>1</sup>                                                                                        | –10.2     |           | +10.2     | mV                     |
| Input Bias Current           |                                                                                                                                          |           | 0.5       |           | $\mu$ A                |
| V <sub>OCM</sub> CMRR        | $\Delta V_{\text{OUT, dm}}/\Delta V_{\text{OCM}}$ ; $\Delta V_{\text{OCM}} = \pm 1$ V                                                    |           | –75       |           | dB                     |
| Gain                         | $\Delta V_{\text{OUT, cm}}/\Delta V_{\text{OCM}}$ ; $\Delta V_{\text{OCM}} = \pm 1$ V, T <sub>MIN</sub> to T <sub>MAX</sub> <sup>1</sup> | 0.9955    | 1         | 1.0045    | V/V                    |
| POWER SUPPLY                 |                                                                                                                                          |           |           |           |                        |
| Operating Range              |                                                                                                                                          | $\pm 1.4$ |           | $\pm 5.5$ | V                      |
| Quiescent Current            |                                                                                                                                          | 18        | 20        | 23        | mA                     |
|                              | T <sub>MIN</sub> to T <sub>MAX</sub> <sup>1</sup>                                                                                        | 13.2      |           |           | mA                     |
| Power Supply Rejection Ratio | $\Delta V_{\text{OUT, dm}}/\Delta V_S$ ; $\Delta V_S = \pm 1$ V, T <sub>MIN</sub> to T <sub>MAX</sub> <sup>1</sup>                       |           | –90       | –70       | dB                     |
| OPERATING TEMPERATURE RANGE  |                                                                                                                                          | –55       |           | +105      | °C                     |

<sup>1</sup> Specified to  $\pm 6$  sigma over the –55°C to +105°C operating temperature range.

**±D<sub>IN</sub> TO ±OUT SPECIFICATIONS**

At 25°C,  $V_S = 5\text{ V}$ ,  $V_{OCM} = 2.5\text{ V}$ ,  $G = +1$ ,  $R_{L, dm} = 500\ \Omega$ , unless otherwise noted. All specifications refer to single-ended input and differential output, unless otherwise noted.

**Table 3.**

| Parameter                         | Conditions                                                                  | Min  | Typ          | Max   | Unit                         |
|-----------------------------------|-----------------------------------------------------------------------------|------|--------------|-------|------------------------------|
| <b>DYNAMIC PERFORMANCE</b>        |                                                                             |      |              |       |                              |
| –3 dB Small Signal Bandwidth      | $V_{OUT} = 0.5\text{ V p-p}$ , $C_F = 0\text{ pF}$                          | 280  | 310          |       | MHz                          |
|                                   | $T_{MIN}$ to $T_{MAX}$ <sup>1</sup>                                         | 242  |              |       | MHz                          |
|                                   | $V_{OUT} = 0.5\text{ V p-p}$ , $C_F = 1\text{ pF}$                          |      | 225          |       | MHz                          |
| Bandwidth for 0.1 dB Flatness     | $V_{OUT} = 0.5\text{ V p-p}$ , $C_F = 0\text{ pF}$                          |      | 29           |       | MHz                          |
| Large Signal Bandwidth            | $V_{OUT} = 2\text{ V p-p}$ , $C_F = 0\text{ pF}$                            |      | 265          |       | MHz                          |
| Slew Rate                         | $V_{OUT} = 2\text{ V p-p}$ , $C_F = 0\text{ pF}$                            |      | 950          |       | V/ $\mu\text{s}$             |
| Settling Time                     | 0.01%, $V_{OUT} = 2\text{ V p-p}$ , $C_F = 1\text{ pF}$                     |      | 16           |       | ns                           |
| Overdrive Recovery Time           | $V_{IN} = 2.5\text{ V}$ to $0\text{ V}$ step, $G = +2$                      |      | 4            |       | ns                           |
| <b>NOISE/HARMONIC PERFORMANCE</b> |                                                                             |      |              |       |                              |
| Second Harmonic                   | $V_{OUT} = 2\text{ V p-p}$ , 5 MHz, $R_{L, dm} = 800\ \Omega$               |      | –90          |       | dBc                          |
|                                   | $V_{OUT} = 2\text{ V p-p}$ , 20 MHz, $R_{L, dm} = 800\ \Omega$              |      | –79          |       | dBc                          |
|                                   | $V_{OUT} = 2\text{ V p-p}$ , 70 MHz, $R_{L, dm} = 800\ \Omega$              |      | –60          |       | dBc                          |
| Third Harmonic                    | $V_{OUT} = 2\text{ V p-p}$ , 5 MHz, $R_{L, dm} = 800\ \Omega$               |      | –100         |       | dBc                          |
|                                   | $V_{OUT} = 2\text{ V p-p}$ , 20 MHz, $R_{L, dm} = 800\ \Omega$              |      | –82          |       | dBc                          |
|                                   | $V_{OUT} = 2\text{ V p-p}$ , 70 MHz, $R_{L, dm} = 800\ \Omega$              |      | –53          |       | dBc                          |
| IMD                               | 20 MHz                                                                      |      | –74          |       | dBc                          |
| IP3                               | 20 MHz                                                                      |      | 35           |       | dBm                          |
| Voltage Noise (RTI)               | $f = 100\text{ kHz}$ to $40\text{ MHz}$                                     |      | 5            |       | nV/ $\sqrt{\text{Hz}}$       |
| Input Current Noise               | $f = 100\text{ kHz}$ to $40\text{ MHz}$                                     |      | 2            |       | pA/ $\sqrt{\text{Hz}}$       |
| <b>INPUT CHARACTERISTICS</b>      |                                                                             |      |              |       |                              |
| Offset Voltage                    | $V_{OS, dm} = V_{OUT, dm}/2$ ; $V_{DIN+} = V_{DIN-} = V_{OCM} = 0\text{ V}$ | –2.5 | ±1           | +2.5  | mV                           |
|                                   | $T_{MIN}$ to $T_{MAX}$ <sup>1</sup>                                         | –5.1 |              | +5.1  | mV                           |
| Input Bias Current                |                                                                             |      | 3.5          | 7     | $\mu\text{A}$                |
|                                   | $T_{MIN}$ to $T_{MAX}$ variation                                            |      | –0.01        |       | $\mu\text{A}/^\circ\text{C}$ |
| Input Resistance                  | Differential                                                                |      | 6            |       | M $\Omega$                   |
|                                   | Common mode                                                                 |      | 3            |       | M $\Omega$                   |
| Input Capacitance                 |                                                                             |      | 1            |       | pF                           |
| Input Common-Mode Voltage         |                                                                             |      | –0.3 to +3.2 |       | V                            |
| CMRR                              | $\Delta V_{OUT, dm}/\Delta V_{IN, cm}$ ; $\Delta V_{IN, cm} = 1\text{ V}$   |      | –77          | –70   | dB                           |
|                                   | $T_{MIN}$ to $T_{MAX}$ <sup>1</sup>                                         |      |              | –69.5 | dB                           |
| <b>OUTPUT CHARACTERISTICS</b>     |                                                                             |      |              |       |                              |
| Output Voltage Swing <sup>2</sup> | Maximum $\Delta V_{OUT}$ ; single-ended output                              |      | 2.9          |       | V p-p                        |
| Output Balance Error              | $\Delta V_{OUT, cm}/\Delta V_{OUT, dm}$ ; $\Delta V_{OUT, dm} = 1\text{ V}$ |      | –65          |       | dB                           |

<sup>1</sup> Specified to  $\pm 6\sigma$  over the  $-55^\circ\text{C}$  to  $+105^\circ\text{C}$  operating temperature range.

<sup>2</sup> Output swing capabilities vary over operating temperature. See Figure 5 for more information.

# AD8138-EP

## V<sub>OCM</sub> TO $\pm$ OUT SPECIFICATIONS

At 25°C, V<sub>S</sub> = 5 V, V<sub>OCM</sub> = 2.5 V, G = +1, R<sub>L, dm</sub> = 500  $\Omega$ , unless otherwise noted. All specifications refer to single-ended input and differential output, unless otherwise noted.

Table 4.

| Parameter                    | Conditions                                                                                                                                                       | Min        | Typ        | Max        | Unit                   |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------------------|
| DYNAMIC PERFORMANCE          |                                                                                                                                                                  |            |            |            |                        |
| –3 dB Bandwidth              |                                                                                                                                                                  |            | 220        |            | MHz                    |
| Slew Rate                    |                                                                                                                                                                  |            | 250        |            | V/ $\mu$ s             |
| INPUT VOLTAGE NOISE (RTI)    | f = 0.1 MHz to 100 MHz                                                                                                                                           |            | 17         |            | nV/ $\sqrt{\text{Hz}}$ |
| DC PERFORMANCE               |                                                                                                                                                                  |            |            |            |                        |
| Input Voltage Range          |                                                                                                                                                                  |            | 1.0 to 3.8 |            | V                      |
| Input Resistance             |                                                                                                                                                                  |            | 100        |            | k $\Omega$             |
| Input Offset Voltage         | V <sub>OS, cm</sub> = V <sub>OUT, cm</sub> ; V <sub>DIN+</sub> = V <sub>DIN–</sub> = V <sub>OCM</sub> = 0 V<br>T <sub>MIN</sub> to T <sub>MAX</sub> <sup>1</sup> | –5<br>–9.7 | $\pm$ 1    | +5<br>+9.7 | mV<br>mV               |
| Input Bias Current           |                                                                                                                                                                  |            | 0.5        |            | $\mu$ A                |
| V <sub>OCM</sub> CMRR        | $\Delta$ V <sub>OUT, dm</sub> / $\Delta$ V <sub>OCM</sub> ; $\Delta$ V <sub>OCM</sub> = 2.5 V $\pm$ 1 V                                                          |            | –70        |            | dB                     |
| Gain                         | $\Delta$ V <sub>OUT, cm</sub> / $\Delta$ V <sub>OCM</sub> ; $\Delta$ V <sub>OCM</sub> = 2.5 V $\pm$ 1 V, T <sub>MIN</sub> to T <sub>MAX</sub> <sup>1</sup>       | 0.9968     | 1          | 1.0032     | V/V                    |
| POWER SUPPLY                 |                                                                                                                                                                  |            |            |            |                        |
| Operating Range              |                                                                                                                                                                  | 2.7        |            | 11         | V                      |
| Quiescent Current            |                                                                                                                                                                  | 15         | 20         | 21         | mA                     |
|                              | T <sub>MIN</sub> to T <sub>MAX</sub> <sup>1</sup>                                                                                                                | 10.6       |            |            | mA                     |
| Power Supply Rejection Ratio | $\Delta$ V <sub>OUT, dm</sub> / $\Delta$ V <sub>S</sub> ; $\Delta$ V <sub>S</sub> = $\pm$ 1 V<br>T <sub>MIN</sub> to T <sub>MAX</sub> <sup>1</sup>               |            | –90        | –70<br>–57 | dB<br>dB               |
| OPERATING TEMPERATURE RANGE  |                                                                                                                                                                  | –55        |            | +105       | °C                     |

<sup>1</sup> Specified to  $\pm$ 6 sigma over the –55°C to +105°C operating temperature range.

## ABSOLUTE MAXIMUM RATINGS

Table 5.

| Parameter                            | Rating                                          |
|--------------------------------------|-------------------------------------------------|
| Supply Voltage                       | $\pm 5.5$ V                                     |
| $V_{OCM}$                            | $\pm V_S$                                       |
| Output Voltage Swing                 | See Figure 4 and Figure 5                       |
| Internal Power Dissipation           | 550 mW                                          |
| Operating Temperature Range          | $-55^{\circ}\text{C}$ to $+105^{\circ}\text{C}$ |
| Storage Temperature Range            | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Lead Temperature (Soldering, 10 sec) | $300^{\circ}\text{C}$                           |
| Junction Temperature                 | $150^{\circ}\text{C}$                           |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is,  $\theta_{JA}$  is specified for the device soldered in a circuit board in still air.

Table 6.

| Package Type        | $\theta_{JA}$ | Unit                        |
|---------------------|---------------|-----------------------------|
| 8-Lead MSOP/4-Layer | 145           | $^{\circ}\text{C}/\text{W}$ |

### MAXIMUM POWER DISSIPATION

The maximum safe power dissipation in the AD8138-EP package is limited by the associated rise in junction temperature ( $T_J$ ) on the die. At approximately  $150^{\circ}\text{C}$ , which is the glass transition temperature, the plastic changes its properties. Even temporarily exceeding this temperature limit can change the stresses that the package exerts on the die, permanently shifting the parametric performance of the AD8138-EP. Exceeding a junction temperature of  $150^{\circ}\text{C}$  for an extended period can result in changes in the silicon devices, potentially causing failure.

The power dissipated in the package ( $P_D$ ) is the sum of the quiescent power dissipation and the power dissipated in the package due to the load drive for all outputs. The quiescent power is the voltage between the supply pins ( $V_S$ ) times the quiescent current ( $I_S$ ). The load current consists of the differential and common-mode currents flowing to the load, as well as currents flowing through the external feedback networks and internal common-mode feedback loop. The internal resistor tap used in the common-mode feedback loop places a negligible differential load on the output. RMS voltages and currents should be considered when dealing with ac signals.

Airflow reduces  $\theta_{JA}$ . In addition, more metal directly in contact with the package leads from metal traces, through holes, ground, and power planes reduces the  $\theta_{JA}$ .

Figure 3 shows the maximum safe power dissipation vs. the ambient temperature for the 8-lead MSOP ( $\theta_{JA} = 145^{\circ}\text{C}/\text{W}$ ) package on a JEDEC standard 4-layer board.  $\theta_{JA}$  values are approximations.

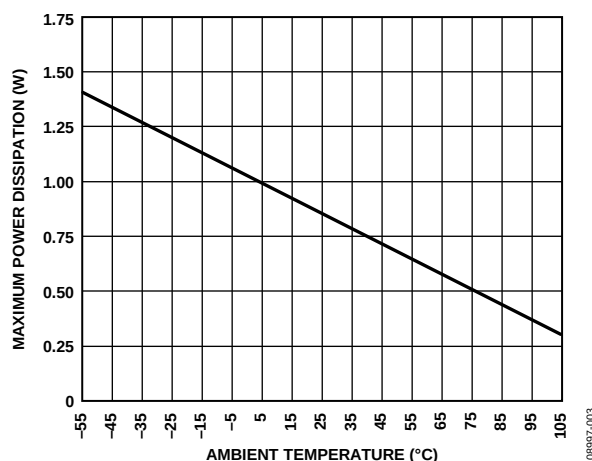


Figure 3. Maximum Power Dissipation vs. Ambient Temperature

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## MAXIMUM OUTPUT VOLTAGE SWING

The maximum output voltage swing must be considered in order for the AD8138-EP to remain current density compliant over the extended temperature range. The maximum output swing is dependent on the load resistance and operating temperatures. Figure 4 shows the maximum output swing over operating temperatures for various loads at  $\pm 5$  V operation.

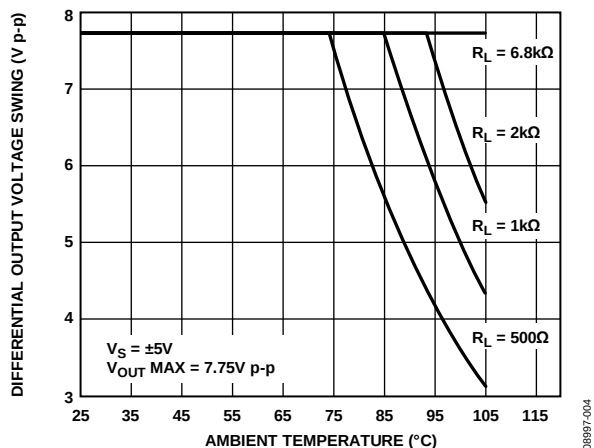


Figure 4. Differential Output Voltage Swing vs. Ambient Temperature,  $V_S = \pm 5$  V

The following equation can be used to determine the maximum output voltage swing for  $V_S = \pm 5$  V:

$$\text{Output} = (38.21 \times \ln(R_L) - 169.26) \times e^{(-0.0293 \times T_A)}$$

where:

*Output* is the maximum output voltage swing that cannot exceed

7.75 V p-p.

$R_L$  is the load resistance ( $\Omega$ ).

$T_A$  is the ambient temperature ( $^{\circ}\text{C}$ ).

Figure 5 shows the maximum output swing over operating temperatures for various loads at  $V_S = 5$  V operation.

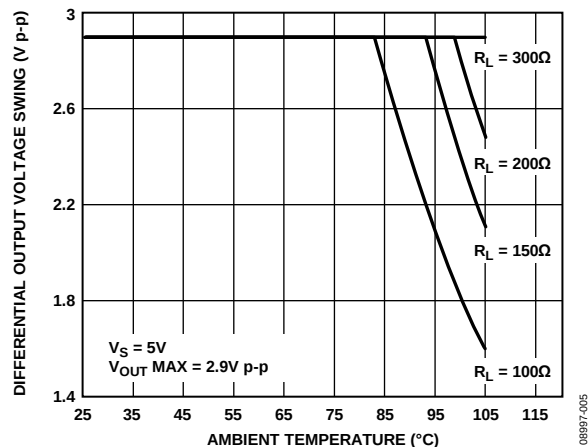


Figure 5. Differential Output Voltage Swing vs. Ambient Temperature,  $V_S = 5$  V

The following equation can be used to determine the maximum output voltage swing for  $V_S = 5$  V:

$$\text{Output} = (24.36 \times \ln(R_L) - 82.34) \times e^{(-0.028 \times T_A)}$$

where:

*Output* is the maximum output voltage swing that cannot exceed

2.9 V p-p.

$R_L$  is the load resistance ( $\Omega$ ).

$T_A$  is the ambient temperature ( $^{\circ}\text{C}$ ).



## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS





Figure 6. Pin Configuration

Table 7. Pin Function Descriptions

| Pin No. | Mnemonic         | Description                                                                                                                                                                  |
|---------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | –IN              | Negative Input Summing Node.                                                                                                                                                 |
| 2       | V <sub>OCM</sub> | Voltage applied to this pin sets the common-mode output voltage with a ratio of 1:1. For example, 1 V dc on V <sub>OCM</sub> sets the dc bias level on +OUT and –OUT to 1 V. |
| 3       | V+               | Positive Supply Voltage.                                                                                                                                                     |
| 4       | +OUT             | Positive Output. Note that the voltage at –D <sub>IN</sub> is inverted at +OUT.                                                                                              |
| 5       | –OUT             | Negative Output. Note that the voltage at +D <sub>IN</sub> is inverted at –OUT.                                                                                              |
| 6       | V–               | Negative Supply Voltage.                                                                                                                                                     |
| 7       | NC               | No Connect.                                                                                                                                                                  |
| 8       | +IN              | Positive Input Summing Node.                                                                                                                                                 |

# AD8138-EP

## OUTLINE DIMENSIONS

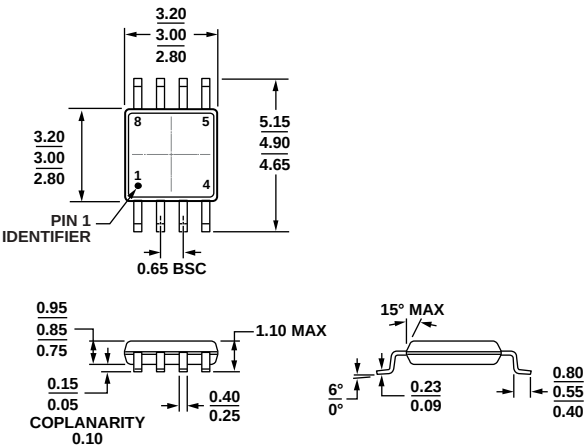

COMPLIANT TO JEDEC STANDARDS MO-187-AA

Figure 7. 8-Lead Mini Small Outline Package [MSOP]  
(RM-8)  
Dimensions shown in millimeters

100709-B

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description           | Package Option | Branding |
|--------------------|-------------------|-------------------------------|----------------|----------|
| AD8138SRMZ-EP-R7   | −55°C to +105°C   | 8-Lead MSOP, 7" Tape and Reel | RM-8           | H27      |

<sup>1</sup> Z = RoHS Compliant Part.

## **NOTES**

## NOTES



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.