

DESCRIPTION

Demonstration circuit 1280A is a dual output converter featuring the LT3471EDD in Boost and Inverter configurations. Both converters are powered from the same 4.5V to 10V input source. The Boost converter puts out 12V at 300mA and the Inverter -12V at 200mA. The demo circuit demonstrates small size and low component count. The LT3471 operates with inputs as high as 16V but in this demo board the input is limited by the magnitude of the Boost output. In a Boost converter the input needs to be less than the output. The DC1280A is designed so that the Inverting converter can easily be configured as a Boost. Instructions are included in the schematic. Both circuits are designed to demonstrate the soft start feature, advantages of the 1.2MHz switching frequency and the internal 42V/1.3A switches.

Both outputs on this demo board can be modified for higher voltages. These circuits are intended for space-conscious applications such as digital cameras, cellular phones, palmtop computers PC cards, miniature disk drives, xDSL power supplies, flash memory products, local 5V or 12V supplies and LCD displays.

Design files for this circuit board are available. Call the LTC factory.

L, LTC, LTM, LT, Burst Mode, OPTI-LOOP, Over-The-Top and PolyPhase are registered trademarks of Linear Technology Corporation. Adaptive Power, C-Load, DirectSense, Easy Drive, FilterCAD, Hot Swap, LinearView, μ Module, Micropower SwitcherCAD, Multimode Dimming, No Latency $\Delta\Sigma$, No Latency Delta-Sigma, No R_{SENSE} , Operational Filter, PanelProtect, PowerPath, PowerSOT, SmartStart, SoftSpan, Stage Shedding, SwitcherCAD, ThinSOT, UltraFast and VLDO are trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

PERFORMANCE SUMMARY FOR BOOST CONVERTER **Specifications are at TA = 25°C**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{IN}	Input Supply Range		4.5		10	V
V_{OUT}	Output Voltage Range	$V_{IN} = 4.5V, I_{LOAD} = 300mA$	11.64	12	12.36	V
RIPPLE		$V_{IN} = 4.5V, I_{LOAD} = 300mA$		40		mV
EFFICIENCY		$V_{IN} = 4.5V, I_{LOAD} = 300mA$		84		%

PERFORMANCE SUMMARY FOR INVERTING REGULATOR **Specifications are at TA = 25°C**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{IN}	Input Supply Range		4.5		12	V
V_{OUT}	Output Voltage Range	$V_{IN} = 4.5V, I_{LOAD} = 200mA$	-11.64	-12	-12.36	V
RIPPLE		$V_{IN} = 4.5V, I_{LOAD} = 200mA$		10		mV
EFFICIENCY		$V_{IN} = 4.5V, I_{LOAD} = 200mA$		74		%

QUICK START PROCEDURE

Demonstration circuit 1280 is easy to set up to evaluate the performance of the LT3471EDD. Re-

fer to Figure 1 for proper measurement equipment setup and follow the procedure below:

LT3471EDD

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place jumpers in the following positions:

JP1 ON

JP2 ON

2. With power off, connect the input power supply (4.5V to 10V) to Vin and GND.

3. Turn on the power at the input.

4. Check for the proper output voltages.

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

5. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltages, efficiency and other parameters.

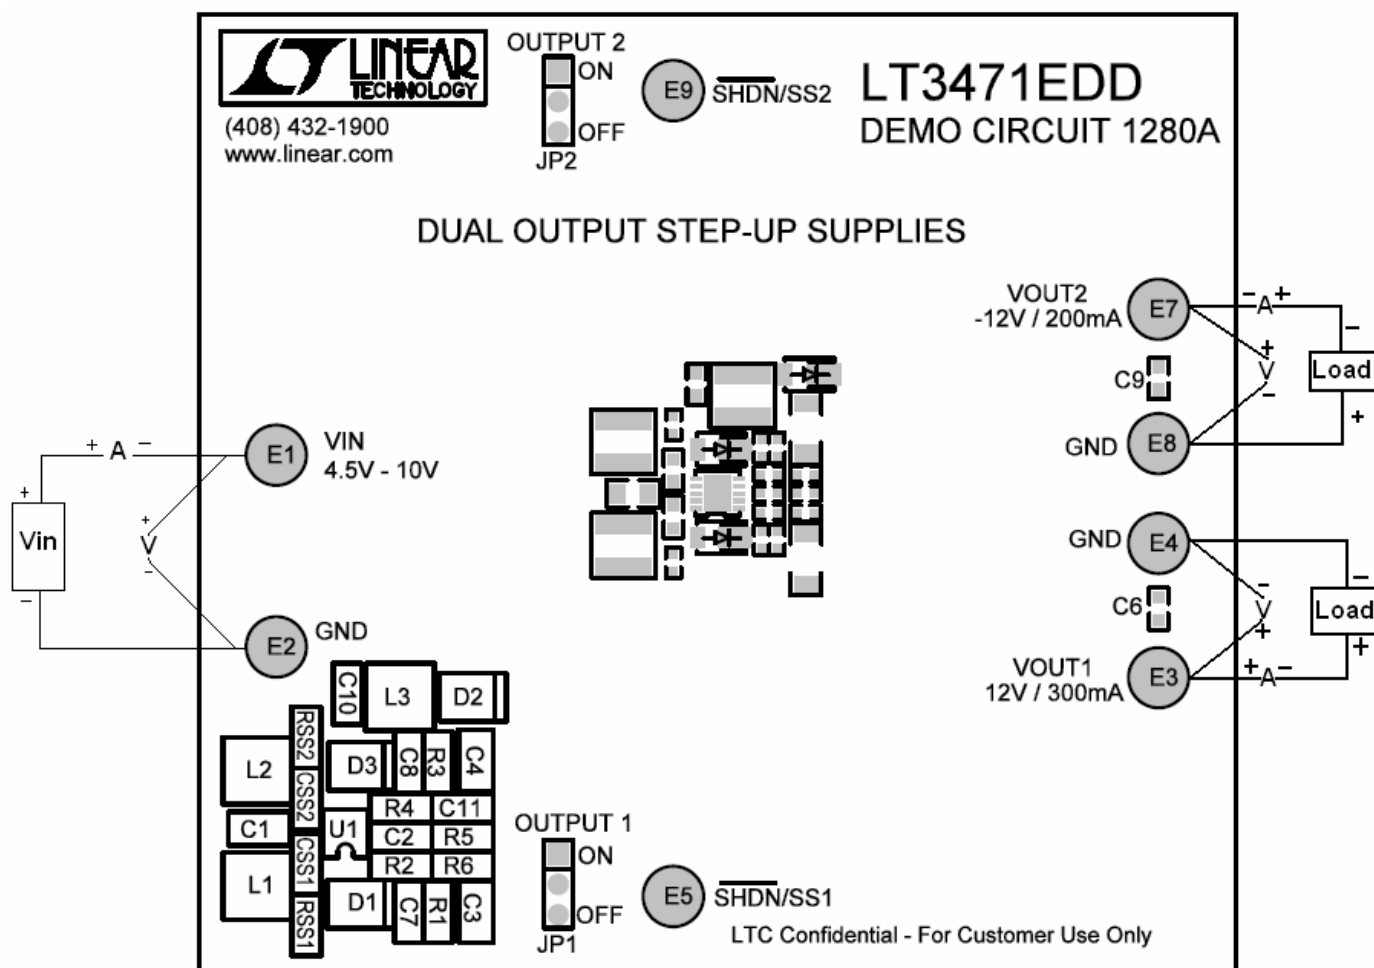


Figure 1. Proper Measurement Equipment Setup for DC1280A




Figure 2. Measuring Input or output Ripple

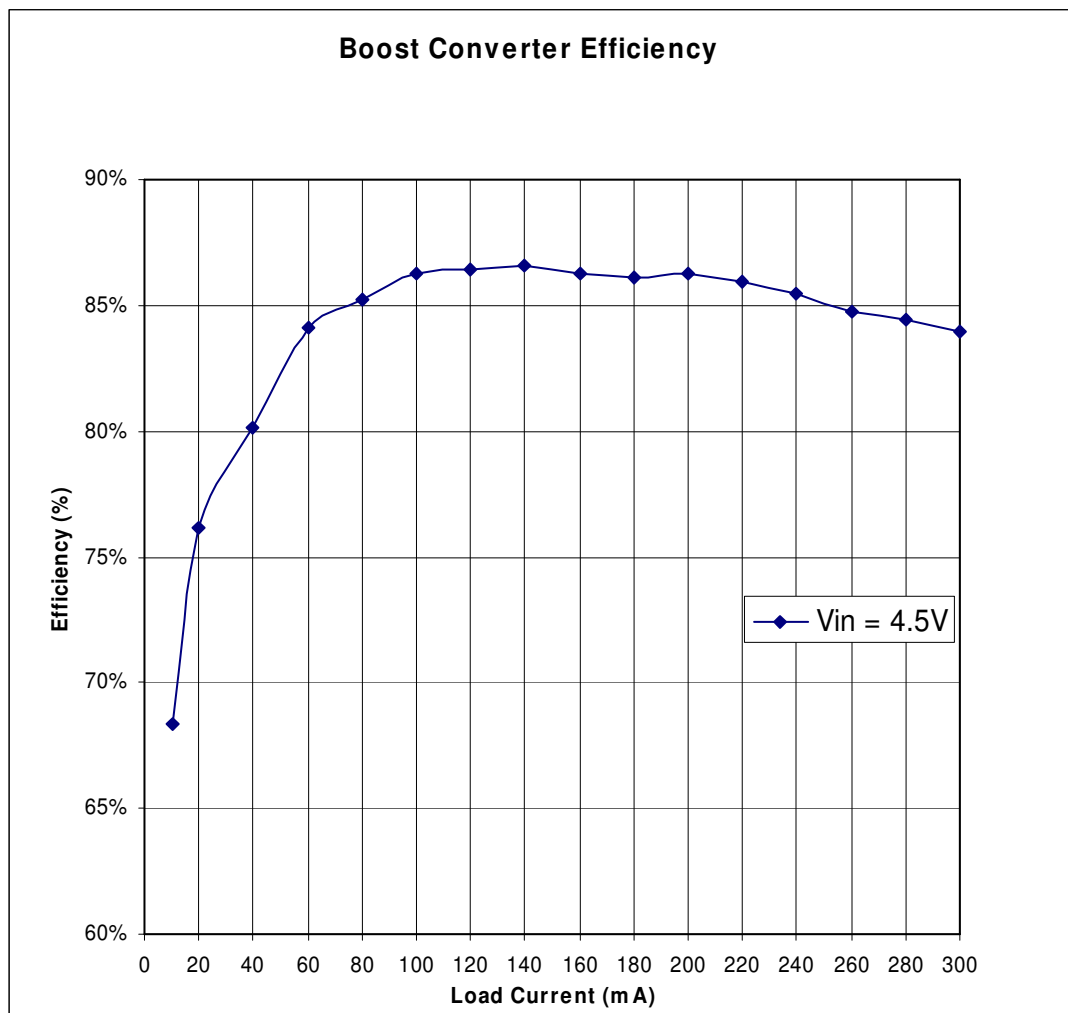


Figure 3. Boost Converter Efficiency at 4.5Vin


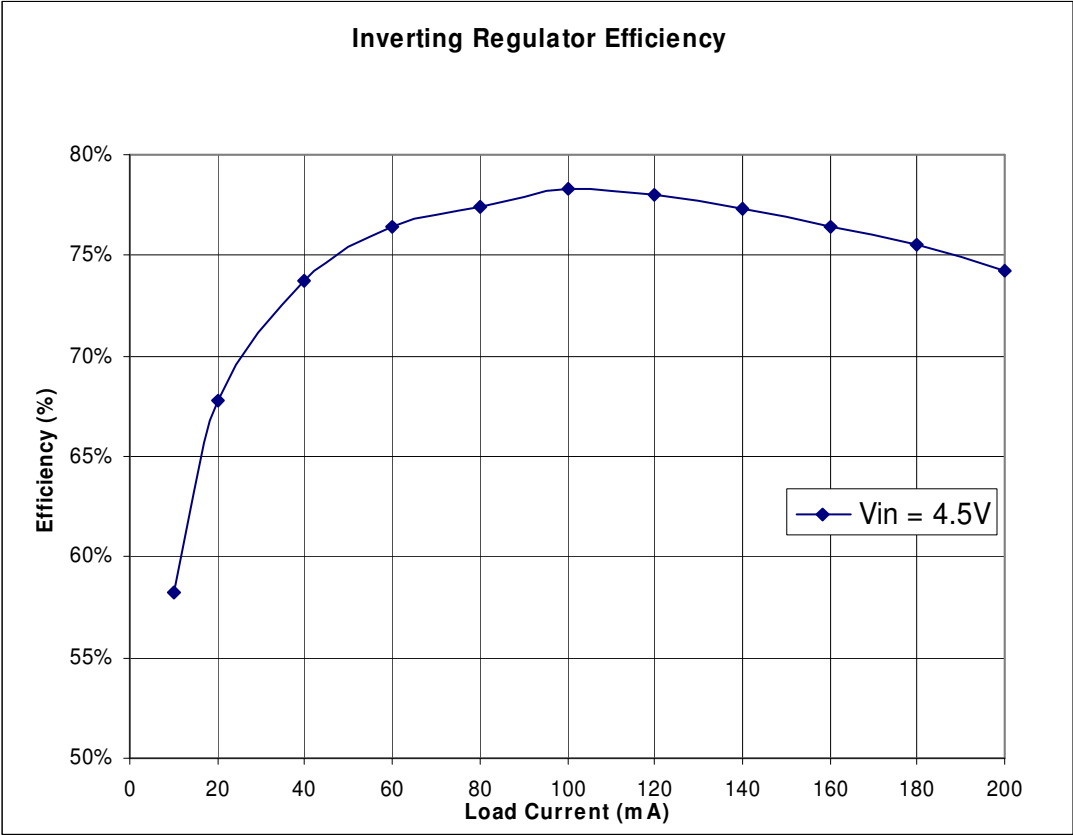


Figure 4. Inverting Regulator Efficiency at 4.5Vin



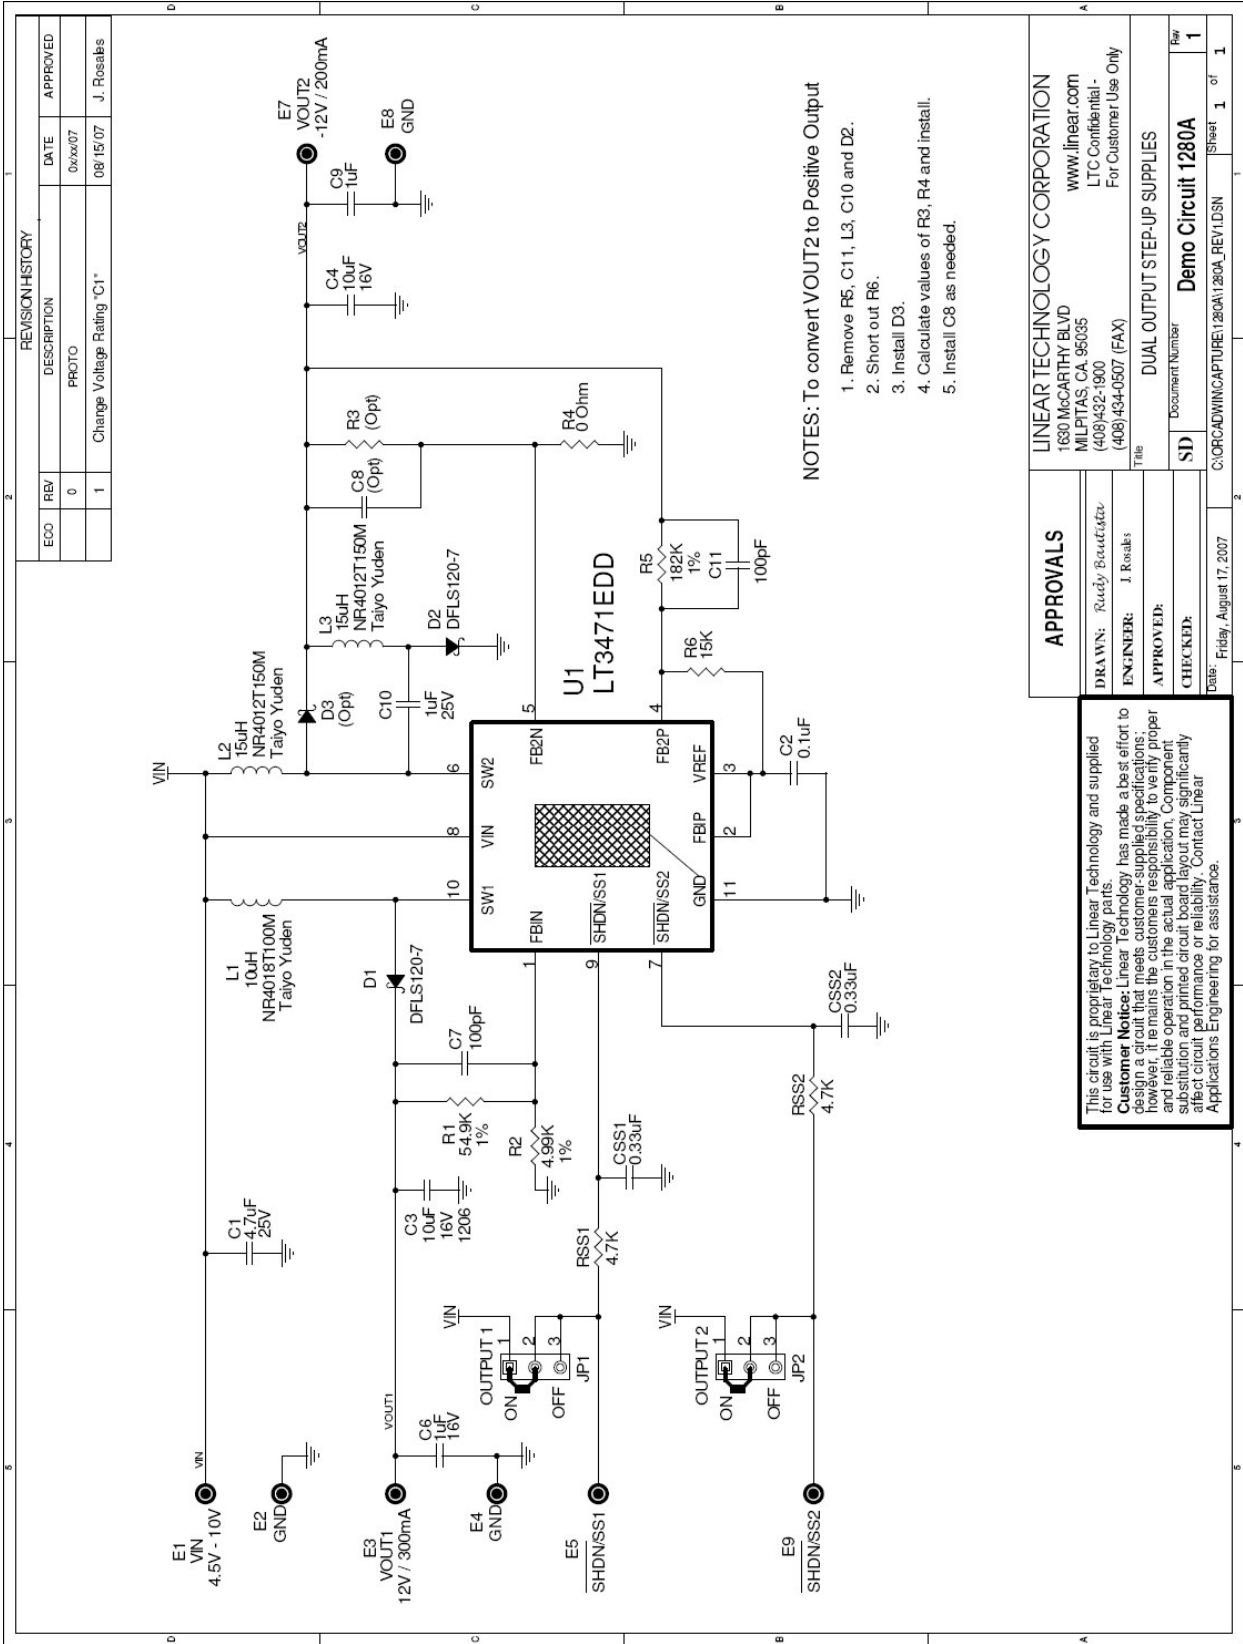

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.