

## DESCRIPTION

Demonstration circuit 679 features the LT3463EDD in two circuits. One circuit is optimized for small size and the other for high performance. Both circuits are dual output  $\pm 20V$  voltage regulators. The positive regulator is a boost converter and the negative rail is an inverting charge pump. Refer to Tables 1 and 2 for details on performance.

The intended application of the DC679 is portable applications where reduced parts count, small circuit size and

high efficiency is important. The Burst Mode operation of the LT3463EDD allows for high efficiency over a broad range of loads and low quiescent current. Parts count is reduced by the integrated schottky diodes and the low current limit and low off time allows small inductors and capacitors to be used.

**Design files for this circuit board are available. Call the LTC factory.**

**Table 1. Performance Summary for the Small Size Circuit ( $T_A = 25^\circ C$ )**

| PARAMETER                                  | CONDITION                                                 | VALUE         |
|--------------------------------------------|-----------------------------------------------------------|---------------|
| Input voltage range                        |                                                           | 2.7V to 6.0V  |
| $ V_{OUT} $ (both rails)                   | 0mA to $I_{OUT(MAX)}$                                     | 20V $\pm 4\%$ |
| $I_{OUT(MAX)}$ (both rails)                | $V_{IN} = 2.7V$                                           | 5mA           |
|                                            | $V_{IN} = 3.6V$                                           | 7mA           |
|                                            | $V_{IN} = 5.0V$                                           | 9mA           |
| Typical Output Ripple (+20V)               | $V_{IN} = 3.6V$ , $I_{OUT} = 7mA$                         | 130mV p-p     |
| Typical Output Ripple (-20V)               | $V_{IN} = 3.6V$ , $I_{OUT} = 7mA$                         | 140mV p-p     |
| Typical Efficiency (+20V)                  | $V_{IN} = 3.6V$ , $I_{OUT} = 7mA$ , -20V rail not enabled | 74%           |
| Typical Efficiency (-20V)                  | $V_{IN} = 3.6V$ , $I_{OUT} = 7mA$ , +20V rail not enabled | 74%           |
| Typical no load input current (both rails) | $V_{IN} = 3.6V$                                           | 140uA         |

**Table 2. Performance Summary for the High Performance Circuit ( $T_A = 25^\circ C$ )**

| PARAMETER                                  | CONDITION                                                 | VALUE         |
|--------------------------------------------|-----------------------------------------------------------|---------------|
| Input voltage range                        |                                                           | 2.7V to 6.0V  |
| $ V_{OUT} $ (both rails)                   | 0mA to $I_{OUT(MAX)}$                                     | 20V $\pm 4\%$ |
| $I_{OUT(MAX)}$ (both rails)                | $V_{IN} = 2.7V$                                           | 7mA           |
|                                            | $V_{IN} = 3.6V$                                           | 9mA           |
|                                            | $V_{IN} = 5.0V$                                           | 13mA          |
| Typical Output Ripple (+20V)               | $V_{IN} = 3.6V$ , $I_{OUT} = 9mA$                         | 105mV p-p     |
| Typical Output Ripple (-20V)               | $V_{IN} = 3.6V$ , $I_{OUT} = 9mA$                         | 105mV p-p     |
| Typical Efficiency (+20V)                  | $V_{IN} = 3.6V$ , $I_{OUT} = 9mA$ , -20V rail not enabled | 76%           |
| Typical Efficiency (-20V)                  | $V_{IN} = 3.6V$ , $I_{OUT} = 9mA$ , +20V rail not enabled | 76%           |
| Typical no load input current (both rails) | $V_{IN} = 3.6V$                                           | 140uA         |

### QUICK START PROCEDURE

Demonstration circuit 679 is easy to set up to evaluate the performance of the LT3463EDD. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

**NOTE:** When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Make sure the  $\overline{\text{SHDN}}$  pins are in the ON position.
2. Turn on the input voltage source and set it to 3.6V.
3. Monitor the output voltage.  $|V_{\text{OUT}}|$  for both the positive and negative rails of the small size and high performance circuits should be  $20\text{V} \pm 4\%$ .
4. Apply the full rated load to the outputs for an input voltage of 3.6V. For the small size circuit this is 7mA and for the high performance circuit this is 9mA. The rails should still be within regulation.
5. With full rated load applied and with the input voltage still at 3.6V, measure the input current. For the small size circuit, the input current should be less than 140mA and for the high performance circuit, the input current should be less than 150mA.
6. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage and other parameters.

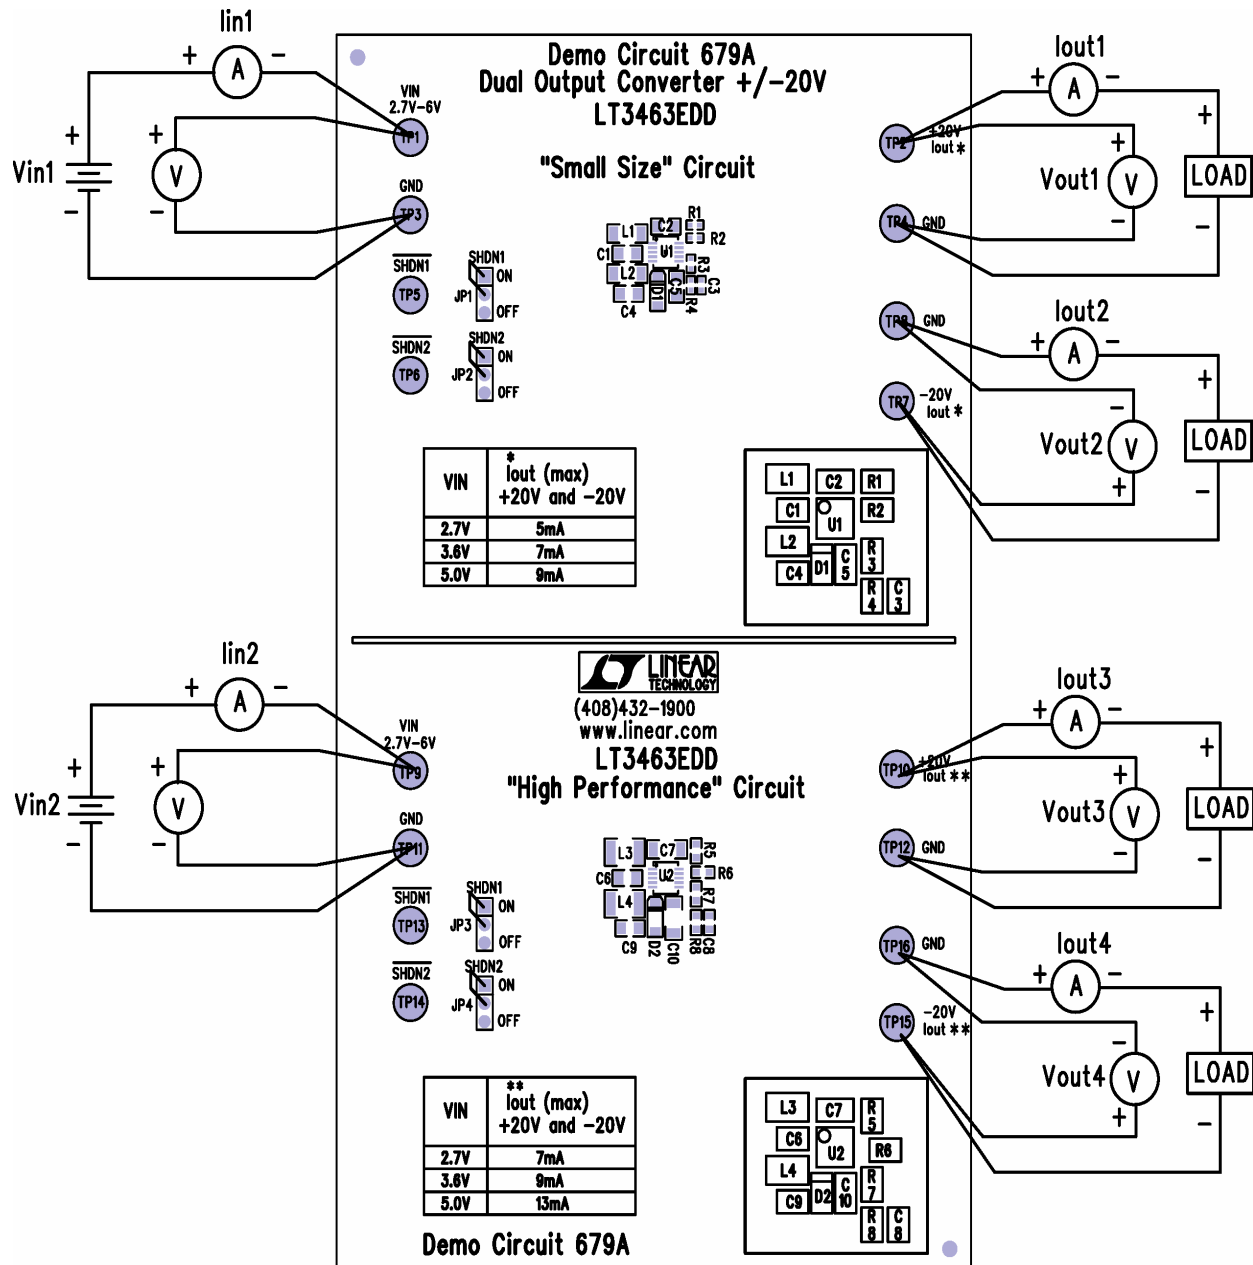


Figure 1. Proper Measurement Equipment Setup





Figure 2. Measuring Input or Output Ripple

| Item | Qty | Reference       | Part Description                   | Manufacture / Part #             |
|------|-----|-----------------|------------------------------------|----------------------------------|
| 1    | 2   | C6,C1           | Cap., X5R 4.7uF 6.3V 20%           | Taiyo Yuden JMK212BJ475MG-T      |
| 2    | 2   | C5,C2           | Cap., X5R .47uF 35V 20%            | Taiyo Yuden GMK212BJ474MG-T      |
| 3    | 1   | C3              | Cap., NPO 10pF 50V 10%             | AVX 04025A100KAT2A               |
| 4    | 2   | C9,C4           | Cap., X7R 0.1uF 50V 10%            | Taiyo Yuden UMK212BJ104KG        |
| 5    | 2   | C7,C10          | Cap., X7R 1uF 35V 10%              | Taiyo Yuden GMK316BJ105KL        |
| 6    | 1   | C8              | Cap., NPO 10pF 50V 10%             | AVX 06035A100KAT2A               |
| 7    | 2   | D1,D2           | Diode Schotkky, 40V                | Diodes Inc. B0540W               |
| 8    | 4   | JP1,JP2,JP3,JP4 | Headers, 3 Pins 2mm Ctrs.          | CommConn Con. Inc. 2802S-03G2    |
| 9    | 4   | XJP1-XJP4       | Shunt, 2 Pins 2mm Ctrs.            | CommConn Con. Inc. CCIJ2MM-138GW |
| 10   | 2   | L1,L2           | Inductor, 4.7uH 340mA 0.65 Ohm 20% | muRata LQH31CN4R7M03L            |
| 11   | 2   | L3,L4           | Inductor, 10uH 300mA 0.42 Ohm 20%  | muRata LQH32CN100M53             |
| 12   | 2   | R4,R1           | Res., Chip 4.53M 1/16W 1%          | AAC CR05-4534FM                  |
| 13   | 1   | R2              | Res., Chip 301K 0.06W 1%           | AAC CR05-3013FM                  |
| 14   | 1   | R3              | Res., Chip 280K 0.06W 1%           | AAC CR05-2803FM                  |
| 15   | 2   | R8,R5           | Res., Chip 4.53M 0.06w 1%          | AAC CR16-4534FM                  |
| 16   | 1   | R6              | Res., Chip 301K 0.06W 1%           | AAC CR16-3013FM                  |
| 17   | 1   | R7              | Res., Chip 280K 0.1W 1%            | AAC CR16-2803FM                  |
| 18   | 16  | TP1-TP16        | Turret, Testpoint                  | Mill Max 2501-2                  |
| 19   | 2   | U1,U2           | I.C., Dual uPower Boost Converter  | Linear Tech. Corp. LT3463EDD     |
| 20   | 1   |                 | PRINTED CIRCUIT BOARD              | DEMO CIRCUIT 679A                |
| 21   | 1   |                 | STENCIL                            | STENCIL # 679A                   |

# QUICK START GUIDE FOR DC679

## DUAL OUTPUT CONVERTER

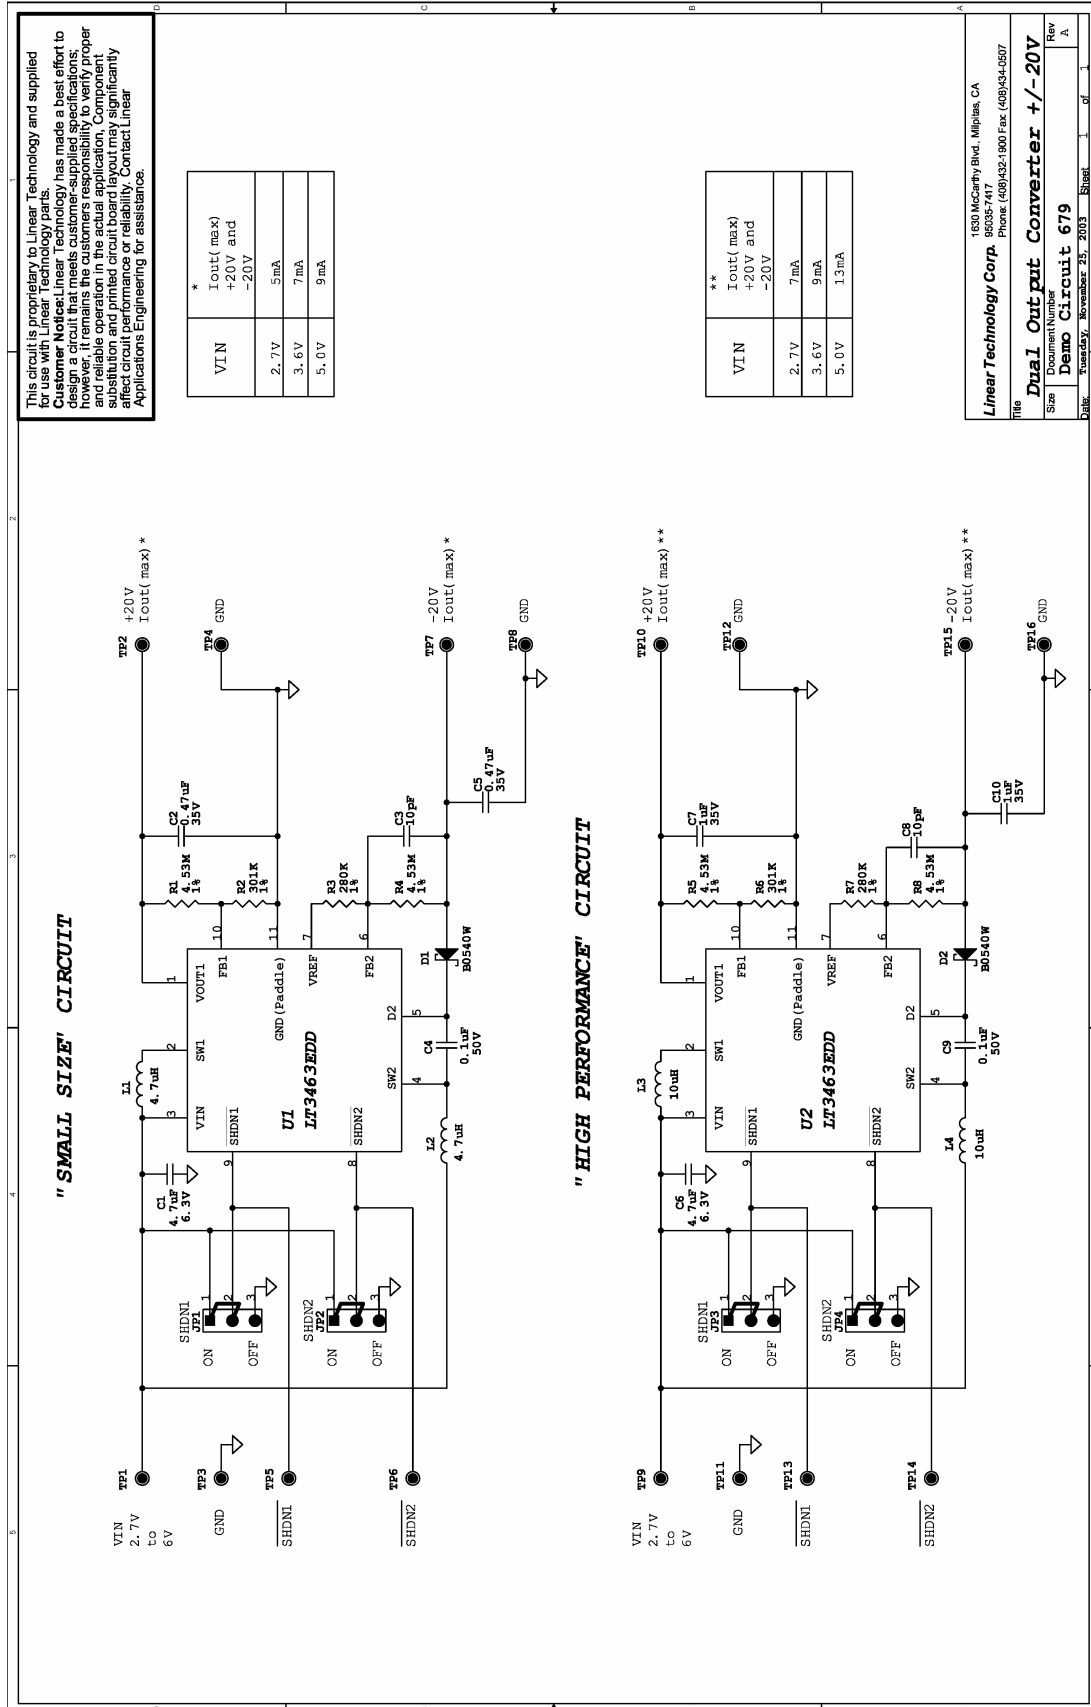



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.