

FEATURES

- Gain-Bandwidth Product: 50MHz
- Unity-Gain Stable
- Slew Rate: 165V/ μ s
- Output Current: \pm 20mA
- Low Supply Current: 12mA
- High Open-Loop Gain: 7.5V/mV
- Low Cost
- Single Supply 5V Operation
- Industry Standard Pinout
- Output Shutdown

APPLICATIONS

- Video Cable Drivers
- Video Signal Processing
- Fast Peak Detectors
- Fast Integrators
- Video Cable Drivers
- Pulse Amplifiers

DESCRIPTION

The LT[®]1195 is a video operational amplifier optimized for operation on single 5V and \pm 5V supplies. Unlike many high speed amplifiers, the LT1195 features high open-loop gain, over 75dB, and the ability to drive heavy loads to a full power bandwidth of 8.5 MHz at 6V_{P-P}. The LT1195 has a unity-gain stable bandwidth of 50MHz, a 60° phase margin and consumes only 12mA of supply current, making it extremely easy to use.


Because the LT1195 is a true operational amplifier, it is an ideal choice for wideband signal conditioning, fast integrators, peak detectors, active filters, and applications requiring speed, accuracy, and low cost.

The LT1195 is a low power version of the popular LT1190, and is available in 8-pin miniDIPs and SO packages with standard pinouts. The normally unused Pin 5 is used for a shutdown feature that shuts off the output and reduces power dissipation to a mere 15mW.


 , LTC and LT are registered trademarks of Linear Technology Corporation

TYPICAL APPLICATION

Fast Pulse Detector

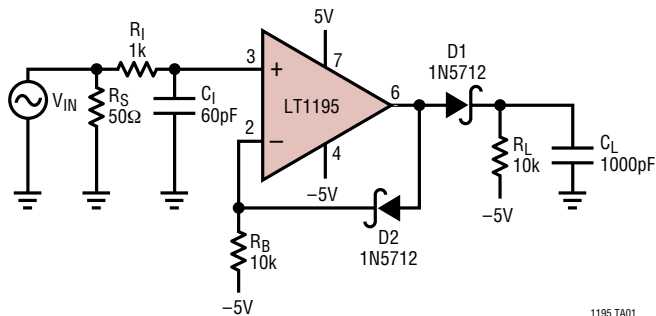

Pulse Detector Response

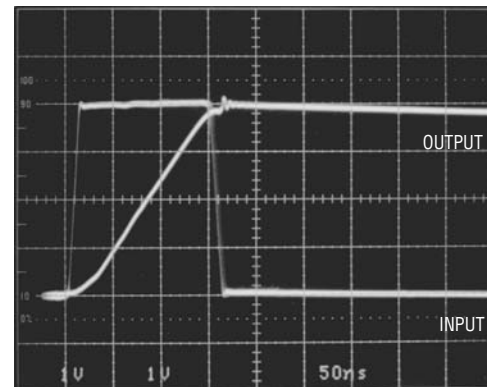

ABSOLUTE MAXIMUM RATINGS

(Note 1)

| | |
|--|--|
| Total Supply Voltage (V^+ to V^-) | 18V |
| Differential Input Voltage | $\pm 6V$ |
| Input Voltage | $\pm V_S$ |
| Output Short-Circuit Duration (Note 2) | Continuous |
| Operating Temperature Range | |
| LT1195M (OBSOLETE) | -55°C to 125°C |
| LT1195C | 0°C to 70°C |
| Junction Temperature (Note 3) | |
| Plastic Package (CN8, CS8) | 150°C |
| Ceramic Package (CJ8, MJ8) (OBSOLETE) | 175°C |
| Storage Temperature Range | -65°C to 150°C |
| Lead Temperature (Soldering, 10 sec) | 300°C |

PACKAGE/ORDER INFORMATION

| | |
|--|------------------------|
| <p>N8 PACKAGE 8-LEAD PDIP</p> <p>S8 PACKAGE 8-LEAD PLASTIC SO</p> <p>$T_{JMAX} = 150^\circ\text{C}$, $\theta_{JA} = 100^\circ\text{C/W}$ (N8) $T_{JMAX} = 150^\circ\text{C}$, $\theta_{JA} = 150^\circ\text{C/W}$ (S8)</p> <p>J8 PACKAGE 8-LEAD CERDIP</p> <p>$T_{JMAX} = 150^\circ\text{C}$, $\theta_{JA} = 100^\circ\text{C/W}$ (J8)</p> <p>OBSOLETE PACKAGE Consider the N8 or S8 Package for Alternate Source</p> | ORDER PART NUMBER |
| | LT1195CN8 LT1195CS8 |
| | S8 PART MARKING |
| | 1195 |
| | ORDER PART NUMBER |
| | LT1195MJ8 LT1195CJ8 |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

$\pm 5V$ ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$

$V_S = \pm 5V$, $C_L \leq 10pF$, Pin 5 open circuit, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | LT1195M/C | | | UNITS |
|---------------------|------------------------------|--|--|-----------|-----------|------------------------------|
| | | | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | J8, N8 Package | | 3.0 | 8.0 | mV |
| | | S8 Package | | 3.0 | 10.0 | mV |
| I_{OS} | Input Offset Current | | | 0.2 | 1.0 | μA |
| I_B | Input Bias Current | | | ± 0.5 | ± 2.0 | μA |
| e_n | Input Noise Voltage | $f_0 = 10\text{kHz}$ | | 70 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| i_n | Input Noise Current | $f_0 = 10\text{kHz}$ | | 2 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| R_{IN} | Input Resistance | Differential Mode | | 230 | | $\text{k}\Omega$ |
| | | Common Mode | | 20 | | $\text{M}\Omega$ |
| C_{IN} | Input Capacitance | $A_V = 1$ | | 2.2 | | pF |
| | | Input Voltage Range | (Note 4) | -2.5 | | 3.5 |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = -2.5$ to $3.5V$ | 60 | 85 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 2.375V$ to $\pm 8V$ | 60 | 85 | | dB |
| A_{VOL} | Large-Signal Voltage Gain | $R_L = 1\text{k}$, $V_{OUT} = \pm 3V$ | 2.0 | 7.5 | | V/mV |
| | | $R_L = 150\Omega$, $V_{OUT} = \pm 3V$ | 0.5 | 1.5 | | V/mV |
| | | $V_S = \pm 8V$, $R_L = 1\text{k}$, $V_{OUT} = \pm 5V$ | | 11.0 | | V/mV |
| V_{OUT} | Output Voltage Swing | $V_S = \pm 5V$, $R_L = 1\text{k}$ | ± 3.8 | ± 4.0 | | V |
| | | $V_S = \pm 8V$, $R_L = 1\text{k}$ | ± 6.7 | ± 7.0 | | V |
| SR | Slew Rate | $A_V = -1$, $R_L = 1\text{k}$ (Note 5, 10) | 110 | 165 | | $\text{V}/\mu\text{s}$ |
| FPBW | Full Power Bandwidth | $V_{OUT} = 6V_{P-P}$ (Note 6) | | 8.75 | | MHz |
| GBW | Gain-Bandwidth Product | | | 50 | | MHz |
| t_{r1} , t_{f1} | Rise Time, Fall Time | $A_V = 50$, $V_{OUT} = \pm 1.5V$, 20% to 80% (Note 10) | 125 | 170 | 285 | ns |
| t_{r2} , t_{f2} | Rise Time, Fall Time | $A_V = 1$, $V_{OUT} = \pm 125\text{mV}$, 10% to 90% | | 3.4 | | ns |
| t_{PD} | Propagation Delay | $A_V = 1$, $V_{OUT} = \pm 125\text{mV}$, 50% to 50% | | 2.5 | | ns |
| | | Overshoot | $A_V = 1$, $V_{OUT} = \pm 125\text{mV}$ | | 22 | |
| t_S | Settling Time | 3V Step, 0.1% (Note 7) | | 220 | | ns |
| Diff A_V | Differential Gain | $R_L = 150\Omega$, $A_V = 2$ (Note 8) | | 1.25 | | % |
| Diff Ph | Differential Phase | $R_L = 150\Omega$, $A_V = 2$ (Note 8) | | 0.86 | | DEG_{P-P} |

1195fa

±5V ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$

$V_S = \pm 5\text{V}$, $C_L \leq 10\text{pF}$, Pin 5 open circuit, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | LT1195M/C | | | UNITS |
|-----------|-------------------------|--|-----------|-----|-----|---------------|
| | | | MIN | TYP | MAX | |
| I_S | Supply Current | | | 12 | 16 | mA |
| | Shutdown Supply Current | Pin 5 at V^- | | 0.8 | 1.5 | mA |
| $I_{S/D}$ | Shutdown Pin Current | Pin 5 at V^- | | 5 | 25 | μA |
| t_{ON} | Turn-On Time | Pin 5 from V^- to Ground, $R_L = 1\text{k}$ | | 160 | | ns |
| t_{OFF} | Turn-Off Time | Pin 5 from Ground to V^- , $R_L = 1\text{k}$ | | 700 | | ns |

5V ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$

$V_S^+ = 5\text{V}$, $V_S^- = 0\text{V}$, $V_{CM} = 2.5\text{V}$, $C_L \leq 10\text{pF}$, Pin 5 open circuit, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | LT1195M/C | | | UNITS |
|-----------|-----------------------------|---|----------------|-----------|-----------|------------------|
| | | | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | J8, N8 Package | | 3.0 | 9.0 | mV |
| | | S8 Package | | 3.0 | 11.0 | mV |
| I_{OS} | Input Offset Current | | | 0.2 | 1.0 | μA |
| I_B | Input Bias Current | | | ± 0.5 | ± 2.0 | μA |
| | Input Voltage Range | (Note 4) | 2.0 | | 3.5 | V |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 2\text{V}$ to 3.5V | 60 | 85 | | dB |
| A_{VOL} | Large-Signal Voltage Gain | $R_L = 150\Omega$ to Ground, $V_{OUT} = 1\text{V}$ to 3V | 0.5 | 3.0 | | V/mV |
| V_{OUT} | Output Voltage Swing | $R_L = 150\Omega$ to Ground | V_{OUT} High | 3.5 | 3.8 | V |
| | | | V_{OUT} Low | | 0.25 | 0.4 |
| SR | Slew Rate | $A_V = -1$, $V_{OUT} = 1\text{V}$ to 3V | | 140 | | V/ μs |
| GBW | Gain-Bandwidth Product | | | 45 | | MHz |
| I_S | Supply Current | | | 11 | 15 | mA |
| | Shutdown Supply Current | Pin 5 at V^- | | 0.8 | 1.5 | mA |
| $I_{S/D}$ | Shutdown Pin Current | Pin 5 at V^- | | 5 | 25 | μA |

±5V ELECTRICAL CHARACTERISTICS $-55^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$, (Note 11)

$V_S = \pm 5\text{V}$, Pin 5 open circuit, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | LT1195M | | | UNITS |
|--------------------------|------------------------------|---|-----------|-----------|-----------|------------------------------|
| | | | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | | | 3.0 | 15.0 | mV |
| $\Delta V_{OS}/\Delta T$ | Input V_{OS} Drift | | | 17 | | $\mu\text{V}/^\circ\text{C}$ |
| I_{OS} | Input Offset Current | | | 0.2 | 2.0 | μA |
| I_B | Input Bias Current | | | ± 0.5 | ± 2.5 | μA |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = -2.5\text{V}$ to 3.5V | 55 | 85 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 2.375\text{V}$ to $\pm 8\text{V}$ | 55 | 80 | | dB |
| A_{VOL} | Large-Signal Voltage Gain | $R_L = 1\text{k}$, $V_{OUT} = \pm 3\text{V}$ | 1.50 | 5.0 | | V/mV |
| | | $R_L = 150\Omega$, $V_{OUT} = \pm 3\text{V}$ | 0.25 | 0.8 | | V/mV |
| V_{OUT} | Output Voltage Swing | $R_L = 1\text{k}$ | ± 3.7 | ± 3.9 | | V |
| I_S | Supply Current | | | 12 | 18 | mA |
| | Shutdown Supply Current | Pin 5 at V^- , (Note 9) | | 0.8 | 2.5 | mA |
| $I_{S/D}$ | Shutdown Pin Current | Pin 5 at V^- | | 5 | 25 | μA |

±5V ELECTRICAL CHARACTERISTICS $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$

$V_S = \pm 5\text{V}$, Pin 5 open circuit, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | LT1195C | | | UNITS |
|--------------------------|------------------------------|---|-----------|-----------|-----------|--------------------------------|
| | | | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | J8, N8 Package | | 3.0 | 10.0 | mV |
| | | S8 Package | | 3.0 | 15.0 | mV |
| $\Delta V_{OS}/\Delta T$ | Input V_{OS} Drift | | | 12 | | $\mu\text{V}/^{\circ}\text{C}$ |
| I_{OS} | Input Offset Current | | | 0.2 | 1.7 | μA |
| I_B | Input Bias Current | | | ± 0.5 | ± 2.5 | μA |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = -2.5\text{V}$ to 3.5V | 60 | 85 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 2.375\text{V}$ to $\pm 5\text{V}$ | 60 | 90 | | dB |
| A_{VOL} | Large-Signal Voltage Gain | $R_L = 1\text{k}$, $V_{OUT} = \pm 3\text{V}$ | 2.0 | 7.5 | | V/mV |
| | | $R_L = 150\Omega$, $V_{OUT} = \pm 3\text{V}$ | 0.3 | 1.5 | | V/mV |
| V_{OUT} | Output Voltage Swing | $R_L = 1\text{k}$ | ± 3.7 | ± 3.9 | | V |
| I_S | Supply Current | | | 12 | 17 | mA |
| | Shutdown Supply Current | Pin 5 at V^- (Note 9) | | 0.9 | 2.0 | mA |
| $I_{S/D}$ | Shutdown Pin Current | Pin 5 at V^- | | 5 | 25 | μA |

5V ELECTRICAL CHARACTERISTICS $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$

$V_S^+ = 5\text{V}$, $V_S^- = 0\text{V}$, Pin 5 open circuit, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | LT1195C | | | UNITS |
|--------------------------|-----------------------------|---------------------------------------|----------------|-----------|-----------|--------------------------------|
| | | | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | J8, N8 Package | | 1.0 | 10.0 | mV |
| | | S8 Package | | 1.0 | 15.0 | mV |
| $\Delta V_{OS}/\Delta T$ | Input V_{OS} Drift | | | 15 | | $\mu\text{V}/^{\circ}\text{C}$ |
| I_{OS} | Input Offset Current | | | 0.2 | 1.7 | μA |
| I_B | Input Bias Current | | | ± 0.5 | ± 2.5 | μA |
| | Input Voltage Range | (Note 4) | 2.0 | | 3.5 | V |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 2\text{V}$ to 3.5V | 60 | 85 | | dB |
| V_{OUT} | Output Voltage Swing | $R_L = 150\Omega$ to Ground | V_{OUT} High | 3.5 | 3.75 | V |
| | | | V_{OUT} Low | | 0.15 | 0.4 |
| I_S | Supply Current | | | 12 | 16 | mA |
| | Shutdown Supply Current | Pin 5 at V^- (Note 9) | | 0.9 | 2.0 | mA |
| $I_{S/D}$ | Shutdown Pin Current | Pin 5 at V^- | | 5 | 25 | μA |

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: A heat sink may be required to keep the junction temperature below absolute maximum when the output is shorted continuously.

Note 3: T_J is calculated from the ambient temperature T_A and power dissipation P_D according to the following formats:

LT1195MJ8/LT1195CJ8: $T_J = T_A + (P_D \cdot 100^{\circ}\text{C}/\text{W})$
 LT1195N: $T_J = T_A + (P_D \cdot 100^{\circ}\text{C}/\text{W})$
 LT1195CS: $T_J = T_A + (P_D \cdot 150^{\circ}\text{C}/\text{W})$

Note 4: Exceeding the input common mode range may cause the output to invert.

Note 5: Slew rate is measured between $\pm 1\text{V}$ on the output, with $\pm 3\text{V}$ input step.

Note 6: Full power bandwidth is calculated from the slew rate measurement: $\text{FPBW} = \text{SR}/2\pi V_P$.

Note 7: Settling time measurement techniques are shown in "Take the Guesswork Out of Settling Time Measurements," EDN, September 19, 1985.

Note 8: NTSC (3.58MHz). For $R_L = 1\text{k}$, Diff $A_V = 0.3\%$, Diff $\text{Ph} = 0.35^{\circ}$.


Note 9: See Applications Information section for shutdown at elevated temperatures. Do not operate the shutdown above $T_J > 125^{\circ}\text{C}$.

Note 10: AC parameters are 100% tested on the ceramic and plastic DIP packaged parts (J8 and N8 suffix) and are sample tested on every lot of the SO packaged parts (S8 suffix).

Note 11: Do not operate at $A_V < 2$ for $T_A < 0^{\circ}\text{C}$.


TYPICAL PERFORMANCE CHARACTERISTICS

Input Bias Current vs Common Mode Voltage

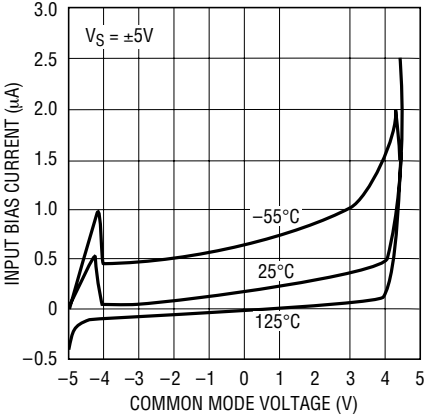


1195 G01

Input Bias Current vs Temperature

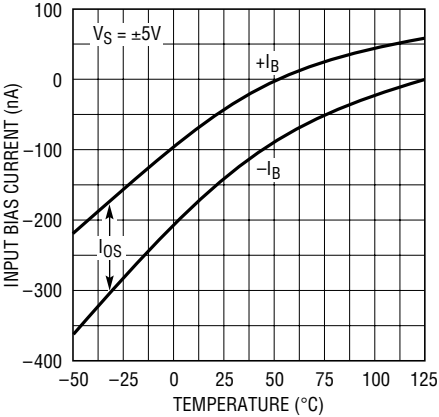


1195 G02

Common Mode Voltage vs Temperature

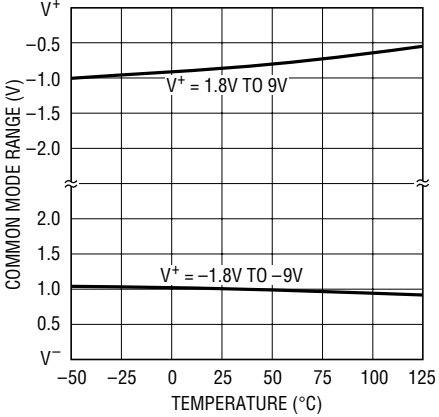


1195 G03

Equivalent Input Noise Voltage vs Frequency

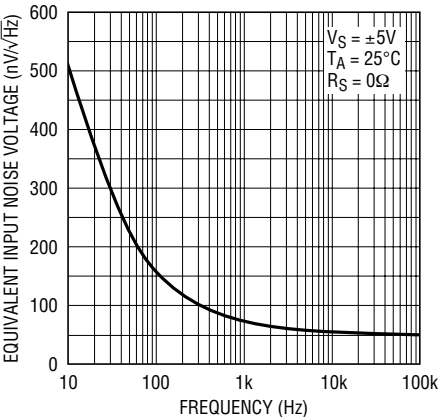


1195 G04

Equivalent Input Noise Current vs Frequency

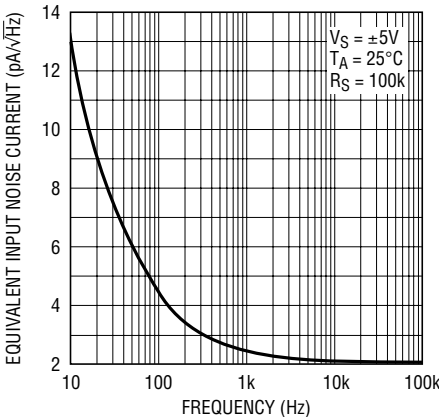


1195 G05

Supply Current vs Supply Voltage

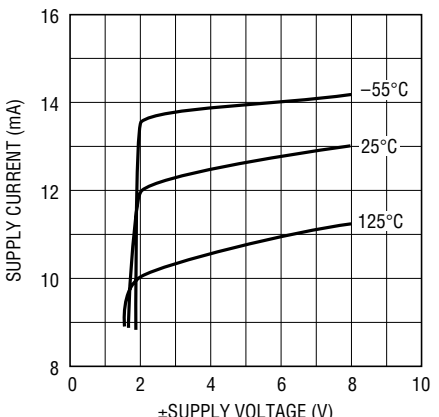


1195 G06

Shutdown Supply Current vs Temperature

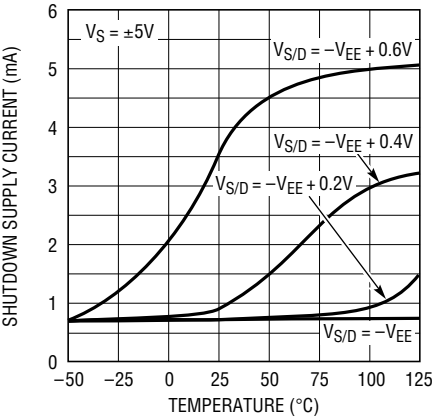


1195 G07

Output Voltage Swing vs Load Resistance

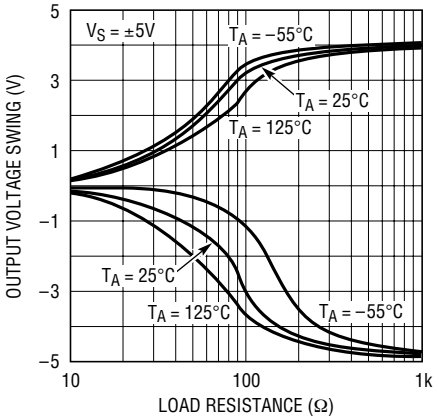

1195 G08


Open-Loop Gain vs Temperature

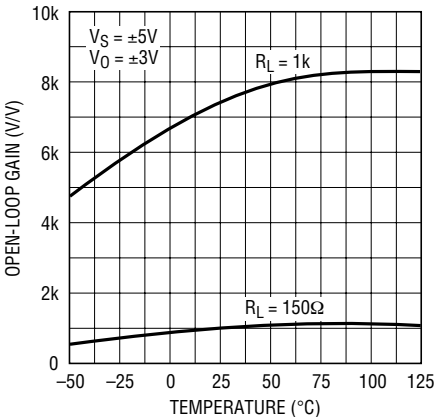

1195 G09


TYPICAL PERFORMANCE CHARACTERISTICS

Gain and Phase vs Frequency

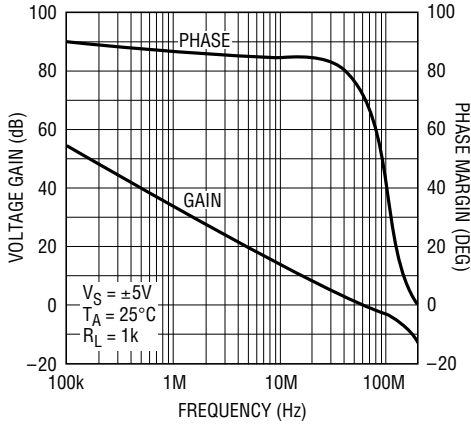


1195 G10

Open-Loop Voltage Gain vs Load Resistance

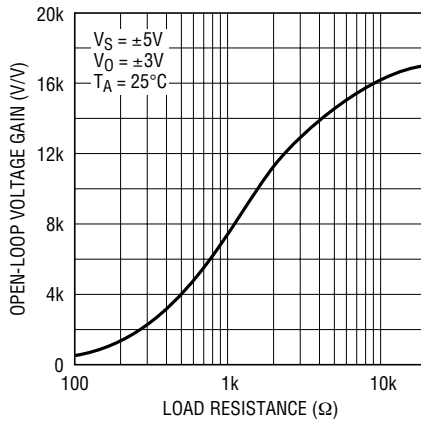


1195 G11

Gain-Bandwidth Product vs Supply Voltage

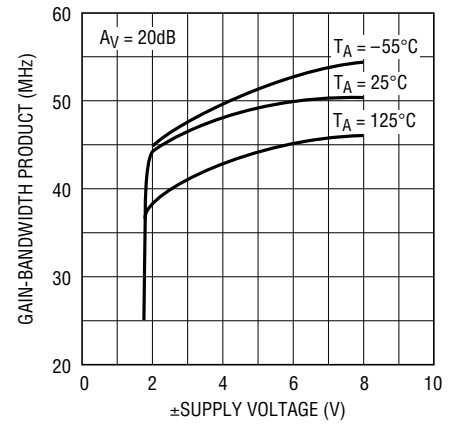


1195 G12

Unity-Gain Frequency and Phase Margin vs Temperature

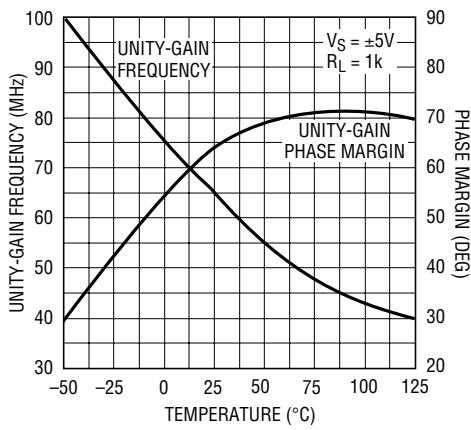


1195 G13

Output Impedance vs Frequency

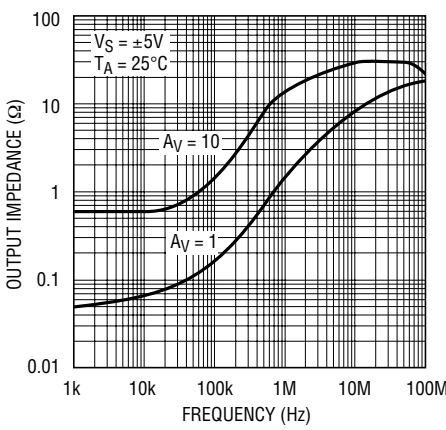


1195 G14

Common Mode Rejection Ratio vs Frequency

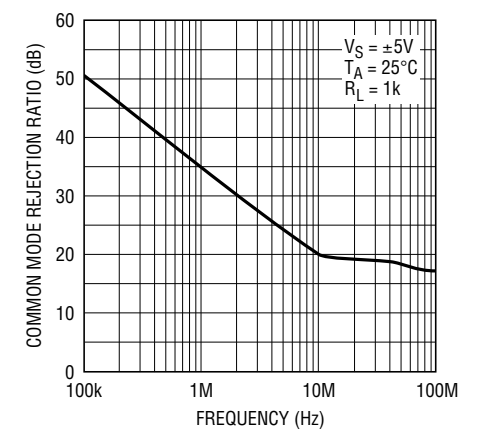


1195 G15

Power Supply Rejection Ratio vs Frequency

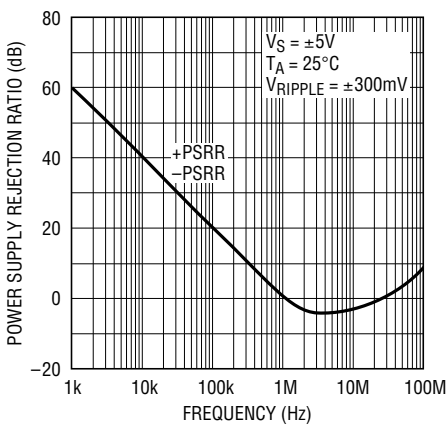


1195 G16

Output Short-Circuit Current vs Temperature

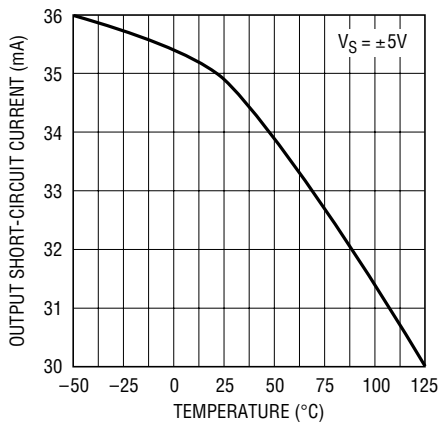

1195 G17


±Output Swing vs Supply Voltage

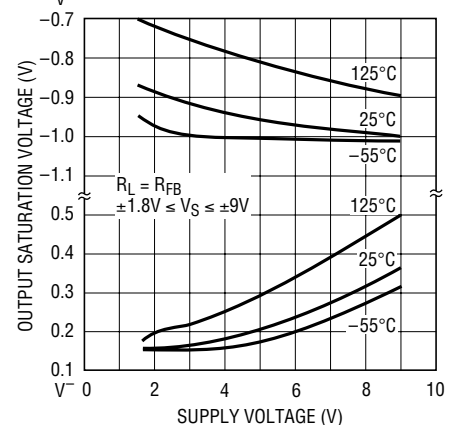

1195 G18


TYPICAL PERFORMANCE CHARACTERISTICS

Slew Rate vs Temperature

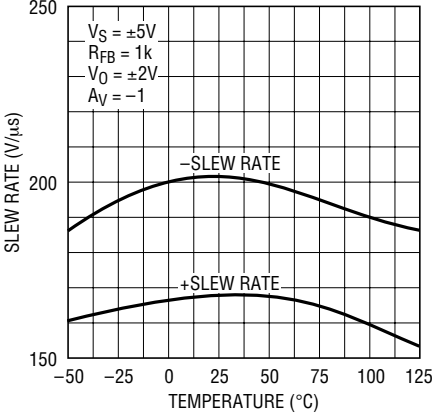


1195 G19

Output Voltage Step vs Settling Time, $A_V = -1$

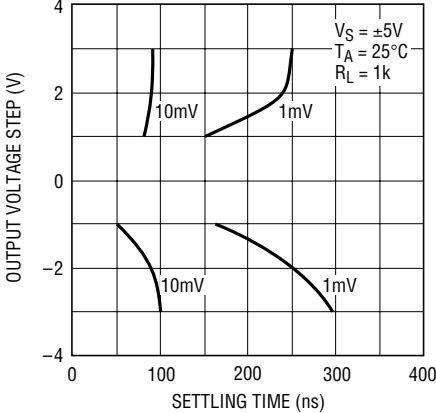


1195 G20

Output Voltage Step vs Settling Time, $A_V = 1$

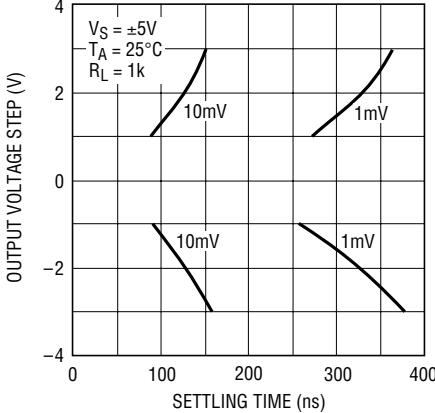

1195 G21


Large-Signal Transient Response

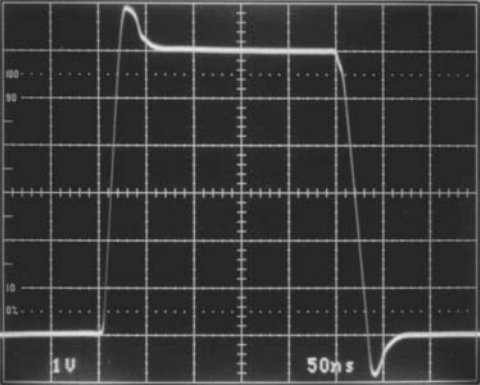

$A_V = 1, R_L = 1k$

1195 G22


Large-Signal Transient Response

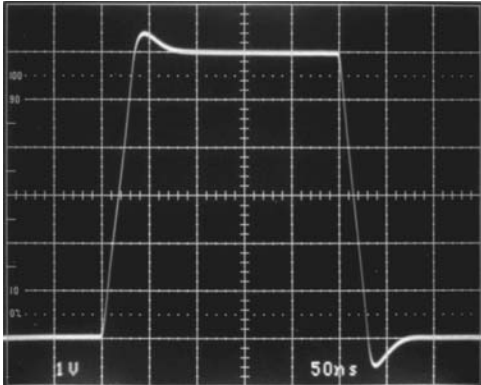

$A_V = -1, R_L = 1k$


1195 G23

Overload Recovery

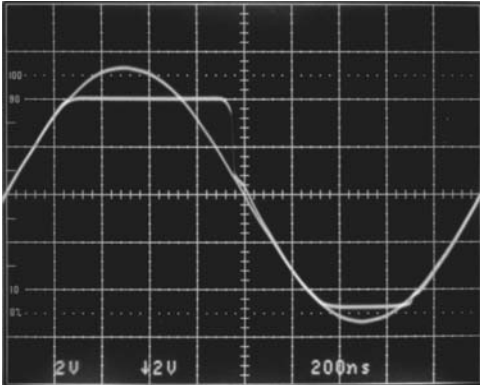

$A_V = 1, V_{IN} = 11V_{p-p}$

1195 G24



INPUT OFFSET VOLTAGE CAN BE ADJUSTED OVER A $\pm 150mV$ RANGE WITH A 1k to 10k POTENTIOMETER.

1195 G25

APPLICATIONS INFORMATION


Power Supply Bypassing

The LT1195 is quite tolerant of power supply bypassing. In some applications a 0.1 μ F ceramic disc capacitor placed 0.5 inches from the amplifier is all that is required. In applications requiring good settling time, it is important to use multiple bypass capacitors. A 0.1 μ F ceramic disc in parallel with a 4.7 μ F tantalum is recommended.

Cable Terminations


The LT1195 operational amplifier has been optimized as a low cost video cable driver. The ± 20 mA guaranteed output current enables the LT1195 to easily deliver 6V_{P-P} into 150 Ω , while operating on ± 5 V supplies.

Double-Terminated Cable Driver

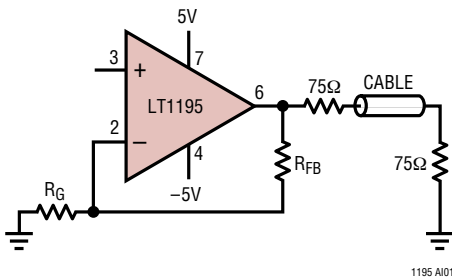

1195 AI01

Cable Driver Voltage Gain vs Frequency

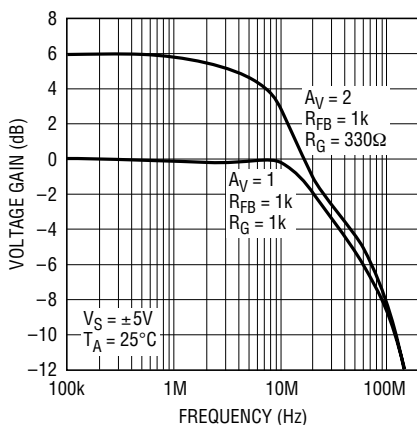

1195 AI02


When driving a cable it is important to terminate the cable to avoid unwanted reflections. This can be done in one of two ways: single termination or double termination. With single termination, the cable must be terminated at the

receiving end (75 Ω to ground) to absorb unwanted energy. The best performance can be obtained by double termination (75 Ω in series with the output of the amplifier, and 75 Ω to ground at the other end of the cable). This termination is preferred because reflected energy is absorbed at each end of the cable. When using the double termination technique it is important to note that the signal is attenuated by a factor of 2, or 6dB. This can be compensated for by taking a gain of 2, or 6dB in the amplifier.

Using the Shutdown Feature

The LT1195 has a unique feature that allows the amplifier to be shut down for conserving power, or for multiplexing several amplifiers onto a common cable. The amplifier will shutdown by taking Pin 5 to V^- . In shutdown, the amplifier dissipates 15mW while maintaining a true high impedance output state of 15k in parallel with the feedback resistors. The amplifiers must be used in a noninverting configuration for MUX applications. In inverting configurations the input signal is fed to the output through the feedback components. The following scope photos show that with very high R_L , the output is truly high impedance; the output slowly decays toward ground. Additionally, when the output is loaded with as little as 1k the amplifier shuts off in 700ns. This shutoff can be under the control of HC CMOS operating between 0V and -5 V.

Output Shutdown

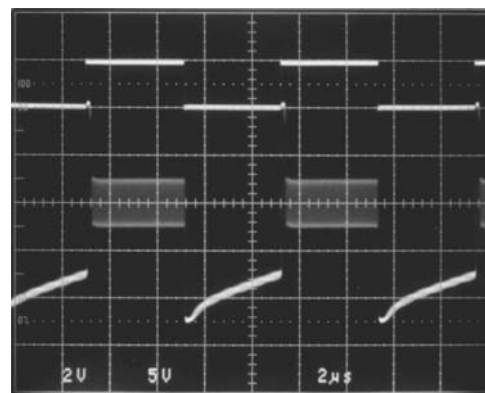


1MHz SINE WAVE GATED OFF WITH SHUTDOWN PIN
 $A_V = 1$, $R_L =$ SCOPE PROBE

1195 AI03

APPLICATIONS INFORMATION

Output Shutdown

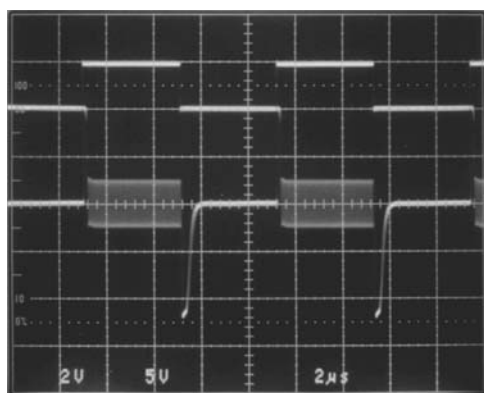


1MHz SINE WAVE GATED OFF WITH SHUTDOWN PIN

$A_v = 1$, $R_L = 1k$

1195 AI04

Single 5V Video Amplifier

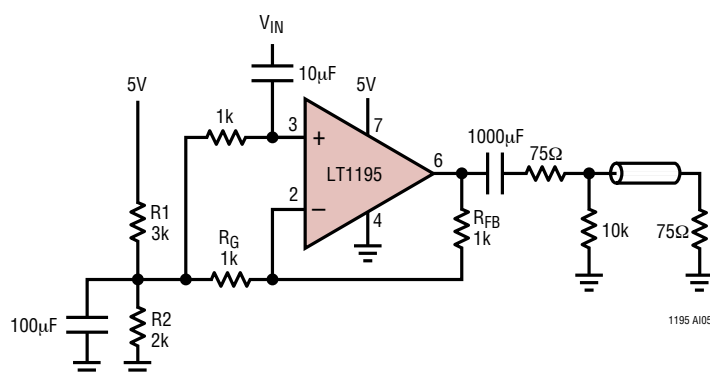

1195 AI05


Detecting Pulses

The front page shows a circuit for detecting very fast pulses. In this open-loop design, the detector diode is D1 and a level shifting or compensating diode is D2. A load resistor R_L is connected to $-5V$, and an identical bias resistor R_B is used to bias the compensating diode. Equal value resistors ensure that the diode drops are equal. A very fast pulse will exceed the amplifier slew rate and cause a long overload recovery time. Some amount of dV/dt limiting on the input can help this overload condition, however too much will delay the response. Also shown is the response to a $4V_{p-p}$ input that is $150ns$ wide. The maximum output slew rate in the photo is $30V/\mu s$. This rate is set by the $30mA$ current limit driving $1000pF$.

Operation on Single 5V Supply


The LT1195 has been optimized for a single 5V supply. This circuit amplifies standard composite video ($1V_{p-p}$ including sync) by 2 and drives a double-terminated 75Ω cable. Resistors R_1 and R_2 bias the amplifier at $2V$, allowing the sync pulses to stay within the common mode range of the amplifier. Large coupling capacitors are required to pass the low frequency sidebands of the composite signal. A multiburst response and vector plot standard color burst are shown.

Video Multiburst at Pin 6 of Amplifier

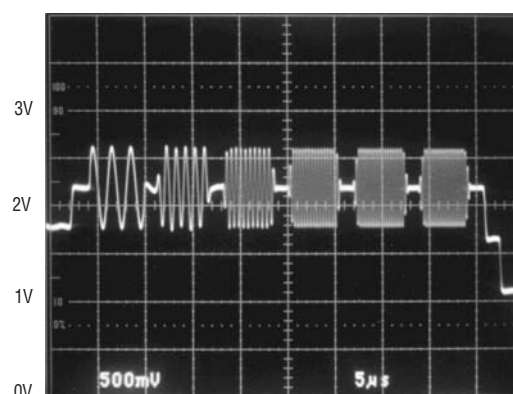

1195 AI06

Vector Plot of Standard Color Burst

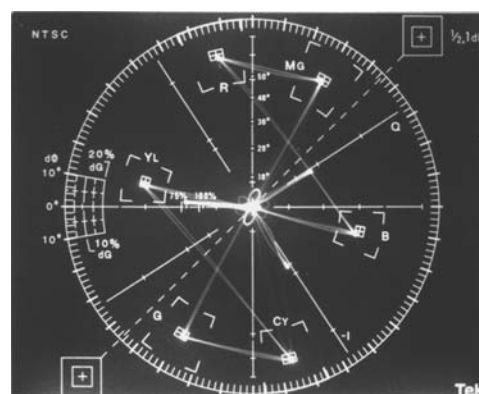


1195 AI07

APPLICATIONS INFORMATION

Send Color Video Over Twisted-Pair


With an LT1195 it is possible to send and receive color composite video signals more than 1000 feet on a low cost twisted-pair. A bidirectional “video bus” consists of the LT1195 op amp and the LT1187 video difference amplifier. A pair of LT1195s at TRANSMIT 1, is used to generate differential signals to drive the line which is back-terminated in its characteristic impedance. The LT1187 twisted-pair receiver, converts signals from differential to single-ended. Topology of the LT1187 provides for cable compensation at the amplifier’s feedback node as shown. In this case, 1000 feet of twisted-pair is compensated with 1000pF and 50Ω to boost the 3dB bandwidth of the system from 750kHz to 4MHz. This bandwidth is adequate to pass a 3.58MHz chrome subcarrier and the 4.5MHz sound subcarrier. Attenuation in the cable can be compensated by lowering the gain set resistor R_G . At TRANSMIT 2, another pair of LT1195s serve the dual function to provide cable termination via low output impedance and generate differential signals for TRANSMIT 2. Cable termination is made up of 15Ω and 33Ω attenuators to reduce the differential input signal to the LT1187. Maximum input signal for the LT1187 is 760mV_{P-P}.

1.5MHz Square Wave Input and Equalized Response Through 1000 Feet of Twisted-Pair

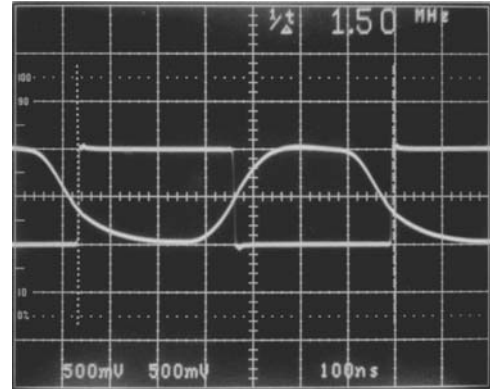


1195 A109

Multiburst Pattern Passed Through 1000 Feet of Twisted-Pair

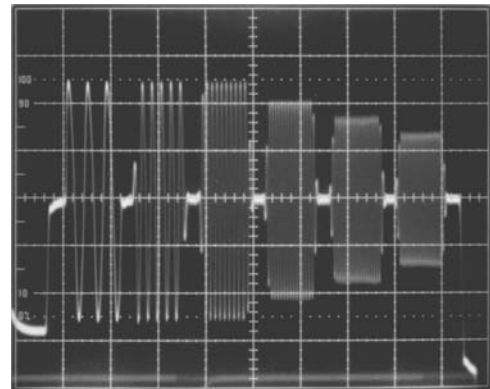


1195 A110

1.5MHz Square Wave Input and Unequalized Response Through 1000 Feet of Twisted-Pair

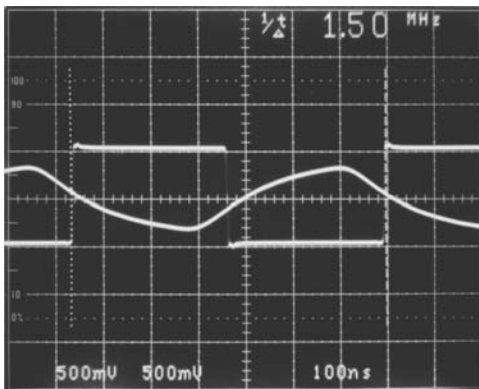

1195 A108


Vector Plot of Standard Color Burst Through 1000 Feet of Twisted-Pair

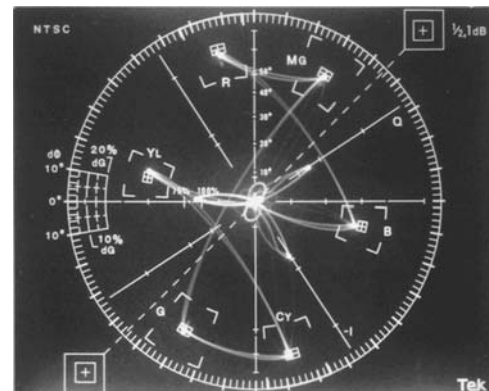

1195 A111


APPLICATIONS INFORMATION

Bidirectional Video Bus

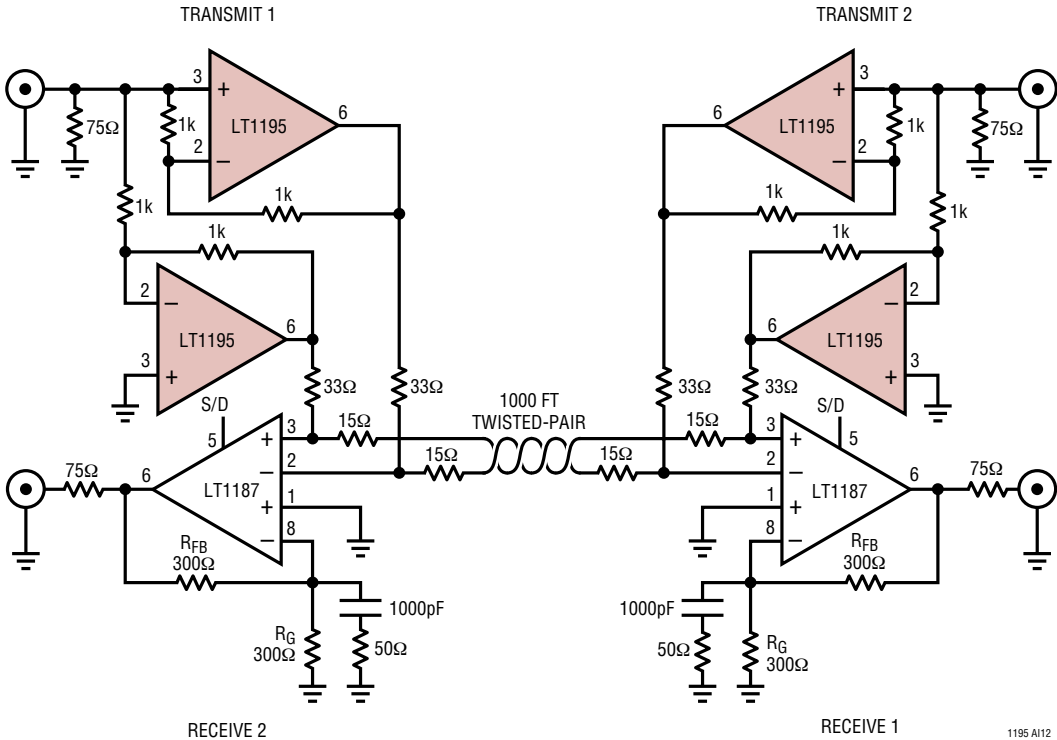

1195 AI12




SIMPLIFIED SCHEMATIC

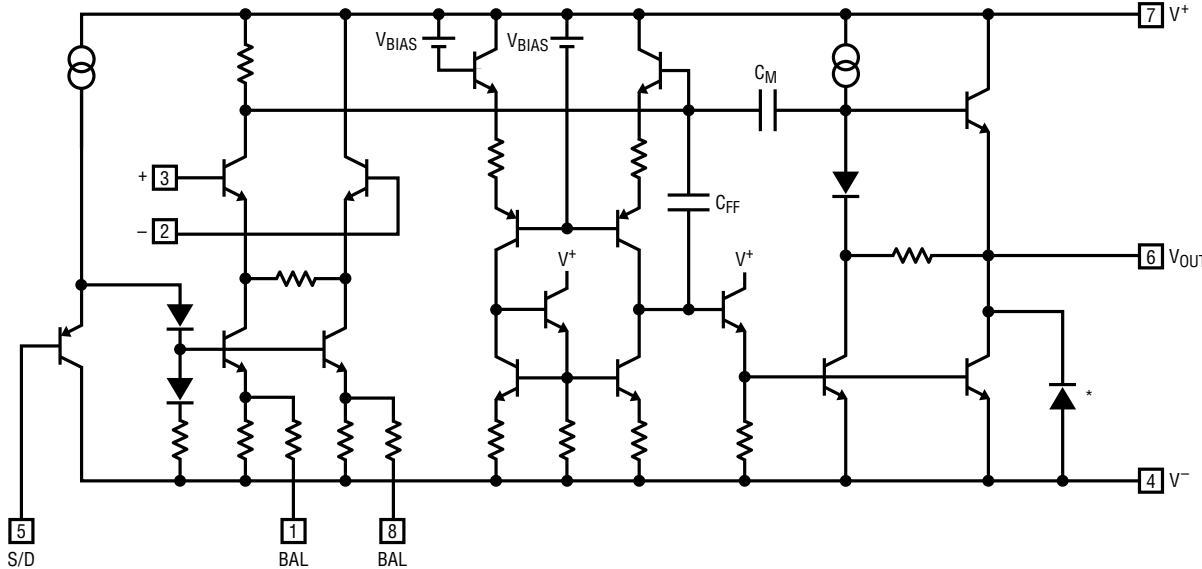

* SUBSTRATE DIODE, DO NOT FORWARD BIAS

1195 SS

PACKAGE DESCRIPTION

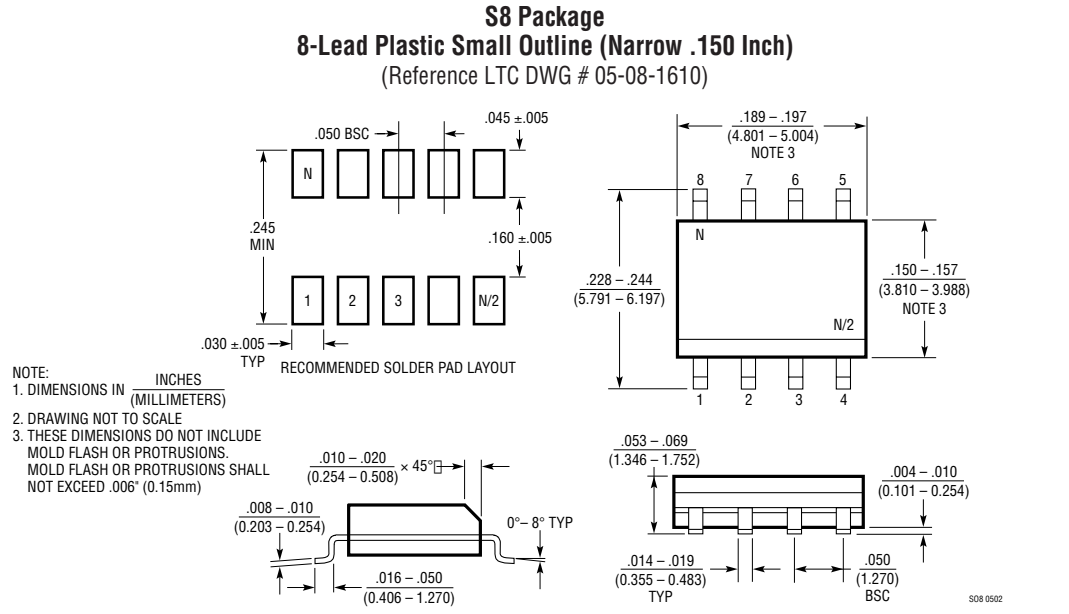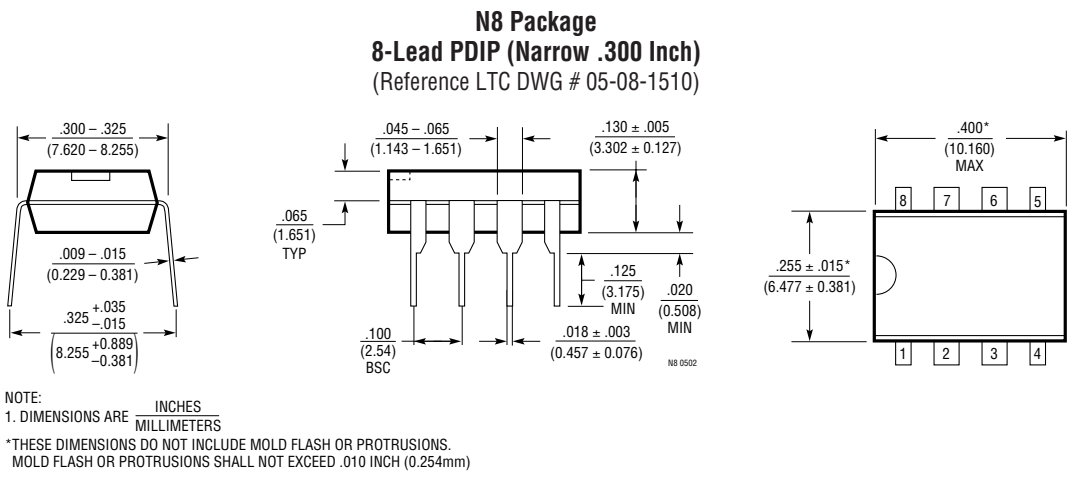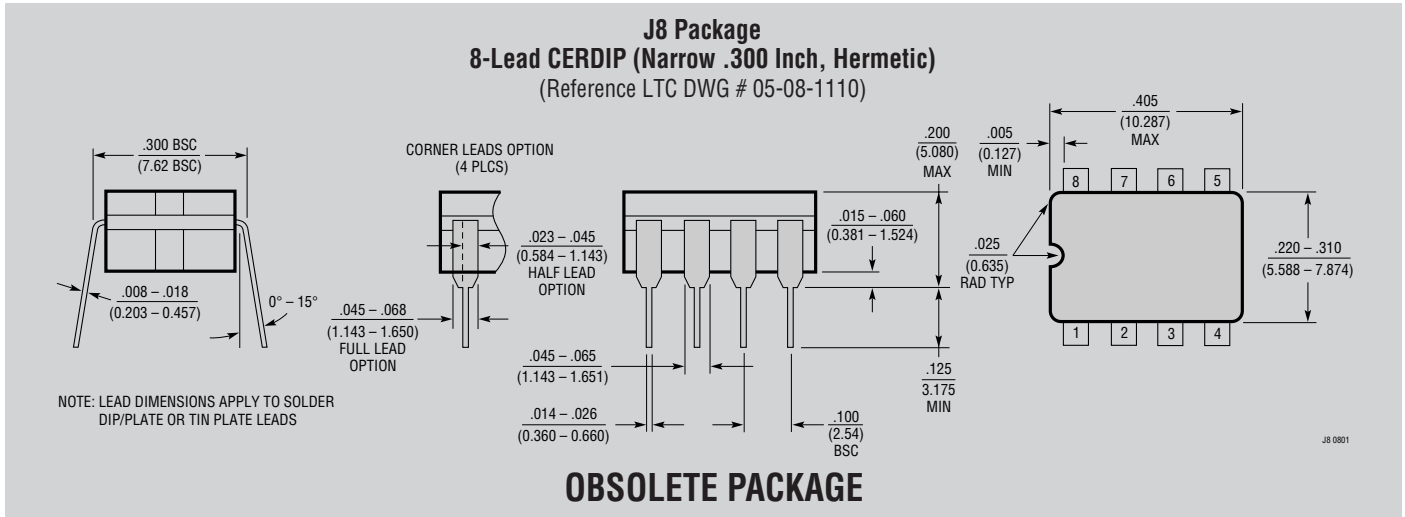



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.