


## High voltage high and low-side driver

Datasheet - production data

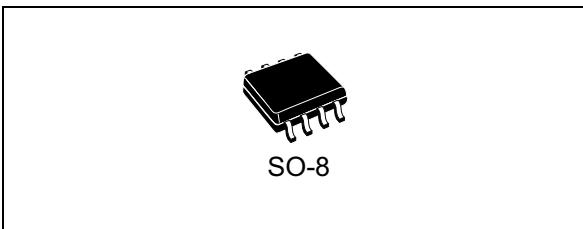

## Features

- High voltage rail up to 600 V
- dV/dt immunity  $\pm 50$  V/ns over full temperature range
- Driver current capability:
  - 290 mA source
  - 430 mA sink
- Switching times 75/35 ns rise/fall with 1 nF load
- 3.3 V, 5 V TTL/CMOS inputs with hysteresis
- Integrated bootstrap diode
- Internal 320 ns deadtime
- Interlocking function
- Compact and simplified layout
- Bill of material reduction
- Flexible, easy and fast design

## Applications

- Home appliances
- Industrial applications and drives
- Motor drivers DC, AC, PMDC and PMAC motors systems
- HVAC
- Factory automation
- Power supply systems
- Compressors
- Fans
- Lighting applications

## Description

The L6399 is a high voltage device manufactured using BCD™ “offline” technology. It is a single-chip half bridge gate driver for N-channel power MOSFETs or IGBTs.


The high-side (floating) section is designed to withstand a voltage rail up to 600 V. The logic inputs are CMOS/TTL compatible down to 3.3 V for easy microcontroller/DSP interfacing.

## Contents

<b>1</b>	<b>Block diagram</b>	<b>3</b>
<b>2</b>	<b>Electrical data</b>	<b>4</b>
2.1	Absolute maximum ratings	4
2.2	Recommended operating conditions	4
2.3	Thermal data	4
<b>3</b>	<b>Pin connection</b>	<b>5</b>
<b>4</b>	<b>Electrical characteristics</b>	<b>6</b>
4.1	AC operation	6
4.2	DC operation	7
<b>5</b>	<b>Timing and waveform definitions</b>	<b>8</b>
<b>6</b>	<b>Input logic</b>	<b>10</b>
<b>7</b>	<b>Bootstrap driver</b>	<b>11</b>
	C <sub>BOOT</sub> selection and charging	11
<b>8</b>	<b>Typical application diagram</b>	<b>13</b>
<b>9</b>	<b>Package information</b>	<b>14</b>
9.1	SO-8 package information	15
<b>10</b>	<b>Order codes</b>	<b>17</b>
<b>11</b>	<b>Revision history</b>	<b>17</b>

# 1 Block diagram

Figure 1. Block diagram

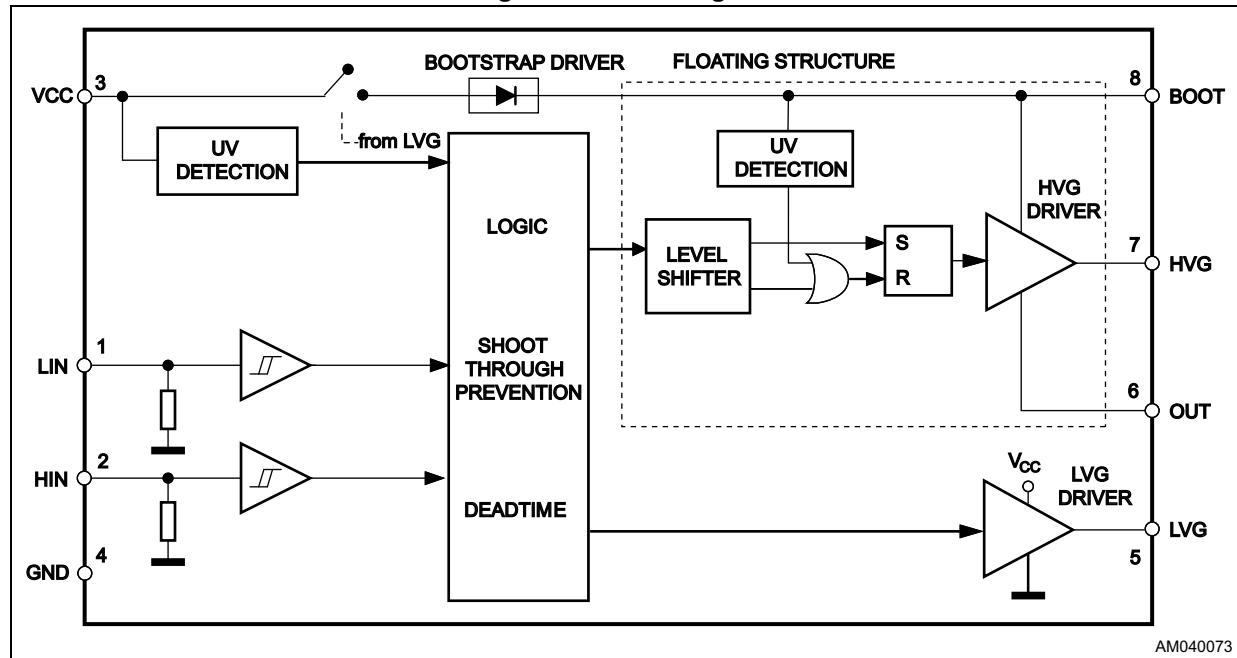

## 2 Electrical data

### 2.1 Absolute maximum ratings

Table 1. Absolute maximum rating

Symbol	Parameter	Value		Unit
		Min.	Max.	
$V_{CC}$	Supply voltage	-0.3	21	V
$V_{OUT}$	Output voltage	$V_{BOOT} - 21$	$V_{BOOT} + 0.3$	V
$V_{BOOT}$	Bootstrap voltage	-0.3	620	V
$V_{hvg}$	High-side gate output voltage	$V_{OUT} - 0.3$	$V_{BOOT} + 0.3$	V
$V_{lvg}$	Low-side gate output voltage	-0.3	$V_{CC} + 0.3$	V
$V_i$	Logic input voltage	-0.3	15	V
$dV_{OUT}/dt$	Allowed output slew rate	-	50	V/ns
$P_{tot}$	Total power dissipation ( $T_A = 25^\circ\text{C}$ )	-	800	mW
$T_J$	Junction temperature	-	150	$^\circ\text{C}$
$T_{stg}$	Storage temperature	-50	150	$^\circ\text{C}$
ESD	Human body model	2		kV

### 2.2 Recommended operating conditions

Table 2. Recommended operating conditions

Symbol	Pin	Parameter	Test condition	Min.	Max.	Unit
$V_{CC}$	3	Supply voltage	-	10	20	V
$V_{BO}^{(1)}$	8 - 6	Floating supply voltage	-	9.8	20	V
$V_{OUT}$	6	Output voltage	-	- 11 <sup>(2)</sup>	580	V
$f_{sw}$	-	Switching frequency	HVG, LVG load $C_L = 1 \text{ nF}$	-	800	kHz
$T_J$	-	Junction temperature	-	-40	125	$^\circ\text{C}$

1.  $V_{BO} = V_{BOOT} - V_{OUT}$ .
2. LVG off.  $V_{CC} = 10 \text{ V}$   
Logic is operational if  $V_{BOOT} > 5 \text{ V}$ .


### 2.3 Thermal data

Table 3. Thermal data

Symbol	Parameter	SO-8	Unit
$R_{th(JA)}$	Thermal resistance junction to ambient	150	$^\circ\text{C/W}$

### 3 Pin connection

**Figure 2. Pin connection (top view)**

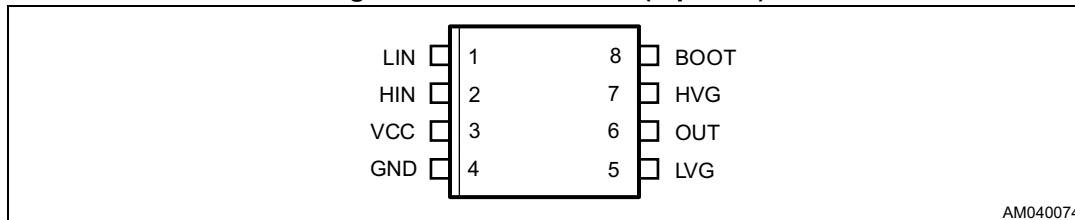

**Table 4. Pin description**

Pin no.	Pin name	Type	Function
1	LIN	I	Low-side driver logic input (active high)
2	HIN	I	High-side driver logic input (active high)
3	VCC	P	Lower section supply voltage
4	GND	P	Ground
5	LVG <sup>(1)</sup>	O	Low-side driver output
6	OUT	P	High-side (floating) common voltage
7	HVG <sup>(1)</sup>	O	High-side driver output
8	BOOT	P	Bootstrapped supply voltage

1. The circuit guarantees less than 1 V on the LVG and HVG pins (at  $I_{sink} = 10 \text{ mA}$ ), with  $V_{CC} > 3 \text{ V}$ . This allows omitting the “bleeder” resistor connected between the gate and the source of the external MOSFET normally used to hold the pin low.

## 4 Electrical characteristics

### 4.1 AC operation

Table 5. AC operation electrical characteristics ( $V_{CC} = 15 \text{ V}$ ;  $T_J = +25 \text{ }^\circ\text{C}$ )

Symbol	Pin	Parameter	Test condition		Min.	Typ.	Max.	Unit
$t_{on}$	1, 2 vs. 5, 7	High/low-side driver turn-on propagation delay <sup>(1)</sup>	$V_{OUT} = 0 \text{ V}$	$V_{IN} = 0 \text{ to } 3.3 \text{ V}$	50	125	200	ns
$t_{off}$		High/low side driver turn-off propagation delay <sup>(1)</sup>	$V_{BOOT} = V_{CC}$ $C_L = 1 \text{ nF}$	$V_{IN} = 3.3 \text{ to } 0 \text{ V}$	50	125	200	ns
DT	-	Deadtime <sup>(2)</sup>	$C_L = 1 \text{ nF}$	-	225	320	415	ns
$t_r$	5, 7	Rise time <sup>(1)</sup>	$C_L = 1 \text{ nF}$	-	-	75	120	ns
$t_f$		Fall time <sup>(1)</sup>	$C_L = 1 \text{ nF}$	-	-	35	70	ns

1. See [Figure 3](#)

2. See [Figure 4](#).

## 4.2 DC operation

Table 6. DC operation electrical characteristics ( $V_{CC} = 15 \text{ V}$ ;  $T_J = + 25^\circ\text{C}$ )


Symbol	Pin	Parameter	Test condition	Min.	Typ.	Max.	Unit
<b>Low supply voltage section<sup>(1)</sup></b>							
$V_{CC\_hys}$	3	$V_{CC}$ UV hysteresis	-	1.2	1.5	1.8	V
$V_{CC\_thON}$		$V_{CC}$ UV turn-ON threshold	-	9	9.5	10	V
$V_{CC\_thOFF}$		$V_{CC}$ UV turn-OFF threshold	-	7.6	8	8.4	V
$I_{QCCU}$		Undervoltage quiescent supply current	$V_{CC} = 7 \text{ V}$ $\text{LIN} = \text{HIN} = \text{GND}$	-	170	330	$\mu\text{A}$
$I_{QCC}$		Quiescent current	$V_{CC} = 15 \text{ V}$ $\text{LIN} = \text{HIN} = \text{GND}$	-	380	440	$\mu\text{A}$
<b>Bootstrapped supply voltage section<sup>(1)</sup></b>							
$V_{BO\_hys}$	8	$V_{BO}$ UV hysteresis	-	0.8	1	1.2	V
$V_{BO\_thON}$		$V_{BO}$ UV turn-ON threshold	-	8.2	9	9.8	V
$V_{BO\_thOFF}$		$V_{BO}$ UV turn-OFF threshold	-	7.3	8	8.7	V
$I_{QBOU}$		Undervoltage $V_{BO}$ quiescent current	$V_{BO} = 7 \text{ V}$ , $\text{LIN} = \text{GND}$ ; $\text{HIN} = 5 \text{ V}$	-	30	140	$\mu\text{A}$
$I_{QBO}$		$V_{BO}$ quiescent current	$V_{BO} = 15 \text{ V}$ , $\text{LIN} = \text{GND}$ ; $\text{HIN} = 5 \text{ V}$	-	190	240	$\mu\text{A}$
$I_{LK}$	-	High voltage leakage current	$V_{hvg} = V_{OUT} = V_{BOOT} = 600 \text{ V}$	-	-	10	$\mu\text{A}$
$R_{DS(on)}$	-	Bootstrap driver on resistance <sup>(2)</sup>	LVG ON	-	120	-	$\Omega$
<b>Driving buffers section</b>							
$I_{SO}$	5, 7	High/low-side source short-circuit current	$V_{IN} = V_{ih}$ ( $t_p < 10 \mu\text{s}$ )	200	290	-	mA
$I_{SI}$		High/low side sink short-circuit current	$V_{IN} = V_{il}$ ( $t_p < 10 \mu\text{s}$ )	250	430	-	mA
<b>Logic inputs</b>							
$V_{il}$	1, 2	Low level logic threshold voltage	-	0.8	-	1.1	V
$V_{ih}$		High level logic threshold voltage	-	1.9	-	2.25	V
$I_{INI}$		LIN/HIN logic "0" input bias current	$V_{IN} = 0 \text{ V}$	-	-	1	$\mu\text{A}$
$I_{HINh}$	2	HIN High logic level input current	$V_{IN} = 15 \text{ V}$	110	175	260	$\mu\text{A}$
$R_{PD-HIN}$		HIN pull-down resistor	$V_{IN} = 15 \text{ V}$	57	85	137	$\text{k}\Omega$
$I_{LINh}$	1	LIN High logic level input current	$V_{IN} = 15 \text{ V}$	10	40	100	$\mu\text{A}$
$R_{PD-LIN}$		LIN pull-down resistor	$V_{IN} = 15 \text{ V}$	150	375	1500	$\text{k}\Omega$

1.  $V_{BO} = V_{BOOT} - V_{OUT}$ .


2.  $R_{DS(on)}$  is tested in the following way:  $R_{DS(on)} = [(V_{CC} - V_{BOOT1}) - (V_{CC} - V_{BOOT2})] / [I_1(V_{CC}, V_{BOOT1}) - I_2(V_{CC}, V_{BOOT2})]$  where  $I_1$  is the pin 8 current when  $V_{BOOT} = V_{BOOT1}$ ,  $I_2$  when  $V_{BOOT} = V_{BOOT2}$ .


## 5 Timing and waveform definitions

**Figure 3. Propagation delay timing definition**

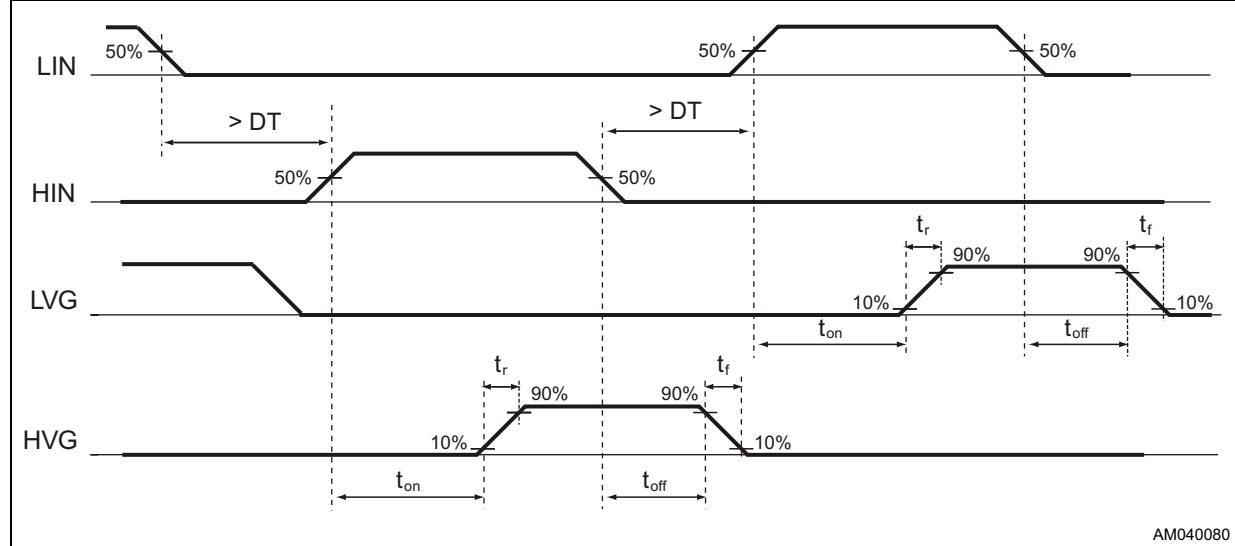

**Figure 4. Deadtime and interlocking timing definition**

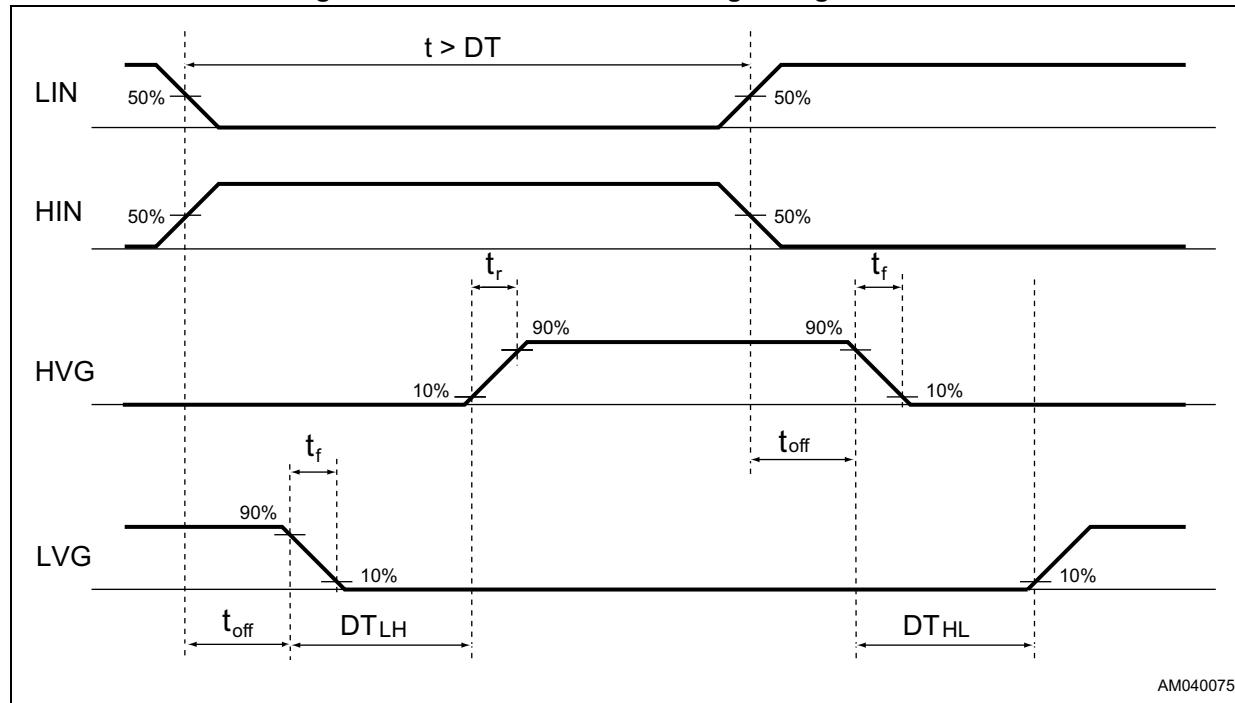

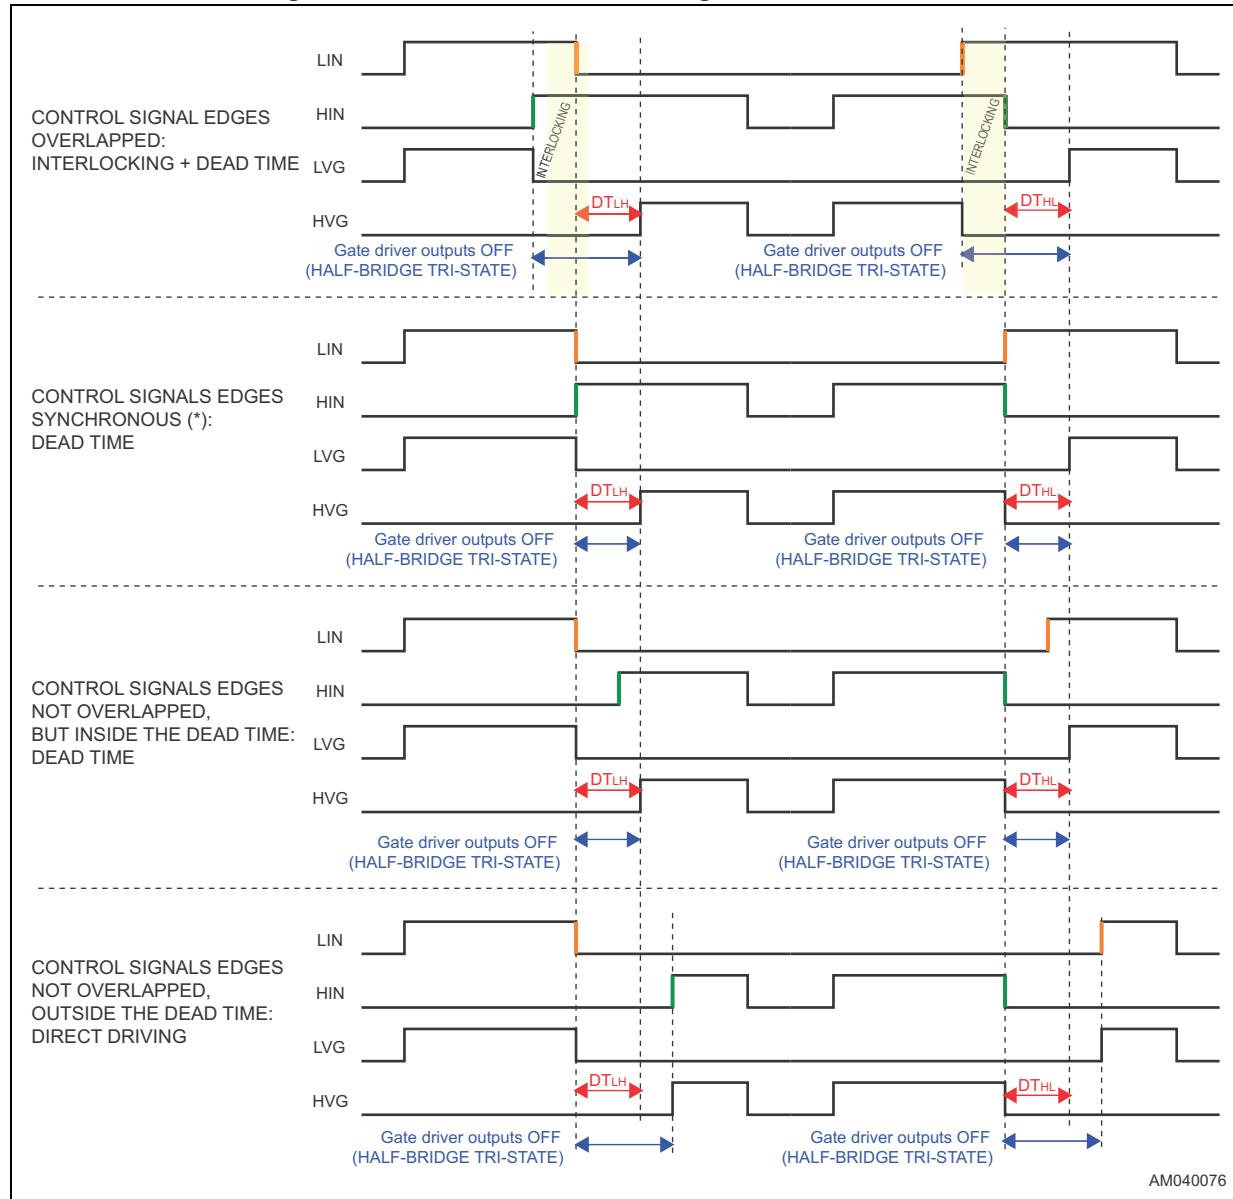**Figure 5. Deadtime and interlocking waveform definitions**

## 6 Input logic

Table 7. Truth table

Input		Output	
LIN	HIN	LVG	HVG
L	L	L	L
L	H	L	H
H	L	H	L
H	H	L <sup>(1)</sup>	L <sup>(1)</sup>

1. Interlocking function.

Input logic is provided with interlocking circuitry which prevents the two outputs (LVG, HVG) being active at the same time when both the logic input pins (LIN, HIN) are at a high logic level. In addition, to prevent cross-conduction of the external MOSFETs, after each output is turned off, the other output cannot be turned on before a certain amount of time (DT) (see [Figure 4: Deadtime and interlocking timing definition](#) and [Figure 5: Deadtime and interlocking waveform definitions](#)).

## 7 Bootstrap driver

A bootstrap circuitry is needed to supply the high voltage section. This function is normally accomplished by a high voltage fast recovery diode (*Figure 6*). In the L6399 device a patented integrated structure replaces the external diode. It is realized by a high voltage DMOS, driven synchronously with the low-side driver (LVG), with a diode in series, as shown in *Figure 7*. An internal charge pump (*Figure 7*) provides the DMOS driving voltage.

### C<sub>BOOT</sub> selection and charging

To choose the proper C<sub>BOOT</sub> value the external MOS can be seen as an equivalent capacitor. This capacitor C<sub>EXT</sub> is related to the MOS total gate charge:

**Equation 1**

$$C_{EXT} = \frac{Q_{gate}}{V_{gate}}$$

The ratio between the capacitors C<sub>EXT</sub> and C<sub>BOOT</sub> is proportional to the cyclical voltage loss. It has to be:

**Equation 2**

$$C_{BOOT} \ggg C_{EXT}$$

E.g.: if Q<sub>gate</sub> is 30 nC and V<sub>gate</sub> is 10 V, C<sub>EXT</sub> is 3 nF. With C<sub>BOOT</sub> = 100 nF the drop would be 300 mV.

If HVG has to be supplied for a long time, the C<sub>BOOT</sub> selection has to take into account also the leakage and quiescent losses.

E.g.: HVG steady state consumption is lower than 190 µA, so if HVG T<sub>ON</sub> is 5 ms, C<sub>BOOT</sub> has to supply C<sub>EXT</sub> with 1 µC. This charge on a 1 µF capacitor means a voltage drop of 1 V.

The internal bootstrap driver gives a great advantage: the external fast recovery diode can be avoided (it usually has a high leakage current).

This internal diode can work only if V<sub>OUT</sub> is close to GND (or lower) and in the meanwhile the LVG is on. The charging time (T<sub>charge</sub>) of the C<sub>BOOT</sub> is the time in which both conditions are fulfilled and it has to be long enough to charge the capacitor.

The bootstrap driver introduces a voltage drop due to the equivalent resistance of the internal diode R<sub>DSON</sub> (typical value: 120 Ω). At low frequency this drop can be neglected. Anyway increasing the frequency it must be taken into account.

The following equation is useful to compute the drop on the bootstrap DMOS:

**Equation 3**

$$V_{drop} = I_{charge} \cdot R_{BOOT} \rightarrow V_{drop} = \frac{Q_{gate}}{T_{charge}} \cdot R_{DSON}$$

where Q<sub>gate</sub> is the gate charge of the external power MOS.


For example: using a power MOS with a total gate charge of 30 nC the drop on the bootstrap diode is about 1 V, if the  $T_{charge}$  is 5  $\mu$ s. In fact:

**Equation 4**


$$V_{drop} = \frac{30\text{nC}}{5\mu\text{s}} \cdot 120\Omega \sim 0.72\text{V}$$

$V_{drop}$  has to be taken into account when the voltage drop on  $C_{BOOT}$  is calculated: if this drop is too high, or the circuit topology doesn't allow a sufficient charging time, an external diode can be used.

**Figure 6. Bootstrap driver with high voltage fast recovery diode**

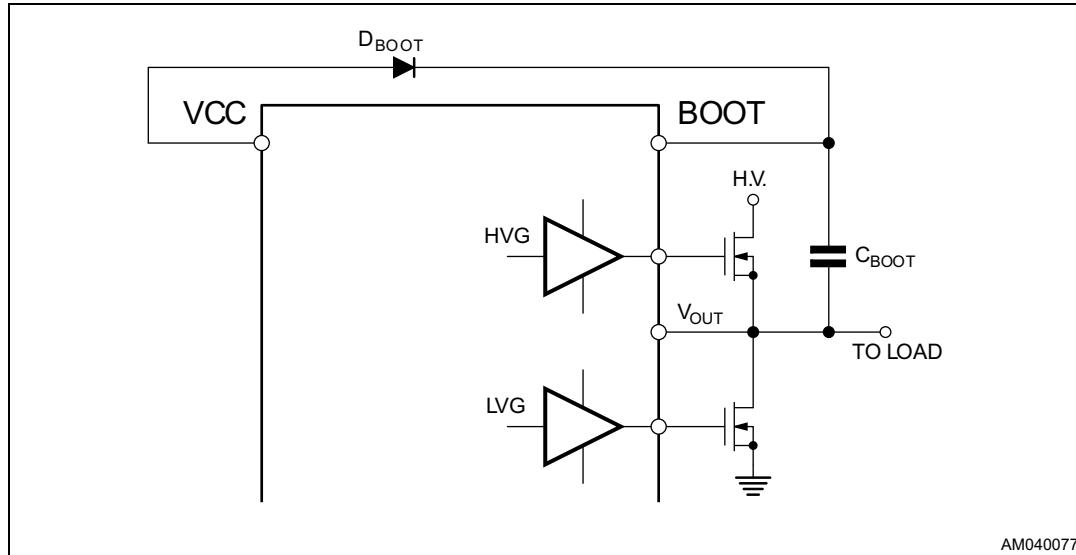


**Figure 7. Bootstrap driver with internal charge pump**

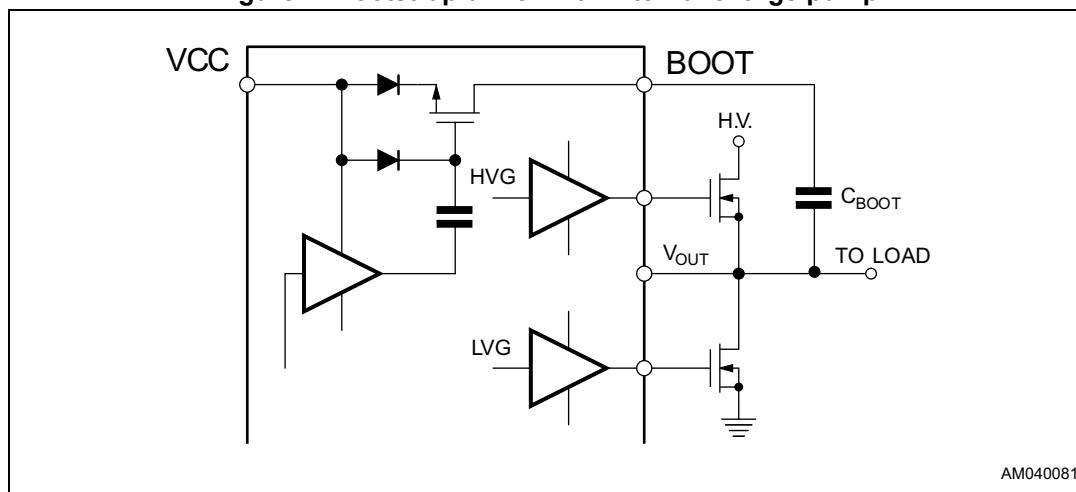

## 8 Typical application diagram

Figure 8. Typical application schematic

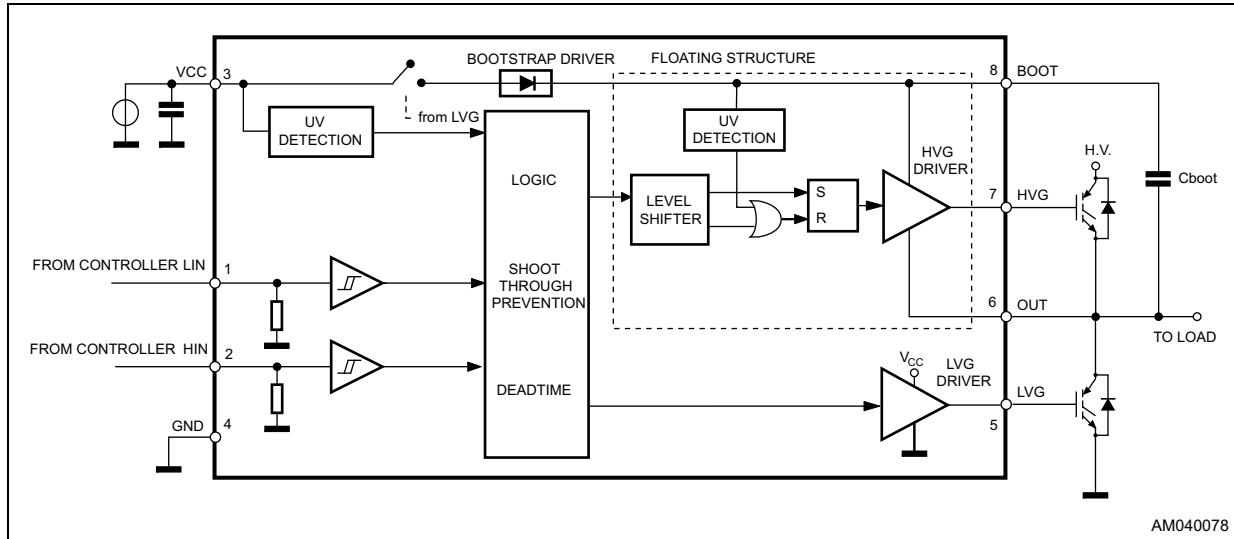

## 9 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com).  
ECOPACK is an ST trademark.

## 9.1 SO-8 package information

Figure 9. SO-8 package outline

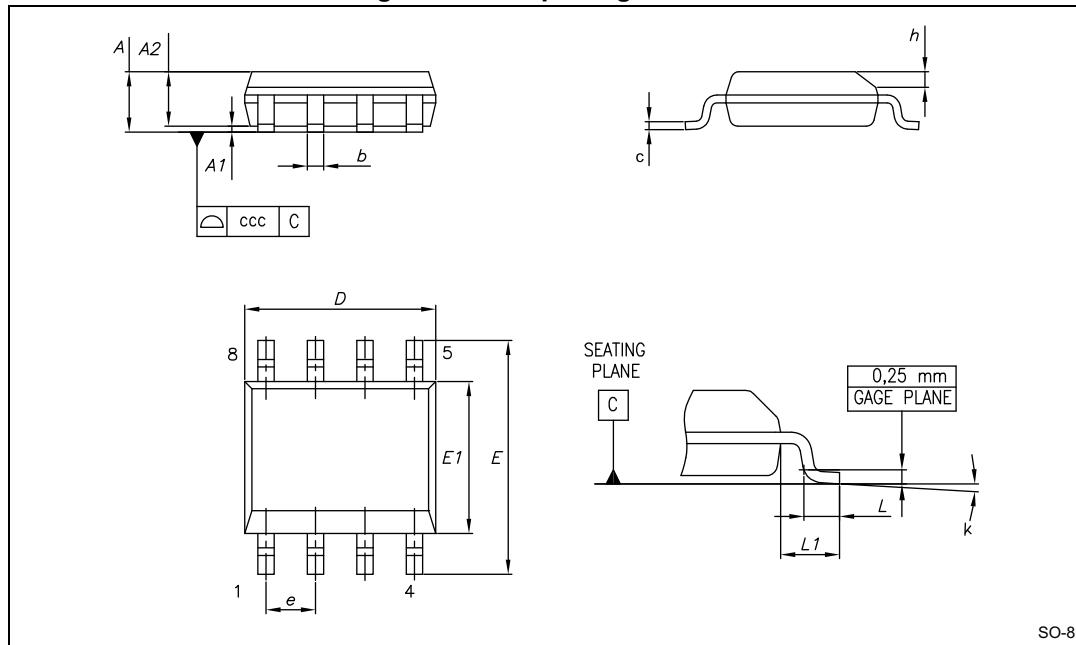
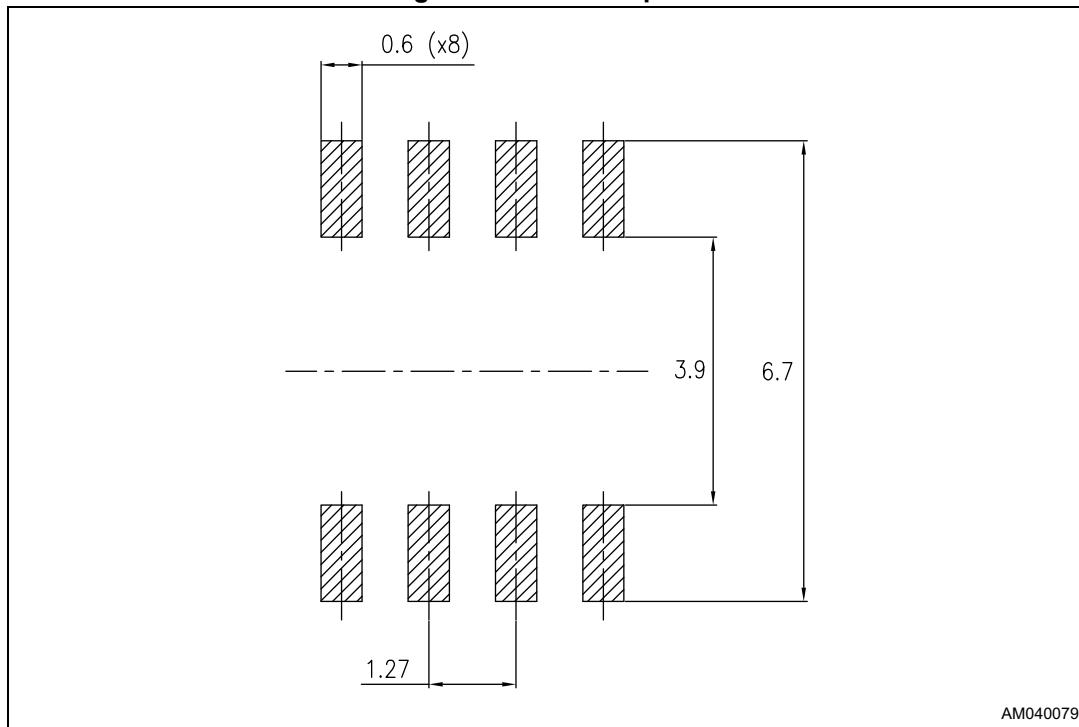


Table 8. SO-8 package mechanical data

Symbol	Dimensions (mm)			Note
	Min.	Typ.	Max.	
A	-	-	1.75	-
A1	0.10	-	0.25	-
A2	1.25	-	-	-
b	0.28	-	0.48	-
c	0.17	-	0.23	-
D	4.80	4.90	5.00	(1)
E	5.80	6.00	6.20	-
E1	3.80	3.90	4.00	(2)
e	-	1.27	-	-
h	0.25	-	0.50	-
L	0.40	-	1.27	-
L1	-	1.04	-	-
k	0	-	8	(3)
ccc	-	-	0.10	-

1. The dimension "D" does not include the mold flash, protrusions or gate burrs. The mold flash, protrusions or gate burrs shall not exceed 0.15 mm in total (both sides).
2. The dimension "E1" does not include the interlead flash or protrusions. The interlead flash or protrusions shall not exceed 0.25 mm per side.
3. Degrees.

**Figure 10. SO-8 footprint**

## 10 Order codes

Table 9. Order codes

Order codes	Package	Packaging
L6399D	SO-8	Tube
L6399DTR	SO-8	Tape and reel

## 11 Revision history

Table 10. Document revision history

Date	Revision	Changes
03-Mar-2017	1	Initial release.
27-Mar-2017	2	Updated document status to: <i>Datasheet - production data on page 1</i> .

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.