


WaveLink® Differential Probe System (4 GHz – 6 GHz)

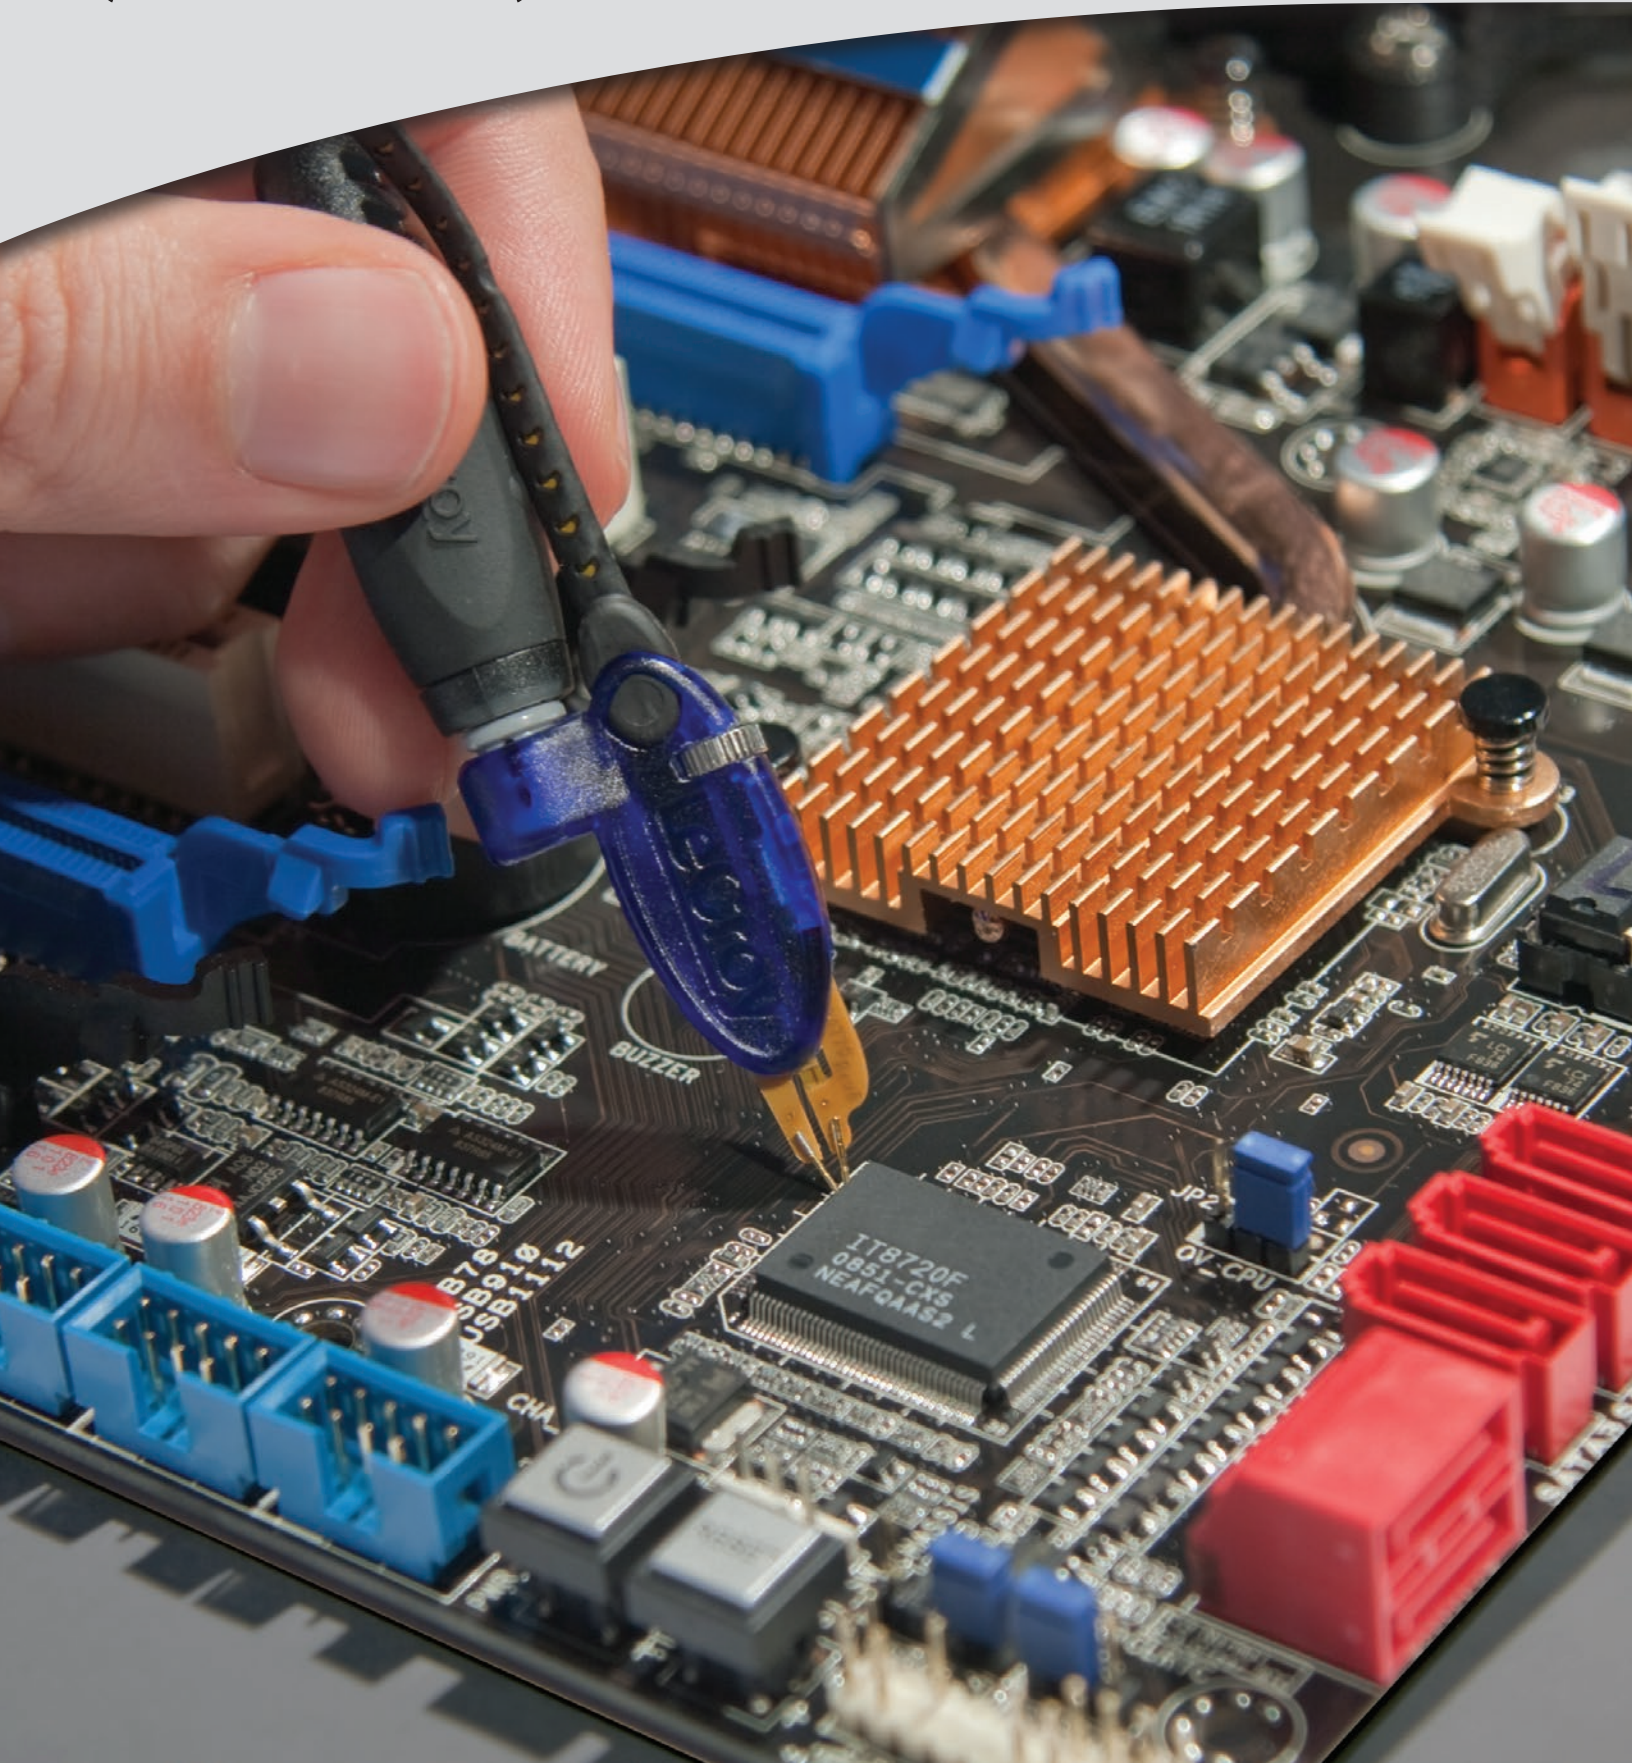

EXCEPTIONAL WAVEFORM FIDELITY

Key Features

- 4 GHz or 6 GHz models
- Up to 5 Vpk-pk dynamic range with low noise
- ± 3 V offset range
- Deluxe soft carrying case
- Wide variety of tips and leads
 - Solder-In Lead
 - Positioner (Browser) Tip
 - Adjustable (Browser) Tip
 - Quick Connect Lead
 - Square Pin Lead
 - HiTemp Solder-In Lead
- Ideal for DDR2, DDR3, LPDDR2



The WaveLink 4-6 GHz differential probe series provides the widest range of tips with the highest input dynamic range and a large offset capability.

WaveLink®

WaveLink® probes provide industry leading technology for wideband signal connection to test instruments. The first differential probes to employ SiGe technology, they deliver full system bandwidth when used with WaveRunner®, WavePro®, WaveMaster®, DDA and SDA oscilloscopes up to 6 GHz.

WaveLink probes:

- Maintain good loading characteristics across the frequency span
- Optimize for gain, noise and bandwidth for optimal performance
- Offer broad range of dynamic range and noise over gain settings by incorporating automatic probe attenuation changes

WaveLink is the first differential probe to use a unique calibration process to achieve superb waveform fidelity for routine voltage measurements.

Calibration coefficients "fine tune" the frequency response of each WaveLink probe and are individually determined during factory calibration and programmed into the probe. The SDA, DDA, WaveMaster, WaveRunner, or WavePro Series oscilloscopes read this data and use it to digitally compensate the entire system response for superior fidelity.

Signal Fidelity

WaveLink probes virtually eliminate distortion when measuring signals. This benefit is particularly useful in eye pattern measurements, now routine for systems using fast serial parallel data bus architecture.

All WaveLink probes offer:

- Superior loading characteristics
- Precise frequency response with outstanding fidelity for high-speed signals


Both low loading and frequency response flatness are needed to ensure the signal fidelity required to measure performance accurately.

Tip Flexibility


WaveLink test leads make connecting to test points very simple. The wide variety of tips offered provide confidence that the most challenging test points can be probed.

The Solder-In, PT Browser, Quick Connect, and Square Pin lead sets are rated for multiple insertions and offer field replacement tips for user value, while giving the best signal fidelity as a system to the test points.

An assortment of hands-free probe holders ease the challenge of connecting multiple leads to a board.

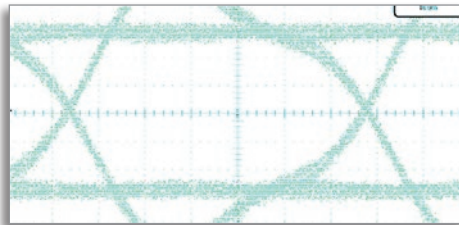

3.125 Gb/s XAUI signal measured with system using a probe with good frequency flatness, but excessive loading.

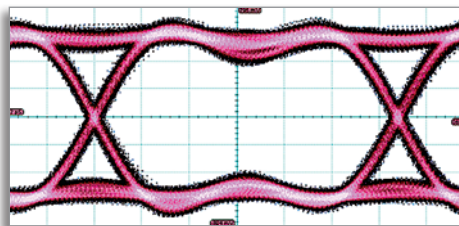

Same signal measured with WaveLink D610. Low loading and flat frequency response combine to maintain the fidelity in the eye pattern.

Serial Data


Serial data signals all vary in signal characteristics and connection type. WaveLink features a wide dynamic range and offset to accommodate a wide input voltage range. WaveLink's automatic probe attenuation network allows an input voltage up to $\pm 5 V_{p-p}$ with the lowest system noise for measuring small signals.

Single-ended Measurements

WaveLink differential probes offer enhanced capabilities to make single-ended measurements with low loading and improved CMRR. Single-ended measurements on DDR signals with D6x0/D4x0 probes utilize $\pm 3 V$ offset range to return a more accurate and repeatable measurement.

Probe Positioners

Multiple probe connections are often necessary to properly debug board level problems. WaveLink probes afford a variety of hands free positioners to offer stable and accurate probe tip placement to make perfect contact without the worry of hand probing errors.

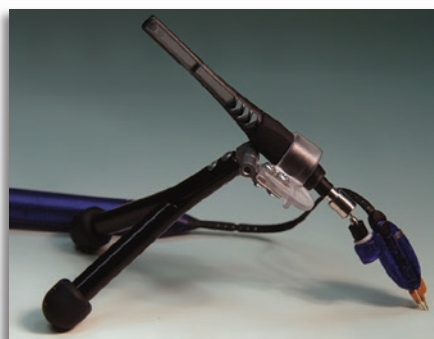


FreeHand with PT Tip and Wand.



XYZ Positioner with PT Tip.

FLEXIBLE INTERCONNECTION OPTIONS

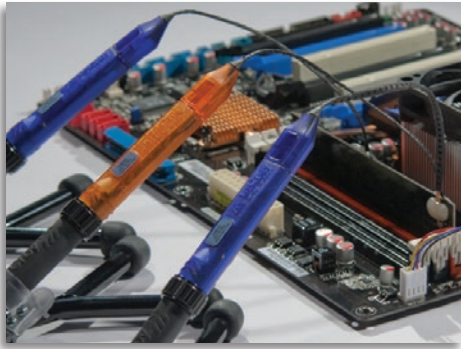

WaveLink Differential Amplifier Small Tip Modules

The D610/D410 and D620/D420 probes provide superior electrical characteristics to provide the best signal fidelity.

- Lowest noise performance for accurate measurements
- High DC impedance
- Low loading for minimum signal disturbance
- High sensitivity for probing low voltage signals


The D6x0/D4x0 probes are superior to single-ended probes for measuring ground referenced signals. Placing the probe will not alter local ground variation, and the measured signal won't be distorted by this variation.

Best-in-class mechanical design for optimum utility:

- Small tip, high bandwidth differential probe
- Five interconnect configurations for flexibility
- Very small form factor for accessing tight spaces

Each of the interchangeable leads is a thin, highly flexible 145 mm (5.7") long lead connecting the tip and the D610/D620 and D410/D420 probe tip module.

Five Different Tips for Interconnect Flexibility

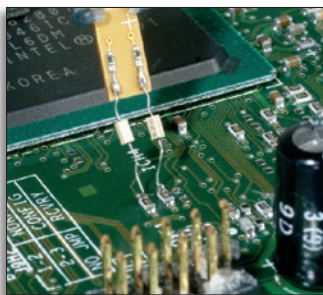


A. Solder-In Lead (SI)

The Solder-In interconnect lead features the smallest physical tip size of any high bandwidth differential probe and the highest level of electrical performance. Two very small damping resistors are directly soldered into the connect points providing a reliable, intermittence-free electrical connection. The resistors have highly flexible leads allowing connection to input points with a wide range of input spacing.




B. Quick Connect (QC)

The Quick Connect interconnect lead enables you to quickly move the probe between multiple test points on the test circuit. Just solder a pair of leaded damping resistors at each location where interconnection is required. A small connector mounted on the probe tip plugs into the damping resistors, letting you quickly move between sets of test points.

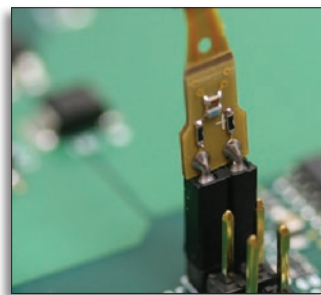

C. Square Pin (SP)


Many applications, such as IC characterization boards, use standard 0.025" square pins for interconnect. The Square Pin interconnect lead directly mates with a pair of 0.025" (0.635 mm) square pins that are mounted on standard 0.100" (2.54 mm) centers.

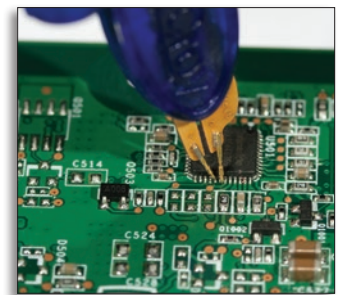

D. Positioner Tip (PT)

The PT positioner tips provides spring loaded leads to allow for easy probing. The adjustable wheel allows for precise probing, allowing a spread up to 0.14". The small form factor provides a convenient grip for hand probing, or use the wand or XYZ positioner for more precise placement.


BROWSER OPTIONS

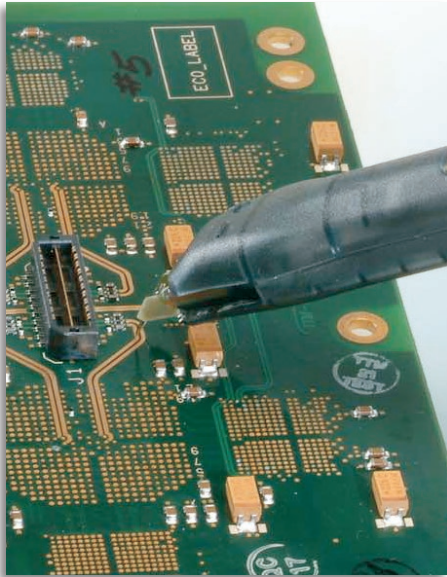

WaveLink Differential Amplifier Modules with Adjustable Tip

WaveLink adjustable tip probes are designed to provide an optimum mechanical connection for signal measurement.

- Built-in thumbwheel for precise positioning of tip – stays put after adjustment
- Maintains sharp points for good contact
- Tips made of “NiTiNOL,” a super-elastic nickel-titanium alloy
- Flexes as you apply pressure
- Consistently returns to original form

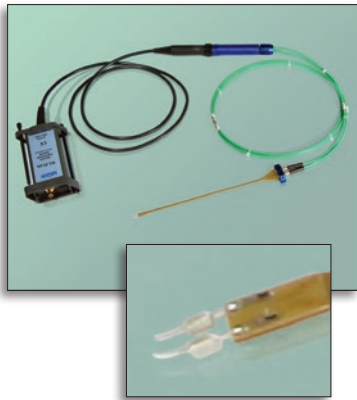


E. High Temperature (HiTemp) Cables and Solder-In Lead

The 90 cm HiTemp cables and Solder-In lead can be used for controlled situations where the differential amplifier module needs to be removed from the extreme temperature environment. Ideally suited for testing scenarios where the temperature can fluctuate from -40 °C to +105 °C.

PT Browser Tip Leads

The PT browser tip offers two options to pair with the appropriate probe body, providing the best scope/probe combination. The Dx10-PT and Dx20-PT browser tips are used with the D610/D620 for 6 GHz bandwidth probing needs, while a pairing with the D410/D420 amplifiers are rated to 4 GHz bandwidth. The PT positioner tip offers the

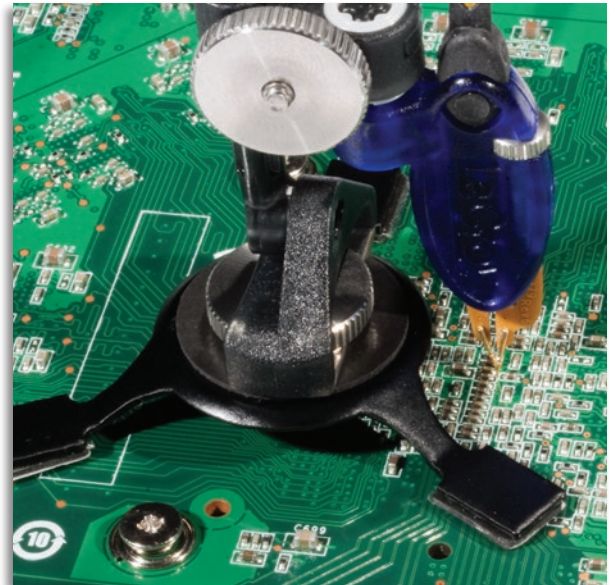

most flexibility in a browser probe to provide the best signal fidelity in an easy to use form factor. The PT browser tip offers superior noise and loading characteristics. The PT can be used with a variety of holders and accessories to allow for ease in hand browsing, or flexibility to use a positioner for hands free probing.

The small form factor makes probing small pitch ICs easy, with a tip spread of 0.14", adjustable with a thumb wheel. The probe tips offer a field replaceable spring tip (with a flex of 0.6 mm) to allow robust contact with DUT contacts.


COMPATIBILITY AND STANDARD ACCESSORIES CHART

Compatibility Chart

Platform/Cable Assembly

Differential Amplifiers

Tips/Leads

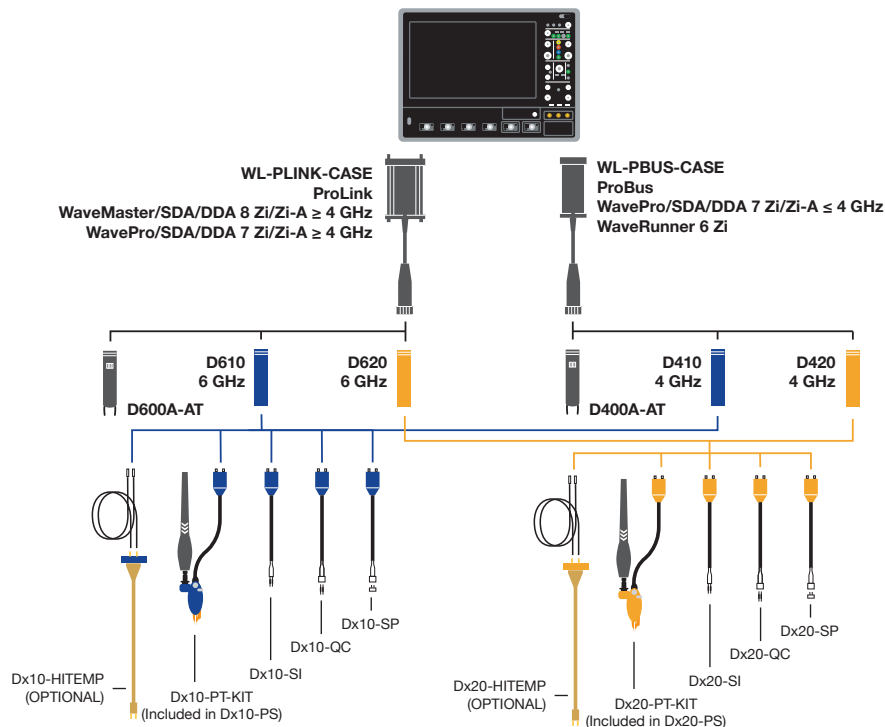

Accessories and Replacement Parts

| | WL-PLINK-CASE WL-PBUS-CASE | D610/ D620 | Dx10/ Dx20-PS | Dx10/ Dx20-PT-KIT | Dx10-SI-HiTemp/ Dx20-SI-HiTemp | Dx00A-AT | Replacement Part |
|---|-------------------------------|---------------|------------------|----------------------|-----------------------------------|----------|--|
| Standard Accessories | | | | | | | |
| Amplifier System (includes items below with*) | | 1 each | 1 each | | | | D410, D420, D610 or D620 |
| *Amplifier | | 1 each | 1 each | | | | |
| *Solder-In Lead Set (includes items below with**) | | 1 each | 1 each | | | | Dx10-SI, Dx20-SI |
| **Spare Damping Resistors for SI Tip | | 1 set of 5 | 1 set of 5 | | | | PKxx0-SI |
| **Tip Retaining Clip for SI & QC Leads | | 1 each | 1 each | | | | PK600ST-3 |
| **Adhesive Tape | | 1 set | 1 set | | | | Dxx0-PT-TAPE |
| *Quick Connect Lead Set | | 1 each | 1 each | | | | Dx10-QC, Dx20-QC |
| *Damping Resistors for QC Tip (Included with QC Tip) | | 2 sets of 20 | 2 sets of 20 | | | | PKxx0-QC |
| *Ground Lead | | 1 each | 1 each | | | | PACC-LD005 |
| *Ground Clip | | 1 each | 1 each | | | | PK006-4 |
| *Square Pin Lead Set | | 1 each | 1 each | | | | Dx10-SP, Dx20-SP |
| *Instruction Manual | | 1 each | 1 each | | | 1 each | WL6G-OM-E |
| *Accessory Info Sheet & Quick Start Guide | | 1 each | 1 each | | | | 921489-00 (Dx10), 921488-00(Dx20) |
| Positioner Tip with Accessories (kit includes items below with†) | | | 1 each | 1 each | | | RK-Dx10-PT-KIT, RK-Dx20-PT-KIT |
| †Positioner Tip Browser | | | 1 each | 1 each | | | Dx10-PT, Dx20-PT |
| †Replacement Pogo-pins for Dx10-PT/Dx20-PT | | | 1 set | 1 set | | | Dxx0-PT-TIPS |
| †Positioner Tip Probe Guides | | | 1 set | 1 set | | | Dxx0-PT-GUIDES |
| †XYZ Positioner | | | 1 each | 1 each | | | Dxx0-PT-XYZ-POSITIONER |
| †Adhesive Tape for XYZ Positioner | | | 1 each | 1 each | | | Dxx0-PT-TAPE |
| †Browser Wand for PT Tip | | | 1 each | 1 each | | | Dxx0-PT-WAND |
| †Interlock Pieces for PT Tip | | | 1 each | 1 each | | | Dxx0-PT-INTERLOCK |
| †Swivel for PT Tip | | | 1 each | 1 each | | | Dxx0-PT-SWIVEL |
| Platform/Cable Assembly Kit (includes items below with‡) | 1 each | | 1 each | | | | WL-PLINK-CASE or WL-BUS-CASE |
| ‡Platform/Cable Assembly | 1 each | | 1 each | | | | |
| ‡Freehand Probe Holder | 1 each | | 1 each | | | | PACC-MS001 |
| ‡Probe Deskew Fixture | 1 each | | 1 each | | | | PCF200 |
| ‡Platform/Cable Assembly Mounting Clip | 1 each | | 1 each | | 1 each | 1 each | PK600ST-4 includes clips and clamps |
| ‡Probe Cable Clamp | 2 each | | 2 each | | 1 each | 1 each | PK600ST-4 includes clips and clamps |
| ‡Deluxe Soft Carrying Case | 1 each | | 1 each | | | | SAC-03 |
| ‡Foam Insert for Deluxe Case | 1 each | | 1 each | | | | 921081-00 (WL-PLINK-CASE) or 921079-00 (WL-PBUS-CASE) |
| ‡Protective Storage Case | 1 each | | 1 each | | | | 921083-00 |
| ‡Plastic Tray for Storage Case | 1 each | | 1 each | | | | 921078-00 |
| HiTemp Solder-In Lead | | | | | 1 each | | Dx10-SI-HiTemp, Dx20-SI-HiTemp |
| HiTemp Cable | | | | | 1 matched set | | Dxx0-Cable-HiTemp |
| Calibration Certificate | | | | | | | See Ordering Information |

Recommended Accessories

Deskew Test Fixture
Cascade Microtech EZ-Probe Positioner

TF-DSQ
EZ PROBE

SPECIFICATIONS

| | D610, D610-PS | D620, D620-PS | D410, D410-PS | D420, D420-PS | D600A-AT | D400A-AT |
|--|---|---|--|--|---|---|
| Bandwidth* (Probe only, guaranteed) (System bandwidth, typical) | Dx10-SI and Dx10-PT Tips 6 GHz Dx10-HiTemp 5 GHz Dx10-QC Tip 4 GHz Dx10-SP Tip 3 GHz | Dx20-SI and Dx20-PT Tips 6 GHz Dx20-HiTemp 5 GHz Dx20-QC Tip 4 GHz Dx20-SP Tip 3 GHz | Dx10-SI, Dx10-HiTemp, Dx10-QC and Dx10-PT Tips 4 GHz Dx10-SP Tip 3 GHz | Dx20-SI, Dx20-HiTemp, Dx20-QC and Dx20-PT Tips 4 GHz Dx20-SP Tip 3 GHz | 6 GHz | 4 GHz |
| Rise Time* (10–90%) | Dx10-SI and Dx10-PT Tips 75 ps (typical) Dx10-HiTemp 90 ps (typical) Dx10-QC Tip 122.5 ps (typical) Dx10-SP Tip 150 ps (typical) | Dx20-SI and Dx20-PT Tips 75 ps (typical) Dx20-HiTemp 90 ps (typical) Dx20-QC Tip 122.5 ps (typical) Dx20-SP Tip 150 ps (typical) | Dx10-SI, Dx10-HiTemp, and Dx10-PT Tips 112 ps (typical) Dx10-QC Tip 122.5 ps (typical) Dx10-SP Tip 150 ps (typical) | Dx20-SI, Dx20-HiTemp, and Dx20-PT Tips 112 ps (typical) Dx20-QC Tip 122.5 ps (typical) Dx20-SP Tip 150 ps (typical) | <75 ps (typical) | <112 ps (typical) |
| Rise Time* (20–80%) | Dx10-SI and Dx10-PT Tips 56 ps (typical) Dx10-HiTemp 67.5 ps (typical) Dx10-QC Tip 92 ps (typical) Dx10-SP Tip 113 ps (typical) | Dx20-SI and Dx20-PT Tips 56 ps (typical) Dx20-HiTemp 67.5 ps (typical) Dx20-QC Tip 92 ps (typical) Dx20-SP Tip 113 ps (typical) | Dx10-SI, Dx10-HiTemp, and Dx10-PT Tips 84 ps (typical) Dx10-QC Tip 92 ps (typical) Dx10-SP Tip 113 ps (typical) | Dx20-SI, Dx20-HiTemp, and Dx20-PT Tips 84 ps (typical) Dx20-QC Tip 92 ps (typical) Dx20-SP Tip 113 ps (typical) | 56 ps (typical) | 84 ps (typical) |
| Noise (System) | <36 nV/√Hz (2.8 mV _{rms}) (typical) Referred to input, 6 GHz bandwidth | <61 nV/√Hz (4.8 mV _{rms}) (typical) Referred to input, 6 GHz bandwidth | <36 nV/√Hz (2.3 mV _{rms}) (typical) Referred to input, 4 GHz bandwidth | <67 nV/√Hz (4.3 mV _{rms}) (typical) Referred to input, 4 GHz bandwidth | <74 nV/√Hz (5.8 mV _{rms}) (typical) Referred to input, 6 GHz bandwidth | <74 nV/√Hz (4.7 mV _{rms}) (typical) Referred to input, 4 GHz bandwidth |

Input

| | | | | | | |
|--|---|---|--|--|--|--|
| Input Dynamic Range (Nominal) | 2.5V _{pk-pk} , ±1.25V | 5V _{pk-pk} , ±2.5V | 2.5V _{pk-pk} , ±1.25V | 5V _{pk-pk} , ±2.5V | 4.8V _{pk-pk} , ±2.4V | |
| Input Common Mode Voltage Range (Nominal) | ±4 V | | | | ±2.4 V _{max} | |
| Input Offset Voltage Range | ±3 V Differential (nominal) | | | | n/a | |
| Non-destructive Input Range (Nominal) | ±20 V | | | | ±18 V | |
| Attenuation | 1.7X / 1.0X (nominal) | 3.2X / 1.9X (nominal) | 1.7X / 1.0X (nominal) | 3.2X / 1.9X (nominal) | 2.5X | |
| DC Input Resistance (Nominal) | 200 kΩ Differential 50 kΩ Common Mode | | | | 4 kΩ Differential 2 kΩ Common Mode | |
| Impedance (Z_{min}, typical) | Dx10-SI Lead, Dx10-HiTemp >175 Ω Differential† Dx10-PT Tip >175 Ω Differential† Dx10-QC Tip >125 Ω Differential† Dx10-SP Tip >40 Ω Differential† | Dx20-SI Lead, Dx20-HiTemp >250 Ω Differential† Dx20-PT Tip >175 Ω Differential† Dx20-QC Tip >125 Ω Differential† Dx20-SP Tip >40 Ω Differential† | Dx10-SI Lead, Dx10-HiTemp >200 Ω Differential† Dx10-PT Tip >175 Ω Differential† Dx10-QC Tip >100 Ω Differential† Dx10-SP Tip >40 Ω Differential† | Dx20-SI Lead, Dx20-HiTemp >350 Ω Differential† Dx20-PT Tip >175 Ω Differential† Dx20-QC Tip >100 Ω Differential† Dx20-SP Tip >40 Ω Differential† | >200 Ω Differential | >450 Ω Differential through entire frequency range |
| Impedance (Mid-band, typical) | Dx10-SI Lead, Dx10-HiTemp 275 Ω at 3 GHz, 175 Ω at 6 GHz Dx10-PT Tip 200 Ω at 3 GHz, 200 Ω at 6 GHz Dx10-QC Tip 125 Ω at 3 GHz, 125 Ω at 6 GHz Dx10-SP Tip 40 Ω at 3 GHz, 100 Ω at 6 GHz | Dx20-SI Lead, Dx20-HiTemp 475 Ω at 3 GHz, 250 Ω at 6 GHz Dx20-PT Tip 200 Ω at 3 GHz, 200 Ω at 6 GHz Dx20-QC Tip 125 Ω at 3 GHz, 200 Ω at 6 GHz Dx20-SP Tip 40 Ω at 3 GHz, 175 Ω at 6 GHz | Dx10-SI Lead, Dx10-HiTemp 400 Ω at 2 GHz, 200 Ω at 4 GHz Dx10-PT Tip 275 Ω at 2 GHz, 175 Ω at 4 GHz Dx10-QC Tip 150 Ω at 2 GHz, 125 Ω at 4 GHz Dx10-SP Tip 75 Ω at 2 GHz, 15 Ω at 4 GHz | Dx20-SI Lead, Dx20-HiTemp 700 Ω at 2 GHz, 350 Ω at 4 GHz Dx20-PT Tip 275 Ω at 2 GHz, 175 Ω at 4 GHz Dx20-QC Tip 150 Ω at 2 GHz, 150 Ω at 4 GHz Dx20-SP Tip 75 Ω at 2 GHz, 15 Ω at 4 GHz | 650 Ω at 3 GHz, 200 Ω at 6 GHz (Differential) | 1000 Ω at 2 GHz, 450 Ω at 4 GHz (Differential) |
| CMRR (Typical) | 30 dB DC to 10 MHz 26 dB 10 MHz to 6 GHz | | 30 dB DC to 10 MHz 26 dB 10 MHz to 4 GHz | | >40 dB DC to 1 GHz >30 dB 1 GHz to 3 GHz >20 dB to 6 GHz | >40 dB DC to 1 GHz >30 dB 1 GHz to 3 GHz >20 dB 3 GHz to 4 GHz |

Environmental

| | |
|----------------------|---|
| Temperature | Operating: 0 °C to 40 °C; Non-operating: -40 °C to 70 °C |
| Humidity | Operating: 5% to 80% RH (non-condensing), 50% RH above 30 °C Non-operating: 5% to 95% RH (non-condensing), 75% RH above 30 °C and 45% RH above 40 °C |
| ESD Tolerance | 2 kV (typical), 100 pF, 300 Ω HBM |

Dimensions

| | | |
|--|--|--|
| Dx10-PT/Dx20-PT Positioner Tip and Dx00A-AT Browser | 0 to 3.5 mm (0 to 0.14"), 305 μm (0.012") diameter 0.55 mm (0.022") Z-axis compliance | 0 to 3.0 mm (0 to 0.12"), 75 μm diameter 2 mm Z-axis compliance |
| Dx10-SI/Dx20-SI | 0 to 11 mm (0 to 0.43") tip spread at circuit connection | NA |
| Dx10-QC/Dx20-QC Tips | | |
| Cable Length | 1.3 m (4 ft. 3 in) for both WL-PLink and WL-PBUS, sold separately | |

* All Bandwidth and Rise Time measurements are made with an oscilloscope bandwidth greater or equal to the probe bandwidth

† Through entire frequency range

ORDERING INFORMATION

Product Description Product Code

Complete Probe Systems

| | |
|---|---------|
| 4 GHz Complete Probe System with Dx10-SI Solder-In Tip (Qty. 1), Dx10-SP Square Pin (Qty. 1), Dx10-QC Quick Connect (Qty. 1), and Dx10-PT-KIT Positioner Tip Browser (Qty. 1) | D410-PS |
| 4 GHz Complete Probe System with Dx20-SI Solder-In Tip (Qty. 1), Dx20-SP Square Pin (Qty. 1), Dx20-QC Quick Connect (Qty. 1), and Dx20-PT-KIT Positioner Tip Browser (Qty. 1) | D420-PS |
| 6 GHz Complete Probe System with Dx10-SI Solder-In Tip (Qty. 1), Dx10-SP Square Pin (Qty. 1), Dx10-QC Quick Connect (Qty. 1), and Dx10-PT-KIT Positioner Tip Browser (Qty. 1) | D610-PS |
| 6 GHz Complete Probe System with Dx20-SI Solder-In Tip (Qty. 1), Dx20-SP Square Pin (Qty. 1), Dx20-QC Quick Connect (Qty. 1), and Dx20-PT-KIT Positioner Tip Browser (Qty. 1) | D620-PS |

Amplifier and Probe Tip Modules

| | |
|---|----------|
| WaveLink D410 4 GHz/2.5Vp-p Differential Probe Amplifier with Dx10-SI Solder-In Tip (Qty. 1), Dx10-SP Square Pin (Qty. 1), and Dx10-QC Quick Connect (Qty. 1) | D410 |
| WaveLink D420 4 GHz/5Vp-p Differential Probe Amplifier with Dx20-SI Solder-In Tip (Qty. 1), Dx20-SP Square Pin (Qty. 1), and Dx20-QC Quick Connect (Qty. 1) | D420 |
| WaveLink D610 6 GHz/2.5Vp-p Differential Probe Amplifier with Dx10-SI Solder-In Tip (Qty. 1), Dx10-SP Square Pin (Qty. 1), and Dx10-QC Quick Connect (Qty. 1) | D610 |
| WaveLink D620 6 GHz/5Vp-p Differential Probe Amplifier with Dx20-SI Solder-In Tip (Qty. 1), Dx20-SP Square Pin (Qty. 1), and Dx20-QC Quick Connect (Qty. 1) | D620 |
| WaveLink D400A-AT 4 GHz/4.8Vp-p Differential Amplifier Module with Adjustable Tip | D400A-AT |
| WaveLink D600A-AT 6 GHz/4.8Vp-p Differential Amplifier Module with Adjustable Tip | D600A-AT |

Positioner Tip (Browser) Kits

| | |
|--|-------------|
| WaveLink Dx10-PT Adjustable Positioner Tip Kit. For use with Dx10 amplifiers. | Dx10-PT-KIT |
| WaveLink Dx20-PT Adjustable Positioner Tip Kit. For use with Dx20 amplifiers. | Dx20-PT-KIT |

Probe Platform/Cable Assemblies and Adapters

| | |
|--|---------------|
| WaveLink ProLink Platform/Cable Assembly Kit with complete soft carrying case for all probe items. | WL-PLINK-CASE |
| WaveLink ProBus Platform/Cable Assembly Kit with complete soft carrying case for all probe items. | WL-PBUS-CASE |

Hi-Temp Leads

| | |
|---|-------------|
| WaveLink Temperature Extension Cables for Dx10. Includes set of Matched 30" High Temperature Cables (Qty. 1) and solder-in lead set (Qty. 1) | Dx10-HiTemp |
| WaveLink Temperature Extension Cables for Dx20. Includes set of Matched 30" High Temperature Cables (Qty. 1) and solder-in lead set (Qty. 1) | Dx20-HiTemp |

Product Description Product Code

Accessories

| | |
|---|----------|
| Cascade Microtech EZ-Probe Positioner | EZ PROBE |
| Probe Deskew and Calibration Test Fixture | TF-DSQ |

Calibration Options

| | |
|--|-----------------|
| NIST Calibration for D410. Includes test data. | D410-CCNIST |
| NIST Calibration for D420. Includes test data. | D420-CCNIST |
| NIST Calibration for D610. Includes test data. | D610-CCNIST |
| NIST Calibration for D620. Includes test data. | D620-CCNIST |
| NIST Calibration for D400A-AT. Includes test data. | D400A-AT-CCNIST |
| NIST Calibration for D600A-AT. Includes test data. | D600A-AT-CCNIST |

Replacement Parts

| | |
|---|----------------|
| Replacement Dx10-SI 4 & 6 GHz Solder-In Lead with Qty. 5 Spare Resistors. | Dx10-SI |
| Replacement Dx20-SI 4 & 6 GHz Solder-In Lead with Qty. 5 Spare Resistors. | Dx20-SI |
| Replacement Dx10-QC 4 & 6 GHz Quick Connect Lead | Dx10-QC |
| Replacement Dx20-QC 4 & 6 GHz Quick Connect Lead | Dx20-QC |
| Replacement Dx10-SP 4 & 6 GHz Square Pin Lead | Dx10-SP |
| Replacement Dx20-SP 4 & 6 GHz Square Pin Lead | Dx20-SP |
| Replacement SI Resistor Kit for Dx10/Dx20 - Kit of 20 | PKxx0-SI |
| Replacement QC Resistor Kit for Dx10/Dx20 - 2 kits of 20 | PKxx0-QC |
| Qty. 4 Replacement Pogo Pin Tips and Qty. 2 Replacement Sockets for Dx10-PT and Dx20-PT Adjustable Positioner Tips. | Dxx0-PT-TIPS |
| Replacement Probe Tip Holder Kit | PK600ST-3 |
| Replacement Platform/Cable Assembly Mounting Kit | PK600ST-4 |
| Quantity 1 Package of Black Adhesive Pads (10/pkg) and Quantity 1 Package of White Adhesive Pads (10/pkg) | Dxx0-PT-TAPE |
| Quantity 1 Package of Adhesive Probe Connection Guides (200 individual guides/package) | Dxx0-PT-GUIDES |

Customer Service

Teledyne LeCroy oscilloscopes and probes are designed, built, and tested to ensure high reliability. In the unlikely event you experience difficulties, our digital oscilloscopes are fully warranted for three years and our probes are warranted for one year.

This warranty includes:

- No charge for return shipping
- Long-term 7-year support
- Upgrade to latest software at no charge



1-800-5-LeCroy
teledynelecroy.com

Local sales offices are located throughout the world.
Visit our website to find the most convenient location.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.