


RF1284

**319.508 MHz
SAW Filter**



- **Ideal Front-End Filter for European Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Rugged TO39 Hermetic Package**
- **Complies with Directive 2002/95/EC (RoHS)**

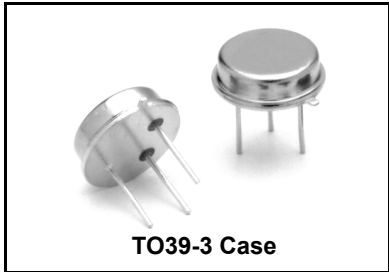

The RF1284 is a low-loss, compact and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 319.508 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFM's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching (not included). Quartz construction provides excellent frequency stability over a wide temperature range.

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25°C Absolute Frequency Tolerance from 319.500 MHz	f_c	1, 2	319.428		319.588	MHz
	Δf_c				±80	kHz
Insertion Loss	IL	1		2.0	3.0	dB
3 dB Bandwidth	BW ₃	1, 2	500	600	800	kHz
Rejection at $f_c - 21.4$ MHz (Image) at $f_c - 10.7$ MHz (LO) Ultimate		1	40	50		dB
			15	40		
				80		
Temperature Operating Case Temperature Turnover Temperature Turnover Frequency Frequency Temperature Coefficient	T_c	3, 4	-40		+85	°C
	T_o		15	25	35	°C
	f_o			f_c		MHz
	FTC			0.032		ppm/°C ²
Frequency Aging Absolute Value during the First Year	Δf	5		≤10		ppm/yr
Impedance @ f_c Input $Z_{IN}=R_{IN}/C_{IN}$ Output $Z_{OUT}=R_{OUT}/C_{OUT}$	Z_{IN}	1	1570Ω//6.84pf			nH
	Z_{OUT}	1	1490Ω//7.02pf			pF
Lid Symbolization (in addition to Lot and/or Date Codes)	RFM // RF1284 // YYWWS##					



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:



1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
2. The frequency f_c is defined as the midpoint between the 3dB frequencies.
3. Where noted, specifications apply over the entire specified operating temperature range.
4. The turnover temperature, T_o , is the temperature of maximum (or turnover) frequency, f_o . The nominal frequency at any case temperature, T_c , may be calculated from: $f = f_o [1 - FTC (T_o - T_c)^2]$.
5. Frequency aging is the change in f_c with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
6. The design, manufacturing process, and specifications of this device are subject to change without notice.
7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.

Absolute Maximum Ratings

Rating	Value	Units
Incident RF Power	+13	dBm
DC Voltage Between Any Two Pins (Observe ESD Precautions)	±30	VDC
Case Temperature ⁵	-40 to +85	°C


Typical Filter Response

Typical filter responses are shown below. The actual response is dependent on external impedance matching and circuit layout. Illustrated frequencies and minimum rejection for LO and IMAGE are shown only for superhet receivers with 10.7 MHz IF.

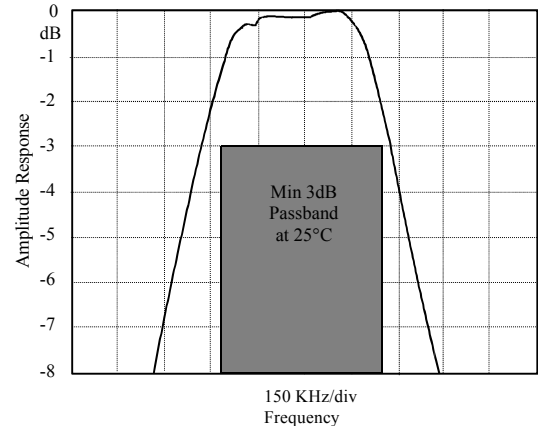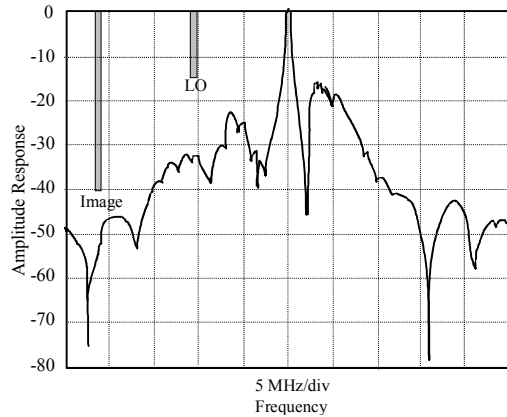


Electrical Connections


Pin	Connection
1	Input or Output
2	Output or Input
3	Case Ground



Case Design

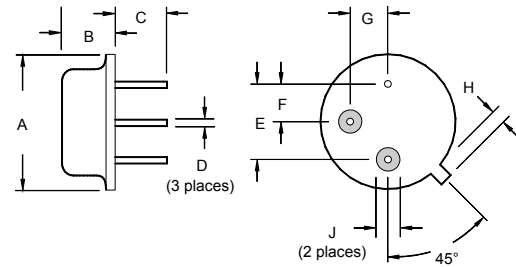

Typical Test Circuit

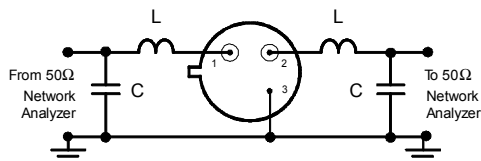

Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A		9.30		0.366
B		3.18		0.125
C	2.50	3.50	0.098	0.138
D	0.46 Nominal		0.018 Nominal	
E	5.08 Nominal		0.200 Nominal	
F	2.54 Nominal		0.100 Nominal	
G	2.54 Nominal		0.100 Nominal	
H		1.02		0.040
J	1.40		0.055	

19 Apr 2007 09:49:09


CH1 S11 1 UFS 1: 53.895 Ω 9.0879 Ω 4.5270 nH 319.500 000 MHz

hp
RF1284 DEMO DEVICE #98
FULL 2 PORTS CAL.

Cor

Full

↑

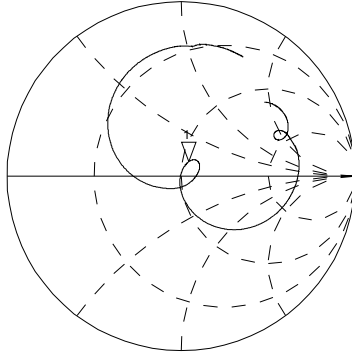


CH2 S22 1 UFS 1: 49.963 Ω 8.5449 Ω 4.2565 nH 319.500 000 MHz

Cor

Full

↑

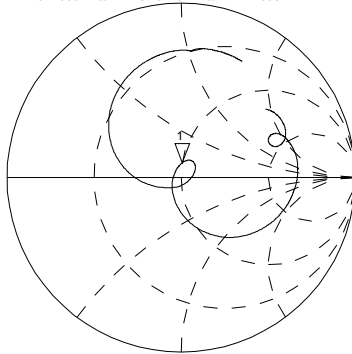

CENTER 319.500 000 MHz

SPAN 2.000 000 MHz


19 Apr 2007 09:49:37

CH1 S21 LOG 1 dB/ REF -2.9 dB 1: 0.000 dB 0.000 000 MHz

hp
RF1284 DEMO DEVICE #98
THRU CAL.

Cor

Resp

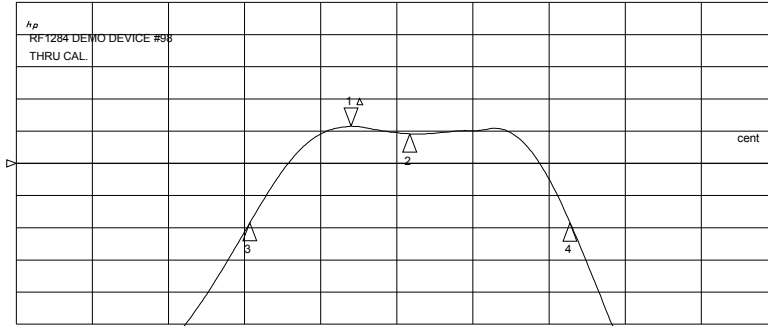

CH1 Markers

Max Δ REF=1

BW: .673195 MHz

cent : 319.535654 MHz

Q: 474.66


1 loss : -1.7450 dB

CH2 S21 LOG 10 dB/ REF -2.9 dB 1: -1.9228 dB 319.500 000 MHz

Cor

Resp

↑

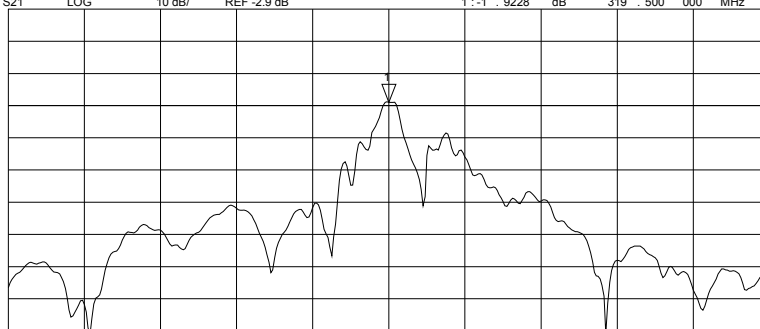

CH2 CENTER 319.500 000 MHz

SPAN 30.000 000 MHz

19 Apr 2007 09:50:51


CH1 S11 1 UFS 1: 44.488 Ω 12.287 Ω 6.1207 nH 319.500 000 MHz

hp
RF1284 DEMO DEVICE #99
FULL 2 PORTS CAL.

Cor

Full

↑

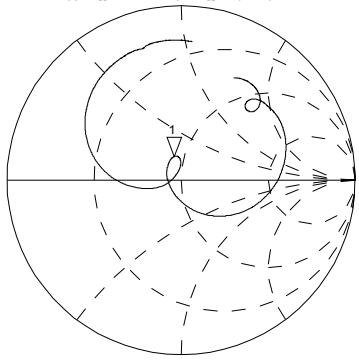


CH2 S22 1 UFS 1: 54.975 Ω 10.461 Ω 5.2110 nH 319.500 000 MHz

Cor

Full

↑

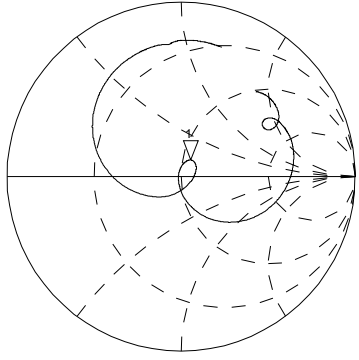

CENTER 319.500 000 MHz

SPAN 2.000 000 MHz

19 Apr 2007 09:51:09


CH1 S21 LOG 1 dB/ REF -2.9 dB 1: 0.0000 dB 0.000 000 MHz

hp
RF1284 DEMO DEVICE #99
THRU CAL.

Cor

Resp

↑

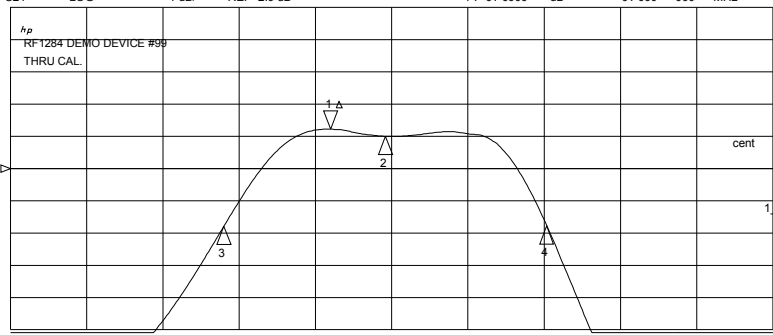


CH1 Markers
Max Δ REF=1
BW: .677150 MHz
cent: 319.494904 MHz
Q: 471.82
1_loss: -1.6733 dB

CH2 S21 LOG 10 dB/ REF -2.9 dB 1: -1.8845 dB 319.500 000 MHz

Cor

Resp

↑

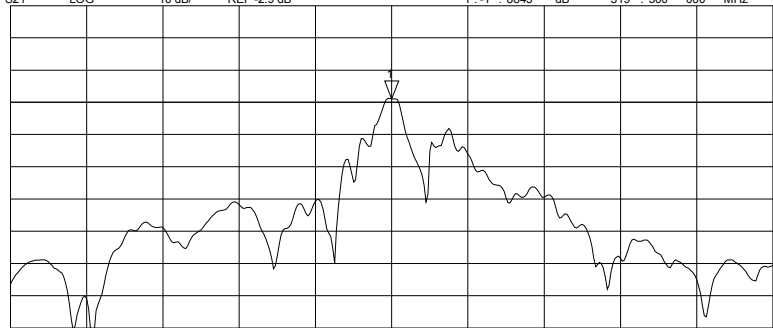

CH2 CENTER 319.500 000 MHz


SPAN 30.000 000 MHz

19 Apr 2007 09:52:20

CH1 S11 1 U FS 1: 57.795 Ω 15.191 Ω 7.5674 nH 319.500 000 MHz

h_p
RF1284 DEMO DEVICE #100
FULL 2 PORTS CAL.

Cor

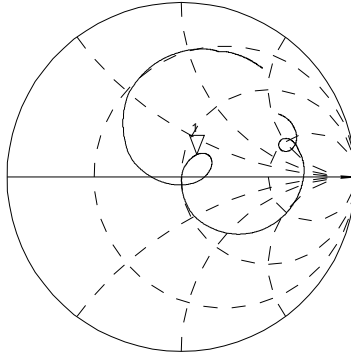


Full

↑

CH2 S22 1 U FS 1: 52.545 Ω 13.787 Ω 6.8679 nH 319.500 000 MHz

Cor

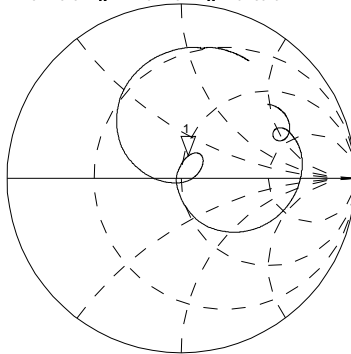

Full

↑

CENTER 319.500 000 MHz


SPAN 2.000 000 MHz

19 Apr 2007 09:52:50

CH1 S21 LOG 1 dB/ REF -2.9 dB 1: 0.000 dB 0.000 000 MHz

h_p
RF1284 DEMO DEVICE #100
THRU CAL

Cor

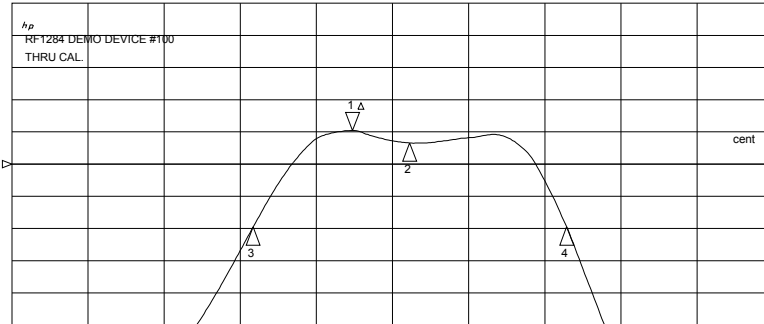

Resp

CH1 Markers
Max Δ REF=1
BW: .658896 MHz
cent : 319.544482 MHz
Q: 484.97
1_loss : -1.8522 dB

CH2 S21 LOG 10 dB/ REF -2.9 dB 1: -2.1396 dB 319.500 000 MHz

Cor




Resp

↑

CH2 CENTER 319.500 000 MHz

SPAN 30.000 000 MHz

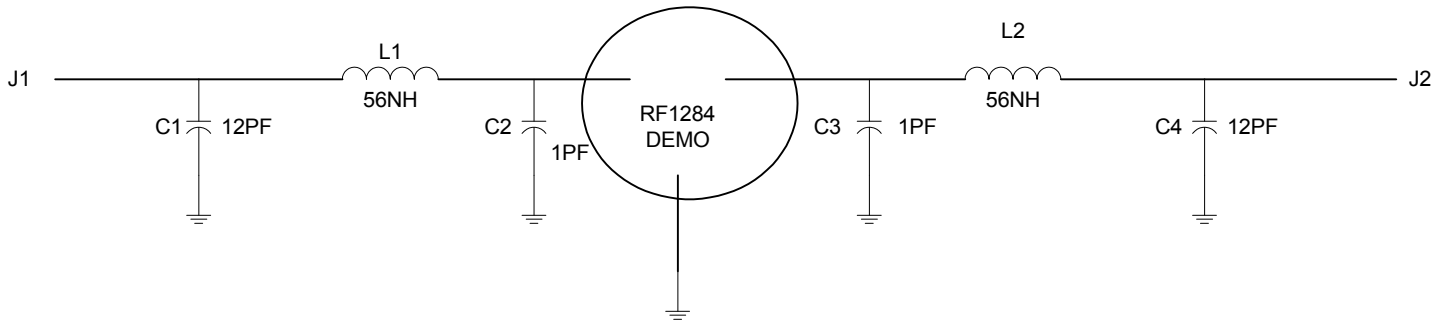

PCB,	400-0455-001	
IND,	501-0966-560, 1008CS 56NH	L1, L2
CAP,	501-1275-010, 0805, 1PF	C2, C3
CAP,	501-1275-120, 0805, 12PF	C1, C1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.