

## FRS-R — 600Vac/300Vdc, 65-600A, Dual Element, Time-Delay Fuses



**Description:** Advanced protection, energy efficient Class RK5 dual element, current-limiting, time-delay fuses. Time-delay – 10 seconds (minimum) at 500% of rated current.

**Catalog Symbol:** FRS-R-(amp)

### Ratings:

Volts — 600Vac, 300Vdc  
 Amps — 65-600A  
 IR — 200kA Vac RMS Sym.  
 — 20kA Vdc

### Agency Information:

CE, UL Listed, Std. 248-12, Class RK5, Guide JDDZ, File E4273

CSA Certified, C22.2 No. 248.12, Class 1422-02, File 53787


### Catalog Numbers (amps)

|           |           |           |
|-----------|-----------|-----------|
| FRS-R-65  | FRS-R-125 | FRS-R-350 |
| FRS-R-70  | FRS-R-150 | FRS-R-400 |
| FRS-R-75  | FRS-R-175 | FRS-R-450 |
| FRS-R-80  | FRS-R-200 | FRS-R-500 |
| FRS-R-90  | FRS-R-225 | FRS-R-600 |
| FRS-R-100 | FRS-R-250 |           |
| FRS-R-110 | FRS-R-300 |           |

### Carton Quantity and Weight

| Amp Rating | Carton Qty. |
|------------|-------------|
| 65-100     | 1           |
| 101-200    | 1           |
| 201-400    | 1           |
| 401-600    | 1           |

### Dimensions - in



| Amp Ratings | A               | B             |
|-------------|-----------------|---------------|
| 65-100      | 7.88 (± 0.062)  | 1.11 (± 0.02) |
| 110-200     | 9.63 (± 0.062)  | 1.61 (± 0.02) |
| 225-400     | 11.63 (± 0.094) | 2.34 (± 0.02) |
| 450-600     | 13.38 (± 0.094) | 2.88 (± 0.02) |

### Features:

- Provides motor overload, ground fault and short-circuit protection. When used in circuits subject to surge currents such as those caused by motors, transformers and other inductive components, these fuses can be sized close to full-load amps to give maximum overcurrent protection.
- The time-delay feature makes it possible to use fuse amp ratings which are much smaller than those of non-time delay fuses. Considerable cost saving occurs by permitting the use of smaller size switches, panels and fuses themselves.
- Provides a good degree of short-circuit protection (greater current-limitation) to help protect downstream components from high fault currents.
- Gives motor running back-up protection to motors without extra cost.
- Helps protect motors against burnout from overloads and single-phasing when sized properly.
- Simplifies and improves blackout prevention (selective coordination ratios).
- Dual-element fuses can be applied in circuits subject to temporary motor overloads and surge currents to provide both high-performance, short-circuit and overload protection.

### Recommended Fuse Blocks

| Fuse Amps | 1-Pole      | 2-Pole      | 3-Pole      |
|-----------|-------------|-------------|-------------|
| 70-100    | RM60100-1CR | RM60100-2CR | RM60100-3CR |
| 110-200   | RM60200-1CR | RM60200-2CR | RM60200-3CR |
| 225-400   | RM60400-1CR | RM60400-2CR | RM60400-3CR |
| 450-600   | RM60600-1CR | RM60600-2CR | RM60100-3CR |

For additional information on the RM Series of 600 volt fuse blocks, see product brochure # 3192.

### Fuse Reducers For Class R Fuses


| Equipment Fuse Clips | Desired Fuse (Case) Size | Catalog Numbers (Pairs) 600V |
|----------------------|--------------------------|------------------------------|
| 200A                 | 100A                     | NO.2621-R                    |
| 400A                 | 100A                     | NO.2641-R                    |
|                      | 200A                     | NO.642-R                     |
|                      | 100A                     | NO.2661-R                    |
| 600A                 | 200A                     | NO.2662-R                    |
|                      | 400A                     | NO.2664-R†                   |

† Single reducer only (pair not required).

For additional information on Class R fuse reducers, see Data Sheet # 1118.


## FRS-R — 600Vac/300Vdc, 65-600A, Dual Element, Time-Delay Fuses

Time-Current Curves - Average Melt

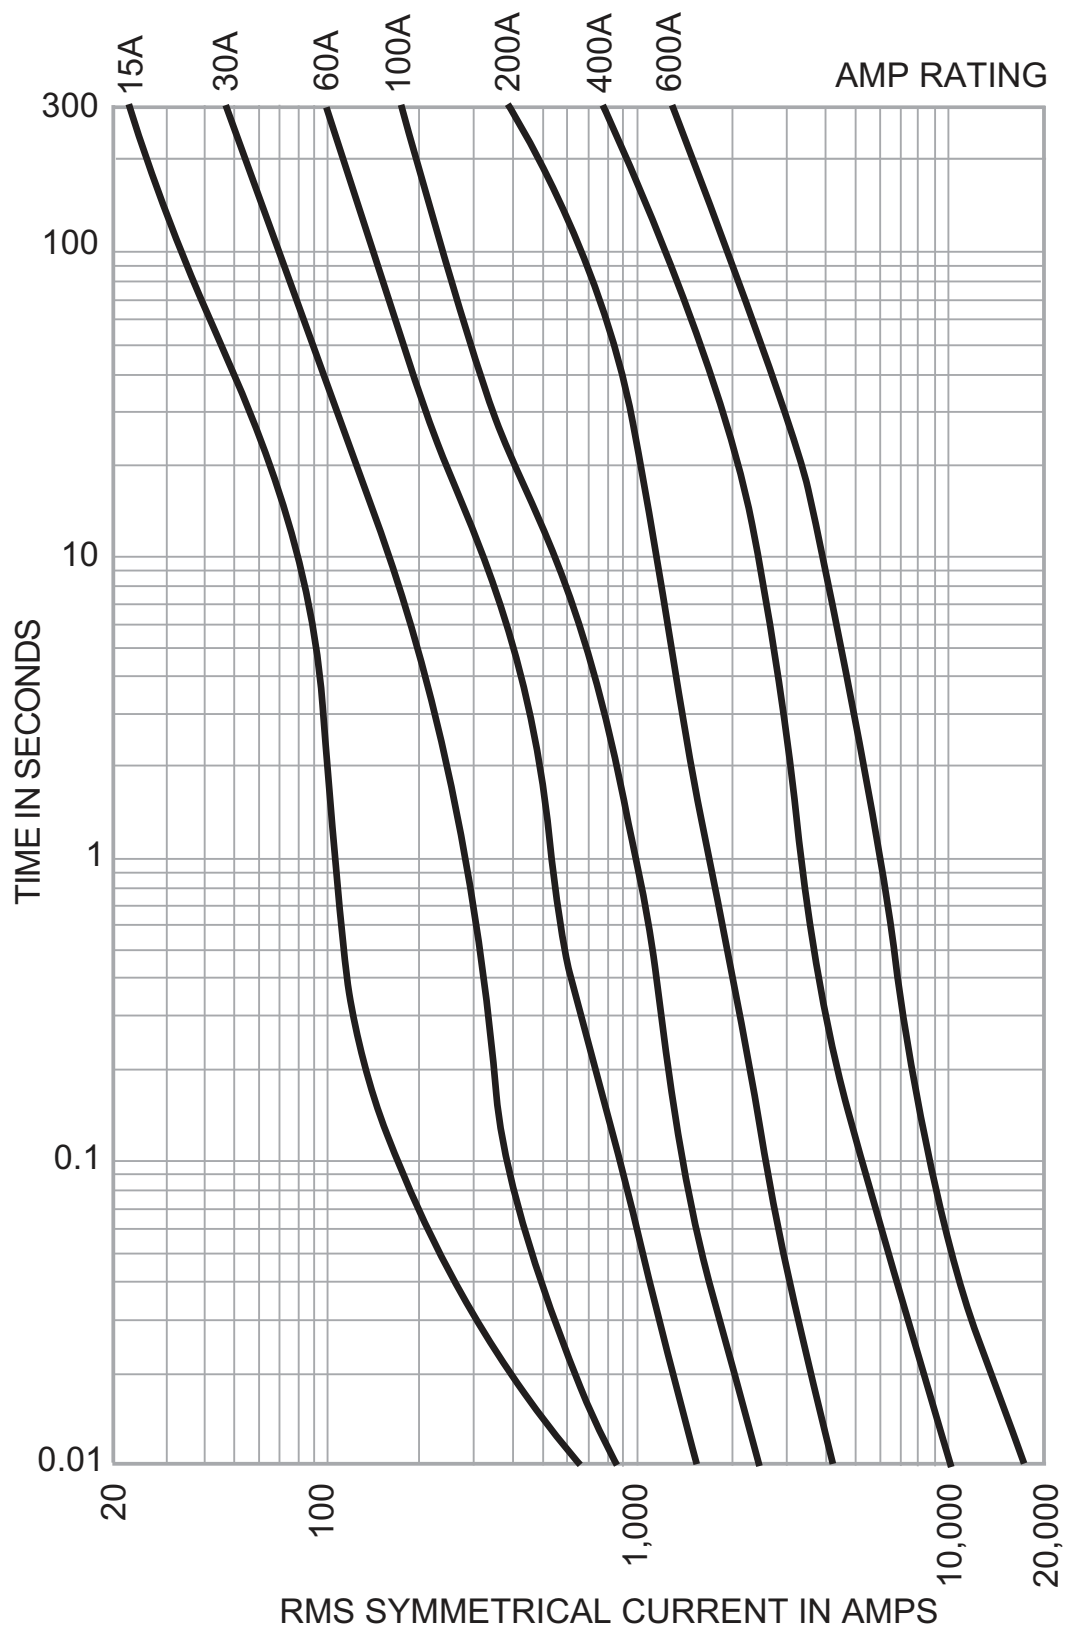

## FRS-R — 600Vac/300Vdc, 65-600A, Dual Element, Time-Delay Fuses

### Current-Limitation Curves

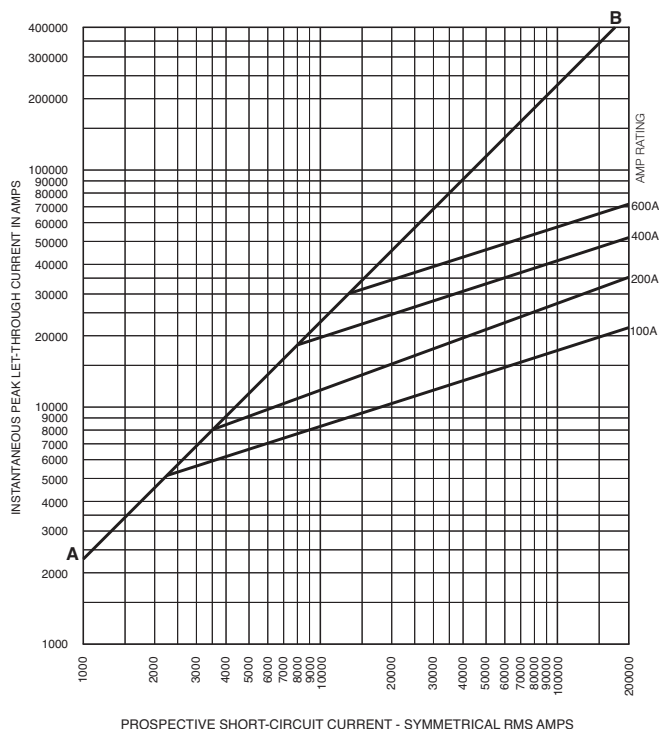

### Current-Limiting Effects

| Prosp.<br>S.C.C. | Let-Through Current<br>(Apparent RMS Symmetrical Vs. Fuse Rating) |        |        |        |
|------------------|-------------------------------------------------------------------|--------|--------|--------|
|                  | 100A                                                              | 200A   | 400A   | 600A   |
| 5000             | 3000                                                              | 4000   | 5000   | 5000   |
| 10,000           | 4000                                                              | 5000   | 9000   | 10,000 |
| 15,000           | 4000                                                              | 6000   | 10,000 | 14,000 |
| 20,000           | 5000                                                              | 7000   | 11,000 | 15,000 |
| 25,000           | 5000                                                              | 7000   | 12,000 | 17,000 |
| 30,000           | 5000                                                              | 8000   | 13,000 | 18,000 |
| 35,000           | 5000                                                              | 8000   | 13,000 | 18,000 |
| 40,000           | 6000                                                              | 9000   | 14,000 | 19,000 |
| 50,000           | 6000                                                              | 9000   | 14,000 | 20,000 |
| 60,000           | 6000                                                              | 10,000 | 15,000 | 22,000 |
| 70,000           | 7000                                                              | 11,000 | 17,000 | 23,000 |
| 80,000           | 7000                                                              | 12,000 | 17,000 | 23,000 |
| 90,000           | 7000                                                              | 12,000 | 17,000 | 24,000 |
| 100,000          | 8000                                                              | 13,000 | 18,000 | 25,000 |
| 150,000          | 9000                                                              | 14,000 | 21,000 | 27,000 |
| 200,000          | 9000                                                              | 16,000 | 23,000 | 32,000 |

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.