

DS75361 Dual TTL-to-MOS Driver

General Description



The DS75361 is a monolithic integrated dual TTL-to-MOS driver interface circuit. The device accepts standard TTL input signals and provides high-current and high-voltage output levels for driving MOS circuits. It is used to drive address, control, and timing inputs for several types of MOS RAMs including the 1103 and MM5270 and MM5280.

The DS75361 operates from standard TTL 5V supplies and the MOS V_{SS} supply in many applications. The device has been optimized for operation with V_{CC2} supply voltage from 16V to 20V; however, it is designed for use over a much wider range of V_{CC2} .

Features

- Capable of driving high-capacitance loads
- Compatible with many popular MOS RAMs
- V_{CC2} supply voltage variable over wide range to 24V
- Diode-clamped inputs
- TTL compatible
- Operates from standard bipolar and MOS supplies
- High-speed switching
- Transient overdrive minimizes power dissipation
- Low standby power dissipation

Schematic and Connection Diagrams

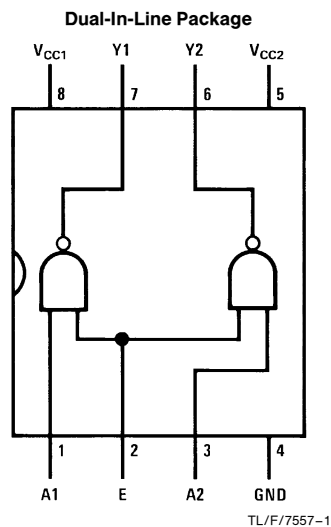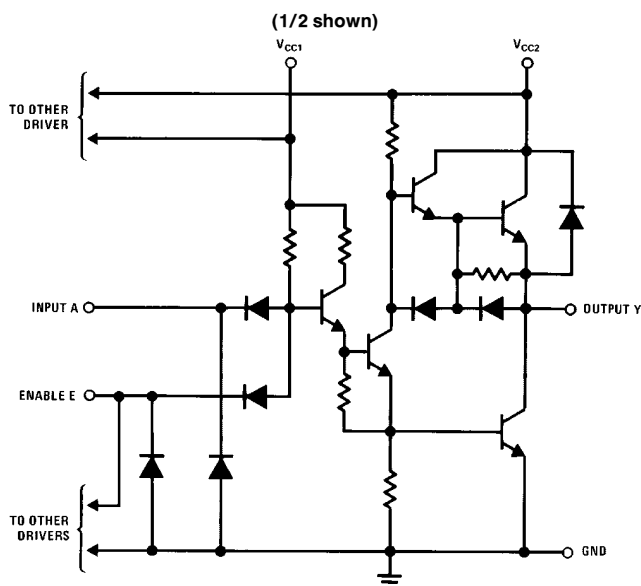

Top View

Order Number DS75361N
See NS Package Number N08E

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage Range of V_{CC1} (Note 1)	−0.5 to 7V
Supply Voltage Range of V_{CC2}	−0.5V to 25V
Input Voltage	5.5V
Inter-Input Voltage (Note 4)	5.5V
Storage Temperature Range	−65°C to +150°C
Maximum Power Dissipation* at 25°C	
Molded Package	1022 mW

Lead Temperature 1/16 inch from Case for
10 Seconds: N or P Package

200°C

*Derate molded package 8.2 mW/° above about 25°C.

Operating Conditions

	Min	Max	Units
Supply Voltage (V_{CC1})	4.75	5.25	V
Supply Voltage (V_{CC2})	4.75	24	V
Operating Temperature (T_A)	0	+70	°C

Electrical Characteristics (Notes 2 and 3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IH}	High-Level Input Voltage		2			V
V_{IL}	Low-Level Input Voltage				0.8	V
V_I	Input Clamp Voltage	$I_I = -12$ mA			−1.5	V
V_{OH}	High-Level Output Voltage	$V_{IL} = 0.8V, I_{OH} = -50$ μ A	$V_{CC2} - 1$	$V_{CC2} - 0.7$		V
		$V_{IL} = 0.8V, I_{OH} = -10$ mA	$V_{CC2} - 2.3$	$V_{CC2} - 1.8$		V
V_{OL}	Low-Level Output Voltage	$V_{IH} = 2V, I_{OL} = 10$ mA		0.15	0.3	V
		$V_{CC2} = 15V$ to 24V, $V_{IH} = 2V$, $I_{OL} = 40$ mA		0.25	0.5	V
V_O	Output Clamp Voltage	$V_I = 0V, I_{OH} = 20$ mA			$V_{CC2} + 1.5$	V
I_I	Input Current at Maximum Input Voltage	$V_I = 5.5V$			1	mA
I_{IH}	High-Level Input Current	$V_I = 2.4V$	A Inputs		40	μ A
			E Input		80	μ A
I_{IL}	Low-Level Input Current	$V_I = 0.4V$	A Inputs	−1	−1.6	mA
			E Input	−2	−3.2	mA
$I_{CC1(H)}$	Supply Current from V_{CC1} , Both Outputs High	$V_{CC1} = 5.25V, V_{CC2} = 24V$, All Inputs at 0V, No Load		2	4	mA
$I_{CC2(H)}$	Supply Current from V_{CC2} , Both Outputs High				0.5	mA
$I_{CC1(L)}$	Supply Current from V_{CC1} , Both Outputs Low	$V_{CC1} = 5.25V, V_{CC2} = 24V$, All Inputs at 5V, No Load		16	24	mA
$I_{CC2(L)}$	Supply Current from V_{CC2} , Both Outputs Low			7	11	mA
$I_{CC2(S)}$	Supply Current from V_{CC2} , Stand-by Condition	$V_{CC1} = 0V, V_{CC2} = 24V$, All Inputs at 5V, No Load			0.5	mA

Note 1: “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed. Except for “Operating Temperature Range” they are not meant to imply that the devices should be operated at these limits. The table of “Electrical Characteristics” provides conditions for actual device operation.

Note 2: Unless otherwise specified min/max limits apply across the 0°C to +70°C range for the DS75361. All typical values are for $T_A = 25^\circ\text{C}$ and $V_{CC1} = 5V$ and $V_{CC2} = 20V$.


Note 3: All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

Note 4: This rating applies between the A input of either driver and the common E input.


Switching Characteristics $V_{CC1} = 5V$, $V_{CC2} = 20V$, $T_A = 25^\circ C$

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{DLH}	Delay Time, Low-to-High Level Output	$C_L = 390\text{ pF}$, $R_D = 10\Omega$ (Figure 1)		11	20	ns
t_{DHL}	Delay Time, High-to-Low Level Output			10	18	ns
t_{TLH}	Transition Time, Low-to-High Level Output			25	40	ns
t_{THL}	Transition Time, High-to-Low Level Output			21	35	ns
t_{PLH}	Propagation Delay Time, Low-to-High Level Output		10	36	55	ns
t_{PHL}	Propagation Delay Time, High-to-Low Level Output		10	31	47	ns

AC Test Circuit and Switching Time Waveforms

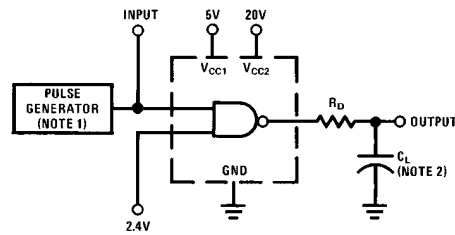

TL/F/7557-4

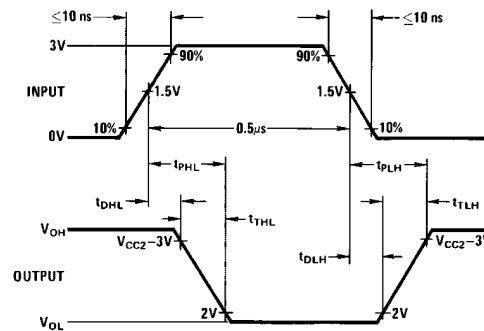

TL/F/7557-5


Note 1: The pulse generator has the following characteristics: PRR = 1 MHz, $Z_{OUT} = 50\Omega$.

Note 2: C_L includes probe and jig capacitance.


FIGURE 1. Switching Times, Each Driver

Typical Performance Characteristics


High-Level Output Voltage vs Output Current




Low-Level Output Voltage vs Output Current




Voltage Transfer Characteristics




Total Dissipation (Both Drivers) vs Frequency




Propagation Delay Time, Low-to-High Level Output vs Ambient Temperature




Propagation Delay Time, High-to-Low Level Output vs Ambient Temperature




Propagation Delay Time, Low-to-High Level Output vs V_{CC2} Supply Voltage




Propagation Delay Time, High-to-Low Level Output vs V_{CC2} Supply Voltage



Propagation Delay Time, Low-to-High Level Output vs Load Capacitance



Propagation Delay Time, High-to-Low Level Output vs Load Capacitance



TL/F/7557-2

Typical Applications

The fast switching speeds of this device may produce undesirable output transient overshoot because of load or wiring inductance. A small series damping resistor may be used to reduce or eliminate this output transient overshoot. The

optimum value of the damping resistor to use depends on the specific load characteristics and switching speed. A typical value would be between 10Ω and 30Ω (Figure 3).

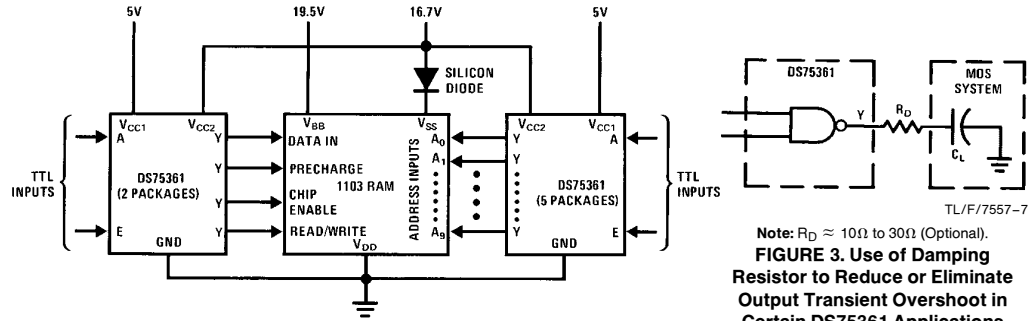


FIGURE 2. Interconnection of DS75361 Devices with 1103 RAM

Thermal Information

POWER DISSIPATION PRECAUTIONS

Significant power may be dissipated in the DS75361 driver when charging and discharging high-capacitance loads over a wide voltage range at high frequencies. The total dissipation curve shows the power dissipated in a typical DS75361 as a function of load capacitance and frequency. Average power dissipated by this driver can be broken into three components:

$$P_{T(AV)} = P_{DC(AV)} + P_{C(AV)} + P_{S(AV)}$$

where $P_{DC(AV)}$ is the steady-state power dissipation with the output high or low, $P_{C(AV)}$ is the power level during charging or discharging of the load capacitance, and $P_{S(AV)}$ is the power dissipation during switching between the low and high levels. None of these include energy transferred to the load and all are averaged over a full cycle.

The power components per driver channel are:

$$P_{DC(AV)} = \frac{P_L t_L + P_H t_H}{T}$$

$$P_{C(AV)} \approx C V_C^2 f$$

$$P_{S(AV)} = \frac{P_{LH} t_{LH} + P_{HL} t_{HL}}{T}$$

where the times are defined in Figure 4.

P_L , P_H , P_{LH} , and P_{HL} are the respective instantaneous levels of power dissipation and C is load capacitance.

The DS75361 is so designed that P_S is a negligible portion of P_T in most applications. Except at very high frequencies, $t_L + t_H \gg t_{LH} + t_{HL}$ so that P_S can be neglected. The total dissipation curve for no load demonstrates this point. The power dissipation contributions from both channels are then added together to obtain total device power.

The following example illustrates this power calculation technique. Assume both channels are operating identically with $C = 200$ pF, $f = 2$ MHz, $V_{CC1} = 5$ V, $V_{CC2} = 20$ V, and duty cycle = 60% outputs high ($t_H/T = 0.6$). Also, assume $V_{OH} = 19.3$ V, $V_{OL} = 0.1$ V, P_S is negligible, and that the current from V_{CC2} is negligible when the output is high.

On a per-channel basis using data sheet values:

$$P_{DC(AV)} = \left[(5V) \left(\frac{2 \text{ mA}}{2} \right) + (20V) \left(\frac{0 \text{ mA}}{2} \right) \right] (0.6) + \left[(5V) \left(\frac{16 \text{ mA}}{2} \right) + (20V) \left(\frac{7 \text{ mA}}{2} \right) \right] (0.4)$$

$$P_{DC(AV)} = 47 \text{ mW per channel}$$

$$P_{C(AV)} \approx (200 \text{ pF}) (19.2V)^2 (2 \text{ MHz})$$

$$P_{C(AV)} \approx 148 \text{ mW per channel.}$$

For the total device dissipation of the two channels:

$$P_{T(AV)} \approx 2 (47 + 148)$$

$$P_{T(AV)} \approx 390 \text{ mW typical for total package.}$$


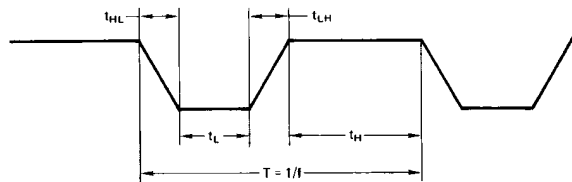


FIGURE 4. Output Voltage Waveform

TL/F/7557-8

Physical Dimensions inches (millimeters)

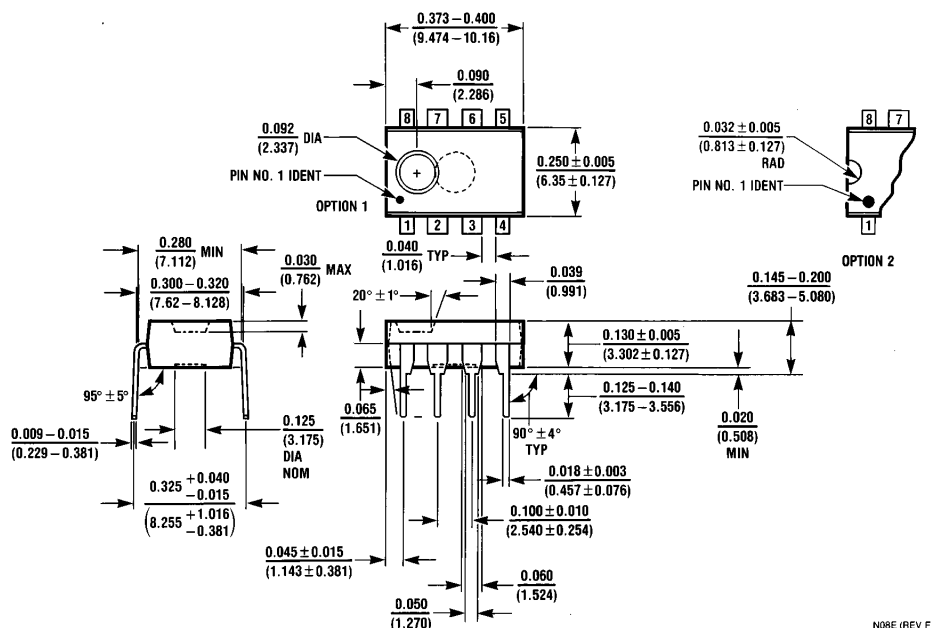

Molded Dual-In-Line Package
Order Number DS75361N
See NS Package Number N08E

N08E (REV F)

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
19th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.