



## MIC2095/MIC2097/MIC2098/MIC2099

### Current-Limiting Power Distribution Switches

#### General Description

The MIC2095/97/98/99 family of switches are self-contained, current-limiting, high-side power switches, ideal for power-control applications. These switches are useful for general purpose power distribution applications such as digital televisions (DTV), printers, set-top boxes (STB), PCs, PDAs, and other peripheral devices.

The current limiting switches feature either a fixed 0.5A/0.9A or resistor programmable output current limit. The family also has fault blanking to eliminate false noise-induced, over current conditions. After an over-current condition, these devices automatically restart if the enable pin remains active. The MIC2097 switch offers a unique new patented Kickstart feature, which allows momentary high-current surges up to the secondary current limit ( $I_{LIMIT\_2nd}$ ). This is useful for charging loads with high inrush currents, such as capacitors.

The MIC2095/97/98/99 family of switches provides under-voltage, over-temperature shutdown, and output fault status reporting. The family also provides either an active low or active high, logic level enable pin.

The MIC2095/97/98/99 family is offered in a space saving 1.6mm x 1.6mm Thin MLF<sup>®</sup> (TMLF) package.

Datasheets and support documentation can be found on Micrel's web site at: [www.micrel.com](http://www.micrel.com).


#### Features

- MIC2095: 0.5A fixed current limit
- MIC2098: 0.9A fixed current limit
- MIC2097/99: Resistor programmable current limit – 0.1A to 1.1A
- MIC2097: Kickstart for high peak current loads
- Under voltage lock-out (UVLO)
- Soft start prevents large current inrush
- Automatic-on output after fault
- Thermal protection
- Enable active high or active low
- 170mΩ typical on-resistance @ 5V
- 2.5V – 5.5V operating range

#### Applications

- Digital televisions (DTV)
- Set top boxes
- PDAs
- Printers
- USB / IEEE 1394 power distribution
- Desktop and laptop PCs
- Game consoles
- USB keyboard
- Docking stations

#### Typical Application

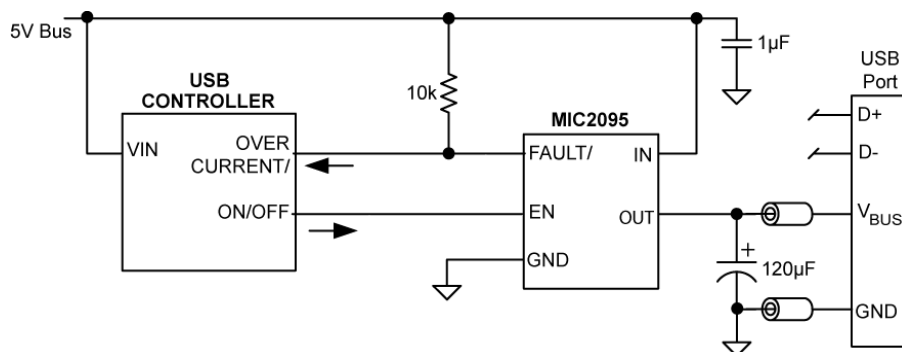

MIC2095 USB Power Switch


MLF and MicroLeadFrame are registered trademarks of Amkor Technology, Inc.

Micrel Inc. • 2180 Fortune Drive • San Jose, CA 95131 • USA • tel +1 (408) 944-0800 • fax + 1 (408) 474-1000 • <http://www.micrel.com>


## Ordering Information

| Part Number  | Marking | ENABLE Logic | Kickstart <sup>(TM)</sup> | ILIMIT       | FAULT/ Output | Junction Temperature Range <sup>(1)</sup> | Package                  |
|--------------|---------|--------------|---------------------------|--------------|---------------|-------------------------------------------|--------------------------|
| MIC2095-1YMT | J1K     | Active High  | No                        | 0.5A         | Yes           | –40°C to +125°C                           | 6-Pin 1.6mm x 1.6mm TMLF |
| MIC2095-2YMT | J2K     | Active Low   | No                        | 0.5A         | Yes           | –40°C to +125°C                           | 6-Pin 1.6mm x 1.6mm TMLF |
| MIC2097-1YMT | K1K     | Active High  | Yes                       | 0.1 A – 1.1A | Yes           | –40°C to +125°C                           | 6-Pin 1.6mm x 1.6mm TMLF |
| MIC2097-2YMT | K2K     | Active Low   | Yes                       | 0.1 A – 1.1A | Yes           | –40°C to +125°C                           | 6-Pin 1.6mm x 1.6mm TMLF |
| MIC2098-1YMT | H1K     | Active High  | No                        | 0.9A         | Yes           | –40°C to +125°C                           | 6-Pin 1.6mm x 1.6mm TMLF |
| MIC2098-2YMT | H2K     | Active Low   | No                        | 0.9A         | Yes           | –40°C to +125°C                           | 6-Pin 1.6mm x 1.6mm TMLF |
| MIC2099-1YMT | G1K     | Active High  | No                        | 0.1 A – 1.1A | Yes           | –40°C to +125°C                           | 6-Pin 1.6mm x 1.6mm TMLF |
| MIC2099-2YMT | G2K     | Active Low   | No                        | 0.1 A – 1.1A | Yes           | –40°C to +125°C                           | 6-Pin 1.6mm x 1.6mm TMLF |


## Pin Configuration

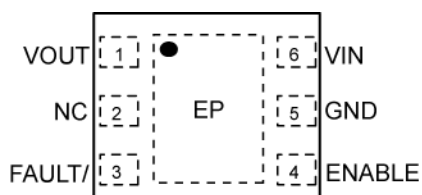


6-Pin 1.6mm x 1.6mm TMLF (MT) (Top View)  
MIC2095-1YMT/MIC2098-1YMT

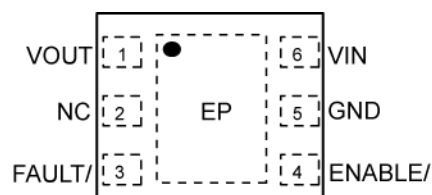

6-Pin 1.6mm x 1.6mm TMLF (MT) (Top View)  
MIC2095-2YMT/MIC2098-2YMT

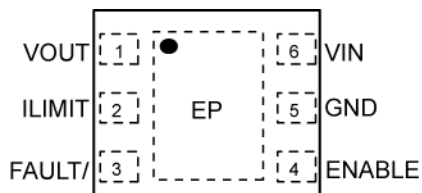

6-Pin 1.6mm x 1.6mm TMLF (MT) (Top View)  
MIC2097-1YMT / MIC2099-1YMT

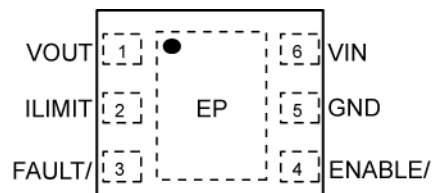

6-Pin 1.6mm x 1.6mm TMLF (MT) (Top View)  
MIC2097-2YMT / MIC2099-2YMT

## Pin Description

| Pin Number                                         | Pin Name | Pin Function                                                                                                                                                                                                                                       |
|----------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                                                  | VOUT     | Switch output (Output): The load being driven by the switch is connected to this pin.                                                                                                                                                              |
| 2<br>(MIC2095/MIC2098)                             | NC       | No Connect; Pin not used.                                                                                                                                                                                                                          |
| 2<br>(MIC2097/MIC2099)                             | ILIMIT   | Current Limit (Input): A resistor from this pin to ground sets the current limit value. See the “setting $I_{LIMIT}$ ” section for details on setting the resistor value.                                                                          |
| 3                                                  | FAULT/   | Fault status (Output): A logic low on this pin indicates the switch is in current limiting, or has been shut down by the thermal protection circuit. This is an open-drain output allowing logical OR'ing of FAULT/ outputs from multiple devices. |
| 4<br>(MIC2095-1/MIC2097-1/<br>MIC2098-1/MIC2099-1) | ENABLE   | Switch Enable (Input): Logic high on this pin enables the switch.                                                                                                                                                                                  |
| 4<br>(MIC2095-2/MIC2097-2/<br>MIC2098-2/MIC2099-2) | ENABLE/  | Switch Enable (Input): Logic low on this pin enables the switch.                                                                                                                                                                                   |
| 5                                                  | GND      | Ground.                                                                                                                                                                                                                                            |
| 6                                                  | VIN      | Power input (Input): This pin provides power to both the output power switch and the internal control circuitry.                                                                                                                                   |
| EP                                                 | EP       | Used to remove heat from die. Connect to ground. Use multiple vias to the ground plane to minimize thermal impedance. See Applications Section for additional information.                                                                         |

**Absolute Maximum Ratings<sup>(1)</sup>**

|                                                    |                    |
|----------------------------------------------------|--------------------|
| Supply Voltage ( $V_{IN}$ )                        | –0.3V to 6.0V      |
| Output Voltage ( $V_{OUT}$ )                       | –0.3V to $V_{IN}$  |
| FAULT Pin Voltage ( $V_{FAULT}$ )                  | –0.3V to $V_{IN}$  |
| ENABLE Pin Voltage ( $V_{ENABLE}$ )                | –0.3V to $V_{IN}$  |
| ILIMIT Pin Voltage ( $V_{ILIMIT}$ )                | –0.3V to $V_{IN}$  |
| Power Dissipation ( $P_D$ )                        | Internally Limited |
| Maximum Junction Temperature ( $T_J$ )             | 150°C              |
| Storage Temperature ( $T_s$ )                      | –65°C to +150°C    |
| Lead Temperature (soldering, 10sec.)               | 260°C              |
| ESD HBM Rating ( $V_{OUT}$ , GND) <sup>(3)</sup>   | 4kV                |
| ESD HBM Rating (FAULT, ENABLE, VIN) <sup>(3)</sup> | 2kV                |

**Operating Ratings<sup>(2)</sup>**

|                                           |                |
|-------------------------------------------|----------------|
| Supply Voltage ( $V_{IN}$ )               | 2.5V to 5.5V   |
| ENABLE Pin Voltage ( $V_{ENABLE}$ )       | 0V to $V_{IN}$ |
| FAULT Pin Voltage ( $V_{FAULT}$ )         | 0V to $V_{IN}$ |
| Ambient Temperature Range ( $T_A$ )       | –40°C to +85°C |
| Package Thermal Resistance <sup>(6)</sup> |                |
| 1.6mm × 1.6mm TMLF ( $\theta_{JA}$ )      | 93°C/W         |

**Electrical Characteristics<sup>(4)</sup>**

$V_{IN} = 5V$ ;  $C_{IN} = 1\mu F$   $T_A = 25^\circ C$  unless noted, **bold** values indicate  $-40^\circ C \leq T_A \leq +85^\circ C$ .

| Symbol                    | Parameter                               | Condition                                                                              | Min.       | Typ. | Max.       | Units      |
|---------------------------|-----------------------------------------|----------------------------------------------------------------------------------------|------------|------|------------|------------|
| <b>Power Input Supply</b> |                                         |                                                                                        |            |      |            |            |
| $V_{IN}$                  | Input Voltage Range                     |                                                                                        | <b>2.5</b> |      | <b>5.5</b> | V          |
| $I_{IN}$                  | Quiescent Supply Current <sup>(5)</sup> | Switch = ON<br>Active Low Enable, $V_{EN} = 0V$<br>Active High Enable, $V_{EN} = 1.5V$ |            | 80   | <b>300</b> | $\mu A$    |
|                           | Shutdown Current                        | Switch = OFF<br>Active Low Enable, $V_{EN} = 1.5V$                                     |            | 8    | <b>15</b>  | $\mu A$    |
|                           |                                         | Switch = OFF<br>Active High Enable, $V_{EN} = 0.5V$                                    |            | 0.1  | <b>5</b>   | $\mu A$    |
| $UVLO_{THRESHOLD}$        | $V_{IN}$ UVLO Threshold                 | $V_{IN}$ Rising                                                                        | <b>2</b>   | 2.25 | <b>2.5</b> | V          |
|                           |                                         | $V_{IN}$ Falling                                                                       | <b>1.9</b> | 2.15 | <b>2.4</b> | V          |
|                           | $V_{IN}$ UVLO Hysteresis                |                                                                                        |            | 100  |            | mV         |
| <b>Enable Control</b>     |                                         |                                                                                        |            |      |            |            |
| $V_{EN}$                  | ENABLE Logic Level Low <sup>(5)</sup>   | $V_{IL(MAX)}$                                                                          |            |      | <b>0.5</b> | V          |
|                           | ENABLE Logic Level High <sup>(5)</sup>  | $V_{IH(MIN)}$                                                                          | <b>1.5</b> |      |            | V          |
| $I_{EN}$                  | ENABLE Bias Current                     | $0V \leq V_{EN} \leq 5V$                                                               |            | 0.1  | <b>5</b>   | $\mu A$    |
| $t_{ON\_DLY}$             | Output Turn-on Delay                    | $R_L = 43\Omega$ , $C_L = 120\mu F$<br>$V_{EN} = 50\%$ to $V_{OUT} = 10\%$             |            | 1000 | 1500       | $\mu s$    |
| $t_{OFF\_DLY}$            | Output Turn-off Delay                   | $R_L = 43\Omega$ , $C_L = 120\mu F$<br>$V_{EN} = 50\%$ to $V_{OUT} = 90\%$             |            |      | 700        | $\mu s$    |
| $t_{RISE}$                | Output Turn-on rise time                | $R_L = 100\Omega$ , $C_{LOAD} = 1\mu F$<br>$V_{OUT} = 10\%$ to $90\%$                  | 500        | 1000 | 1500       | $\mu s$    |
| <b>Thermal Protection</b> |                                         |                                                                                        |            |      |            |            |
| $OT_{Threshold}$          | Over-temperature Shutdown               | $T_J$ Rising                                                                           |            | 145  |            | $^\circ C$ |
|                           |                                         | $T_J$ Falling                                                                          |            | 135  |            | $^\circ C$ |

## Electrical Characteristics (Continued)


$V_{IN} = 5V$ ;  $C_{IN} = 1\mu F$   $T_A = 25^\circ C$  unless noted, **bold** values indicate  $-40^\circ C \leq T_A \leq +85^\circ C$ .

| Symbol                                  | Parameter                                  | Condition                                                                                                                    | Min. | Typ. | Max. | Units |
|-----------------------------------------|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|------|------|------|-------|
| Internal Switch                         |                                            |                                                                                                                              |      |      |      |       |
| R <sub>DS(ON)</sub>                     | On Resistance                              | V <sub>IN</sub> = 5V, I <sub>OUT</sub> = 100mA                                                                               |      | 170  | 220  | mΩ    |
|                                         |                                            |                                                                                                                              |      |      | 275  | mΩ    |
| I <sub>LEAK</sub>                       | Output Leakage Current                     | Switch = OFF, V <sub>OUT</sub> = 0V<br>Active Low Enable, V <sub>EN</sub> = 1.5V<br>Active High Enable, V <sub>EN</sub> = 0V |      | 0.1  | 10   | μA    |
| Output Current Limit (MIC2095)          |                                            |                                                                                                                              |      |      |      |       |
| I <sub>LIMIT</sub>                      | Fixed Current Limit                        | V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>                                                                                     | 0.5  | 0.7  | 0.9  | A     |
| Output Current Limit (MIC2098)          |                                            |                                                                                                                              |      |      |      |       |
| I <sub>LIMIT</sub>                      | Fixed Current Limit                        | V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>                                                                                     | 0.9  | 1.1  | 1.5  | A     |
| Output Current Limit (MIC2097, MIC2099) |                                            |                                                                                                                              |      |      |      |       |
| CLF                                     | Variable Current Limit Factors             | I <sub>OUT</sub> = 1.1A, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub> ; V <sub>IN</sub> =2.5V                                    | 175  | 215  | 263  | V     |
|                                         |                                            | I <sub>OUT</sub> = 0.5A, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub> ; V <sub>IN</sub> =2.5V                                    | 152  | 206  | 263  | V     |
|                                         |                                            | I <sub>OUT</sub> = 0.2A, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub> ; V <sub>IN</sub> =2.5V                                    | 138  | 200  | 263  | V     |
|                                         |                                            | I <sub>OUT</sub> = 0.1A, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub> ; V <sub>IN</sub> =2.5V                                    | 121  | 192  | 263  | V     |
| Kickstart™ Current Limit (MIC2097)      |                                            |                                                                                                                              |      |      |      |       |
| I <sub>LIMIT_2nd</sub>                  | Secondary Current Limit                    | V <sub>IN</sub> = 2.5V; V <sub>OUT</sub> = 0V                                                                                |      | 1.5  |      | A     |
| t <sub>D_LIMIT</sub>                    | Duration of Kickstart™ Current Limit       | V <sub>IN</sub> = 2.5V                                                                                                       | 77   | 105  | 192  | ms    |
| Fault Flag                              |                                            |                                                                                                                              |      |      |      |       |
| V <sub>FAULT/</sub>                     | Fault Flag Output Voltage                  | I <sub>OL</sub> = 10mA                                                                                                       |      | 0.25 | 0.4  | V     |
|                                         | Fault Flag Off Current                     | V <sub>FAULT/</sub> =5V                                                                                                      |      | 0.01 | 1    | μA    |
| Fault Delay (MIC2095, MIC2098, MIC2099) |                                            |                                                                                                                              |      |      |      |       |
| t <sub>D_FAULT</sub>                    | Delay before asserting or releasing FAULT/ | Time from current limiting (V <sub>OUT</sub> = 0.4 x V <sub>IN</sub> ) to FAULT/ state change                                | 20   | 32   | 49   | ms    |
| Fault Delay (MIC2097)                   |                                            |                                                                                                                              |      |      |      |       |
| t <sub>D_FAULT</sub>                    | Delay before asserting or releasing FAULT/ | Time from current limiting (V <sub>OUT</sub> = 0.8 x V <sub>IN</sub> ) to FAULT/ state change; V <sub>IN</sub> = 2.5V        | 77   | 105  | 192  | ms    |


### Notes:

1. Exceeding the absolute maximum rating may damage the device.
2. The device is not guaranteed to function outside its operating rating.
3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.
4. Specifications for packaged product only.
5. Check the Ordering Information section to determine which parts are Active High or Active Low.
6. Requires proper thermal mounting to achieve this performance.

## Timing Diagrams












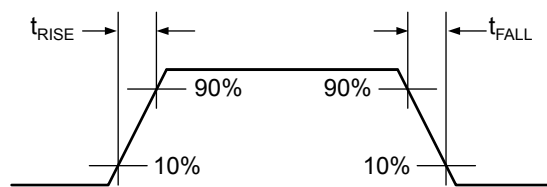


**Rise and Fall Times**












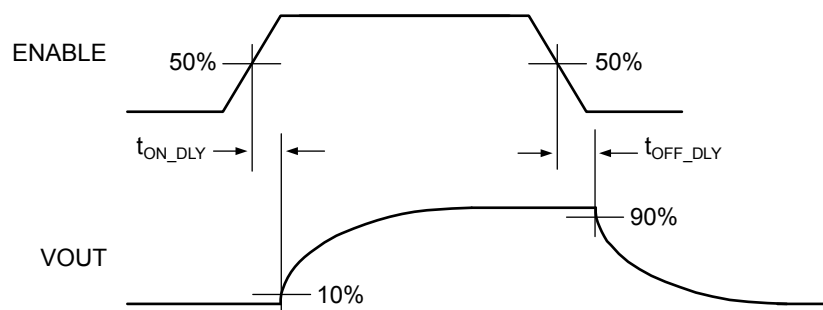


**Switching Delay Times**

## Typical Characteristics

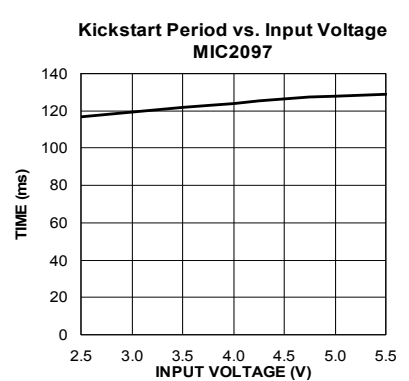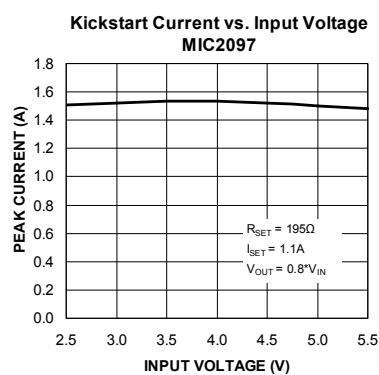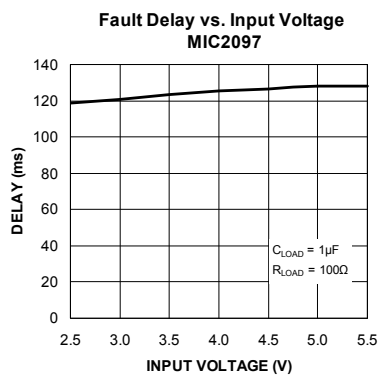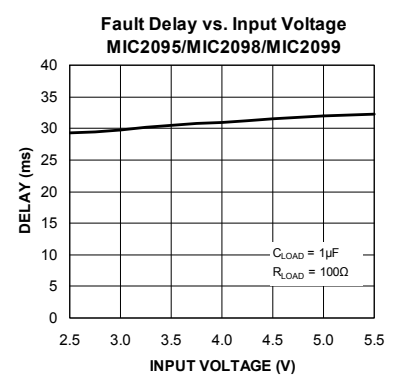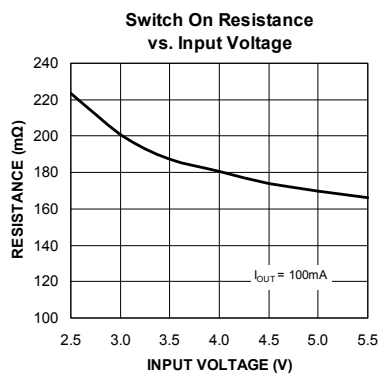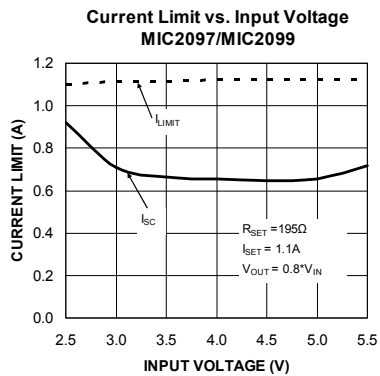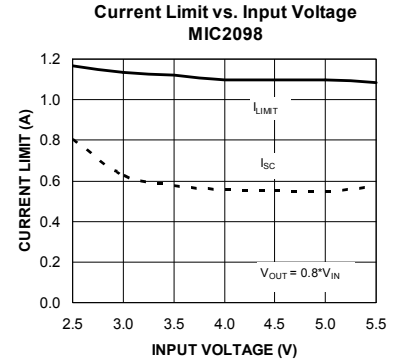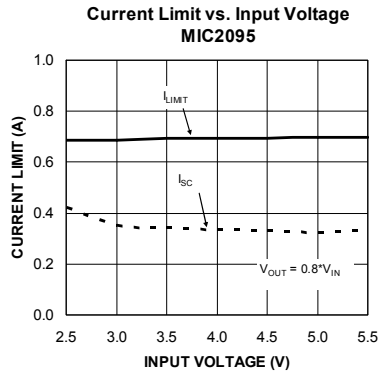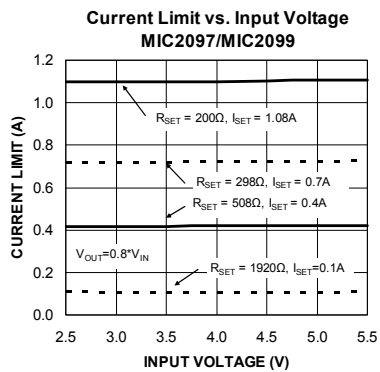
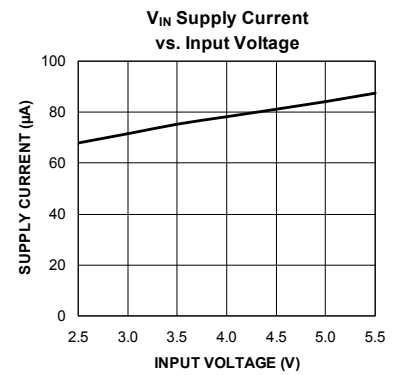
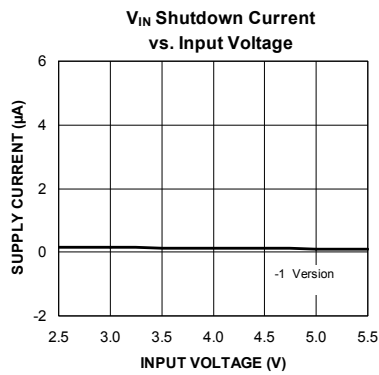
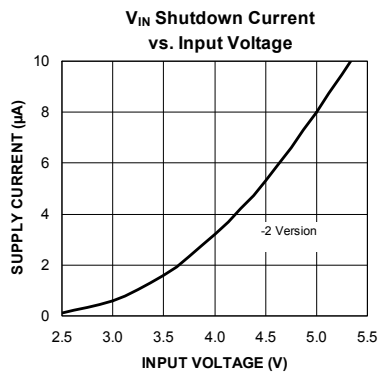


## Typical Characteristics (Continued)

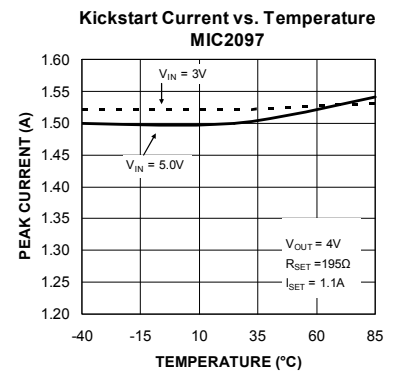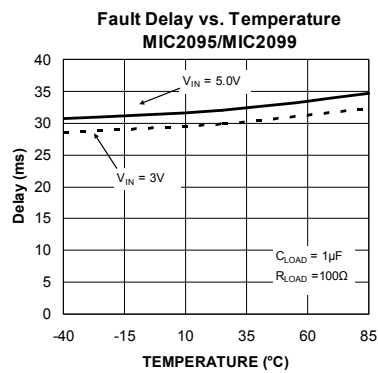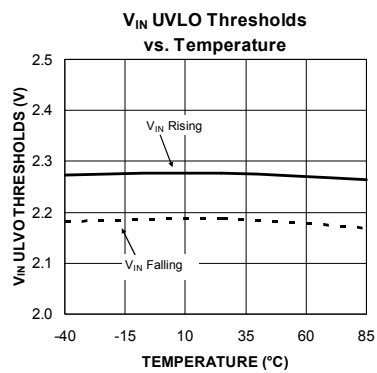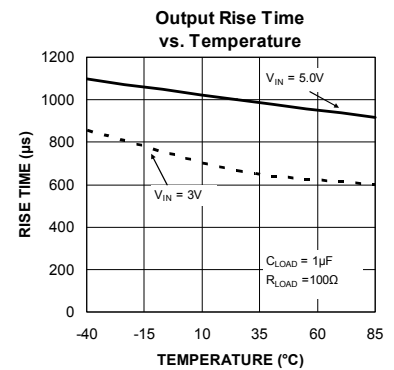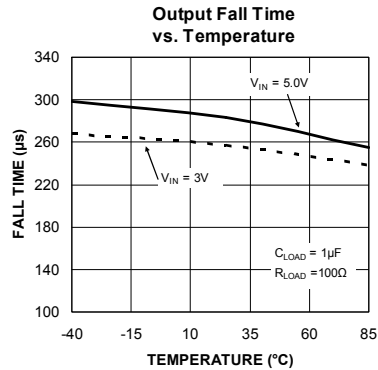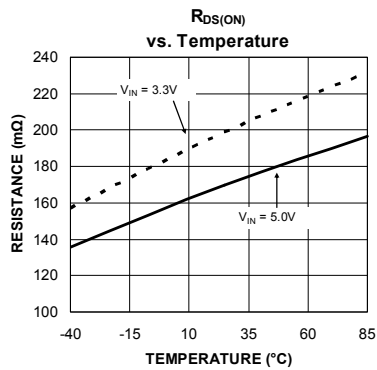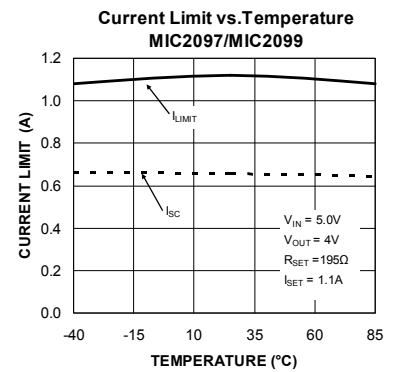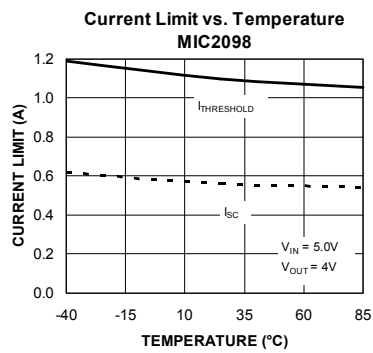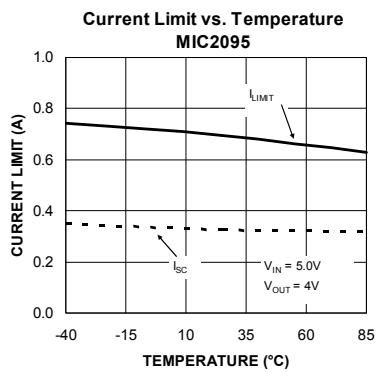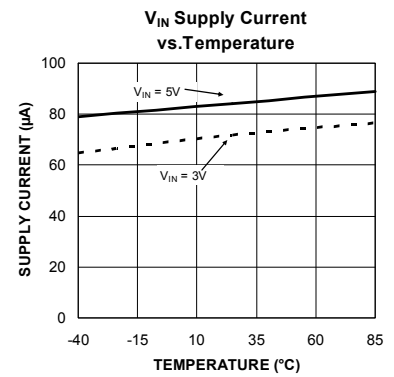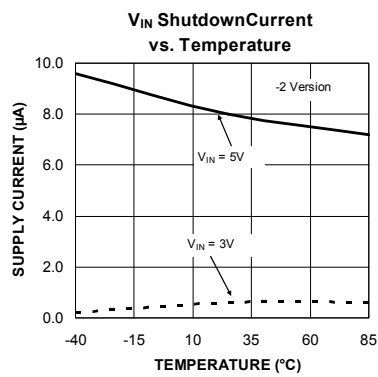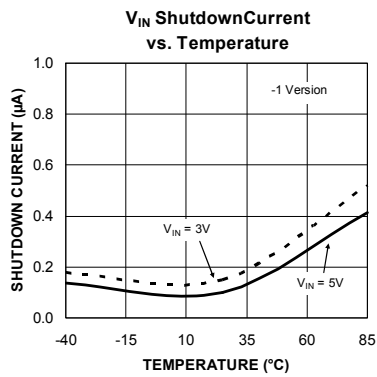




Typical Characteristics (Continued)

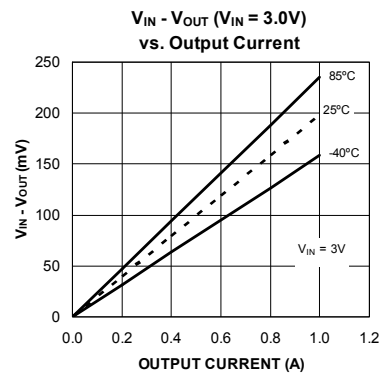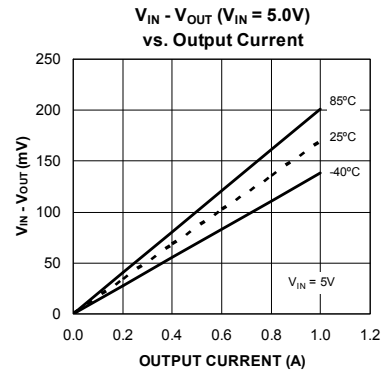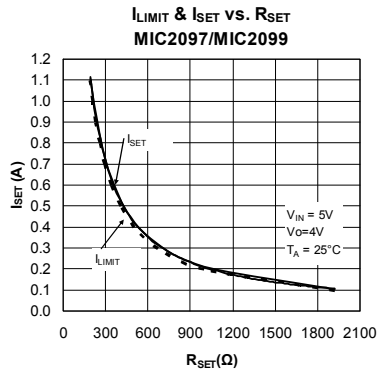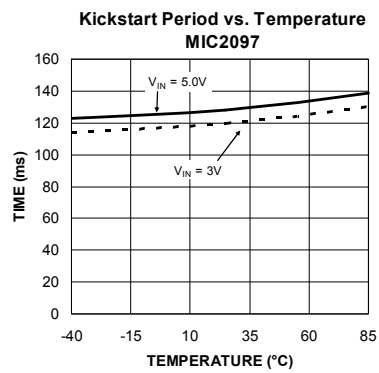


## Functional Characteristics


**V<sub>IN</sub> Soft Turn-On**

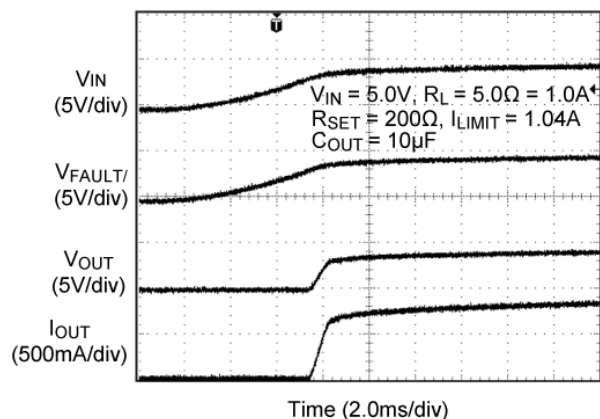


**V<sub>IN</sub> Soft Turn-Off**

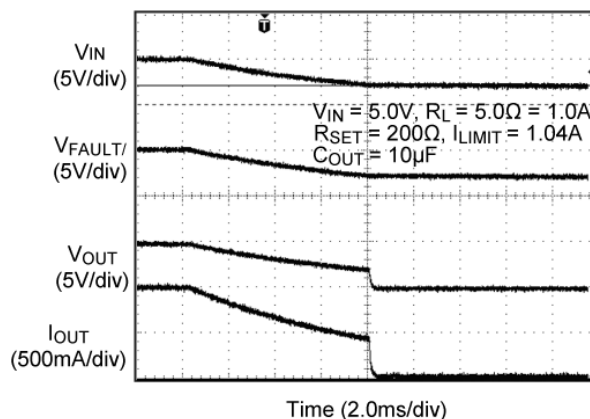


**V<sub>IN</sub> UVLO Thresholds**

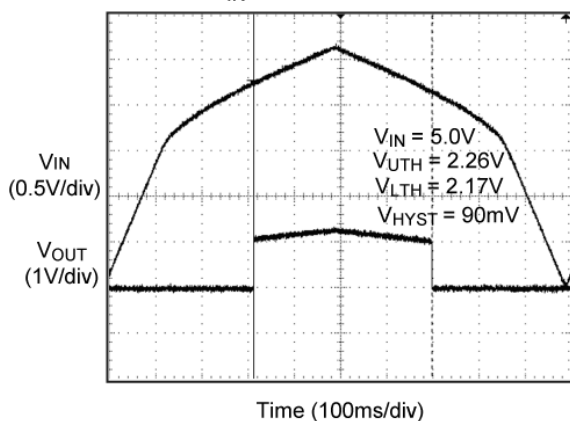


**Enable Turn-On/Turn-Off**

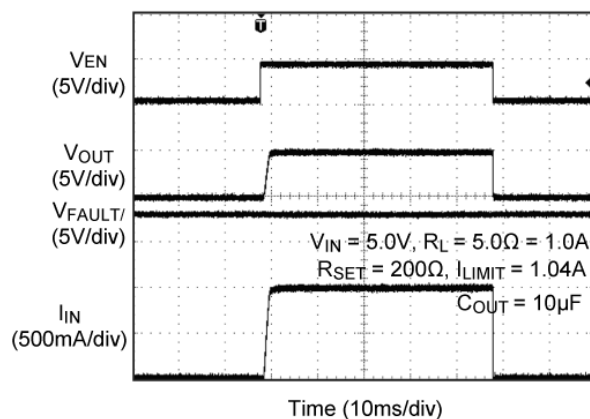

**Enable Turn-On Delay and Rise Time**

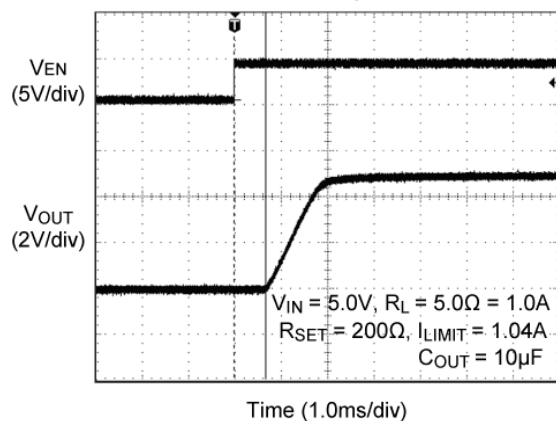


**Enable Turn-Off Delay and Fall Time**

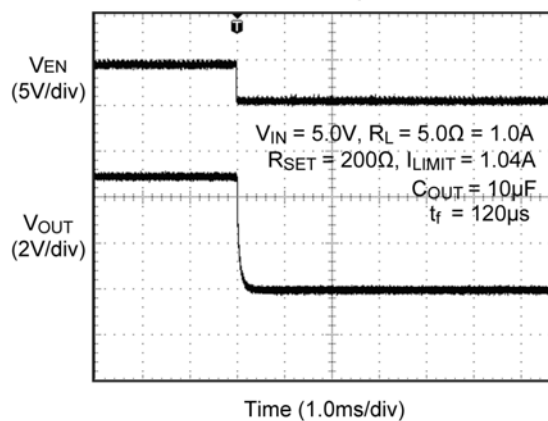


### Functional Characteristics (Continued)


## Enable Thresholds

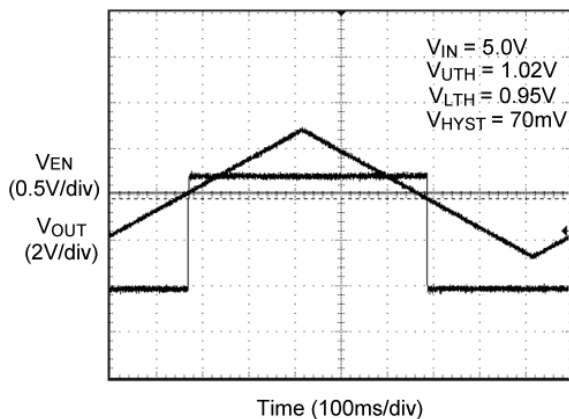


## 2095 Enabled into a Short

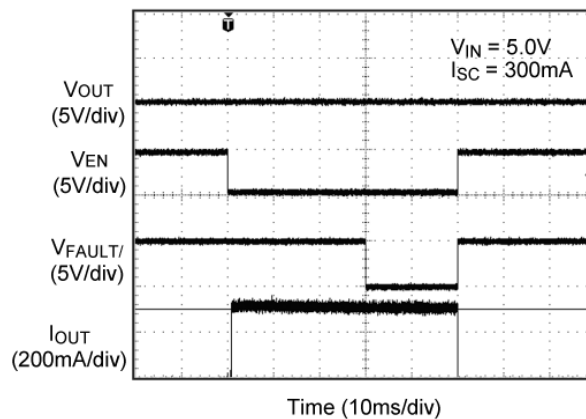


## 2098 Enabled into a Short

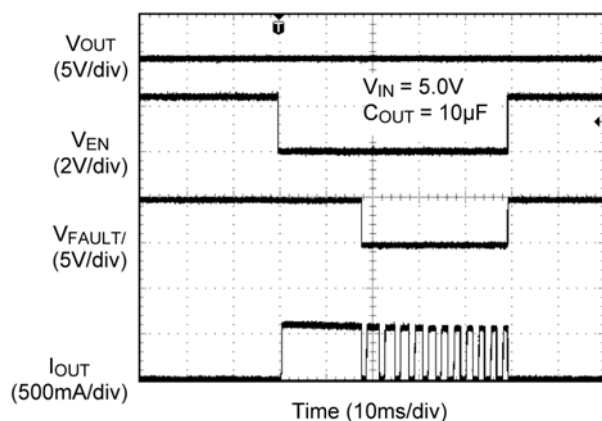


### 2099 Enabled into a Short

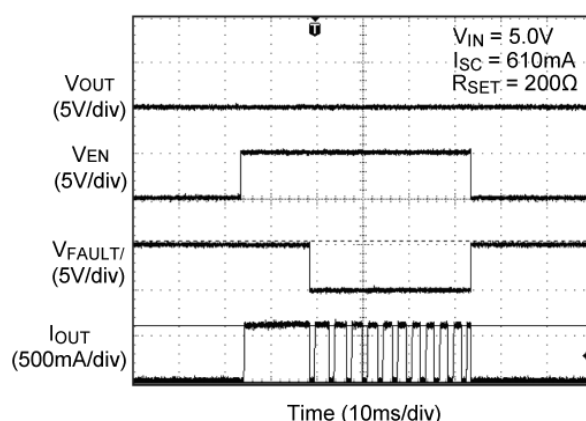

### 2097 Enabled into an Overcurrent Condition

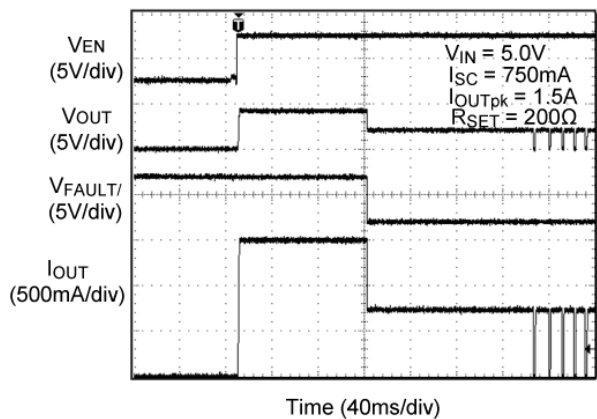


### 2095 Power Up into Short Circuit

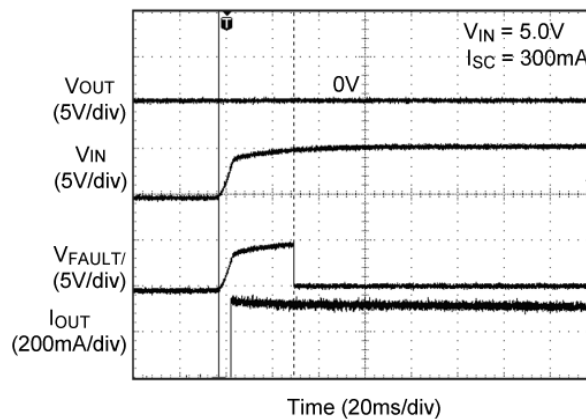


## Functional Characteristics (Continued)


2098 Power Up into Short Circuit

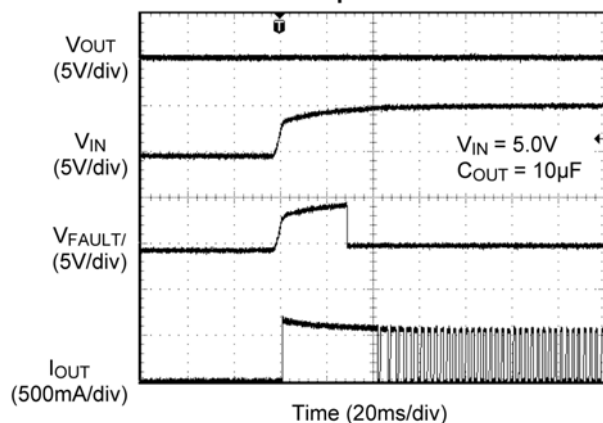


2099 Power Up into Short Circuit

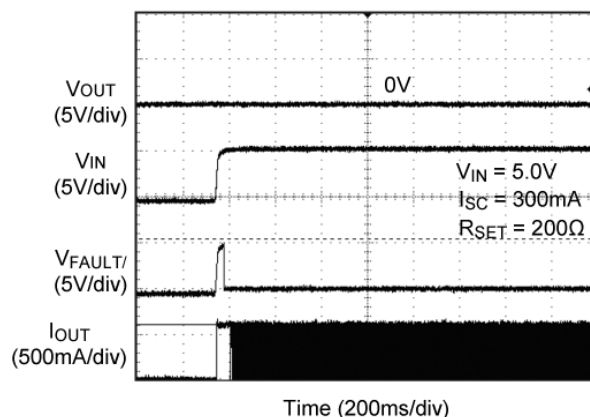


2097 Power Up into Short Circuit

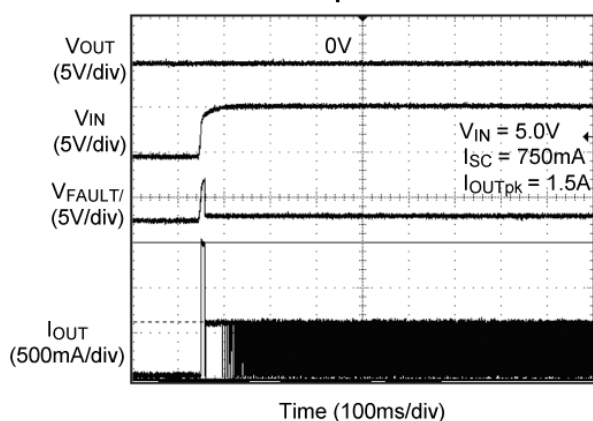


2095 Output Recovery from Short Circuit and Fault/ Response

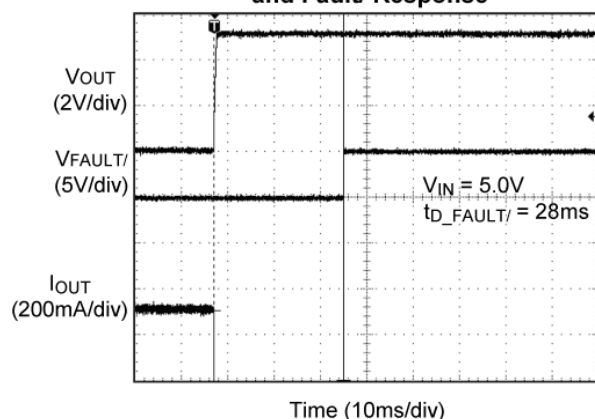

2098 Output Recovery from Short Circuit and FAULT/Response

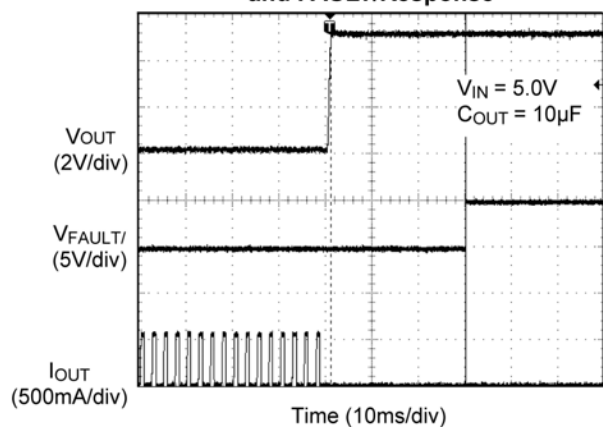


2099 Output Recovery from Short Circuit and Fault/ Response

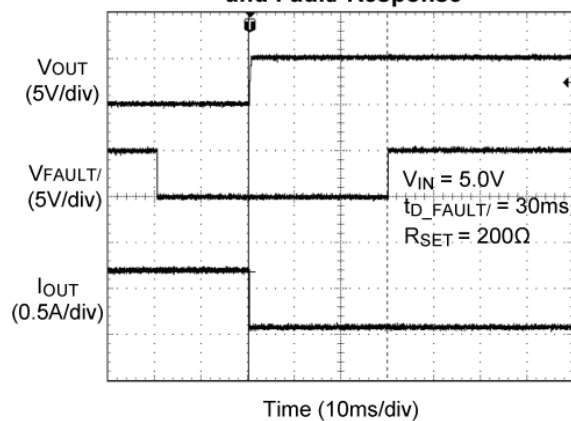


## Functional Characteristics (Continued)


**2097 Output Recovery from Short Circuit and Fault/ Response**

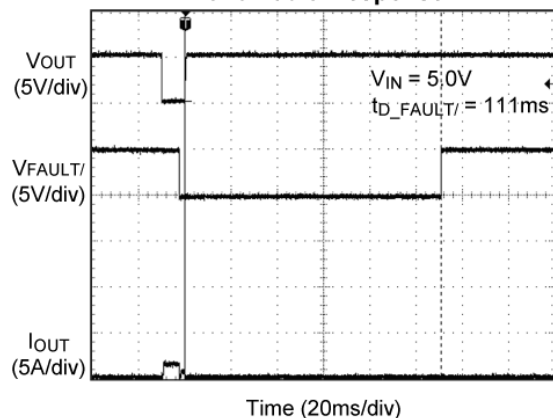


**2095 Inrush Current Response**

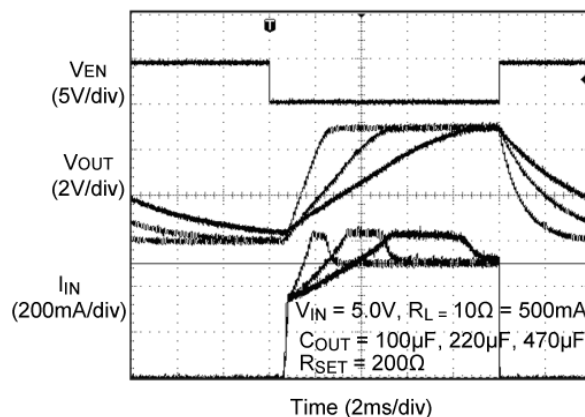


**2098 Inrush Current Response**

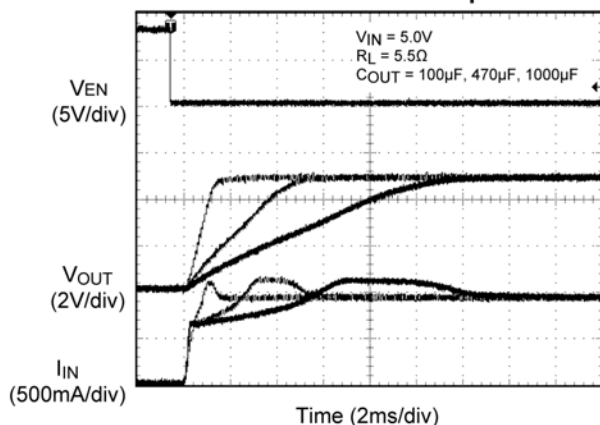


**2099 Inrush Current Response**

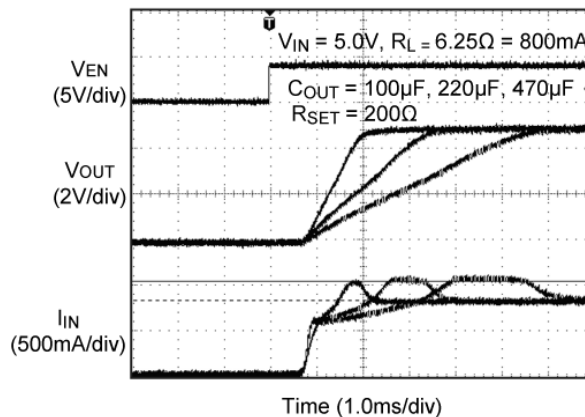

**2097 Inrush Current Response**

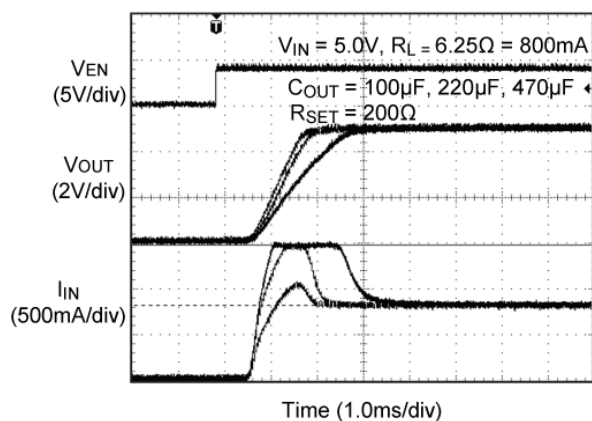


**2095 Output Recovery from Thermal Shutdown**

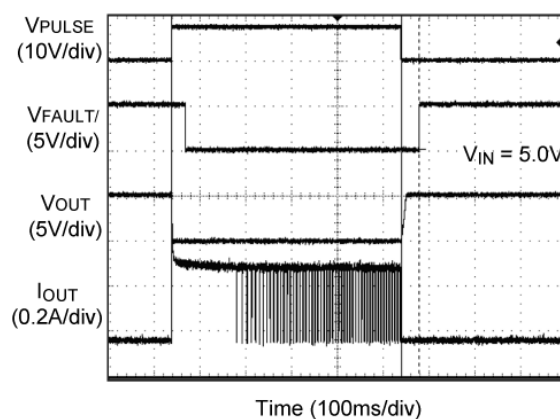


## Functional Characteristics (Continued)


### 2098 Output Recovery from Thermal Shutdown

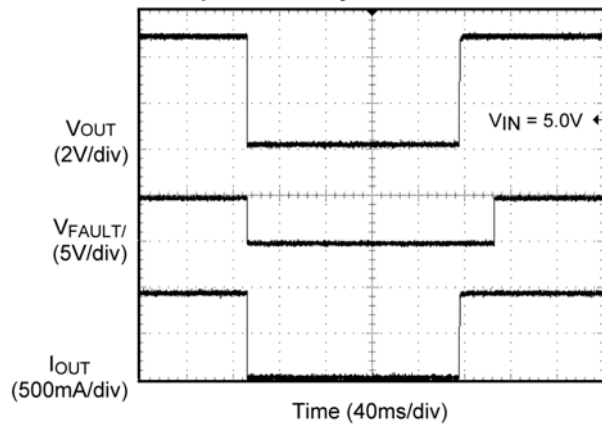


### 2099 Output Recovery from Thermal Shutdown

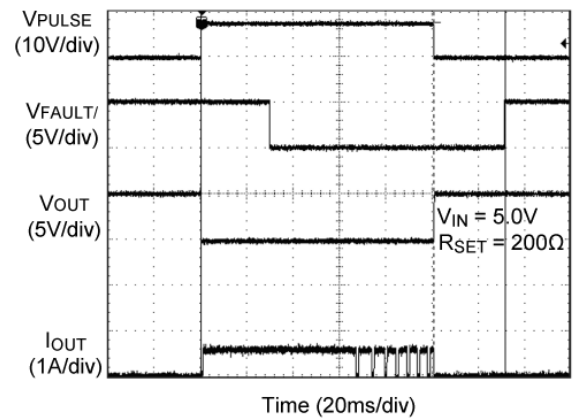

### 2097 Output Recovery from Thermal Shutdown

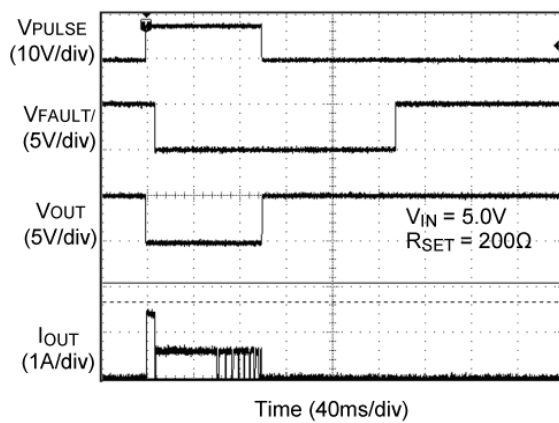

## Functional Diagram

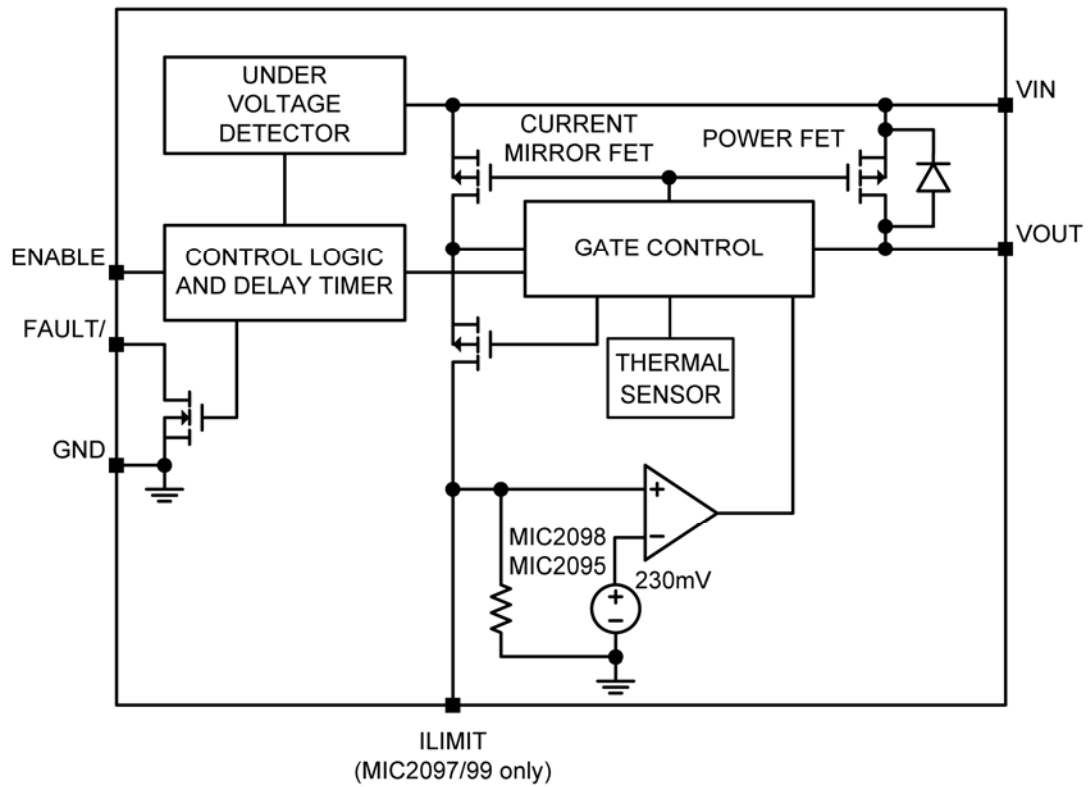

**MIC2095/97/98/99 Functional Diagram**

## Functional Description and Application Information

### $V_{IN}$ and $V_{OUT}$

$V_{IN}$  is both the power supply connection for the internal circuitry driving the switch and the input (Source connection) of the power MOSFET switch.  $V_{OUT}$  is the Drain connection of the power MOSFET and supplies power to the load. In a typical circuit, current flows from  $V_{IN}$  to  $V_{OUT}$  toward the load. Since the switch is bi-directional when enabled, if  $V_{OUT}$  is greater than  $V_{IN}$ , current will flow from  $V_{OUT}$  to  $V_{IN}$ .

When the switch is disabled, current will not flow to the load, except for a small unavoidable leakage current of a few micro amps. However, should  $V_{OUT}$  exceed  $V_{IN}$  by more than a diode drop (~0.6V), while the switch is disabled, current will flow from output to input via the power MOSFET's body diode. When the switch is enabled, current can flow both ways, from  $V_{IN}$  to  $V_{OUT}$ , or  $V_{OUT}$  to  $V_{IN}$ .

### $C_{IN}$

A minimum 1 $\mu$ F bypass capacitor positioned as close as possible to the  $V_{IN}$  and GND pins of the switch is both good design practice and required for proper operation of the switch. This will control supply transients and ringing. Without a sufficient bypass capacitor, large current surges or a short may cause sufficient ringing on  $V_{IN}$  (from supply lead inductance) to cause erratic operation of the switch's control circuitry. For best performance a good quality, low-ESR ceramic capacitor is recommended.

An additional 22 $\mu$ F (or greater) capacitor, positioned close to the  $V_{IN}$  and GND pins of the switch is necessary if the distance between a larger bulk capacitor and the switch is greater than 3 inches. This additional capacitor limits input voltage transients at the switch caused by fast changing input currents that occur during a fault condition, such as current limit and thermal shutdown.

When bypassing with capacitors of 10 $\mu$ F and up, it is good practice to place a smaller value capacitor in parallel with the larger to handle the high frequency components of any line transients. Values in the range of 0.1 $\mu$ F to 1 $\mu$ F are recommended. Again, good quality, low-ESR capacitors, preferably ceramic, should be chosen.

### $C_{OUT}$

An output capacitor is recommended to reduce ringing and voltage sag on the output during a transient condition. A value between 1 $\mu$ F and 10 $\mu$ F is recommended, however, larger values can be used.

### Limitations on $C_{OUT}$

The part may enter current limit when turning on with a large output capacitance. This is an acceptable condition, however, if the part remains in current limit for a time greater than  $t_{D\_FAULT}$ , the FAULT pin will assert low. The maximum value of  $C_{OUT}$  may be approximated by the following equation:

$$C_{OUT\_MAX} = \frac{I_{LIMIT\_MIN} \times t_{D\_FAULT\_MIN}}{V_{IN\_MAX}} \quad \text{Eq. 1}$$

Where:  $I_{LIMIT\_MIN}$  and  $t_{D\_FAULT\_MIN}$  are the minimum specified values listed in the Electrical Characteristic table and  $V_{IN\_MAX}$  is the maximum input voltage to the switch.

### Current Sensing and Limiting

The current limiting switches protect the system power supply and load from damage by continuously monitoring current through the on-chip power MOSFET. Load current is monitored by means of a current mirror in parallel with the power MOSFET switch. Current limiting is invoked when the load exceeds the over-current threshold. When current limiting is activated the output current is constrained to the limit value, and remains at this level until either the load/fault is removed, the load's current requirement drops below the limiting value, or the switch goes into thermal shutdown.

### Kickstart™

The MIC2097 has a Kickstart feature that allows higher momentary current surges before the onset of current limiting. This permits dynamic loads, such as small disk drives or portable printers to draw the inrush current needed to overcome inertial loads without sacrificing system safety. The Kickstart parts differ from the non-Kickstart parts which more rapidly limit load current, potentially starving a motor and causing the appliance to stall or stutter.

During the Kickstart delay period, (typically 105ms), a secondary current limit (nominally set at 1.5A), is in effect. If the load demands a current in excess the secondary limit, Kickstart parts act immediately to restrict output current to the secondary limit for the duration of the Kickstart period. After this time the Kickstart parts revert to their normal current limit. An example of Kickstart operation is in Figure 1.

Kickstart may be over-ridden by the thermal protection circuit and if sufficient internal heating occurs, Kickstart will be terminated and the output switch will be turned off. After the parts cools, if the load is still present  $I_{OUT} \rightarrow I_{LIMIT}$ , not  $I_{LIMIT\_2nd}$ .



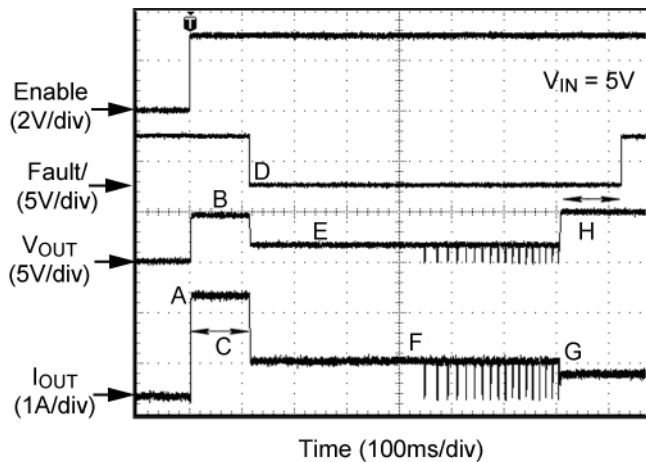


Figure 1. MIC2097 Kickstart Operation

#### Figure 1 Label Key:

- A. The MIC2097 is enabled into an excessive load (slew-rate limiting not visible at this time scale) The initial current surge is limited by either the overall circuit resistance and power-supply compliance, or the secondary current limit, whichever is less.
- B.  $R_{ON}$  of the power FET increases due to internal heating.
- C. Kickstart period.
- D. Current limiting initiated. FAULT/ goes low.
- E.  $V_{OUT}$  is non-zero (load is heavy, but not a dead short where  $V_{OUT} = 0V$ . Limiting response will be the same for dead shorts).
- F. Thermal shutdown followed by thermal cycling.
- G. Excessive load released, normal load remains. MIC2097 drops out of current limiting.
- H. FAULT/ delay period followed by FAULT/ going HIGH.

#### Enable Input

The ENABLE pin is a logic level compatible input which turns on or off the main MOSFET switch. There are two versions of each device. The -1 version has an active high (ENABLE) and the -2 version has an active low (ENABLE/).

#### Fault Output

The FAULT/ is an N-channel open-drain output, which is asserted (LOW true) when the device either begins current limiting or enters thermal shutdown. The FAULT/ signal asserts after a brief delay period in order to filter out very brief over current conditions. After an over-current or over-temperature fault clears, the FAULT/ pin remains asserted (low) for the delay period.

The FAULT/output is open-drain and must be pulled HIGH with an external resistor. The FAULT/ signal may be wire-OR'd with other similar outputs, sharing a single

pull-up resistor. FAULT/ may be tied to a pull-up voltage source which is less than or equal to  $V_{IN}$ .

#### Soft-Start Control

Large capacitive loads can create significant inrush current surges when charged through the current limiting switch. When the switch is enabled, the built-in soft-start limits the initial inrush current by slowly turning on the output.

#### Power Dissipation and Thermal Shutdown

Thermal shutdown is used to protect the current limiting switch from damage should the die temperature exceed a safe operating temperature. Thermal shutdown shuts off the output MOSFET and asserts the FAULT/ output if the die temperature reaches 145°C (typical).

The switch will automatically resume operation when the die temperature cools down to 135°C. If resumed operation results in reheating of the die, another shutdown cycle will occur and the switch will continue cycling between ON and OFF states until the reason for the overcurrent condition has been resolved.

Depending on PCB layout, package type, ambient temperature, etc., hundreds of milliseconds may elapse from the time a fault occurs to the time the output MOSFET will be shut off. This delay is caused because of the time it takes for the die to heat after the fault condition occurs.

Power dissipation depends on several factors such as the load, PCB layout, ambient temperature, and supply voltage. Calculation of power dissipation can be accomplished by the following equation:

$$P_D = R_{DS(ON)} \times (I_{OUT})^2 \quad \text{Eq. 2}$$

To relate this to junction temperature, the following equation can be used:

$$T_J = P_D \times R_{\theta(J-A)} + T_A \quad \text{Eq. 3}$$

Where  $T_J$  = junction temperature,  $T_A$  = ambient temperature, and  $R_{\theta(J-A)}$  is the thermal resistance of the package.

In normal operation, excessive switch heating is most often caused by an output short circuit. If the output is shorted, when the switch is enabled, the switch limits the output current to the maximum value. The heat generated by the power dissipation of the switch continuously limiting the current may exceed the package and PCB's ability to cool the device and the switch will shut down and signal a fault condition. Please see the Fault Output description in the previous page for more details on the FAULT/ output. After the switch

shuts down, and cools, it will re-start itself if the Enable signal retains true (high on the ENABLE parts, low on the ENABLE/ parts).

In Figure 2, die temperature is plotted against  $I_{OUT}$  assuming a constant ambient temperature of 85°C. The plot also assumes the maximum specified switch resistance at high temperature.

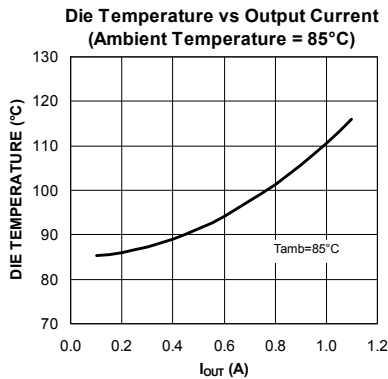


Figure 2. Die Temperature vs.  $I_{OUT}$

### Setting $I_{LIMIT}$

The current limit of the MIC2097 and MIC2099 parts are user programmable and controlled by a resistor connected between the  $I_{LIMIT}$  pin and Ground. The value of the current limit resistor is determined by the following equations:

$$I_{LIMIT} = \frac{\text{CurrentLimitFactor}(\text{CLF})}{R_{LIMIT}} \quad \text{Eq. 4}$$

or

$$R_{LIMIT} = \frac{\text{CurrentLimitFactor}(\text{CLF})}{I_{LIMIT}} \quad \text{Eq. 5}$$

The Current-Limit Factor (CLF) is a number that is characteristic to the MIC2097/9 switches. The CLF is a product of the current-setting resistor value, and the desired current-limit value. Please note that the CLF varies with the current output current, so caution is necessary to use the correct CLF value for the current that you intend to use the part at. For example: If one wishes to set a  $I_{LIMIT} = 1.1\text{A}$ , looking in the electrical specifications we will find CLF at  $I_{LIMIT} = 1.1\text{A}$ , as noted in Table 1.

| Min. | Typ. | Max. | Units |
|------|------|------|-------|
| 175  | 215  | 263  | V     |

Table 1. CLF at  $I_{LIMIT} = 1.1\text{A}$

For the sake of this example, the typical value of CLF at an  $I_{OUT}$  of 1.1A is 215V. Applying Equation 5:

$$R_{LIMIT}(\Omega) = \frac{215\text{V}}{1.1\text{A}} = 195\Omega \quad \text{Eq. 6}$$

Choose  $R_{LIMIT} = 196\Omega$  (the closest standard 1% value)

Designers should be aware that variations in the measured  $I_{LIMIT}$  for a given  $R_{LIMIT}$  resistor, will occur because of small differences between individual ICs (inherent in silicon processing) resulting in a spread of  $I_{LIMIT}$  values. In the example above we used the typical value of CLF to calculate  $R_{LIMIT}$ . We can determine  $I_{LIMIT}$ 's spread by using the minimum and maximum values of CLF and the calculated value of  $R_{LIMIT}$ :

$$I_{LIMIT\_MIN} = \frac{175\text{V}}{196\Omega} = 0.89\text{A} \quad \text{Eq. 7}$$

$$I_{LIMIT\_MAX} = \frac{263\text{V}}{196\Omega} = 1.34\text{A} \quad \text{Eq. 8}$$

Giving us a maximum  $I_{LIMIT}$  variation of:

| $I_{LIMIT\_MIN}$ | $I_{LIMIT\_TYP}$ | $I_{LIMIT\_MAX}$ |
|------------------|------------------|------------------|
| 0.89A (-19%)     | 1.1A             | 1.34A (+22%)     |

For convenience, Table 2 lists the resistance values for the  $R_{SET}$  pin, for various current limit values.

| Nominal $I_{LIMIT}$ | $R_{LIMIT}$ | $I_{LIMIT\_MIN}$ | $I_{LIMIT\_MAX}$ |
|---------------------|-------------|------------------|------------------|
| 0.1A                | 1920        | 0.063            | 0.137            |
| 0.2A                | 1000        | 0.138            | 0.263            |
| 0.3A                | 672         | 0.211            | 0.391            |
| 0.4A                | 508         | 0.288            | 0.517            |
| 0.5A                | 412         | 0.369            | 0.638            |
| 0.6A                | 344         | 0.448            | 0.764            |
| 0.7A                | 298         | 0.533            | 0.884            |
| 0.8A                | 263         | 0.620            | 1.002            |
| 0.9A                | 235         | 0.709            | 1.118            |
| 1.0A                | 213         | 0.801            | 1.233            |
| 1.1A                | 195         | 0.895            | 1.346            |

Table 2. MIC2097 and MIC2099  $R_{LIMIT}$  Table

### $I_{LIMIT}$ vs. $I_{OUT}$ Measured

When in current limit, the switches are designed to act as a constant-current source to the load. As the load tries to pull more than the maximum current,  $V_{OUT}$  drops and the input-to-output voltage differential increases. As the  $(V_{IN} - V_{OUT})$  voltage differential increases, the IC internal temperature also increases. To limit the IC's power dissipation, the current limit is reduced as a function of output voltage.

This folding back of  $I_{LIMIT}$  can be generalized by plotting  $I_{LIMIT}$  as a function of  $V_{OUT}$ , as shown in Figures 3 and 4. The slope of  $V_{OUT}$  between  $I_{OUT} = 0V$  and  $I_{OUT} = I_{LIMIT}$  (where  $I_{LIMIT}$  is a normalized 1A) is determined by  $R_{ON}$  of the switch and  $I_{LIMIT}$ .

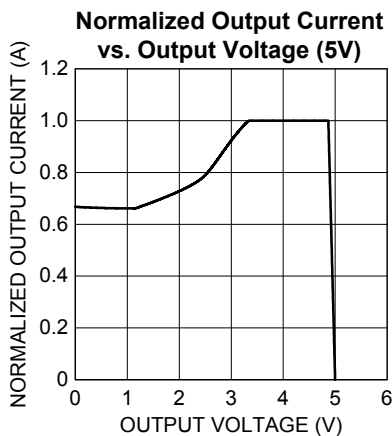


Figure 3. Normalized Output Current vs. Output Voltage

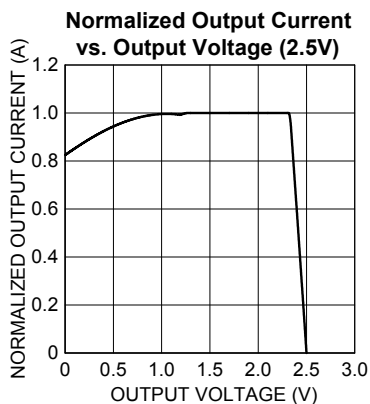


Figure 4. Normalized Output Current vs. Output Voltage

When measuring  $I_{OUT}$  it is important to remember voltage dependence, otherwise the measurement data may appear to indicate a problem when none really exists. This voltage dependence is illustrated in Figures 5 and 6.

In Figure 5, output current is measured as  $V_{OUT}$  is pulled below  $V_{IN}$ , with the test terminating when  $V_{OUT}$  is 1V below  $V_{IN}$ . Observe that once  $I_{LIMIT}$  is reached  $I_{OUT}$  remains constant throughout the remainder of the test. In Figure 6 this test is repeated but with  $(V_{IN} - V_{OUT})$  is 4V.

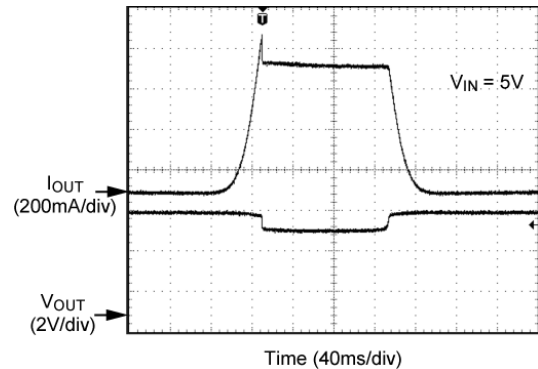


Figure 5.  $I_{OUT}$  in Current Limiting for  $V_{OUT} = 4V$


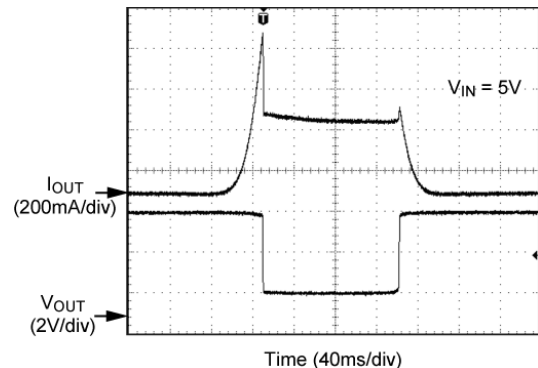


Figure 6.  $I_{OUT}$  in Current Limiting for  $V_{OUT} = 1V$

### Under Voltage Lock Out (UVLO)


The switches have an Under Voltage Lock Out (UVLO) feature that will shut down the switch in a reproducible manner when the input power supply voltage goes too low. The UVLO circuit disables the output until the supply voltage exceeds the UVLO threshold. Hysteresis in the UVLO circuit prevents noise and finite circuit impedance from causing chatter during turn-on and turn-off. While disabled by the UVLO circuit, the output switch (power MOSFET) is OFF and no circuit functions, such as FAULT/ or ENABLE, are considered to be valid or operative.

## Typical Application Schematics

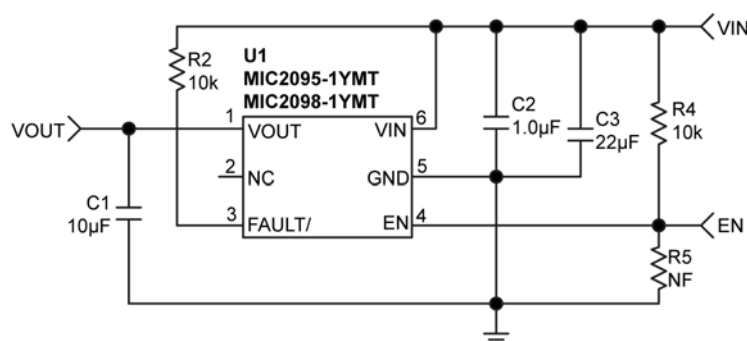


**Figure 7. MIC2095-1 or MIC2098-1 Typical Schematic**

**Note:** MIC2095-1 and MIC2098-1; R5=NF; EN pin uses R4 (pull-up resistor to  $V_{IN}$ ) to enable the output without an external enable signal. MIC2095-2 and MIC2098-2; R4=NF; EN/ pin uses R5 (pull-down resistor to GND) to enable the output without an external enable signal.

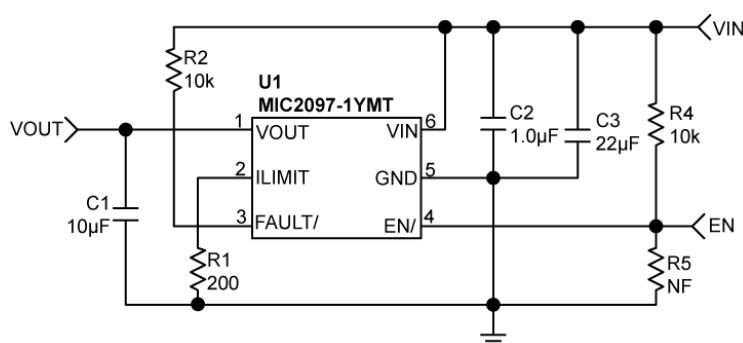

**Figure 8. MIC2097-1 Typical Schematic**

**Note:** MIC2097-1; R5=NF; EN pin uses R4 (pull-up resistor to  $V_{IN}$ ) to enable the output without an external enable signal. MIC2097-2; R4=NF; EN/ pin uses R5 (pull-down resistor to GND) to enable the output without an external enable signal.

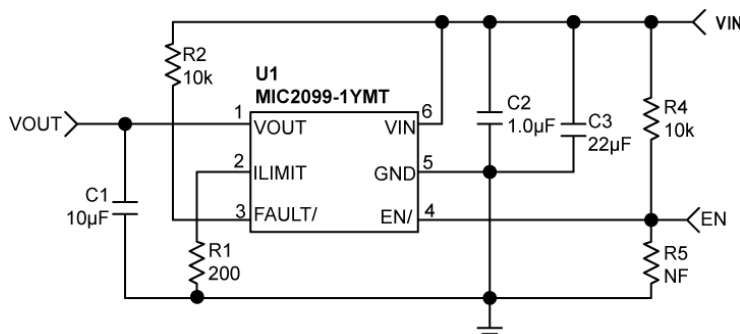

**Figure 9. MIC2099-1 Schematic**

**Note:** MIC2099-1; R5=NF; EN pin uses R4 (pull-up resistor to  $V_{IN}$ ) to enable the output without an external enable signal. MIC2099-2; R4=NF; EN/ pin uses R5 (pull-down resistor to GND) to enable the output without an external enable signal.

## Evaluation Board Schematic

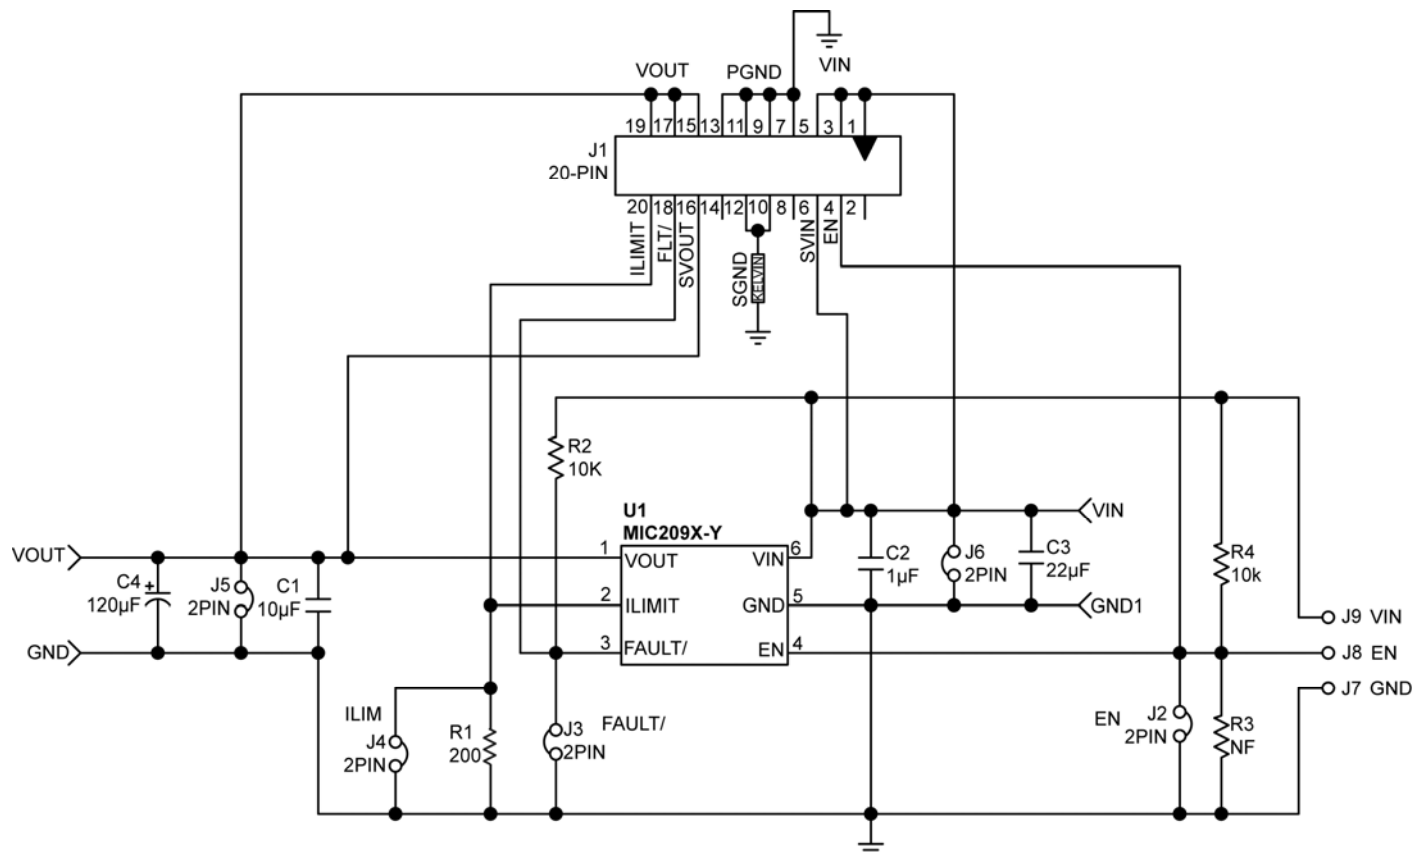


Figure 10. Schematic of MIC209X Evaluation Board

### Notes:

1. Evaluation board is used for all parts.
2. Part numbering scheme is 209X-Y where X is the place holder for the last number (i.e. MIC2095, MIC2097, MIC2098 or MIC2099) and Y is the polarity of the enable signal (-1 indicates active high logic and -2 indicates active low logic).
3. MIC209X-1 EN pin only requires R4 (pull-up resistor to  $V_{IN}$ ) to enable the output without an external enable signal.
4. MIC209X-2 EN/ pin only requires R3 (pull-down resistor-to-GND) to enable the output without an external enable signal.
5. R1 is NF (no fill) with the MIC2095 (fixed current limit).

**MIC209x Bill of Materials**

| Item              | Part Number      | Manufacturer                | Description                                                                                               | Qty. |
|-------------------|------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------|------|
| C1                | 08056D106MAT2A   | AVX <sup>(1)</sup>          | Ceramic Capacitor, 10 $\mu$ F, 6.3V, X5R                                                                  | 1    |
| C2                | 06033D105MAT2A   | AVX <sup>(1)</sup>          | Ceramic Capacitor, 1 $\mu$ F, 25V, X5R                                                                    | 1    |
| C3                | 0805D226MAT2A    | AVX <sup>(1)</sup>          | Ceramic Capacitor, 22 $\mu$ F, 6.3V, X5R                                                                  | 1    |
| C4                |                  |                             | 120 $\mu$ F (optional)                                                                                    | 0    |
| R1 <sup>(4)</sup> | CRCW06032000FRT1 | Vishay Dale <sup>(2)</sup>  | Resistor, 200 (0603 size), 1%                                                                             | 1    |
| R2, R3, R4        | CRCW06031002FRT1 | Vishay Dale <sup>(2)</sup>  | Resistor, 10k (0603 size), 1%                                                                             | 3    |
| U1                | MIC2095-1YMT     | Micrel, Inc. <sup>(3)</sup> | Current-Limiting Power Distribution Switch – 0.5A Fixed Current Limit – Active High Enable                | 1    |
| U1                | MIC2095-2YMT     | Micrel, Inc. <sup>(3)</sup> | Current-Limiting Power Distribution Switch – 0.5A Fixed Current Limit – Active Low Enable                 | 0    |
| U1                | MIC2097-1YMT     | Micrel, Inc. <sup>(3)</sup> | Current-Limiting Power Distribution Switch – Adjustable Current Limit with Kickstart – Active High Enable | 0    |
| U1                | MIC2097-2YMT     | Micrel, Inc. <sup>(3)</sup> | Current-Limiting Power Distribution Switch – Adjustable Current Limit with Kickstart – Active Low Enable  | 0    |
| U1                | MIC2098-1YMT     | Micrel, Inc. <sup>(3)</sup> | Current-Limiting Power Distribution Switch – 0.9A Fixed Current Limit – Active High Enable                | 0    |
| U1                | MIC2098-2YMT     | Micrel, Inc. <sup>(3)</sup> | Current-Limiting Power Distribution Switch – 0.9A Fixed Current Limit – Active Low Enable                 | 0    |
| U1                | MIC2099-1YMT     | Micrel, Inc. <sup>(3)</sup> | Current-Limiting Power Distribution Switch – Adjustable Current Limit – Active High Enable                | 0    |
| U1                | MIC2099-2YMT     | Micrel, Inc. <sup>(3)</sup> | Current-Limiting Power Distribution Switch – Adjustable Current Limit – Active Low Enable                 | 0    |

**Notes:**

1. AVX: [www.avx.com](http://www.avx.com).
2. Vishay: [www.vishay.com](http://www.vishay.com).
3. Micrel, Inc.: [www.micrel.com](http://www.micrel.com).
4. May be omitted when used with the MIC2095 or MIC2098 (fixed current limit).

## PCB Layout Recommendations

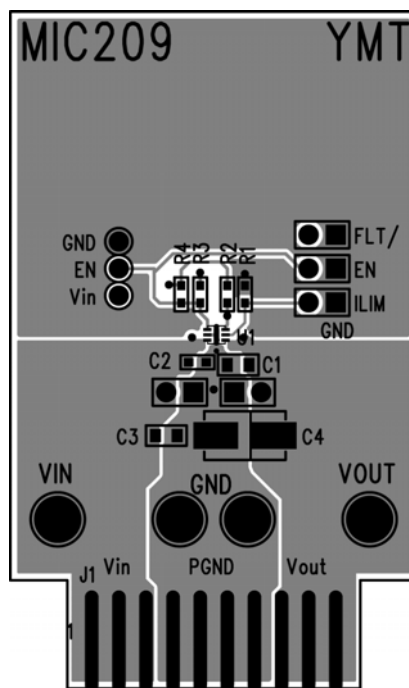


Figure 11. MIC209X Evaluation Board Top Layer



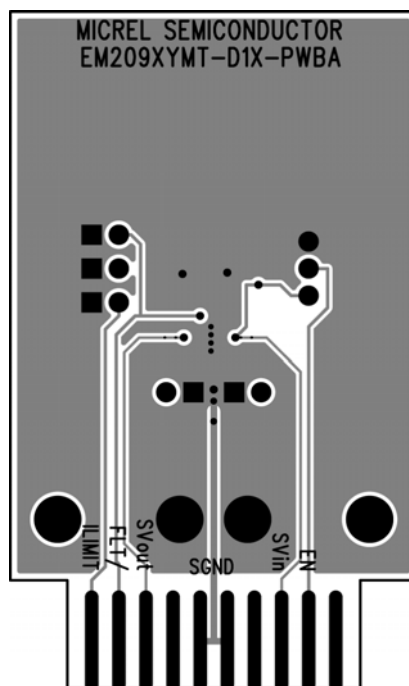


Figure 12. MIC209X Evaluation Board Bottom Layer


## Package Information

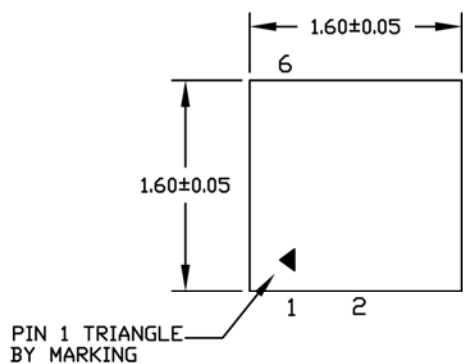

TOP VIEW

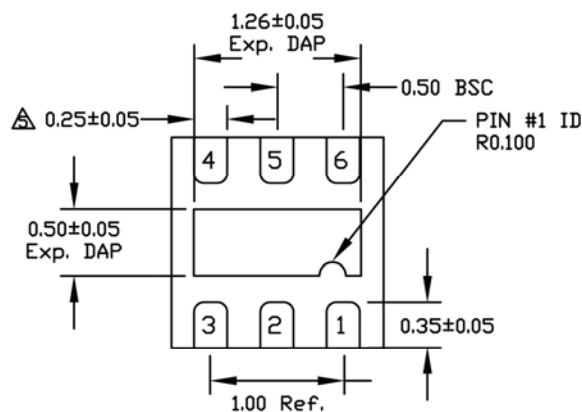

BOTTOM VIEW

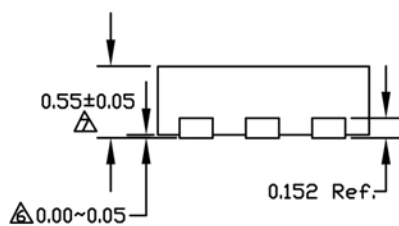

SIDE VIEW

- NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
  2. MAX. PACKAGE WARPAGE IS 0.05 mm.
  3. MAXIMUM ALLOWABLE BURRS IS 0.076 mm IN ALL DIRECTIONS.
  4. PIN #1 ID ON TOP WILL BE LASER/INK MARKED.
  5. DIMENSION APPLIES TO METALIZED TERMINAL AND IS MEASURED BETWEEN 0.20 AND 0.25 mm FROM TERMINAL TIP.
  6. APPLIED ONLY FOR TERMINALS.
  7. APPLIED FOR EXPOSED PAD AND TERMINALS.

### 6-Pin 1.6mm x 1.6mm TMLF (MT)




## Recommended Landing Pattern

### Recommended Land Pattern for MLF 1.6x1.6 6 Lead

LP # MLF1616D-6LD-LP-1

All units are in mm

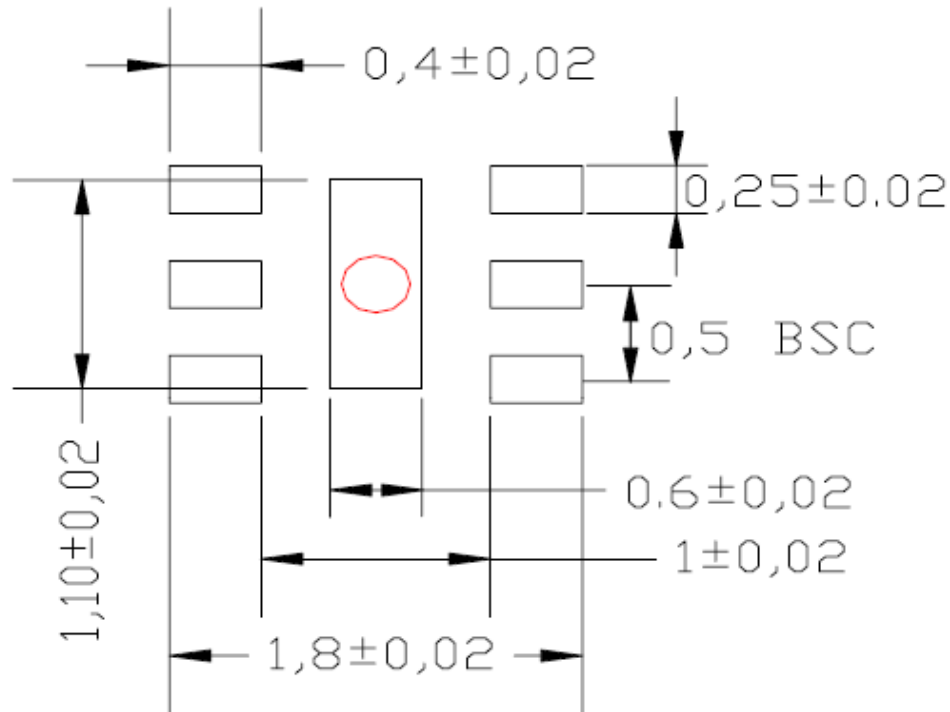Tolerance  $\pm 0.05$  if not noted

Red circle indicates Thermal Via. Size should be .300-.350 mm in diameter and it should be connected to GND plane for maximum thermal performance.

#### 6-Pin 1.6mm x 1.6mm TMLF (MT)

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**

TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2010 Micrel, Incorporated.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.