



DSS7/MSS7/MVS7

DIP 14 Series Reed Relays

www.cotorelay.com

DESCRIPTION

Coto Technology's epoxy molded DIP 14 Series offers a variety of contacts and schematics to meet the needs of a wide range of applications. It features the MVS7 models designed for high reliability. The MSS7 DIPs are 1 form A relays equipped with the MYAD all-position mounting switch. With switching up to 50 Watts and a 4000V isolation option, the DIP 14 Series is a relay package that allows for automatic insertion directly on PCBs as well as insertion into standard 14 pin DIP sockets.

FEATURES

- All position mercury contacts on some models
- Stable contact resistance over life
- 4000 Vac input-output isolation
- Bounce free operation
- High insulation resistance
- Switching speed of 300Hz
- Long life > 1 billion operations
- Epoxy molded for automatic board processing

APPLICATIONS

- ATE
- Process control
- Industrial
- Telecom
- Datacom
- High-end security systems
- Signaling
- Metering

SPECIFICATIONS

All parameters are at 25°C unless otherwise stated.

DSS7
Molded 4-pin
Dry Reed

MSS7
Molded 4-pin
All position
Wetted Contacts

MVS7
High Dielectric
Strength DIP
Wetted Contacts

Parameters	Conditions	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Units
Contact Ratings											
Switching Voltage	Max DC/PeakAC Resistive			200			500			1000 ¹	Volts
Switching Current	Max DC/PeakAC Resistive			0.5			2			2	Amps
Carry Current	Max DC/PeakAC Resistive			2			3			3	Amps
Contact Rating	Max DC/PeakAC Resistive			10			50			50	Watts
Life Expectancy	Signal Level 1V, 10mA 50V, 1A	300	500		200			1000			x106
Static Contact Resistance	500V, 100mA				40		100		2		x106
Contact Material	50mV, 10mA				Hg				5		x106
Hg Content	.		Ru		16				Hg	100	mOhms
									40		mgrams
Relay Specifications											
Insulation Resistance	Between all isolated pins at 100V, 25°C, 40% RH	10 ¹⁰	10 ¹²		10 ⁸	10 ¹⁰		10 ¹⁰	10 ¹²		Ohms
Capacitance	Across Open Contacts		0.7	1		1.2	2		0.7		pF
	Upper Contact to Coil								1.5		pF
	Closed Contact to Coil								2.5		pF
Dielectric Strength	Open Contact to Coil		1.5	2		3	4				pF
	Between Contacts	250			2000						VDC/PeakAC
	Open Contacts							2000			VDC/PeakAC
	Contacts to Coil	5600			5600			5600			VDC/PeakAC
Operate Time (including bounce, DSS7only)	At Nominal Coil Voltage		0.25	0.5		1.2	1.75		1.5	2.5	ms
Release Time	10Hz Square Wave Zener-Diode Suppression		0.25	0.5		1	1.5		1	2.5	ms
Environmental Ratings											
Storage Temperature		-40		+105	-40		+105	-40		+105	°C
Operating Temperature		-38		+80	-38		+75	-38		+85	°C
Soldering Temperature	Applied to pins, 5sec. max			+260		+260				+260	°C
Vibration Resistance ² (survival)	10Hz - 500Hz			20			10			10	Gs
Shock Resistance (survival)	11+/- 1ms, 1/2 Sine Wave			100			30			30	Gs
Weight			1.5			2.3			2.1		grams

¹ Current limited up to 5mA, minimum 20 million operations; for further information consult factory

² Use caution not to exceed vibration resistance limits while ultrasonically cleaning relays with DYAD switches.

COIL SPECIFICATIONS

	Contact Form	Coil Voltage			Coil Resistance			Operate Voltage			Nominal Input Power					
Units		Volts			Ohms			Volts			Volts			mW		
Conditions					+/- 10% (25°C)			Must operate by (25°C)			Must release by (25°C)					
Part #		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
DSS71A05	1 Form A		5	21	450	500	550	0.8		3.75	0.8		3.75			50
DSS71A12	1 Form A		12	30	900	1000	1100	1		9	1		9			144
DSS71A24	1 Form A		24	44	1935	2150	2365	2		18	2		18			268
MSS71A05	1 Form A		5	11	126	140	154	0.5		3.75	0.5		3.75			179
MSS71A12	1 Form A		12	21	450	500	550	1		9	1		9			288
MSS71A24	1 Form A		24	43	1935	2150	2365	2		18	2		18			268
MVS71A05(S)	1 Form A		5	7	94.5	105	116	0.5		3.75	0.5		3.75			238
MVS71A12(S)	1 Form A		12	15	450	500	550	1		9	1		9			288
MVS71A24(S)	1 Form A		24	30	1935	2150	2365	2		18	2		18			268

ORDERING INFORMATION

A complete part number is represented by the digits below

XXXX XX XX X

Series

DSS7

MSS7 ←

MVS7

Contact Form

1A = 1 Form A (Normally open)

OPTIONS

A = ES Option

B = Diode Option ←

C = Shield & diode option

S = Modified pinout

(coil at 2&6, contact at 8 & 14)

Coil Voltage


05 = 5V

12 = 12V

24 = 24V ←

MECHANICAL DIMENSIONS

Dimensions in inches [mm]

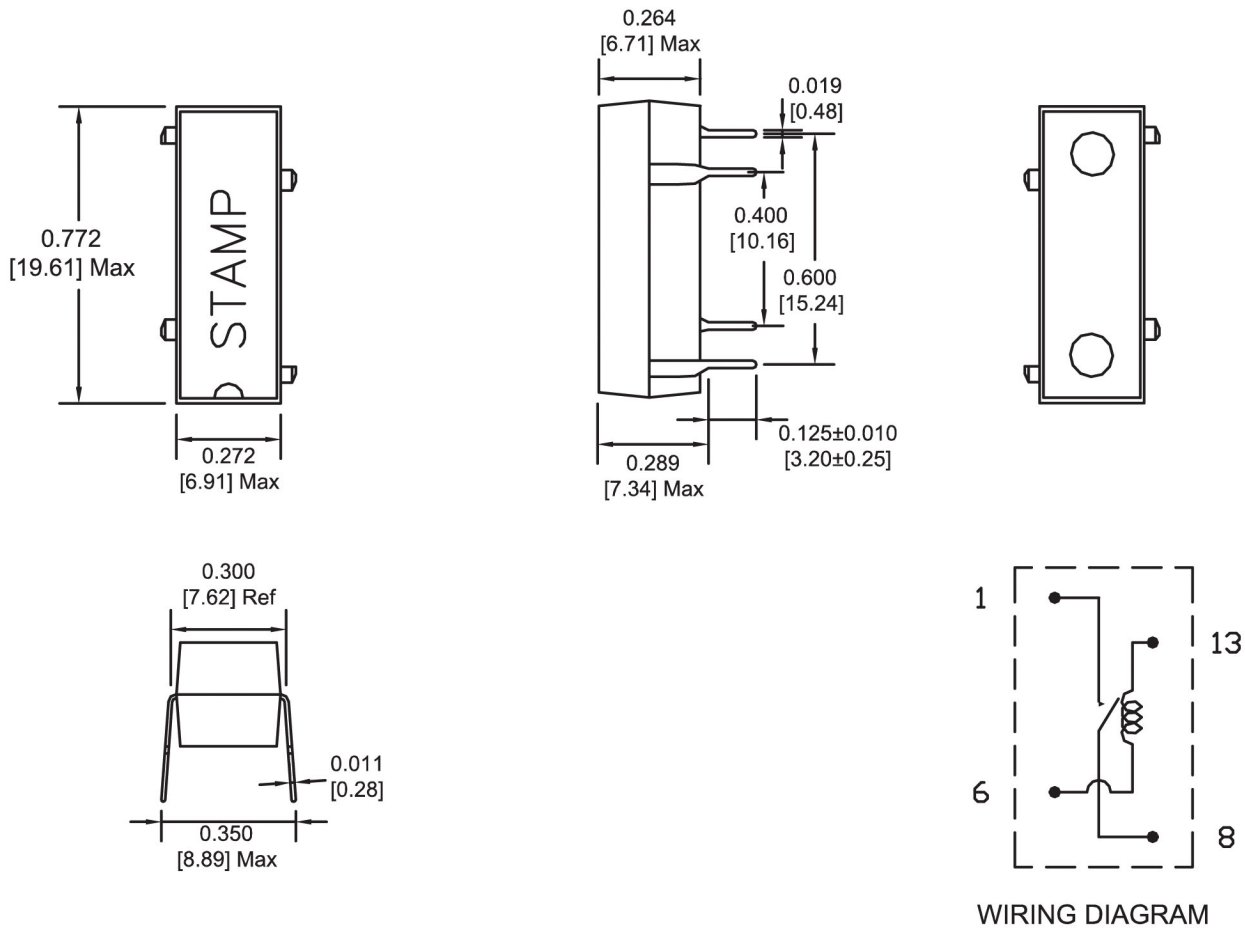

MVS7 must be mounted vertically. Pin #1 is up.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.