

Miniature Fuse, 5 x 20 mm, Quick-Acting F, 220 VAC



220 VAC · Quick-Acting F

See below:

Approvals and Compliances

Description

- Low Breaking Capacity

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	32 - 220 VAC
Rated current	0.02 - 10 A
Breaking Capacity	60 A - 300 A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 70 °C
Climatic Category	40/070/56 acc. to IEC 60068-1
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	1.2 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	HA21, Rated current

Resistance to Vibration	acc. to IEC 60068-2-6, test Fc
Shocks	acc. to IEC 60068-2-27
Bumps	acc. to IEC 60068-2-29
Salt Mist	acc. to IEC 60068-2-11

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Application standards


Application standards where the product can be used

Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.

Compliances

The product complies with following Guide Lines


Identification	Details	Initiator	Description
	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

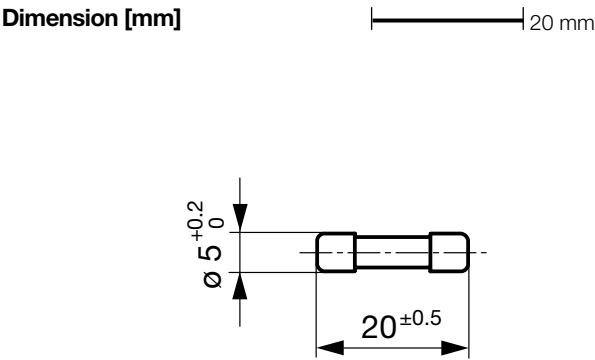

Pre-Arcing Time

Rated Current I_n	$1.15 \times I_n$ min.	$1.65 \times I_n$ max.	$3.0 \times I_n$ max.
0.02 A - 10 A	60 min	60 min	200 ms

Time-Current-Curves

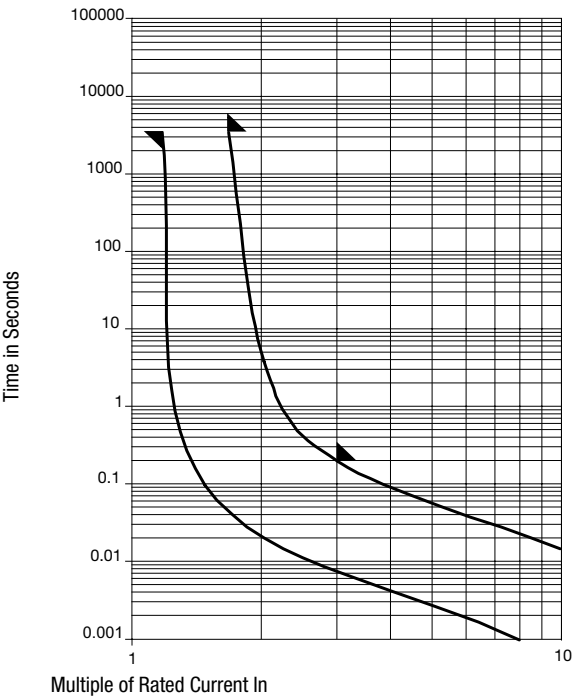

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop $1.0 I_n$ typ. [mV]	Power Dissipation $1.15 I_n$ typ. [mW]	Melting I^2t $10.0 I_n$ typ. [A ² s]	Order Number
0.02	220	1)	790	21	0.00027	7010.3110
0.031	220	1)	1400	60	0.00029	7010.3120
0.04	220	1)	2400	155	0.00017	7010.3130
0.05	220	1)	3300	260	0.00017	7010.3140
0.063	220	1)	2250	220	0.00046	7010.3150
0.08	220	1)	1750	215	0.0012	7010.3160
0.1	220	1)	1200	175	0.003	7010.3210

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.15 I _n typ. [mW]	Melting I ² t 10.0 I _n typ. [A ² s]	Order Number
0.125	220	1)	1550	295	0.0037	7010.3220
0.16	220	1)	1300	320	0.0076	7010.3230
0.2	220	1)	1200	375	0.012	7010.3240
0.25	220	1)	1000	400	0.025	7010.3250
0.31	220	1)	475	225	0.018	7010.3260
0.4	220	1)	310	185	0.054	7010.3270
0.5	220	1)	285	215	0.096	7010.3280
0.63	220	1)	310	300	0.14	7010.3290
0.8	220	1)	270	335	0.3	7010.3310
1	220	1)	150	215	0.81	7010.3410
1.25	220	1)	325	660	0.47	7010.3420
1.6	125	2)	300	790	0.93	7010.3430
2	125	2)	185	560	1.9	7010.3440
2.5	125	2)	285	1250	2.5	7010.3450
3.15	125	2)	145	670	7.1	7010.3460
4	125	2)	165	1050	10	7010.3470
5	125	2)	165	1300	18	7010.3480
6.3	125	2)	130	1200	41	7010.3510
8	32	3)	120	1400	79	7010.3520
10	32	3)	120	1750	145	7010.3530

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 60 A @ 220 VAC , p.f. = 0.6 - 0.8

2) 300 A @ 125 VAC , p.f. ≥ 0.95 / Schurter: 60 A @ 220 VAC

3) 300 A @ 32 VAC , p.f. ≥ 0.95

Packaging Unit Small Box Pack (10 pcs.)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.