

## MAX13335E/MAX13336E

# Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### General Description

The MAX13335E/MAX13336E are high-fidelity stereo audio input amplifiers designed for automotive applications requiring audio-level detection and/or jack sensing capability.

The devices feature a dual-channel, low-noise, programmable gain amplifier that accepts fully differential and quasi-differential input signals with diagnostics capability controlled through an I<sup>2</sup>C interface. The devices' audio receiver can also pair with the MAX13325/MAX13326 audio transmitter to form a complete differential audio link in automotive systems.

Each channel of the device features high common-mode rejection ratio (CMRR) (80dB), enabling the recovery of audio signals in the presence of large common-mode noise in automotive environments. An integrated programmable gain amplifier is adjustable from -14dB to +16dB (MAX13335E) and -22dB to +8dB (MAX13336E) with zero-crossing detection to provide an optimum output-signal level and limit zip noise. The external flexible diagnostic inputs can be configured to perform jack sense functions or to detect short-to-battery, short-to-ground, open load, and shorts between channels.

The audio inputs are protected against ISO 10605 ±15kV Air Gap and ±8kV Contact Discharge ESD pulses. Both devices have a -40°C to +105°C operating temperature range, and are available in a 16-pin QSOP package.

### Features

- ◆ +3.3V or +5V Operation
- ◆ +28V to -16V Tolerant Inputs
- ◆ Wide Common-Mode Input Range (-5V to +11.5V)
- ◆ Fully Differential Inputs Up to 7V<sub>RMS</sub>
- ◆ Quasi-Differential Inputs Up to 3.5V<sub>RMS</sub>
- ◆ Audio Presence Detection
- ◆ Jack Sense Detection
- ◆ Diagnostic Capability
- ◆ Programmable Gain with Zero-Crossing Detection
- ◆ I<sup>2</sup>C Control Interface
- ◆ Automotive Grade ESD Protection
  - ◇ ISO 10605 ±15kV Air Gap
  - ◇ ±8kV Contact Discharge


### Applications

Radio Head Units  
RSA/RSE  
Connectivity Modules  
Automotive Telematics

**Ordering Information** appears at end of data sheet.

For related parts and recommended products to use with this part, refer to [www.maxim-ic.com/MAX13335E.related](http://www.maxim-ic.com/MAX13335E.related).

### Typical Application Circuits

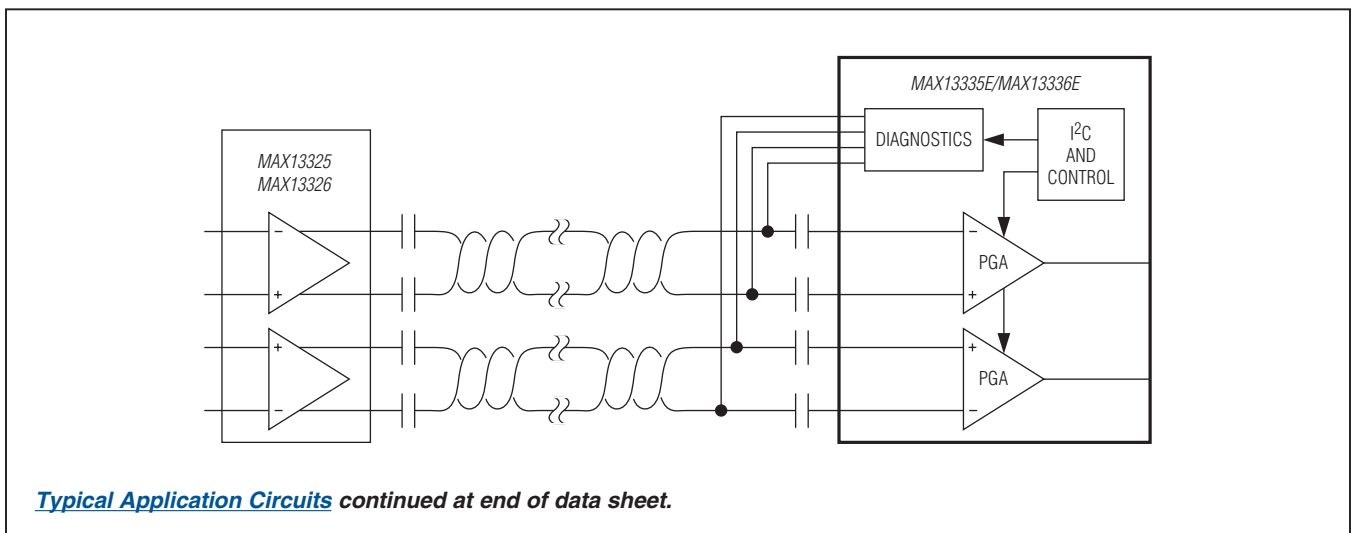

**Typical Application Circuits** continued at end of data sheet.

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### ABSOLUTE MAXIMUM RATINGS

V <sub>DD</sub> to GND.....	-0.3V to +6V	Continuous Power Dissipation (T <sub>A</sub> = +70°C)
D <sub>-</sub> to GND.....	-16V to +28V	QSOP (derate 9.6 mW/°C above +70°C).....
INL <sub>-</sub> , INR <sub>-</sub> to GND.....	-10V to +15V	771.5 mW
OUTR, OUTL to GND.....	-0.3V to (V <sub>DD</sub> + 0.3V)	Operating Junction Temperature Range.....
SDA, SCL, INT to GND.....	-0.3V to +6V	-40°C to +150°C
REF to GND.....	-0.3V to (V <sub>DD</sub> + 0.3V)	Storage Temperature Range.....
Output Short-Circuit Duration.....	Continuous	-65°C to +150°C
		Lead Temperature (soldering, 10s).....
		+300°C
		Soldering Temperature (reflow).....
		+260°C

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### PACKAGE THERMAL CHARACTERISTICS (Note 1)

QSOP

Junction-to-Ambient Thermal Resistance (θ <sub>JA</sub> ).....	103.7°C/W
Junction-to-Case Thermal Resistance (θ <sub>JC</sub> ).....	37°C/W

**Note 1:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maxim-ic.com/thermal-tutorial](http://www.maxim-ic.com/thermal-tutorial).

### ELECTRICAL CHARACTERISTICS

(V<sub>DD</sub> = 5V, A<sub>v</sub> = -6dB, R<sub>L</sub> = 10kΩ, f = 20Hz to 20kHz, T<sub>A</sub> = T<sub>J</sub> = -40°C to +105°C, unless otherwise noted. Typical values are at T<sub>A</sub> = 25°C under normal conditions, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>GENERAL</b>						
Supply-Voltage Range	V <sub>DD</sub>	V <sub>REF</sub> = 1.68V	-5%	3.3	+5%	V
		V <sub>REF</sub> = 2.5V	-5%	5.0	+5%	
Quiescent Supply Current	I <sub>DD</sub>	V <sub>INL-</sub> = V <sub>INR-</sub> = V <sub>DD</sub> /2		11		mA
Shutdown Supply Current	I <sub>SHDN</sub>	SHDN bit = 1		6	10	μA
REF Output Voltage	V <sub>REF</sub>	V <sub>DD</sub> = 3.3V	-4%	1.68	+4%	V
		V <sub>DD</sub> = 5V	-3%	2.5	+3%	
Thermal Shutdown	T <sub>SHDN</sub>	(Note 3)		+150		°C
Thermal Shutdown Hysteresis	T <sub>HYS</sub>	(Note 3)		15		°C

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### ELECTRICAL CHARACTERISTICS (continued)

(V<sub>DD</sub> = 5V, A<sub>V</sub> = -6dB, R<sub>L</sub> = 10kΩ, f = 20Hz to 20kHz, T<sub>A</sub> = T<sub>J</sub> = -40°C to +105°C, unless otherwise noted. Typical values are at T<sub>A</sub> = 25°C under normal conditions, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>AMPLIFIERS</b>						
Programmable Gain Amp	A <sub>V</sub>	G_[3:0] = 0000	MAX13335E		-14	dB
		G_[3:0] = 0001		-12		
		G_[3:0] = 0010		-10		
		G_[3:0] = 0011		-8		
		G_[3:0] = 0100		-6		
		G_[3:0] = 0101		-4		
		G_[3:0] = 0110		-2		
		G_[3:0] = 0111		0		
		G_[3:0] = 1000		2		
		G_[3:0] = 1001		4		
		G_[3:0] = 1010		6		
		G_[3:0] = 1011		8		
		G_[3:0] = 1100		10		
		G_[3:0] = 1101		12		
		G_[3:0] = 1110		14		
		G_[3:0] = 1111		16		
		G_[3:0] = 0000		MAX13336E	-22	
		G_[3:0] = 0001			-20	
		G_[3:0] = 0010			-18	
		G_[3:0] = 0011			-16	
		G_[3:0] = 0100			-14	
		G_[3:0] = 0101			-12	
		G_[3:0] = 0110			-10	
		G_[3:0] = 0111			-8	
		G_[3:0] = 1000			-6	
		G_[3:0] = 1001			-4	
		G_[3:0] = 1010			-2	
		G_[3:0] = 1011			0	
		G_[3:0] = 1100			2	
		G_[3:0] = 1101			4	
		G_[3:0] = 1110			6	
		G_[3:0] = 1111			8	
Gain Error	A <sub>ERR</sub>	Within V <sub>CM</sub> operating range		±0.4		dB
Gain Matching	A <sub>MCH</sub>	Within V <sub>CM</sub> operating range		±0.4		dB

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### ELECTRICAL CHARACTERISTICS (continued)

(V<sub>DD</sub> = 5V, A<sub>V</sub> = -6dB, R<sub>L</sub> = 10kΩ, f = 20Hz to 20kHz, T<sub>A</sub> = T<sub>J</sub> = -40°C to +105°C, unless otherwise noted. Typical values are at T<sub>A</sub> = 25°C under normal conditions, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Offset Voltage	V <sub>IOS</sub>	A <sub>V</sub> = 0dB		-10		+10	mV
Input Impedance	R <sub>IN</sub>	Differential	MAX13335E	13.5	22	33	kΩ
			MAX13336E	19	30	42	
		Single-ended	MAX13335E	8.5	14	21	
			MAX13336E	11	17	24	
Common-Mode Rejection Ratio	A <sub>CMRR</sub>	Within V <sub>CM</sub> range, f = DC, A <sub>V</sub> = -2dB (Note 4)	MAX13335E	60		80	dB
				V <sub>CM</sub> = 2V <sub>RMS</sub> , f = 20Hz to 20kHz (Note 3)	60		
		Within V <sub>CM</sub> range, f = DC, A <sub>V</sub> = -10dB (Note 4)	MAX13336E	65		85	
				V <sub>CM</sub> = 2V <sub>RMS</sub> , f = 20Hz to 20kHz (Note 3)	65		
Power-Supply Rejection Ratio	A <sub>PSRR</sub>	f = 1kHz, V <sub>RIPPLE</sub> = 200mV <sub>P-P</sub> (Note 3)		-80			dB
Input Voltage Range	V <sub>IN</sub>	Quasi-differential source, V <sub>DD</sub> = 3.3V	MAX13335E			1.3	V <sub>RMS</sub>
		Quasi-differential source, V <sub>DD</sub> = 5V				2	
		Differential source, V <sub>DD</sub> = 3.3V				2.6	
		Differential source, V <sub>DD</sub> = 5V				4.0	
		Quasi-differential source, V <sub>DD</sub> = 3.3V	MAX13336E			2.3	
		Quasi-differential source, V <sub>DD</sub> = 5V				3.5	
		Differential source, V <sub>DD</sub> = 3.3V				4.6	
		Differential source, V <sub>DD</sub> = 5V				7.0	
Input Common-Mode Voltage Range	V <sub>CM</sub>	V <sub>DD</sub> = 3.3V	MAX13335E	-1.2			V
		V <sub>DD</sub> = 5V		-1.8			
		V <sub>DD</sub> = 3.3V	MAX13336E	-3.3			
		V <sub>DD</sub> = 5V		-5.0			

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### ELECTRICAL CHARACTERISTICS (continued)

(V<sub>DD</sub> = 5V, A<sub>V</sub> = -6dB, R<sub>L</sub> = 10kΩ, f = 20Hz to 20kHz, T<sub>A</sub> = T<sub>J</sub> = -40°C to +105°C, unless otherwise noted. Typical values are at T<sub>A</sub> = 25°C under normal conditions, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage Range	V <sub>OUT</sub>	R <sub>L</sub> = 10kΩ	0.1		V <sub>DD</sub> - 0.1	V
Total Harmonic Distortion Plus Noise	THD+N	f = 1kHz, V <sub>OUT_</sub> = 1.4V <sub>RMS</sub> (Note 3)		0.01		%
Signal-to-Noise Ratio	SNR	V <sub>OUT_</sub> = 1.4V <sub>RMS</sub> (Note 3)	MAX13335E	104.8		dB
			MAX13336E	99.4		
Output Noise	V <sub>N</sub>	A <sub>V</sub> = 0dB, unweighted (Note 3)	MAX13335E	8		μV <sub>RMS</sub>
			MAX13336E	15		
Slew Rate	SR	C <sub>L</sub> = 300pF (Note 3)	0.5			V/μs
Maximum Capacitive Load	C <sub>L</sub>	No sustained oscillation (Note 3)		300		pF
Crosstalk	A <sub>XTALK</sub>	V <sub>IN</sub> = 2V <sub>RMS</sub> (Note 3)		-80		dB
Mute Attenuation	A <sub>MUTE</sub>	MUTE bit = 1, V <sub>IN</sub> = 2V <sub>RMS</sub> (Note 3)		-80		dB
Shutdown Attenuation	A <sub>SHDN</sub>	SHDN bit = 1, V <sub>IN</sub> = 2V <sub>RMS</sub> (Note 3)		-80		dB
<b>LEVEL SENSE/CLIP DETECTION</b>						
Audio Presence Threshold	V <sub>TAP</sub>	Output referred	127	200	268	mV <sub>RMS</sub>
Clip-Level Warning	V <sub>TCP</sub>	Positive clip warning level		90		% V <sub>DD</sub>
	V <sub>TCN</sub>	Negative clip warning level		10		
<b>DIAGNOSTIC I/O</b>						
Pullup Current Limit	I <sub>IDH</sub>	V <sub>D_</sub> = 1.5V	D_[3:0]=0001	40		μA
			D_[3:0]=0010	97		
			D_[3:0]=0011	154		
			D_[3:0]=0100	210		
			D_[3:0]=0101	265		
			D_[3:0]=0110	320		
			D_[3:0]=0111	375		
			D_[3:0]=1000	430		
			D_[3:0]=1001	485		
			D_[3:0]=1010	540		
			D_[3:0]=1011	595		
			D_[3:0]=1100	650		
D_[3:0]=1101	705					
Pulldown Current	I <sub>IDL</sub>	D_[3:0] = 1110, V <sub>D_</sub> < V <sub>CM</sub>		32	65	μA
Trip High Threshold	V <sub>IDH</sub>	R <sub>D_</sub> = 1kΩ to 10kΩ		1.94		V
Trip Low Threshold	V <sub>IDL</sub>	R <sub>D_</sub> = 1kΩ to 10kΩ		0.92		V
Switch Diode	V <sub>DON</sub>	D_[3:0] = 1111		0.7		V
Input Resistance	R <sub>DOFF</sub>	Off-state D_[3:0] = 0000, V <sub>D_</sub> < V <sub>CM</sub>	1			MΩ

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### ELECTRICAL CHARACTERISTICS (continued)

(V<sub>DD</sub> = 5V, A<sub>V</sub> = -6dB, R<sub>L</sub> = 10kΩ, f = 20Hz to 20kHz, T<sub>A</sub> = T<sub>J</sub> = -40°C to +105°C, unless otherwise noted. Typical values are at T<sub>A</sub> = 25°C under normal conditions, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Leakage Current	I <sub>DLKG</sub>	Off-state D <sub>[3:0]</sub> = 0000, V <sub>D-</sub> < V <sub>CM</sub>		±10		μA
<b>ESD PROTECTION</b>						
ISO 10605 Air Gap	V <sub>ESD</sub>	2kΩ/150pF, INL <sub>-</sub> , INR <sub>-</sub>		±15		kV
Contact Discharge	V <sub>ESD</sub>	330Ω/330pF, INL <sub>-</sub> , INR <sub>-</sub>		±8		kV
<b>DIGITAL INTERFACE</b>						
Input Voltage High	V <sub>INH</sub>	SDA, SCL	0.7 x V <sub>DD</sub>			V
Input Voltage Low	V <sub>INL</sub>	SDA, SCL			0.3 x V <sub>DD</sub>	V
Input Voltage Hysteresis	V <sub>HYS</sub>	SDA, SCL		0.14 x V <sub>DD</sub>		mV
I/O Leakage Current	I <sub>LKG</sub>	SDA, SCL, $\overline{\text{INT}}$		±10		μA
Output Low Voltage	V <sub>OL</sub>	SDA, $\overline{\text{INT}}$ , I <sub>SINK</sub> = 3mA			0.4	V
EN to Full Operation Time	t <sub>SON</sub>	C <sub>REF</sub> = 2.2μF (Note 3)		100		ms
<b>I<sup>2</sup>C TIMING</b>						
Output Fall Time	t <sub>OF</sub>	C <sub>BUS</sub> = 10pF to 400pF			250	ns
Pin Capacitance	C <sub>IN</sub>				10	pF
Clock Frequency	f <sub>SCL</sub>				400	kHz
SCL Low Time	t <sub>LOW</sub>		1.3			μs
SCL High Time	t <sub>HIGH</sub>		0.6			μs
START Condition Hold Time	t <sub>HD:STA</sub>	Repeated START condition	0.6			μs
START Condition Setup Time	t <sub>SU:STA</sub>	Repeated START condition	0.6			μs
Data Hold Time	t <sub>HD:DAT</sub>		0		900	ns
Data Setup Time	t <sub>SU:DAT</sub>		100			ns
Input Rise Time	t <sub>R</sub>	SCL, SDA			300	ns
Input Fall Time	t <sub>F</sub>	SCL, SDA			300	ns
STOP Condition Setup Time	t <sub>SU:STO</sub>		0.6			μs
Bus Free Time	t <sub>BUF</sub>	Between START and STOP conditions	1.3			μs
Maximum Bus Capacitance	C <sub>BUS</sub>	Per bus line			400	pF

**Note 2:** Specifications within minimum and maximum limits are 100% production tested at T<sub>A</sub> = +25°C and are guaranteed over the operating temperature range by design and characterization. Actual typical values may vary and are not guaranteed.

**Note 3:** Guaranteed by bench characterization.







**Note 4:** A<sub>CMRR</sub> = 20log(ΔV<sub>IOS</sub>/ΔV<sub>CM</sub>).

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Typical Operating Characteristics

( $V_{DD} = 5V$ ,  $A_V = -6dB$ ,  $R_L = 10k\Omega$ ,  $BW = 20Hz$  to  $20kHz$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

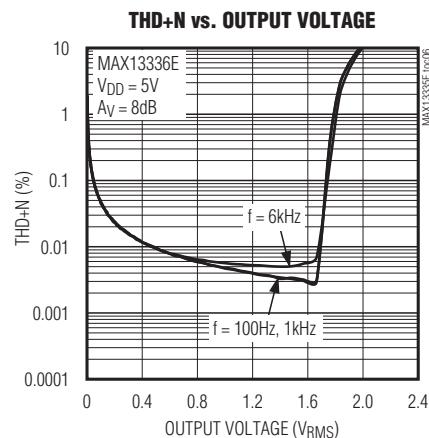
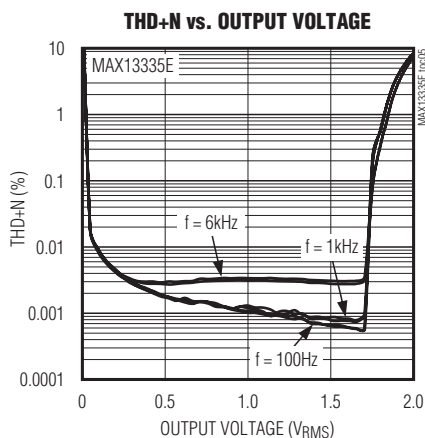
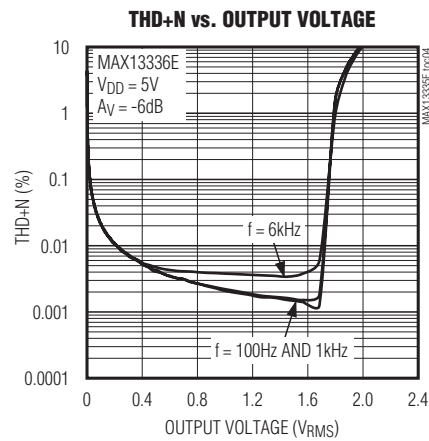
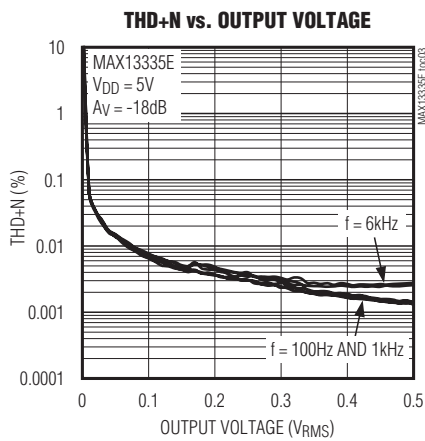
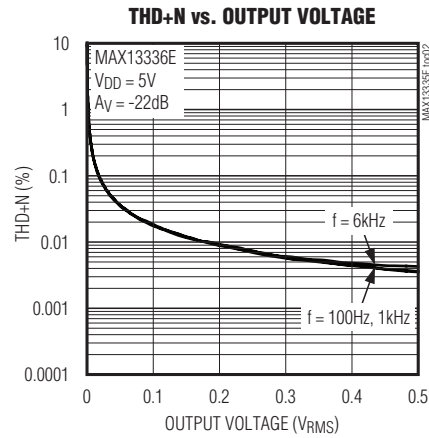
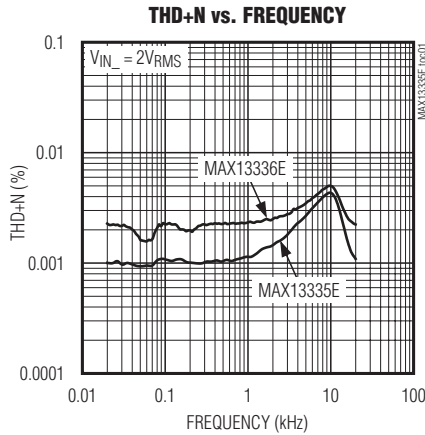


# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Typical Operating Characteristics (continued)

( $V_{DD} = 5V$ ,  $A_V = -6dB$ ,  $R_L = 10k\Omega$ ,  $BW = 20Hz$  to  $20kHz$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

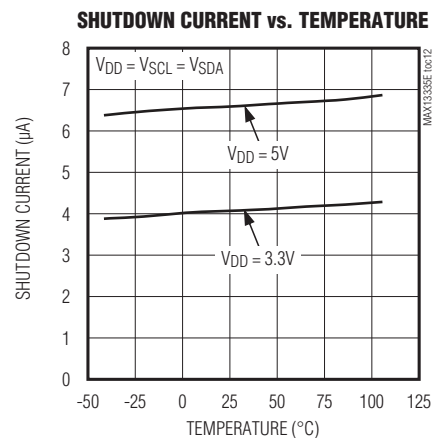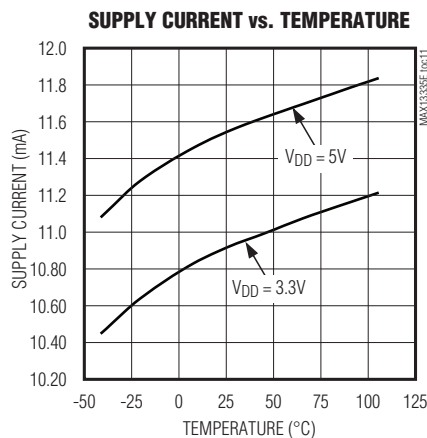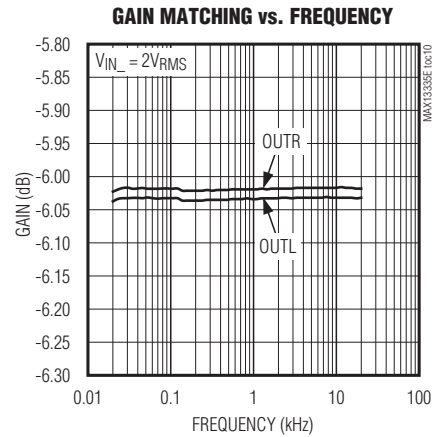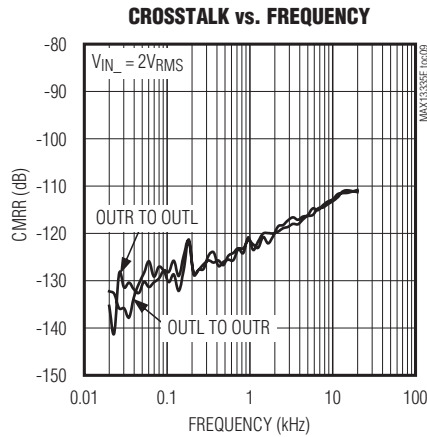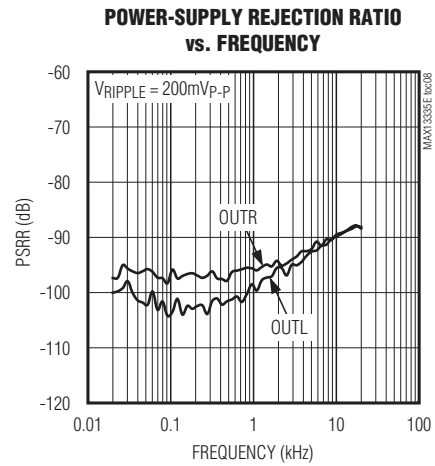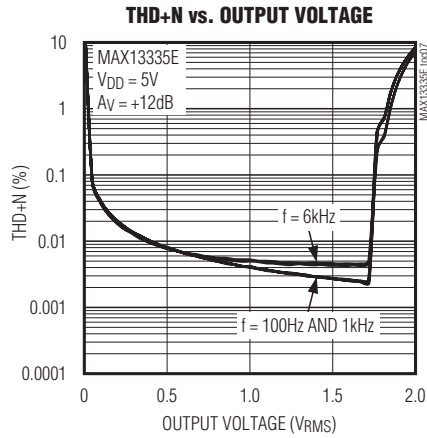









# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Typical Operating Characteristics (continued)


( $V_{DD} = 5V$ ,  $A_V = -6dB$ ,  $R_L = 10k\Omega$ ,  $BW = 20Hz$  to  $20kHz$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

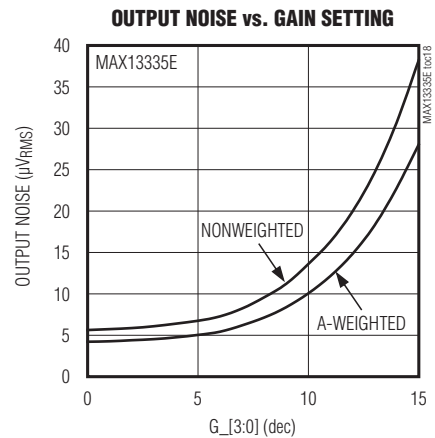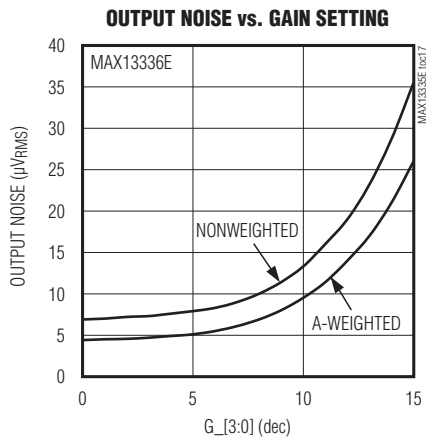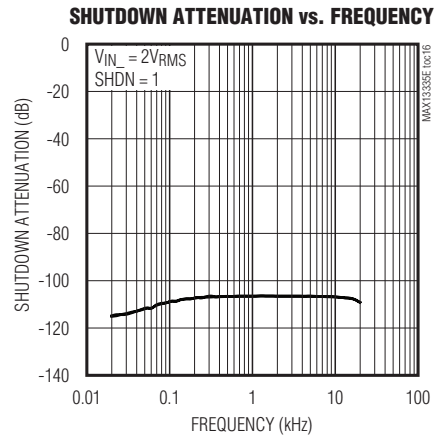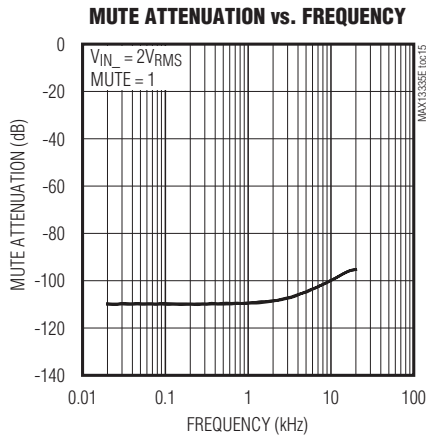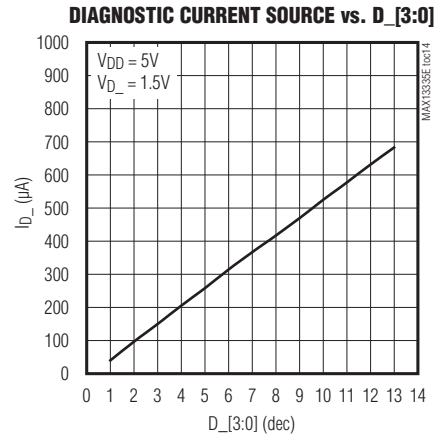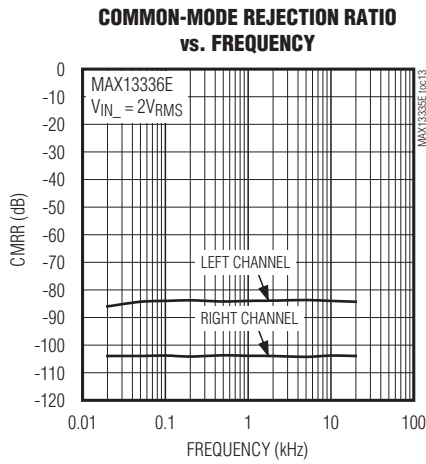

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Pin Configuration

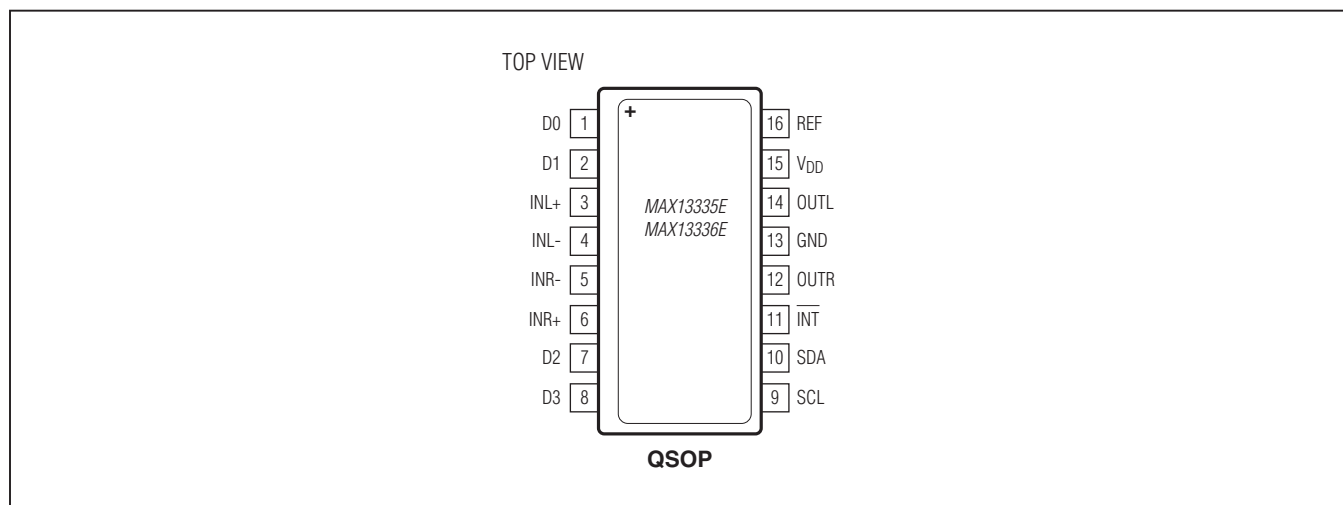

### Pin Description

PIN	NAME	FUNCTION
1	D0	Diagnostic I/O 0. I/O pin used for jack sense and diagnostics.
2	D1	Diagnostic I/O 1. I/O pin used for jack sense and diagnostics.
3	INL+	Noninverting Left-Channel Audio Input
4	INL-	Inverting Left-Channel Audio Input
5	INR-	Inverting Right-Channel Audio Input
6	INR+	Noninverting Right-Channel Audio Input
7	D2	Diagnostic I/O 2. I/O pin used for diagnostics.
8	D3	Diagnostic I/O 3. I/O pin used for diagnostics.
9	SCL	I <sup>2</sup> C Serial-Clock Input
10	SDA	I <sup>2</sup> C Serial-Data Input and Output
11	$\overline{\text{INT}}$	Active-Low, Open-Drain Interrupt Request Output
12	OUTR	Right-Channel Audio Output
13	GND	Ground
14	OUTL	Left-Channel Audio Output
15	V <sub>DD</sub>	Supply Input
16	REF	V <sub>DD</sub> /2 Reference Output. Bypass REF to GND with a 2.2μF capacitor.

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Detailed Description

The MAX13335E/MAX13336E are designed to operate with the MAX13325/MAX13326 dual automotive audio line drivers to form a complete differential audio link in automotive systems. In addition, the MAX13335E/MAX13336E can operate as an auxiliary input audio amplifier with jack sense function.

### Signal Path

The devices can be configured to operate with quasi-differential (up to 3.5V<sub>RMS</sub>) and fully differential (up to 7V<sub>RMS</sub>) input signals. Both input channels feature high 80dB CMRR (typ). An integrated programmable gain amplifier with zero-crossing detection controlled through the I<sup>2</sup>C interface provides adjustable gain from -14dB to +16dB (MAX13335E) or -22dB to +8dB (MAX13336E) in +2dB increments. Zero-crossing detection can be enabled to limit the zip noise during a gain transition by delaying the gain change until a zero-crossing event occurs on the input signal.

### Interrupt Output

The devices can monitor the inputs for the presence of audio, clip detection, and change-of-state in the jack sense. An active-low, open-drain interrupt request output can be configured through the I<sup>2</sup>C interface to report the presence of audio, clip detection, and change-of-state in the jack sense. The internal status register also latches the status change of those parameters until an I<sup>2</sup>C read is performed.

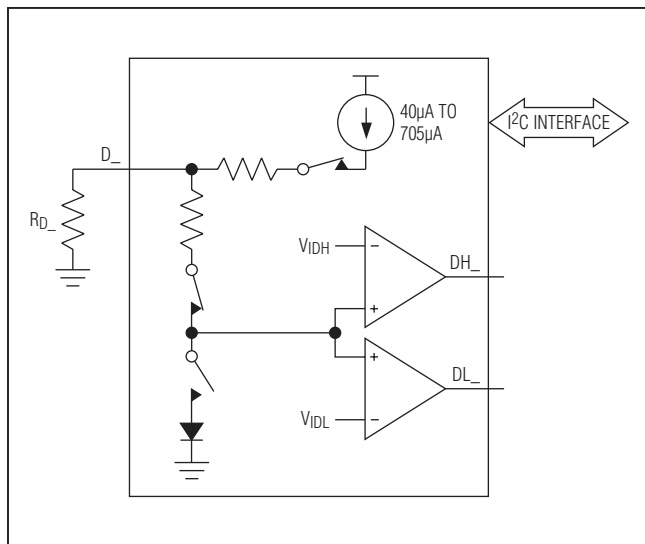


Figure 1. Diagnostic I/O Port

### Thermal Shutdown

Thermal shutdown protects the device when the junction temperature exceeds +150°C (typ). The device resumes operation when the junction temperature drops below the thermal shutdown hysteresis of 15°C (typ). The internal status register latches the status change of the TSD bit until an I<sup>2</sup>C read is performed.

### Diagnostics

The devices feature four similar diagnostic I/O ports. When configured correctly, they are capable of performing jack sense detection, short-to-ground, short-to-battery, open-load, and shorts between channels. Each diagnostic I/O port contains a programmable current source, a voltage sense, and a diode to ground.

The principle behind the diagnosis is simply forcing a current into the load attached to the I/O port and sensing the voltage to check if it is greater or smaller than the two predefined low/high thresholds. These can be easily accessed by a microcontroller through the I<sup>2</sup>C interface.

The procedure usually starts with stepping up the current source from the minimum to maximum range.

- 1) If the sensed voltage is consistently below the low threshold, a short-to-ground event is determined.
- 2) However, if the sensed voltage is consistently above the high threshold, there is a possibility of either a short-to-battery or an open-load event. In order to differentiate between them, the I/O port should be tested again with a voltage-sense-only configuration (i.e., with the current source switched off). If the sensed voltage remains above the high threshold, a short-to-battery event has occurred. Otherwise, an open-load event is detected.
- 3) In some current source range, if the sensed voltage is between the high and low thresholds, this could indicate that the load is present.

A valid readout of the status might require some amount of delays (to be inserted by the microcontroller) due to the settling time needed to charge/discharge any external capacitive load on the I/O port.

The diode is useful in the case of sensing an unconnected load or short between channels. Here, one end of the load can be forced to ground by the diode and the usual procedure described above can be applied to detect various events. It is, however, advisable to test the I/O port for a short-to-battery condition prior to turning on the diode as it could risk damaging the device.

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

See the [Applications Information](#) section for various examples on how the diagnostic can be set up to detect different events.

### Applications Information

#### Serial Interface

Writing to the device using I<sup>2</sup>C requires that first the master send a START condition (S) followed by the device's I<sup>2</sup>C address. After the address, the master sends the address of the register that is to be programmed. The master then ends communication by issuing a STOP condition (P) to relinquish control of the bus, or a repeated START condition (Sr) to communicate to another I<sup>2</sup>C slave ([Figure 2](#)).

#### Bit Transfer

Each SCL rising edge transfers one data bit. The data on SDA must remain stable during the high portion of the SCL clock pulse ([Figure 3](#)). Changes in SDA while SCL

is high are read as control signals (see the [START and STOP Conditions](#) section). When the serial interface is inactive, SDA and SCL idle high.

#### START and STOP Conditions

A master device initiates communication by issuing a START condition (S) which is a high-to-low transition on SDA with SCL high. A START condition from the master signals the beginning of a transmission to the device. The master terminates transmission by a STOP condition (P) (see the [Acknowledge Bit](#) section). A STOP condition is a low-to-high transition on SDA while SCL is high ([Figure 4](#)). The STOP condition frees the bus. If a repeated START condition (Sr) is generated instead of a STOP condition, the bus remains active. When a STOP condition or incorrect slave ID is detected, the device internally disconnects SCL from the serial interface until the next START or repeated START condition, minimizing digital noise and feedthrough.

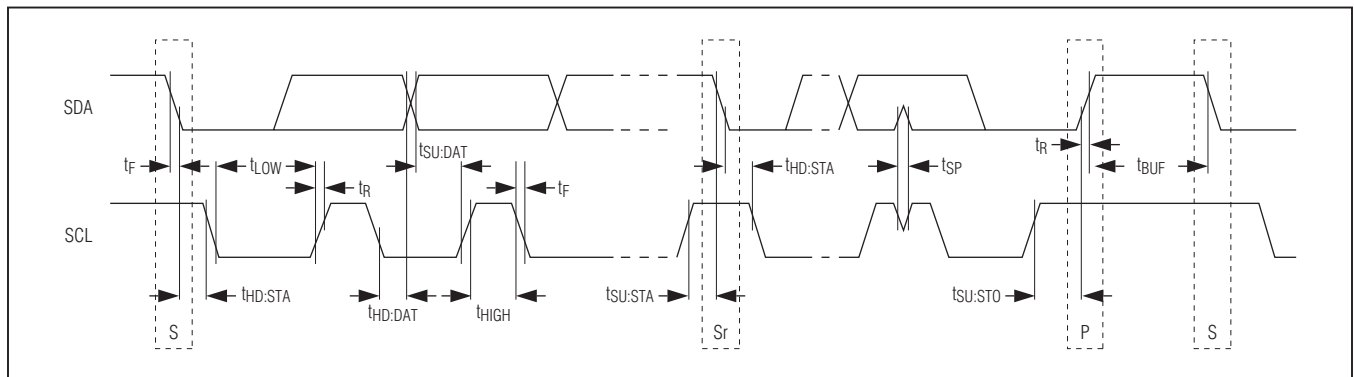


Figure 2. I<sup>2</sup>C Timing

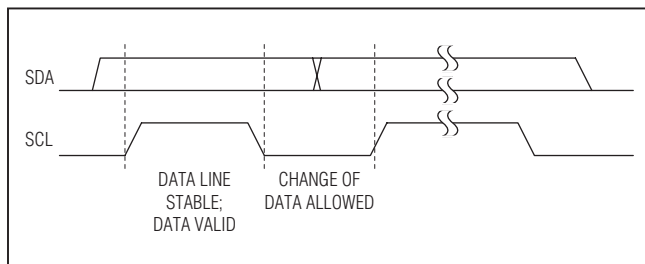


Figure 3. Bit Transfer

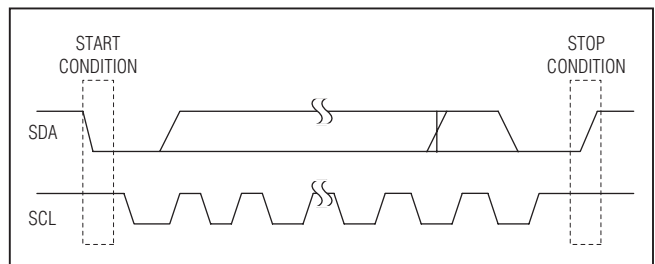


Figure 4. START/STOP Conditions

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Acknowledge Bit

The acknowledge bit (ACK) is a clocked 9th bit that the device uses to handshake the receipt of each byte of data when in write mode. The device pulls down SDA during the entire master-generated 9th clock pulse if the previous byte is successfully received (Figure 5). Monitoring ACK allows for detection of unsuccessful data transfers. An unsuccessful data transfer occurs if a receiving device is busy or if a system fault has occurred. In the event of an unsuccessful data transfer, the bus master could retry communication. The master must pull down SDA during the 9th clock cycle to acknowledge receipt of data when the device is in read mode. An acknowledge must be sent by the master after each read byte to allow data transfer to continue.

A not-acknowledge is sent when the master reads the final byte of data from the device, followed by a STOP condition.

### Slave Address

The device is programmable to one of the four I<sup>2</sup>C slave addresses (Table 2). The power-on default I<sup>2</sup>C slave address of the device for read/write is 0xD0/0xD1 (1101000R/W). The I<sup>2</sup>C slave address of the device can be selected by writing to Control Register 1 (0x03) while  $\overline{\text{INT}}$  is pulled low externally during the I<sup>2</sup>C write duration (Figure 6).

### Single Byte-Write Operation

For a single byte-write operation, send the slave address as the first byte followed by the register address and then a single data byte (Figure 7).

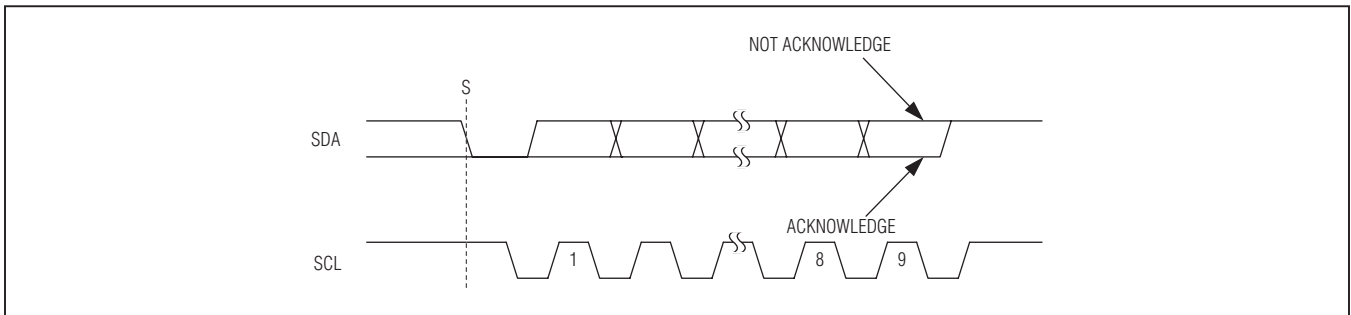


Figure 5. Acknowledge and Not-Acknowledge Bits

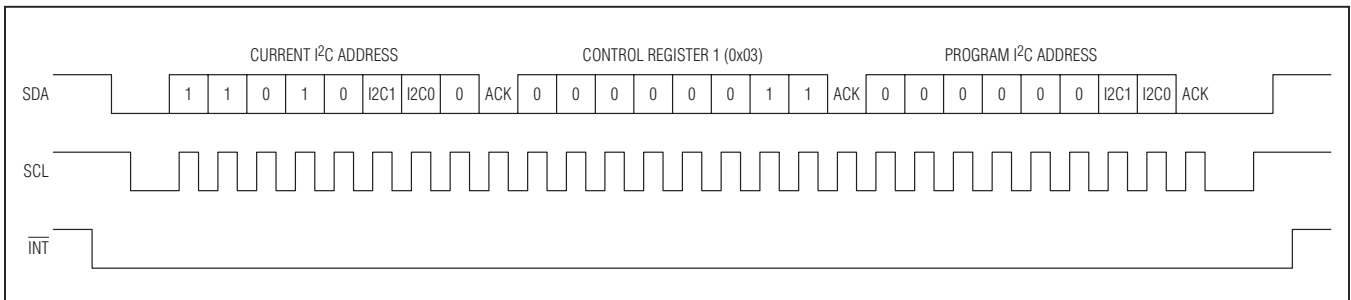


Figure 6. I<sup>2</sup>C Slave Address Programming

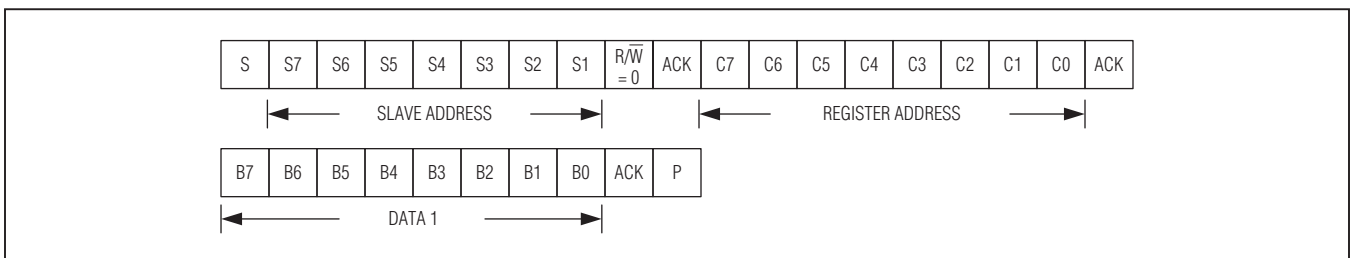


Figure 7. A Single Byte-Write Operation

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Burst-Write Operation

For a burst-write operation, send the slave address as the first byte followed by the register address and then the data bytes (Figure 8).

### Single Byte-Read Operation

For a single byte-read operation, send the slave address with a write as the first byte followed by the register address. Then send a repeated START condition followed by the slave address with the read bit set. After

the slave sends the data byte, send a not-acknowledge followed by a STOP condition (Figure 9).

### Burst-Read Operation

For a burst-read operation, send the slave address with a write as the first byte followed by the register address. Then send a repeated START condition followed by the slave address with the read bit set. The slave sends data bytes until a not-acknowledge condition is sent (Figure 10).

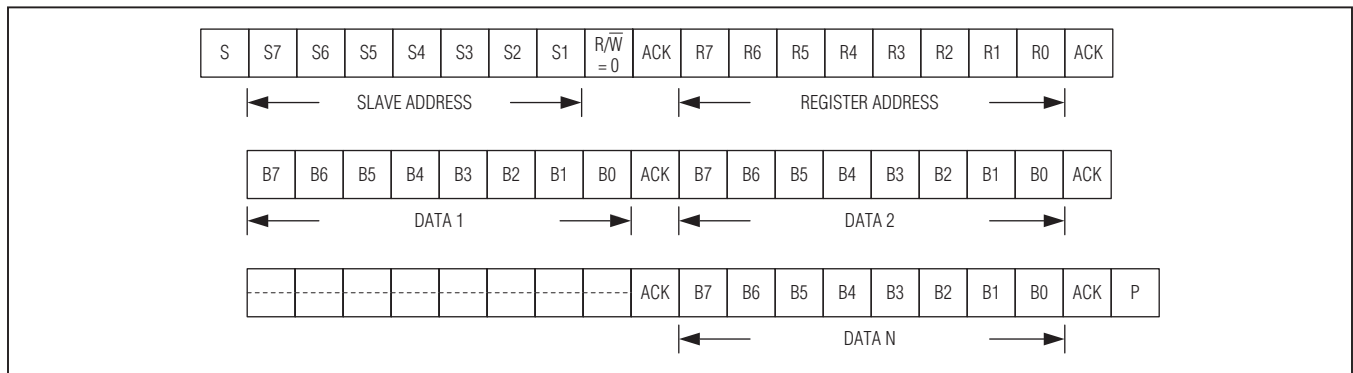


Figure 8. A Burst-Write Operation

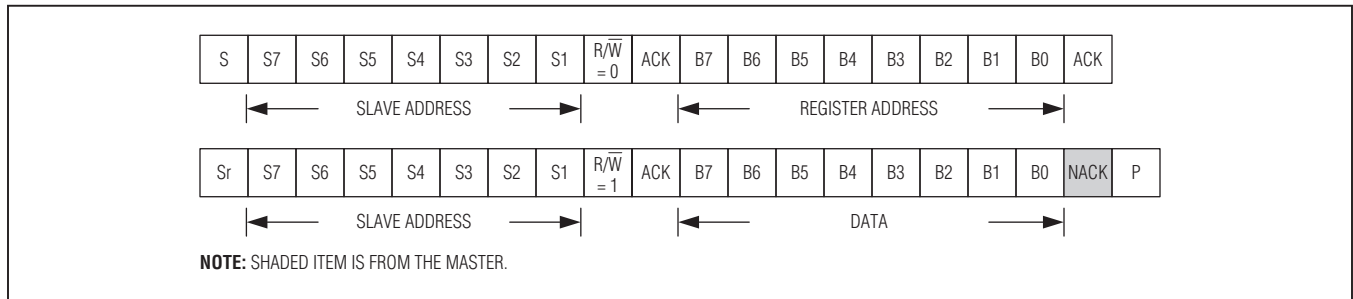


Figure 9. A Single Byte-Read Operation

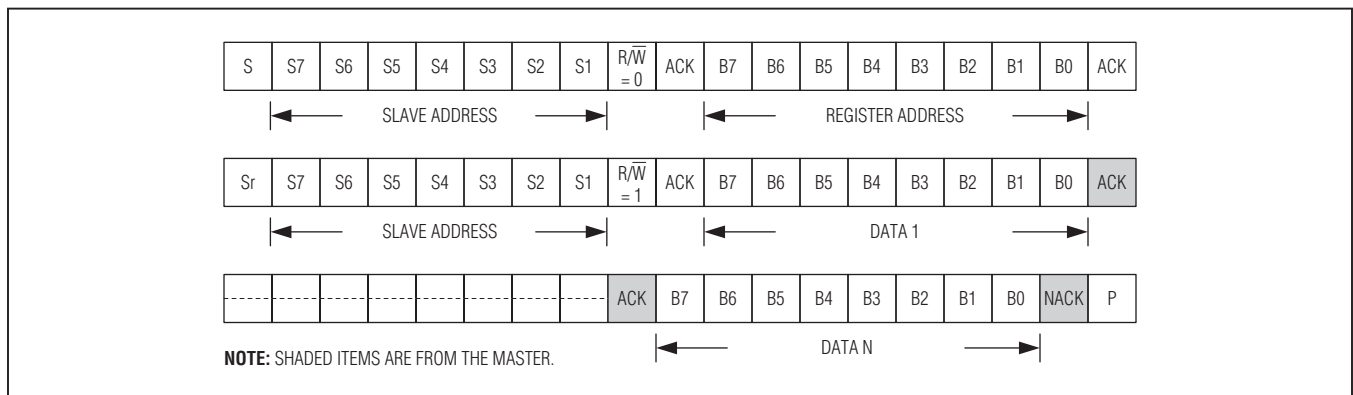


Figure 10. A Burst-Read Operation

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Register Map

NAME	REG	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0	R/W	POR SETTINGS
STAT0	00	DH3	DL3	DH2	DL2	DH1	DL1	DH0	DL0	R	0x00
STAT1	01	APD	CLD	JSD	TSD	—	ID2	ID1	ID0	R	0x00
CTRL0	02	API	CLI	JSI	—	—	ZEN	MUTE	SHDN	R/W	0x00
CTRL1	03	—	—	—	—	—	—	I2C1	I2C0	R/W	0x00
DIAG0	04	D1[3]	D1[2]	D1[1]	D1[0]	D0[3]	D0[2]	D0[1]	D0[0]	R/W	0x00
DIAG1	05	D3[3]	D3[2]	D3[1]	D3[0]	D2[3]	D2[2]	D2[1]	D2[0]	R/W	0x00
GAIN	06	GL3	GL2	GL1	GL0	GR3	GR2	GR1	GR0	R/W	0x00

### Status Register 0 (STAT0)

ADDRESS: 0x00									
MODE: R									
BIT	7	6	5	4	3	2	1	0	
NAME	DH3	DL3	DH2	DL2	DH1	DL1	DH0	DL0	
POR	0	0	0	0	0	0	0	0	

The bits in Status Register 0 are updated to reflect the states of the upper (DH\_) and lower (DL\_) comparator's threshold when voltage sensing is enabled for the corresponding diagnostic I/O. Combinations of DH\_ and DL\_ can be used to decode the fault on the I/O port.

#### Bits 7, 5, 3, 1: DH\_ (Diagnostic Upper Comparator Threshold V<sub>IDH</sub>)

0 = Below upper threshold

1 = Above upper threshold

#### Bits 6, 4, 2, 0: DL\_ (Diagnostic Lower Comparator Threshold V<sub>IDL</sub>)

0 = Below lower threshold

1 = Above lower threshold

**Table 1. Interpretation of Diagnostic Status Bits**

DH_	DL_	CONDITION
0	0	Short-to-ground (or disabled)
0	1	No fault
1	0	Invalid (not used)
1	1	Short-to-battery if current source is disabled (i.e., D_ <sub>[3:0]</sub> = 1110)
1	1	Open-load if current source is enabled (i.e., D_ <sub>[3:0]</sub> = 0001 to 1101)

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Status Register 1 (STAT1)

ADDRESS: 0x01								
MODE: R								
BIT	7	6	5	4	3	2	1	0
NAME	APD	CLD	JSD	TSD	—	ID2	ID1	ID0
POR	0	0	0	0	0	—	—	—

**Bit 7: APD (Audio Presence Status Bit)**

0 = Audio not present.

1 = Audio presence detected.  $\overline{\text{INT}}$  asserts low.

**Bit 6: CLD (Clip Detection Status Bit)**

0 = No clipping detected.

1 = Clip warning.  $\overline{\text{INT}}$  asserts low.

**Bit 5: JSD (Jack Sense Status Bit)**

0 = Jack removed.  $\overline{\text{INT}}$  asserts low.

1 = Jack inserted.  $\overline{\text{INT}}$  asserts low.

**Note:**  $\overline{\text{INT}}$  asserts low whenever jack sense changes state.

**Bit 4: TSD (Thermal Shutdown Status Bit)**

0 = Within safe operating range.

1 = Overheating detected.  $\overline{\text{INT}}$  pin asserts low.

**Bit 3: No Function**

**Bit 2 to 0: ID\_ (Die ID)**

001 = MAX13335E

010 = MAX13336E

**Note:** Reading of Status Register 1 (REG = 0x01) releases  $\overline{\text{INT}}$  and resets bits APD, CLD, JSD, and TSD back to zero.



# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Control Register 0 (CTRL0)

ADDRESS: 0x02								
MODE: R/W								
BIT	7	6	5	4	3	2	1	0
NAME	API	CLI	JSI	—	—	ZEN	MUTE	SHDN
POR	0	0	0	0	0	0	0	0

#### Bit 7: API (Audio Presence Interrupt Enable Bit)

0 = Disable

1 = Enable\*

\*Bit automatically resets to 0 when an audio presence interrupt occurs.

#### Bit 6: CLI (Clip Warning Interrupt Enable Bit)

0 = Disable

1 = Enable\*

\*Bit automatically resets to 0 when a clip warning interrupt occurs.

#### Bit 5: JSI (Jack Sense Interrupt Enable Bit)

The JSI bit can be set only after D1[3:0] and D0[3:0] in Diagnostic register 0 (DIAG0) has been programmed.

0 = Disable

1 = Enable\*

\*Bit automatically resets to 0 when a jack sense interrupt occurs.

**Bits 4 and 3: No Function** (0 should be written during write access.)

#### Bit 2: ZEN (Zero-Crossing Enable Bit)

Enabling zero-crossing detection loads the new PGA gain settings at the signal zero crossing to avoid zip noise.

0 = Disable

1 = Enable

#### Bit 1: MUTE (Mute Enable Bite)

0 = Play mode

1 = Mute mode

#### Bit 0 : SHDN (Shutdown Enable Bit)

0 = Normal mode

1 = Shutdown mode

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Control Register 1 (CTRL1)

ADDRESS: 0x03								
MODE: R/W								
BIT	7	6	5	4	3	2	1	0
NAME	—	—	—	—	—	—	I2C1	I2C0
POR	0	0	0	0	0	0	0	0

**Bits 7 to 2: No Function** (0 should be written during write access.)

#### Bits 1 and 0: I2C<sub>1</sub>

The I2C1 and I2C0 bits determine the I<sup>2</sup>C slave address of the device. The I<sup>2</sup>C slave address is changed by writing to CTRL1 while  $\overline{\text{INT}}$  is pulled low (e.g., by an external microcontroller) for the duration of the I<sup>2</sup>C write cycle.

**Table 2. I<sup>2</sup>C Address**

A7	A6	A5	A4	A3	A2 (I2C1)	A1 (I2C0)	A0 (R/W)	READ	WRITE
1	1	0	1	0	0	0	—	0xD1	0xD0
1	1	0	1	0	0	1	—	0xD3	0xD2
1	1	0	1	0	1	0	—	0xD5	0xD4
1	1	0	1	0	1	1	—	0xD7	0xD6

### Diagnostic Register 0 (DIAG0)

ADDRESS: 0x04								
MODE: R/W								
BIT	7	6	5	4	3	2	1	0
NAME	D1[3]	D1[2]	D1[1]	D1[0]	D0[3]	D0[2]	D0[1]	D0[0]
POR	0	0	0	0	0	0	0	0

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Diagnostic Register 1 (DIAG1)

ADDRESS: 0x05								
MODE: R/W								
BIT	7	6	5	4	3	2	1	0
NAME	D3[3]	D3[2]	D3[1]	D3[0]	D2[3]	D2[2]	D2[1]	D2[0]
POR	0	0	0	0	0	0	0	0

The Diagnostic registers, DIAG0 and DIAG1, program the state of the four diagnostic I/O ports D<sub>n</sub>. The diagnostic ports can be programmed to operate in one of the four states:

- 1) Setting D<sub>n</sub>[3:0] = 0000 disables the corresponding diagnostic I/O.
- 2) Setting D<sub>n</sub>[3:0] = 0001 to 1101 enables the internal current source (40µA to 705µA) and voltage sensing. The voltage sensing utilizes a window comparator with an upper threshold of 1.94V and a lower threshold of 0.92V (see the [Diagnostic Configurations](#) section).
- 3) Setting D<sub>n</sub>[3:0] = 1110 enables voltage sensing only.
- 4) Setting D<sub>n</sub>[3:0] = 1111 enables the internal diode to ground.

**Table 3. Diagnostic I/O Port States**

D <sub>n</sub> [3:0]	FUNCTION
0000	Diagnostic output disabled.
0001	Enables the 40µA current source and voltage sense.
0010	Enables the 97µA current source and voltage sense.
0011	Enables the 154µA current source and voltage sense.
0100	Enables the 210µA current source and voltage sense.
0101	Enables the 265µA current source and voltage sense.
0110	Enables the 320µA current source and voltage sense.
0111	Enables the 375µA current source and voltage sense.
1000	Enables the 430µA current source and voltage sense.
1001	Enables the 485µA current source and voltage sense.
1010	Enables the 540µA current source and voltage sense.
1011	Enables the 595µA current source and voltage sense.
1100	Enables the 650µA current source and voltage sense.
1101	Enables the 705µA current source and voltage sense.
1110	Enable voltage sense. The current source is disabled.
1111	Enables the diode. The current source and voltage sense are disabled.

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Gain Register (GAIN)

ADDRESS: 0x06								
MODE: R/W								
BIT	7	6	5	4	3	2	1	0
NAME	GL3	GL2	GL1	GL0	GR3	GR2	GR1	GR0
POR	0	0	0	0	0	0	0	0

#### Bits 7 to 0: G\_

The Gain register sets the gain of the internal programmable gain amplifier ( $A_V$ ) for the left (GL[3:0]) and right (GR[3:0]) channels. The gain of the programmable gain amplifier ( $A_V$ ) is determined by the following transfer function:

$$\text{Gain}(A_V) = -14\text{dB} + (G_{[3:0]} \times 2)\text{dB} \text{ (for MAX13335E)}$$

$$\text{Gain}(A_V) = -22\text{dB} + (G_{[3:0]} \times 2)\text{dB} \text{ (for MAX13336E)}$$

#### Diagnostic Configurations

The device's diagnostics can be configured for local jack sense, remote jack sense, and differential drive connections (see the [Typical Application Circuits](#)). Diagnostic registers DIAG0 and DIAG1 configure the diagnostic I/O ports D\_ as a current-source output with voltage sensing enabled, a voltage sensing input, or a diode to GND. When voltage sensing is enabled, the current states of the internal window comparator are updated to status register STAT0. A valid readout of the STAT0 register might require some amount of delays (to be inserted by the microcontroller) between configuring the diagnostic and reading the status register due to the settling time needed to charge/discharge the external capacitive load on the D\_ pins.

#### Local Jack Sense

The device is configured for jack sense function when the jack is localized to the same module. In this application

example, the diagnostic I/O D1 is configured as a 97 $\mu$ A current-source output and D0 is configured for voltage sensing. When a plug is not inserted, the internal spring contact of the jack shorts D1 to D0. The 97 $\mu$ A current source from D1 pulls D0 to  $V_{DD}$  resulting in  $DH0 = 1$ . When a plug is inserted, the internal spring contact of the jack is forced open and disconnects D1 from D0. This results in D0 going low and hence  $DH0 = 0$ .

#### Remote Jack Sense Detection

When the jack is remotely located, the device can be used for additional fault detection of the wiring harness used for the connection. See the [Typical Application Circuits](#).

#### Differential Connection

For fully differential applications, the device can be configured to detect faults in the wiring harness as shown in the [Typical Application Circuits](#).

**Table 4. Local Jack Sense Diagnostic Configuration**

CONFIGURATION	FUNCTION	COMPARATOR OUTPUT	STATUS
D1[3:0] = 0010 D0[3:0] = 1110	Source 97 $\mu$ A Source off	DH0 = H	Device not plugged in
D1[3:0] = 0010 D0[3:0] = 1110	Source 97 $\mu$ A Source off	DH0 = L	Device plugged in

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

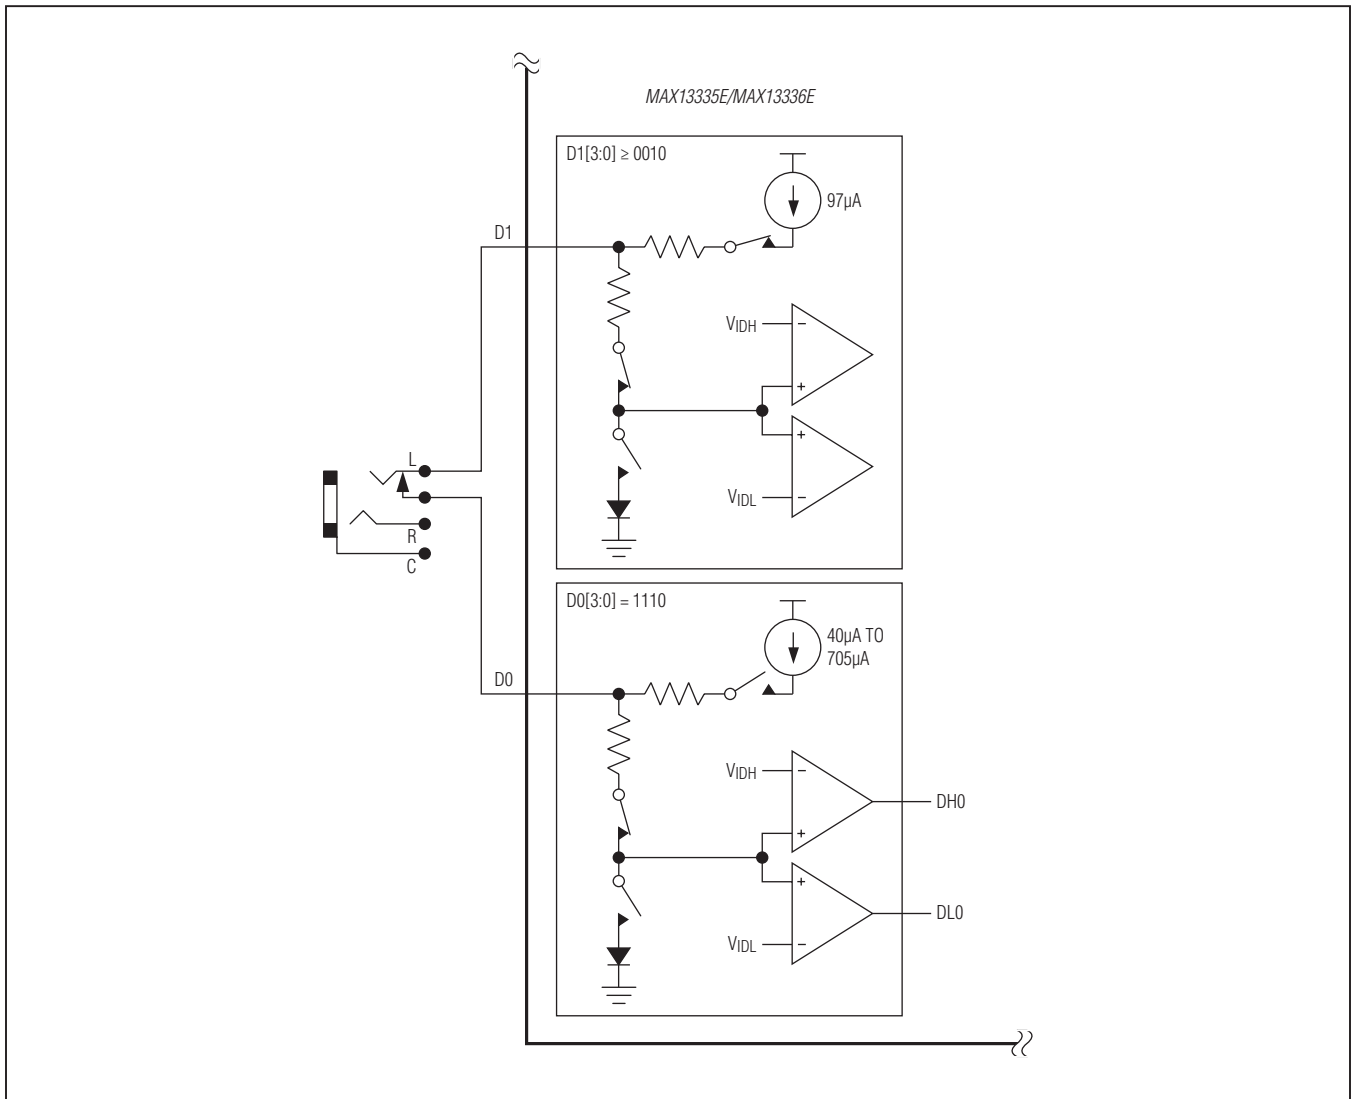


Figure 11. Diagnostic Setup for Local Jack Sense

### Audio Presence Detection

When the device is used in an auxiliary input amplifier, it can detect if audio is present at the inputs so the downstream DSP does not have to continuously convert the analog signal to digital in order to monitor the audio stream. This can save two ADC inputs as the auxiliary input can be muxed with another audio stream that is mutually exclusive. To do this, perform the following steps:

- 1) Set the gain in the GAIN register based on the required input audio level where the APD threshold is exceeded. The threshold is set to  $200\text{mV}_{\text{RMS}}/\text{G}_{[3:0]}$ .
- 2) Set API bit in the CTRL0 register to enable the APD interrupt.

When the input audio level exceeds  $200\text{mV}_{\text{RMS}}/\text{G}_{[3:0]}$  the INT pin is asserted. The microcontroller can read back the STAT0 register to check for APD = 1.

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

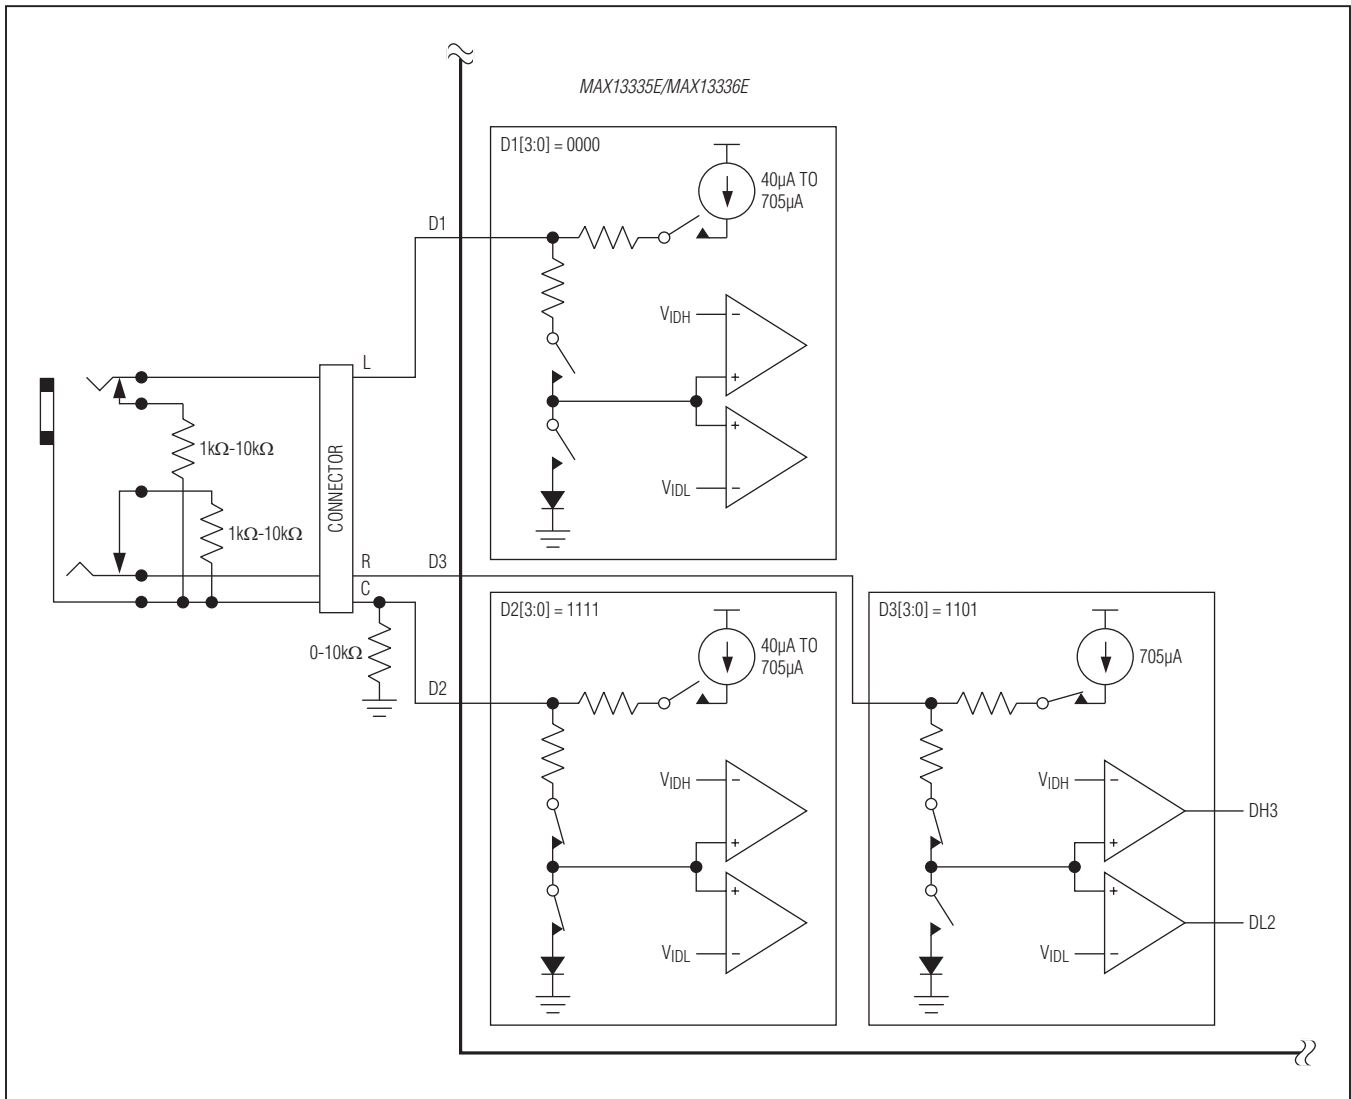


Figure 12. Diagnostic Setup for Remote Jack Sense

### Low-Power Standby with Jack Sense

When the device is used as an auxiliary amplifier, there is the option to put the device into a low-power standby mode while waiting for a plug to be inserted into the jack. To do this, perform the following steps:

- 1) Connect D0 to the R (or L) of the jack.
- 2) Connect R<sub>SENSE</sub> (or L<sub>SENSE</sub>) of the jack with a 50Ω resistor to ground.

- 3) Set the SHDN bit to 1 in the CTRL0 register to power down the amplifier.
- 4) Set D0[3:0] = 0001 to source 40μA out of the D0 pin.
- 5) Enable the JSI bit in the CTRL0 register.

When a plug is inserted, the DH0 comparator trips and subsequently asserts the interrupt  $\overline{INT}$  pin. The microcontroller can read back the STAT0 register to check for DH0 = 1 and follow up by setting SHDN to 0.

In the standby state, the typical current consumption is reduced to 290μA.

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### ESD Guide

For maximum protection against IEC 61000-4-2 and ISO 10605 ESD pulses, a 1k $\Omega$  or larger resistor is recommended on every diagnostic D<sub>n</sub> pin before the input AC-coupling capacitor. Additionally, a suitable ESD diode must be connected from the DC-blocking ceramic capacitor to ground. The ESD diode can be connected

on either side of the DC-blocking capacitor; however, depending on application requirements, the IC side may allow for a lower clamping voltage, which results in a smaller ESD device. If the input source is always DC biased to  $V_{BAT}/2$ , then a unidirectional ESD device can be used when clamping on the input side of the DC-blocking capacitor. See [Figure 13](#).


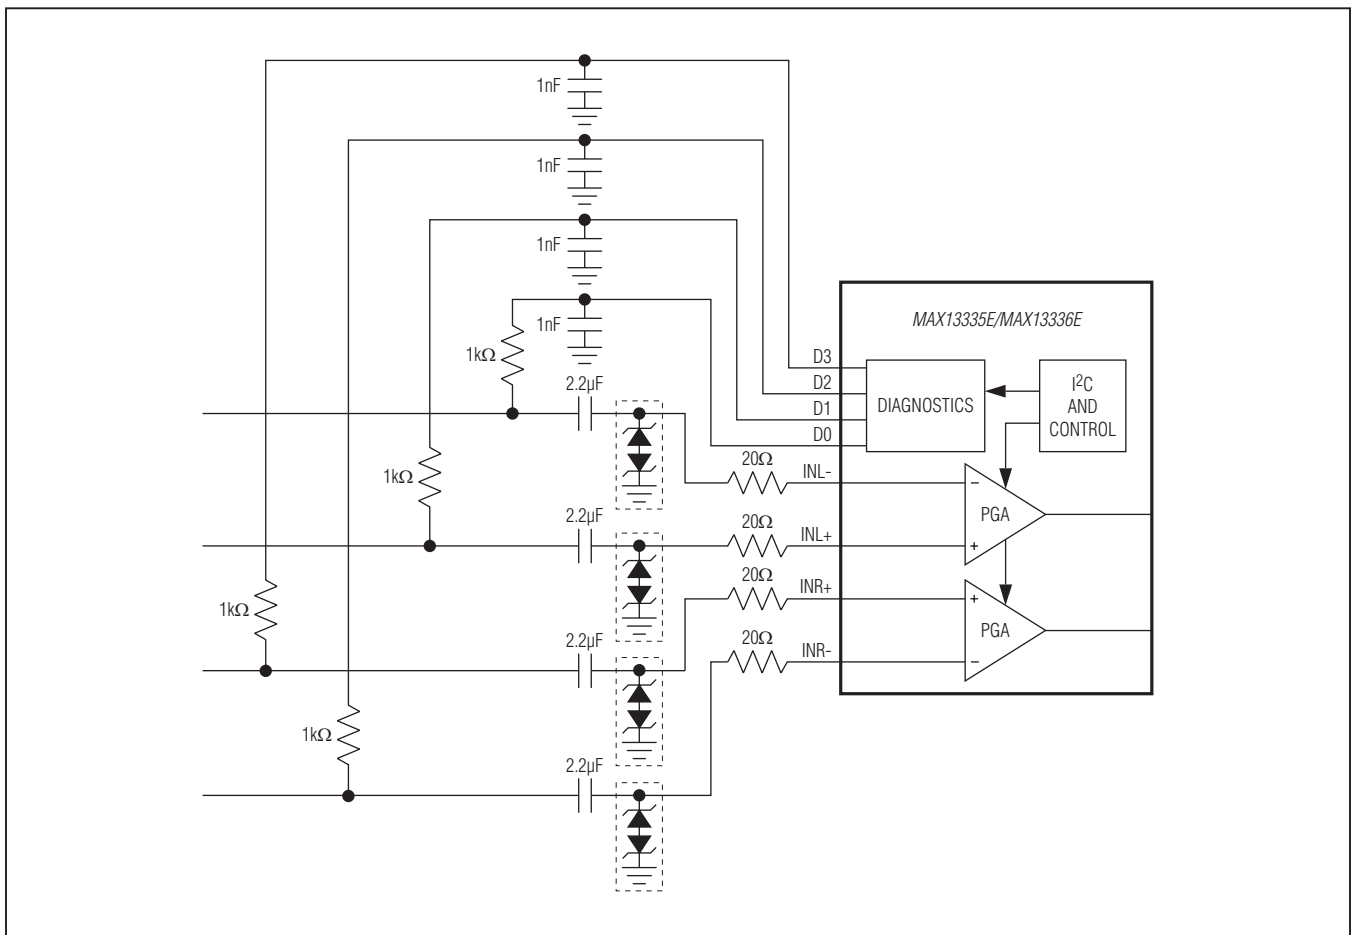


Figure 13. ESD Protection Technique Against IEC 61000-4-2 and ISO 10605 Pulses

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Typical Application Circuits (continued)

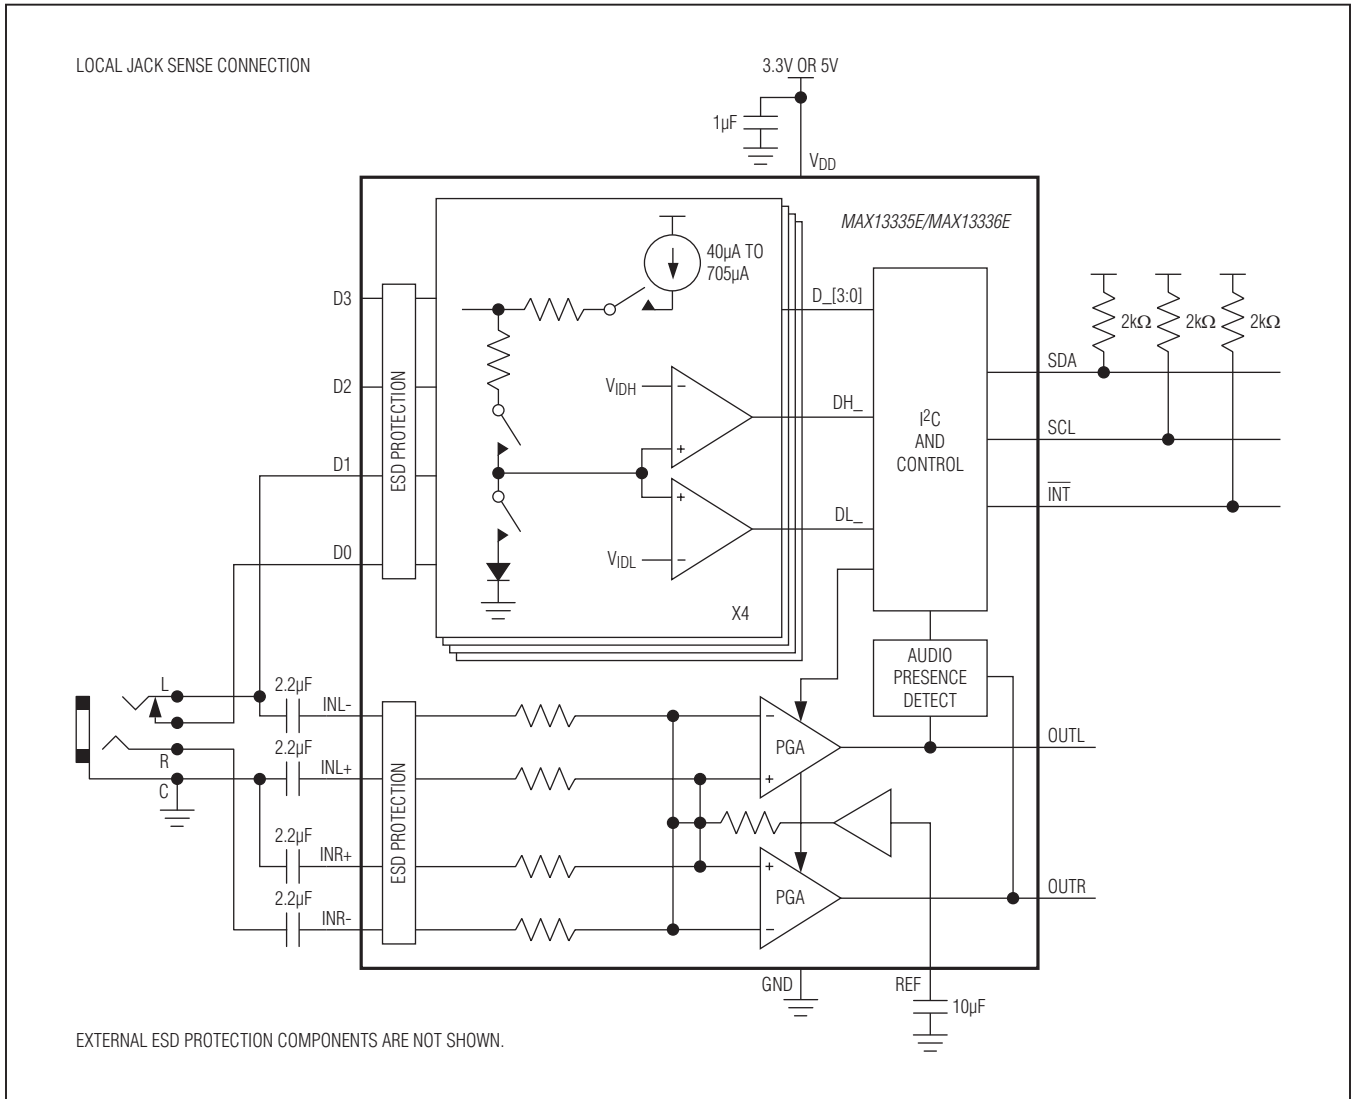




# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics


### Typical Application Circuits (continued)

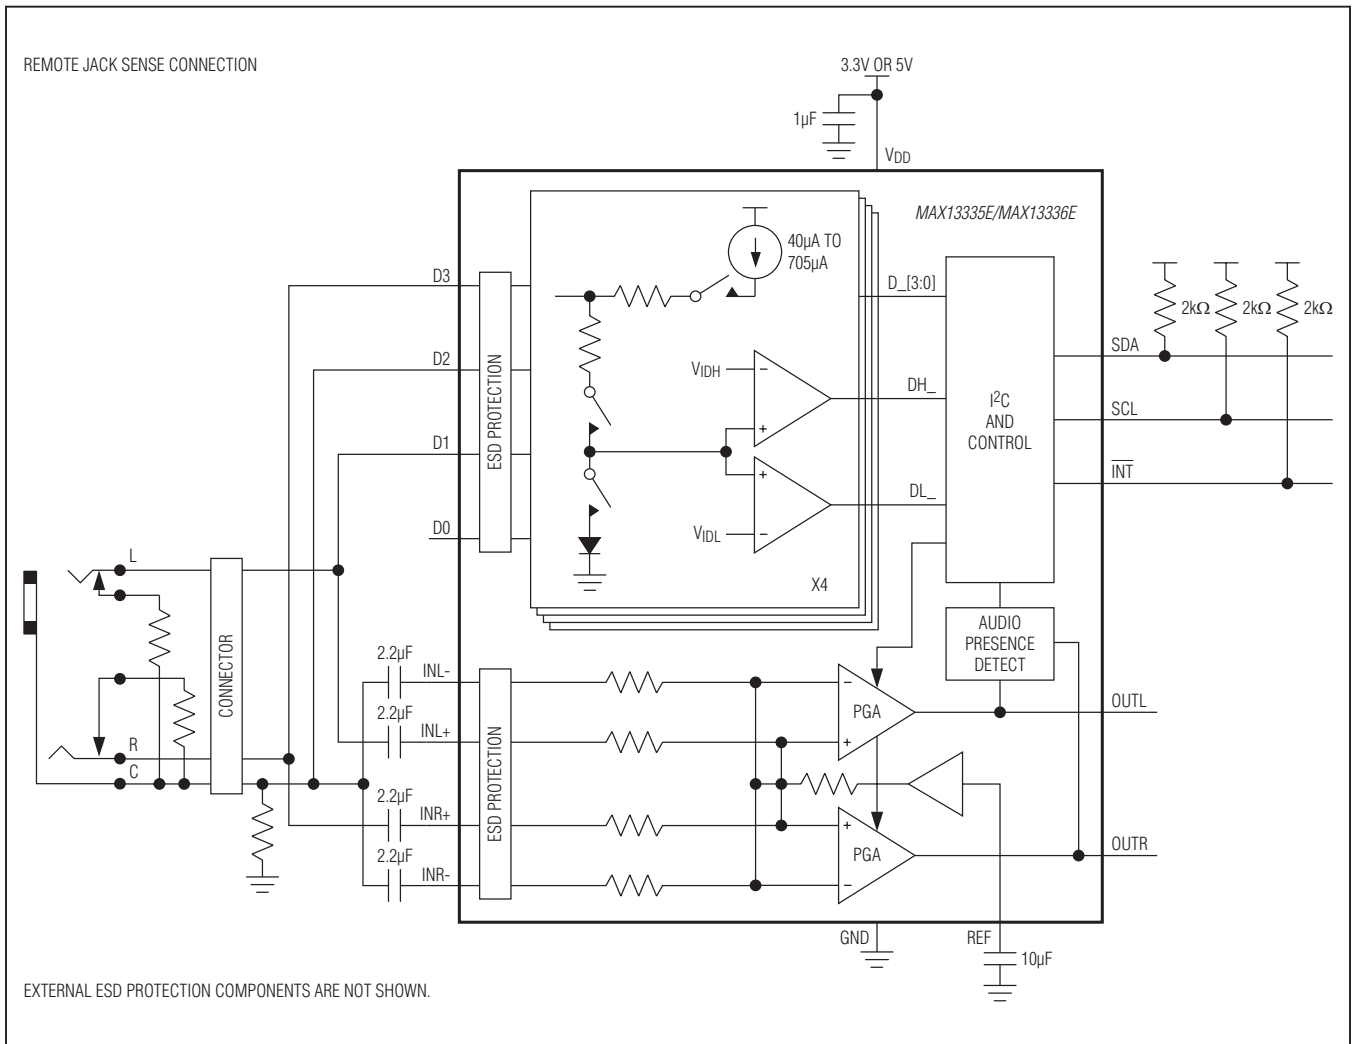

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Typical Application Circuits (continued)

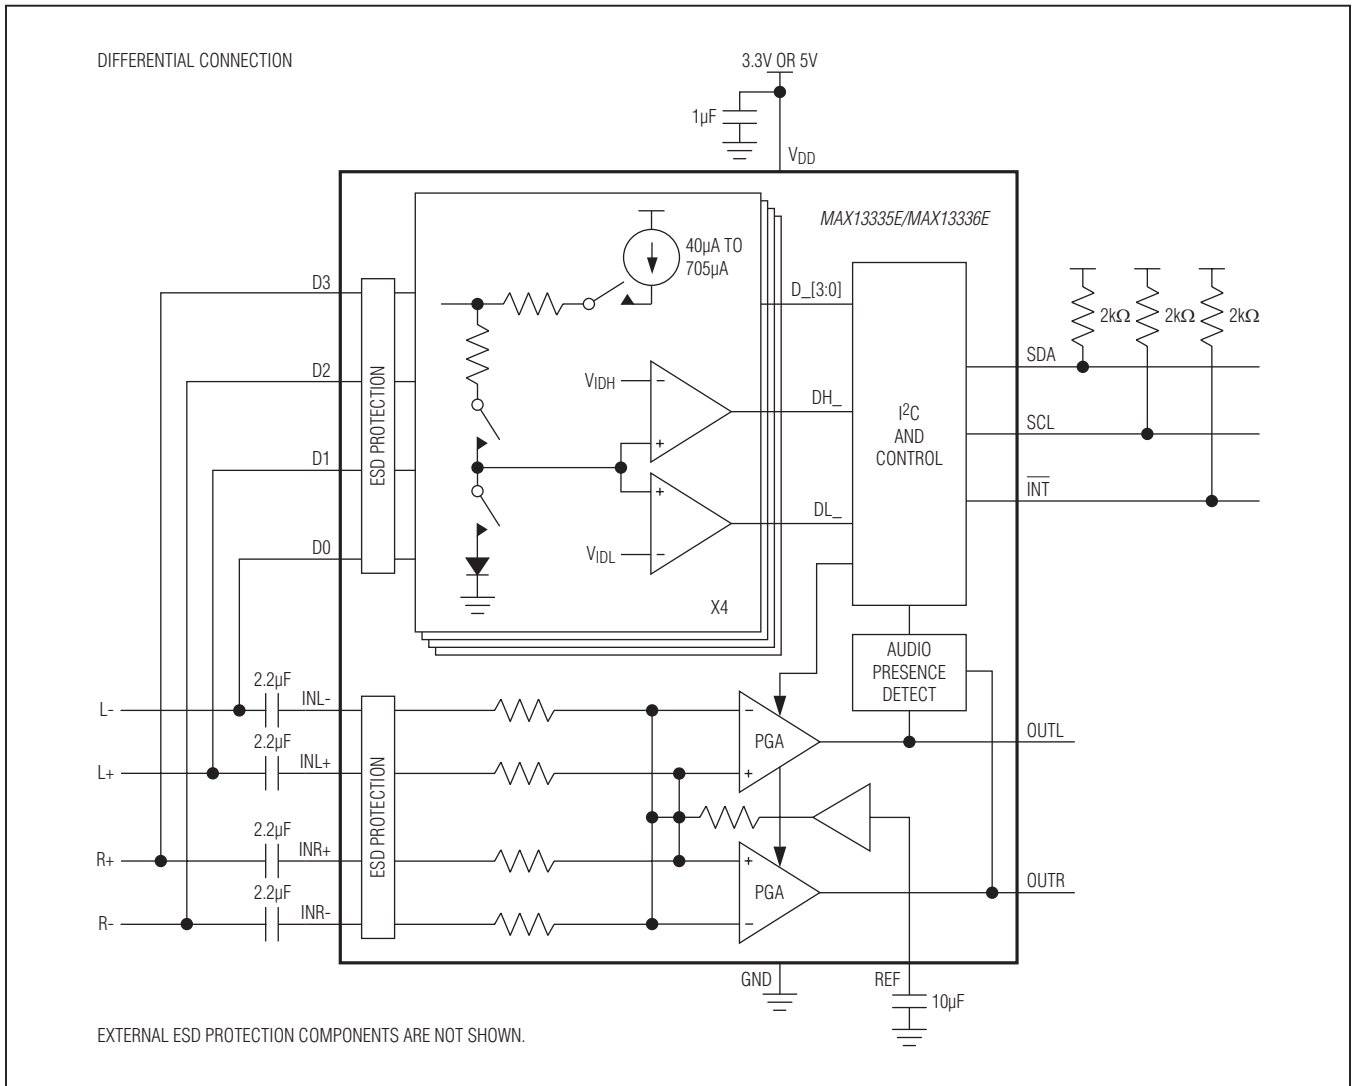

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Ordering Information

PART	TEMP RANGE	GAIN RANGE (dB)	OPTIONS	PIN-PACKAGE
<b>MAX13335E</b> GEE/V+	-40°C to +105°C	-14 to +16	Differential V <sub>IN</sub> up to 4V <sub>RMS</sub> ; quasi-differential V <sub>IN</sub> up to 2V <sub>RMS</sub>	16 QSOP
<b>MAX13336E</b> GEE/V+	-40°C to +105°C	-22 to +8	Differential V <sub>IN</sub> up to 7V <sub>RMS</sub> ; quasi-differential V <sub>IN</sub> up to 3.5V <sub>RMS</sub>	16 QSOP

*V* denotes an automotive qualified part.

+Denotes a lead(Pb)-free/RoHS-compliant package.

### Chip Information

PROCESS: BCD

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
16 QSOP	E16+1	<a href="#">21-0055</a>	<a href="#">90-0167</a>

# MAX13335E/MAX13336E

## Dual Automotive Differential Audio Receivers with I<sup>2</sup>C Control and Diagnostics

### Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	1/12	Initial release	—
1	7/12	Corrected the read operation procedure in the <i>Single Byte-Read Operation</i> and <i>Burst-Read Operation</i> sections	14

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

**Maxim Integrated Products, Inc. 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000** \_\_\_\_\_ **28**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.