

FWP 700V 5-1200A



Electrical Characteristics					Ordering Information			Dimensions	Curves	
Type	Rated Current RMS-Amps	I²t (A² Sec)		Watts Loss	Part Number	Carton Qty.	Carton Weight (lbs)	Figure Number	BIF #	
		Pre-arc	Clearing at 700V							
FWP 700V	5	1.6	10	1.5	FWP-5B	10	2.25	Fig. 1	35785316	
	10	3.6	20	4	FWP-10B					
	15	10	75	5.5	FWP-15B					
	20	26	180	6	FWP-20B					
	25	44	340	7	FWP-25B					
	30	58	450	9	FWP-30B					
	35	34	160	12	FWP-35B	5	1.21		35785308	
	40	76	320	12	FWP-40B					
	50	135	600	12	FWP-50B					
	60	210	950	15.5	FWP-60B					
	70	305	2000	18	FWP-70B	1	0.24			361
	80	360	2400	21	FWP-80B					
	90	415	2700	25	FWP-90B					
	100	540	3500	27	FWP-100B					
	125	1800	7300	28	FWP-125A					
	150	2900	11700	32	FWP-150A					
	175	4200	16700	35	FWP-175A		0.65			
	200	5500	22000	43	FWP-200A					
	225	7700	31300	45	FWP-225A		1.17			
	250	10500	42500	48	FWP-250A					
	300	17600	71200	58	FWP-300A					
	350	23700	95600	65	FWP-350A					
	400	31000	125000	78	FWP-400A					
	450	36400	137000	94	FWP-450A					
	500	45200	170000	107	FWP-500A	2.39				
	600	66700	250000	122	FWP-600A					
	700	54000	300000	125	FWP-700A	1.21				
	800	78000	450000	140	FWP-800A					
	900	91500	530000	150	FWP-900A					
	1000	120000	600000	170	FWP-1000A		6.60	Fig. 2		
	1200	195000	1100000	190	FWP-1200A	Fig. 3		35785308		

■ Interrupting rating 200kA RMS Symmetrical.

■ Watts loss provided at rated current.

■ (700 Vdc/Interrupting rating 50kA) U.L. Recognition & CSA Component Acceptance on 5 through 100 & 700 through 800 amperes.

■ (700 Vdc/Interrupting rating 10kA) U.L. Recognition & CSA Component Acceptance on 125 through 600 amperes.

1 kg = 2.2 lbs 1 lb = 0.45 kg


FWP 700V 5-1200A



Electrical Characteristics


Total Clearing I^2t

The total clearing I^2t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I^2t is found by multiplying by correction factor, K , given as a function of applied working voltage, E_g , (RMS).

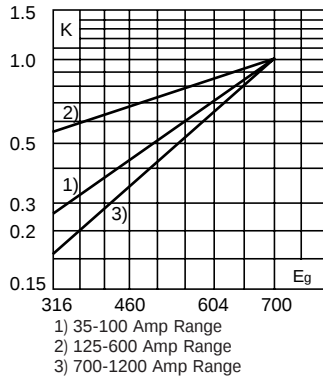


Arc Voltage

This curve gives the peak arc voltage, U_L , which may appear across the fuse during its operation as a function of the applied working voltage, E_g , (RMS) at a power factor of 15%.

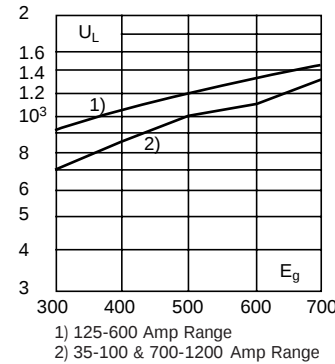

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p , is given as a function of the RMS load current, I_b , in % of the rated current.

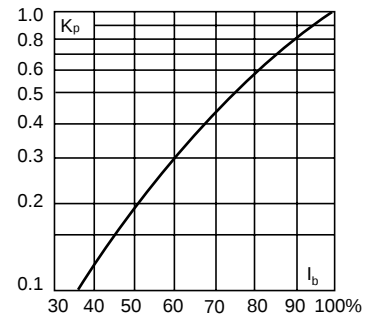

Dimensions

Fig. 1: 5-800 Amp Range

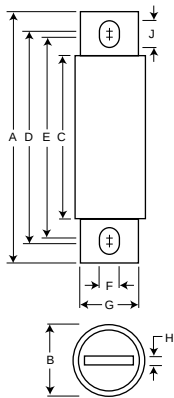


Fig. 2: 900-1000 Amp Range





Fig. 3: 1200 Amp Range



Order #	Fig.	A	B	C	D	E	F	G	H	J
FWP-5B-30B	1	2.870	0.563	1.855	2.477	2.477	0.250	0.405	0.063	0.250
FWP-35B-60B	1	4.375	0.813	2.750	3.708	3.312	0.344	0.725	0.125	0.542
FWP-70B-100B	1	4.406	0.947	2.594	3.625	3.563	0.344	0.750	0.125	0.375
FWP-125A-200A	1	5.090	1.500	2.840	4.190	3.500	0.410	1.000	0.250	0.750
FWP-225A-400A	1	5.090	2.000	2.840	4.280	3.530	0.410	1.500	0.250	0.780
FWP-450A-600A	1	7.090	2.500	2.840	5.720	4.190	0.530	2.000	0.380	1.300
FWP-700A-800A	1	6.630	2.000	2.844	5.562	5.062	0.625	1.500	0.250	0.875
FWP-900A-1000A	2	See Drawing								
FWP-1200A	3	See Drawing								

Dimension in inches.

1mm = 0.0394" 1" = 25.4mm

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.