

# A01 series

## Keylock & selector switches

Distinctive features and specifications

A018\_AX1607US



- ☐ Panel Sealed to IP65
- ☐ Single pole to four pole changeover
- ☐ Custom engraving & overmould key
- ☐ Push on tab terminals
- ☐ 6A 250VAC

### ELECTRICAL SPECIFICATIONS

- **Current/Voltage Rating** : 10mA 5VAC min, 6A 250VAC, 6A 12VDC
- **Initial Contact Resistance** : 10mΩ max at 1Amp 4VDC
- **Insulation Resistance** : 50MΩ min
- **Dielectric Strength** : 750V between open contacts, 5KV live to accessible
- **Electrical Life** : 50,000 cycles min
- **Contact Gap** : >1mm (0.039)
- **Insulation** : Class 2

### MECHANICAL SPECIFICATIONS

- **Mechanical Life (operator)** : Momentary, 1 million cycles, maintained 100,000 cycles
- **Lamp** : Midget grove T1 ¾ filament, neon or LED
- **Terminals** : Solder/quick connect 2.8mm (0.110)

### GENERAL SPECIFICATIONS


- **Operating Temperature** : -20°C to +55°C
- **Solder Heat Resistance** : 350°C for 5 seconds
- **Sealing** : Panel sealed to IP65, rear of panel IP40

### AGENCY APPROVALS




### PANEL CUT OUT

Round & Square bezel operators only



Rectangular bezel operators only



Max panel thickness 8mm (0.314)

### MATERIALS

- **Key** : Nickel plated steel
- **Key Barrel** : Chrome plated alloy
- **Operator** : PBT
- **Nut** : ABS
- **Camtrack Momentary** : PPE
- **Camtrack Maintained** : PPSU
- **Switch Block 1 & 2 pole** : PBT
- **Switch Block 3 & 4 pole** : PEI
- **Contacts** : Gold plated silver



Dimensions : first dimensions are in mm while inches are shown in brackets.  
Refer to the following pages for further information.




Mounting accessories : standard hardware 1 nut and 1 sealing washer.

# A01 series


## Keylock & selector switches

Panel cut-out Ø16 (0.755)

### Keylock

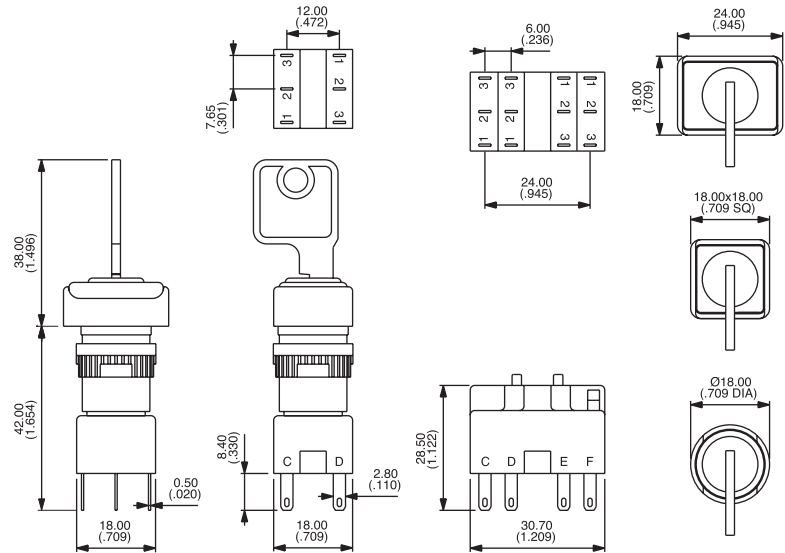

### Selector

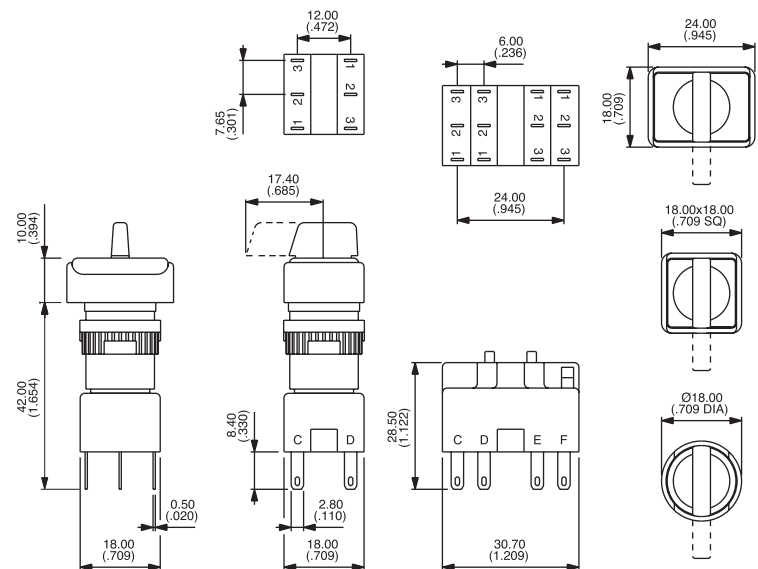

# A01 series

## Keylock & selector switches

Overview

### Keylock

| Operator |       |                    | +        |               | Switch block |         | Key position |
|----------|-------|--------------------|----------|---------------|--------------|---------|--------------|
| Pole     | Bezel | Description        | Part No. | Key removable | No of poles  | Part No |              |
| 1 or 2   |       | 2 pos. maintained  | A018101  | A-C           | Single pole  | A0151B  |              |
| 1 or 2   |       | 2 pos. momentary   | A018102  | A             | Double pole  | A0152B  |              |
| 3 or 4   |       | 2 pos. maintained  | A018103  | A-C           | Three pole   | A0155B  |              |
| 3 or 4   |       | 2 pos. momentary   | A018104  | A             | Four pole    | A0153B  |              |
| 1 or 2   |       | 3 pos. maintained  | A018105  | A-B-C         |              |         |              |
| 1 or 2   |       | 3 pos. momentary   | A018106  | A             |              |         |              |
| 1 or 2   |       | 3 pos. mainL, momR | A018107  | A-B           |              |         |              |
| 1 or 2   |       | 3 pos. momL, mainR | A018108  | A-C           |              |         |              |
| 1 or 2   |       | 2 pos. maintained  | A018201  | A-C           |              |         |              |
| 1 or 2   |       | 2 pos. momentary   | A018202  | A             |              |         |              |
| 3 or 4   |       | 2 pos. maintained  | A018203  | A-C           |              |         |              |
| 3 or 4   |       | 2 pos. momentary   | A018204  | A             |              |         |              |
| 1 or 2   |       | 3 pos. maintained  | A018205  | A-B-C         |              |         |              |
| 1 or 2   |       | 3 pos. momentary   | A018206  | A             |              |         |              |
| 1 or 2   |       | 3 pos. mainL, momR | A018207  | A-B           |              |         |              |
| 1 or 2   |       | 3 pos. momL, mainR | A018208  | A-C           |              |         |              |
| 1 or 2   |       | 2 pos. maintained  | A018301  | A-C           |              |         |              |
| 1 or 2   |       | 2 pos. momentary   | A018302  | A             |              |         |              |
| 3 or 4   |       | 2 pos. maintained  | A018303  | A-C           |              |         |              |
| 3 or 4   |       | 2 pos. momentary   | A018304  | A             |              |         |              |
| 1 or 2   |       | 3 pos. maintained  | A018305  | A-B-C         |              |         |              |
| 1 or 2   |       | 3 pos. momentary   | A018306  | A             |              |         |              |
| 1 or 2   |       | 3 pos. mainL, momR | A018307  | A-B           |              |         |              |
| 1 or 2   |       | 3 pos. momL, mainR | A018308  | A-C           |              |         |              |

Bezel: rectangular square round. 'pos' - position, 'mainL' - maintained left 'momR' - momentary right, etc

- Non-removable key positions: contact APEM components
- 2 standard keys are supplied
- 20 key barrel types available from stock
- For on-on-on function contact APEM components
- Note: 3/4 pole switch block for use only with 2 position key switches

**Key Rotation – 2 position switches**

The model numbers shown are for switches with anticlockwise key rotation.

For clockwise rotation, replace:

|    |      |    |
|----|------|----|
| 01 | with | 25 |
| 02 | with | 24 |
| 03 | with | 27 |
| 04 | with | 28 |

at the end of the model number

### Selector

| Operator |       |                    | +           |            | Switch block |         | Lever position |
|----------|-------|--------------------|-------------|------------|--------------|---------|----------------|
| Pole     | Bezel | Description        | Short lever | Long lever | No of poles  | Part No |                |
| 1 or 2   |       | 2 pos. maintained  | A019201     | A019101    | Single pole  | A0151B  |                |
| 1 or 2   |       | 2 pos. momentary   | A019202     | A019102    | Double pole  | A0152B  |                |
| 3 or 4   |       | 2 pos. maintained  | A019203     | A019103    | Three pole   | A0155B  |                |
| 3 or 4   |       | 2 pos. momentary   | A019204     | A019104    | Four pole    | A0153B  |                |
| 1 or 2   |       | 3 pos. maintained  | A019205     | A019105    |              |         |                |
| 1 or 2   |       | 3 pos. momentary   | A019206     | A019106    |              |         |                |
| 1 or 2   |       | 3 pos. mainL, momR | A019207     | A019107    |              |         |                |
| 1 or 2   |       | 3 pos. momL, mainR | A019208     | A019108    |              |         |                |
| 1 or 2   |       | 2 pos. maintained  | A019401     | A019301    |              |         |                |
| 1 or 2   |       | 2 pos. momentary   | A019402     | A019302    |              |         |                |
| 3 or 4   |       | 2 pos. maintained  | A019403     | A019303    |              |         |                |
| 3 or 4   |       | 2 pos. momentary   | A019404     | A019304    |              |         |                |
| 1 or 2   |       | 3 pos. maintained  | A019405     | A019305    |              |         |                |
| 1 or 2   |       | 3 pos. momentary   | A019406     | A019306    |              |         |                |
| 1 or 2   |       | 3 pos. mainL, momR | A019407     | A019307    |              |         |                |
| 1 or 2   |       | 3 pos. momL, mainR | A019408     | A019308    |              |         |                |
| 1 or 2   |       | 2 pos. maintained  | A019601     | A019501    |              |         |                |
| 1 or 2   |       | 2 pos. momentary   | A019602     | A019502    |              |         |                |
| 3 or 4   |       | 2 pos. maintained  | A019603     | A019503    |              |         |                |
| 3 or 4   |       | 2 pos. momentary   | A019604     | A019504    |              |         |                |
| 1 or 2   |       | 3 pos. maintained  | A019605     | A019505    |              |         |                |
| 1 or 2   |       | 3 pos. momentary   | A019606     | A019506    |              |         |                |
| 1 or 2   |       | 3 pos. mainL, momR | A019607     | A019507    |              |         |                |
| 1 or 2   |       | 3 pos. momL, mainR | A019608     | A019508    |              |         |                |

Bezel: rectangular square round. 'pos' - position, 'mainL' - maintained left 'momR' - momentary right, etc

- Note: 3/4 pole switch block for use only with 2 position rotary lever

**Lever Rotation – 2 position switches**

The model numbers shown are for switches with anticlockwise lever rotation.

For clockwise rotation, replace:

|    |      |    |
|----|------|----|
| 01 | with | 09 |
| 02 | with | 10 |
| 03 | with | 11 |
| 04 | with | 12 |

at the end of the model number

Optional engraving on lever end add "WL" to the end of the part number.



Unsealed switches & indicators (IP40) suffix 01 to the end of the part number.  
Screen engraving insertable legends, & bi-color LED's please contact APEM


# A01 series

## Keylock & selector switches

Accessories

### Flush mount bezels

Dark grey plastic material – supplied with sealing washer

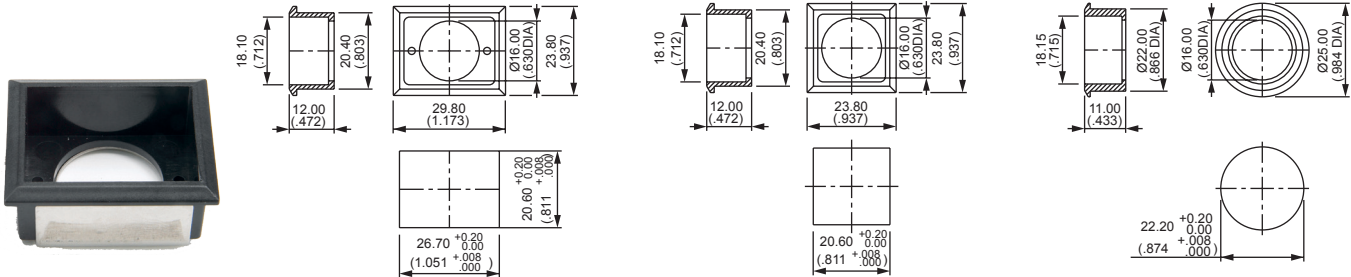


Rectangular : A01FM1

Square : A01FM

Round : A01FM2

Anodised aluminium/matt black

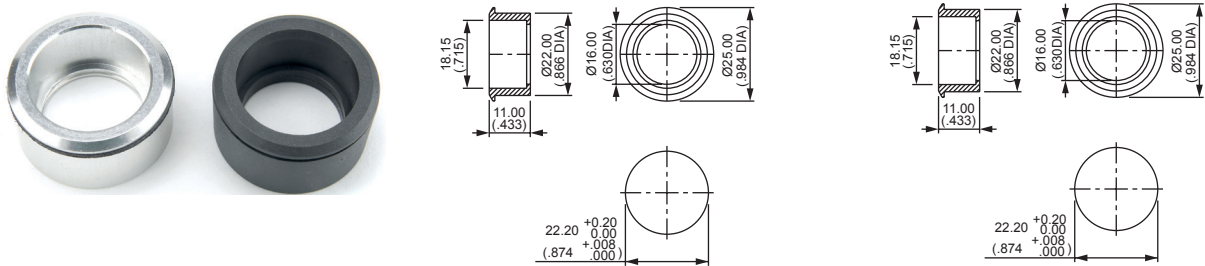

Round natural anodised : A01FMM


Round matt black : A01FMMG

### PCB Sockets

Number of Poles

Part No.

|                                |        |
|--------------------------------|--------|
| Single pole, non illuminated : | A01PC1 |
| Double pole, non illuminated : | A01PC2 |
| Single pole, illuminated :     | A01PC3 |
| Double pole, illuminated :     | A01PC4 |
| Indicator :                    | A01PC5 |

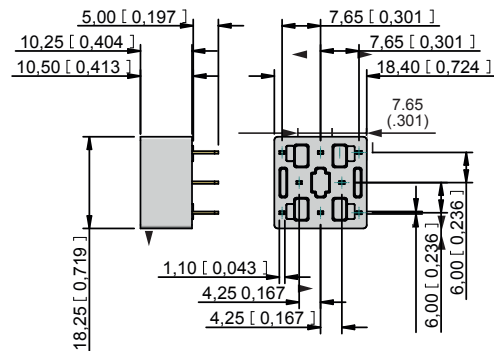



Dimensions : first dimensions are in mm while inches are shown in brackets.  
Refer to the following pages for further information.

# A01 series


## Keylock & selector switches

### Accessories

#### Flap guards




To fit rectangular bezel : A01FG1




To fit round & Square bezel: A01FM2


#### Alluminium bezel protection guards



Rectangular : A01MG1




Square : A01MG




Round natural anodised: A01MG2  
Matt black : A01MG2G

#### Anti rotation ring




A01LW

#### Blanking plugs

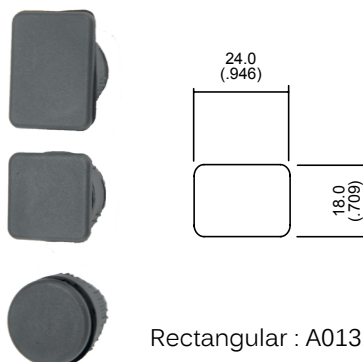

Rectangular : A0131



Square : A0132




Round : A0133

# A01 series

## Keylock & selector switches

Installation & tools

### Installation guide

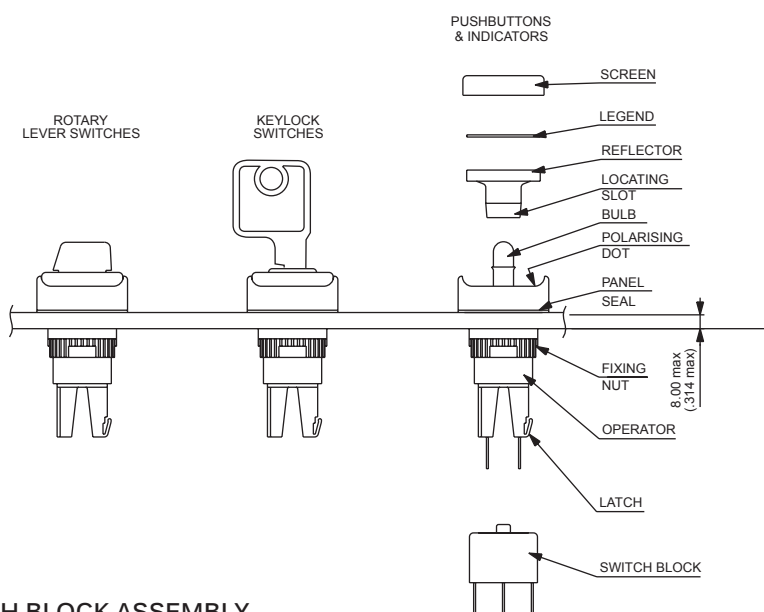

#### SWITCH BLOCK ASSEMBLY

To assemble switch block to the operator, firstly, take care to line up the switch block with the back of the operator. Once in position slide on to the back of the operator. N.B. Ensure latch is fully engaged correctly onto the switch block. To remove switch block, depress the latch and slide the switch block off the operator.

#### PANEL MOUNTING ASSEMBLY

- Drill/punch hole shaped as shown on page one.
- Assemble front operator through hole, fit fixing nut and tighten to a maximum torque of 0.8Nm using tool No. 30-0001.
- Wire chosen switch block as required and slide onto operator until latch engages.
- Fit bulb if required using tool No. 30-0002.
- Snap screen onto reflector assembly with legend in between if required and snap onto front operator, take care to line up the locating slot with the polarising dot and not to damage the internal seal
- To place/remove the bulb use the bulb extractor 30-0002.

### Tools

Nut fixing key



30-0001

Bulb remover



30-0002



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.