

# Single/Dual Micropower Zero-Drift Operational Amplifiers

## FEATURES

- **Supply Current 150 $\mu$ A (Max per Amplifier)**  
Guaranteed Over Temperature
- **Offset Voltage 3 $\mu$ V (Max)**
- **Offset Voltage Drift 30nV/ $^{\circ}$ C (Max)**
- Common Mode Input Range from  $V^-$  to  $V^+ - 0.5V$
- Output Swings Rail-to-Rail
- Voltage Gain: 140dB (Typ)
- PSRR and CMRR: 130dB (Typ)
- Input Bias Current: 1pA (Typ, 25 $^{\circ}$ C)
- Noise: 1.6 $\mu$ V<sub>P-P</sub> (0.01Hz to 10Hz Typ)
- Supply Operation:  
2.7V to 6V (LTC2054/LTC2055)  
2.7V to  $\pm 5.5V$  (LTC2054HV/LTC2055HV)
- Low Profile (1mm) SOT-23, MS8 and  
3mm  $\times$  3mm  $\times$  0.8mm DFN Packages

## APPLICATIONS

- Thermocouple Amplifiers
- Electronic Scales
- Medical Instrumentation
- Strain Gauge Amplifiers
- High Resolution Data Acquisition
- DC Accurate RC Active Filters
- Low Side Current Sense
- Battery-Powered Systems

## DESCRIPTION

The LTC<sup>®</sup>2054/LTC2055 are low power, low noise single/dual zero-drift operational amplifiers available in the SOT-23 (ThinSOT<sup>™</sup>) and MS8 packages. For space limited applications, the LTC2055 is also available in a 3mm  $\times$  3mm  $\times$  0.8mm dual fine pitch leadless package (DFN). They operate from a single 2.7V minimum supply and support  $\pm 5V$  applications. The current consumption is typically 150 $\mu$ A for the LTC2054 and 130 $\mu$ A/amp for the LTC2055.


The LTC2054/LTC2055, despite their miniature size, feature uncompromising DC performance. The typical input offset voltage and offset drift are 0.5 $\mu$ V and 25nV/ $^{\circ}$ C. The almost zero DC offset and drift are supported with a power supply rejection ratio (PSRR) and common mode rejection ratio (CMRR) of more than 130dB.

The input common mode voltage ranges from the negative supply up to typically 0.5V from the positive supply. The open-loop gain is typically 140dB. The LTC2054/LTC2055 also feature a 1.6 $\mu$ V<sub>P-P</sub> DC to 10Hz noise and a 500kHz gain-bandwidth product.


**LT**, LTC and LT are registered trademarks of Linear Technology Corporation.  
ThinSOT is a trademark of Linear Technology Corporation

## TYPICAL APPLICATION

**-48V Low Side Precision Current Sense**

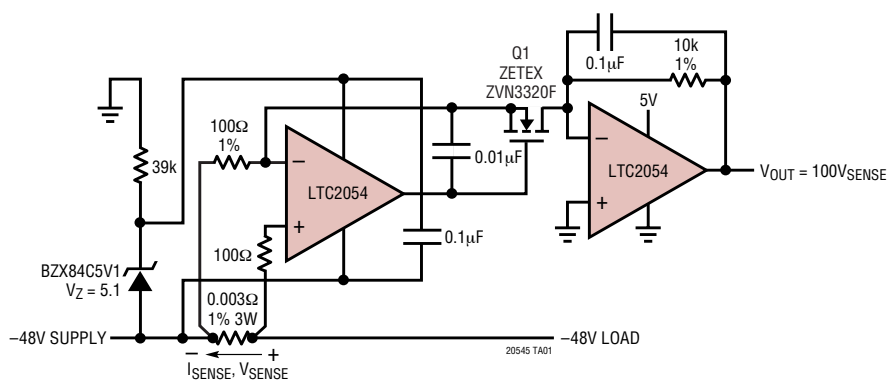

**Supply Current (per Amplifier)**

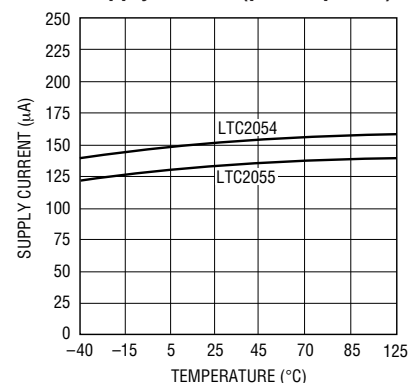

20545 TA01b

sn20545 20545fas

# LTC2054/LTC2055

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|                                                    |                                      |                |
|----------------------------------------------------|--------------------------------------|----------------|
| Total Supply Voltage ( $V^+$ to $V^-$ )            | Operating Temperature Range          | –40°C to 125°C |
| LTC2054/LTC2055                                    | Specified Temperature Range (Note 3) | –40°C to 125°C |
| LTC2054HV/LTC2055HV                                | Storage Temperature Range            | –65°C to 150°C |
| Input Voltage ( $V^+ + 0.3V$ ) to ( $V^- - 0.3V$ ) | DD Package                           | –65°C to 125°C |
| Input Current                                      | Lead Temperature (Soldering, 10 sec) | 300°C          |
| Output Short-Circuit Duration                      |                                      |                |
|                                                    |                                      |                |

## PACKAGE/ORDER INFORMATION

| <p>S5 PACKAGE<br/>5-LEAD PLASTIC SOT-23<br/><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 250^{\circ}C/W</math></p> |                 | <p>DD PACKAGE<br/>8-LEAD (3mm x 3mm) PLASTIC DFN<br/>UNDERSIDE METAL INTERNALLY<br/>CONNECTED TO <math>V^-</math><br/>(PCB CONNECTION OPTIONAL)<br/><math>T_{JMAX} = 125^{\circ}C</math>, <math>\theta_{JA} = 160^{\circ}C/W</math>, NOTE 5</p> |                 | <p>MS8 PACKAGE<br/>8-LEAD PLASTIC MSOP<br/><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 200^{\circ}C/W</math></p> |                  |
|---------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------|------------------|
| ORDER PART NUMBER*                                                                                                              | S5 PART MARKING | ORDER PART NUMBER*                                                                                                                                                                                                                              | DD PART MARKING | ORDER PART NUMBER*                                                                                                             | MS8 PART MARKING |
| LTC2054CS5                                                                                                                      | LTAGB           | LTC2055CDD                                                                                                                                                                                                                                      | LBCW            | LTC2055CMS8                                                                                                                    | LTBCR            |
| LTC2054HVCS5                                                                                                                    | LTAGD           | LTC2055HVCDD                                                                                                                                                                                                                                    | LBCX            | LTC2055HVCMS8                                                                                                                  | LTBCT            |
| LTC2054IS5                                                                                                                      | LTAGB           | LTC2055IDD                                                                                                                                                                                                                                      | LBCW            | LTC2055IMS8                                                                                                                    | LTBCR            |
| LTC2054HVIS5                                                                                                                    | LTAGD           | LTC2055HVIDD                                                                                                                                                                                                                                    | LBCX            | LTC2055HVIMS8                                                                                                                  | LTBCT            |
| LTC2054HS5                                                                                                                      | LTAGB           | LTC2055HDD                                                                                                                                                                                                                                      | LBCW            | LTC2055HMS8                                                                                                                    | LTBCR            |
| LTC2054HVHS5                                                                                                                    | LTAGD           | LTC2055HVHDD                                                                                                                                                                                                                                    | LBCX            | LTC2055HVHMS8                                                                                                                  | LTBCT            |

\*The temperature grade (C, I or H) is indicated on the shipping container. Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS (LTC2054/LTC2055, LTC2054HV/LTC2055HV) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$ . $V_S = 3V$ , $5V$ unless otherwise noted. (Note 3)

| SYMBOL                   | PARAMETER                              | CONDITIONS          |   | LTC2054C/LTC2055C<br>LTC2054I/LTC2055I |           |            | LTC2054H/LTC2055H |           |            | UNITS             |
|--------------------------|----------------------------------------|---------------------|---|----------------------------------------|-----------|------------|-------------------|-----------|------------|-------------------|
|                          |                                        |                     |   | MIN                                    | TYP       | MAX        | MIN               | TYP       | MAX        |                   |
| $I_S$                    | Supply Current (LTC2054)               | No Load, $V_S = 3V$ | ● |                                        | 140       | 175        |                   | 140       | 180        | $\mu A$           |
|                          |                                        | No Load, $V_S = 5V$ | ● |                                        | 150       | 175        |                   | 150       | 180        | $\mu A$           |
| $I_S$                    | Supply Current Per Amplifier (LTC2055) | No Load, $V_S = 3V$ | ● |                                        | 130       | 150        |                   | 130       | 155        | $\mu A$           |
|                          |                                        | No Load, $V_S = 5V$ | ● |                                        | 135       | 150        |                   | 135       | 155        | $\mu A$           |
| $V_{OS}$                 | Input Offset Voltage                   | (Note 2)            |   |                                        | $\pm 0.5$ | $\pm 3$    |                   | $\pm 0.5$ | $\pm 3$    | $\mu V$           |
| $\Delta V_{OS}/\Delta T$ | Average Input Offset Drift             | (Note 2)            | ● |                                        | 0.02      | $\pm 0.03$ |                   | 0.02      | $\pm 0.05$ | $\mu V/^{\circ}C$ |
|                          | Long-Term Offset Drift                 |                     |   |                                        | 50        |            |                   | 50        |            | nV/ $\sqrt{mo}$   |
| $I_B$                    | Input Bias Current (Note 4)            | $V_S = 3V$          |   |                                        | $\pm 1$   |            |                   | $\pm 1$   |            | pA                |
|                          |                                        | $V_S = 3V$          | ● |                                        |           | $\pm 150$  |                   |           | $\pm 3000$ | pA                |
|                          |                                        | $V_S = 5V$          |   |                                        | $\pm 1$   |            |                   | $\pm 1$   |            | pA                |
|                          |                                        | $V_S = 5V$          | ● |                                        |           | $\pm 150$  |                   |           | $\pm 3000$ | pA                |

sn20545 20545fas

# ELECTRICAL CHARACTERISTICS

(LTC2054/LTC2055, LTC2054HV/LTC2055HV) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = 3\text{V}$ ,  $5\text{V}$  unless otherwise noted. (Note 3)

| SYMBOL    | PARAMETER                     | CONDITIONS                                                       |   | LTC2054C/LTC2055C<br>LTC2054I/LTC2055I |         |           | LTC2054H/LTC2055H |         |           | UNITS               |
|-----------|-------------------------------|------------------------------------------------------------------|---|----------------------------------------|---------|-----------|-------------------|---------|-----------|---------------------|
|           |                               |                                                                  |   | MIN                                    | TYP     | MAX       | MIN               | TYP     | MAX       |                     |
| $I_{OS}$  | Input Offset Current (Note 4) | $V_S = 3\text{V}$<br>$V_S = 3\text{V}$                           | ● |                                        | $\pm 2$ | $\pm 300$ |                   | $\pm 2$ | $\pm 700$ | pA<br>pA            |
|           |                               | $V_S = 5\text{V}$<br>$V_S = 5\text{V}$                           | ● |                                        | $\pm 2$ | $\pm 300$ |                   | $\pm 2$ | $\pm 700$ | pA<br>pA            |
| $e_n$     | Input Noise Voltage           | $R_S = 100\Omega$ , DC to 1Hz                                    |   |                                        | 0.6     |           |                   | 0.6     |           | $\mu\text{V}_{P-P}$ |
|           |                               | $R_S = 100\Omega$ , DC to 10Hz                                   |   |                                        | 1.6     |           |                   | 1.6     |           | $\mu\text{V}_{P-P}$ |
| CMRR      | Common Mode Rejection Ratio   | $V_{CM} = \text{GND to } V^+ - 0.7\text{V}$<br>$V_S = 3\text{V}$ | ● | 115<br>110                             | 130     |           | 115<br>110        | 130     |           | dB<br>dB            |
|           |                               | $V_{CM} = \text{GND to } V^+ - 0.7\text{V}$<br>$V_S = 5\text{V}$ | ● | 120<br>115                             | 130     |           | 120<br>115        | 130     |           | dB<br>dB            |
| PSRR      | Power Supply Rejection Ratio  | $V_S = 2.7\text{V to } 6\text{V}$                                | ● | 120<br>115                             | 130     |           | 120<br>115        | 130     |           | dB<br>dB            |
|           |                               |                                                                  | ● | 120<br>115                             | 135     |           | 120<br>115        | 135     |           | dB<br>dB            |
| $A_{VOL}$ | Large-Signal Voltage Gain     | $R_L = 100\text{k}$ , $V_S = 3\text{V}$ , $V_{OUT} = V_S/2$      | ● | 120<br>115                             | 135     |           | 120<br>115        | 135     |           | dB<br>dB            |
|           |                               | $R_L = 100\text{k}$ , $V_S = 5\text{V}$ , $V_{OUT} = V_S/2$      | ● | 125<br>120                             | 140     |           | 125<br>120        | 140     |           | dB<br>dB            |
| $V_{OUT}$ | Output Voltage Swing High     | $R_L = 5\text{k to GND}$ , $V_S = 3\text{V}$                     | ● | 2.87                                   | 2.89    |           | 2.87              | 2.89    |           | V                   |
|           |                               | $R_L = 5\text{k to GND}$ , $V_S = 3\text{V}$                     | ● | 2.85                                   |         |           | 2.84              |         |           | V                   |
|           |                               | $R_L = 5\text{k to GND}$ , $V_S = 5\text{V}$                     | ● | 4.80                                   | 4.83    |           | 4.80              | 4.83    |           | V                   |
|           |                               | $R_L = 5\text{k to GND}$ , $V_S = 5\text{V}$                     | ● | 4.75                                   |         |           | 4.70              |         |           | V                   |
|           |                               | $R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$                   | ● | 2.98                                   | 2.99    |           | 2.98              | 2.99    |           | V                   |
| $V_{OUT}$ | Output Voltage Swing Low      | $R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$                   | ● | 2.975                                  |         |           | 2.97              |         |           | V                   |
|           |                               | $R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$                   | ● | 4.985                                  | 4.99    |           | 4.985             | 4.99    |           | V                   |
|           |                               | $R_L = 100\text{k to GND}$ , $V_S = 5\text{V}$                   | ● | 4.980                                  |         |           | 4.970             |         |           | V                   |
|           |                               | $R_L = 5\text{k to GND}$ , $V_S = 3\text{V}$                     | ● |                                        | 2       | 8         |                   | 3       | 8         | mV<br>mV            |
|           |                               | $R_L = 5\text{k to GND}$ , $V_S = 3\text{V}$                     | ● |                                        |         | 10        |                   |         | 10        | mV<br>mV            |
|           |                               | $R_L = 5\text{k to GND}$ , $V_S = 5\text{V}$                     | ● |                                        | 2       | 8         |                   | 3       | 8         | mV<br>mV            |
|           |                               | $R_L = 5\text{k to GND}$ , $V_S = 5\text{V}$                     | ● |                                        |         | 10        |                   |         | 10        | mV<br>mV            |
|           |                               | $R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$                   | ● |                                        | 2       | 8         |                   | 3       | 8         | mV<br>mV            |
|           |                               | $R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$                   | ● |                                        |         | 10        |                   |         | 10        | mV<br>mV            |
|           |                               | $R_L = 100\text{k to GND}$ , $V_S = 5\text{V}$                   | ● |                                        | 2       | 8         |                   | 3       | 8         | mV<br>mV            |
|           |                               | $R_L = 100\text{k to GND}$ , $V_S = 5\text{V}$                   | ● |                                        |         | 10        |                   |         | 10        | mV<br>mV            |
| SR        | Slew Rate                     |                                                                  |   |                                        | 0.5     |           |                   | 0.5     |           | V/ $\mu\text{s}$    |
| GBW       | Gain Bandwidth Product        |                                                                  |   |                                        | 500     |           |                   | 500     |           | kHz                 |
| $f_s$     | Internal Sampling Frequency   |                                                                  |   |                                        | 1       |           |                   | 1       |           | kHz                 |

# ELECTRICAL CHARACTERISTICS (LTC2054HV/LTC2055HV) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$ . $V_S = \pm 5\text{V}$ unless otherwise noted. (Note 3)

| SYMBOL                   | PARAMETER                      | CONDITIONS                                                      |   | LTC2054HVC/LTC2055HVC<br>LTC2054HVI/LTC2055HVI |            |            | LTC2054HVH/LTC2055HVH    |            |            | UNITS                                                    |
|--------------------------|--------------------------------|-----------------------------------------------------------------|---|------------------------------------------------|------------|------------|--------------------------|------------|------------|----------------------------------------------------------|
|                          |                                |                                                                 |   | MIN                                            | TYP        | MAX        | MIN                      | TYP        | MAX        |                                                          |
| $I_S$                    | Supply Current                 | No Load (LTC2054)                                               | ● |                                                | 175        | 210        |                          | 175        | 215        | $\mu\text{A}$                                            |
| $I_S$                    | Supply Current (Per Amplifier) | No Load (LTC2055)                                               | ● |                                                | 150        | 180        |                          | 150        | 185        | $\mu\text{A}$                                            |
| $V_{OS}$                 | Input Offset Voltage           | (Note 2)                                                        |   |                                                | $\pm 0.5$  | $\pm 5$    |                          | $\pm 0.5$  | $\pm 5$    | $\mu\text{V}$                                            |
| $\Delta V_{OS}/\Delta T$ | Average Input Offset Drift     | (Note 2)                                                        | ● |                                                | 0.025      | $\pm 0.03$ |                          | 0.025      | $\pm 0.05$ | $\mu\text{V}/^\circ\text{C}$                             |
|                          | Long-Term Offset Drift         |                                                                 |   |                                                | 50         |            |                          | 50         |            | $\text{nV}/\sqrt{\text{mo}}$                             |
| $I_B$                    | Input Bias Current (Note 4)    |                                                                 | ● |                                                | $\pm 3$    | $\pm 150$  |                          | $\pm 3$    | $\pm 3000$ | $\text{pA}$<br>$\text{pA}$                               |
| $I_{OS}$                 | Input Offset Current (Note 4)  |                                                                 | ● |                                                | $\pm 6$    | $\pm 300$  |                          | $\pm 6$    | $\pm 700$  | $\text{pA}$<br>$\text{pA}$                               |
| $e_n$                    | Input Noise Voltage            | $R_S = 100\Omega$ , DC to 1Hz<br>$R_S = 100\Omega$ , DC to 10Hz |   |                                                | 0.6<br>1.6 |            |                          | 0.6<br>1.6 |            | $\mu\text{V}_{\text{P-P}}$<br>$\mu\text{V}_{\text{P-P}}$ |
| CMRR                     | Common Mode Rejection Ratio    | $V_{\text{CM}} = \text{GND to } V^+ - 0.9$                      | ● | 120<br>115                                     | 130        |            | 120<br>115               | 130        |            | $\text{dB}$<br>$\text{dB}$                               |
| PSRR                     | Power Supply Rejection Ratio   | $V_S = 2.7\text{V to } 11\text{V}$                              | ● | 120<br>115                                     | 130        |            | 120<br>115               | 130        |            | $\text{dB}$<br>$\text{dB}$                               |
| AVOL                     | Large-Signal Voltage Gain      | $R_L = 100\text{k}$ , $V_{\text{OUT}} = \text{GND}$             | ● | 125<br>120                                     | 140        |            | 125<br>120               | 140        |            | $\text{dB}$<br>$\text{dB}$                               |
| $V_{\text{OUT}}$         | Maximum Output Voltage Swing   | $R_L = 5\text{k to GND}$                                        | ● | $\pm 4.78$                                     | $\pm 4.82$ |            | $\pm 4.78$               | $\pm 4.82$ |            | $\text{V}$                                               |
|                          |                                | $R_L = 5\text{k to GND}$                                        | ● | $\pm 4.75$                                     |            |            | $\pm 4.70$               |            |            | $\text{V}$                                               |
|                          |                                | $R_L = 100\text{k to GND}$<br>$R_L = 100\text{k to GND}$        | ● | $\pm 4.98$<br>$\pm 4.975$                      | $\pm 4.99$ |            | $\pm 4.98$<br>$\pm 4.97$ | $\pm 4.99$ |            | $\text{V}$<br>$\text{V}$                                 |
| SR                       | Slew Rate                      |                                                                 |   |                                                | 0.5        |            |                          | 0.5        |            | $\text{V}/\mu\text{s}$                                   |
| GBW                      | Gain Bandwidth Product         |                                                                 |   |                                                | 500        |            |                          | 500        |            | $\text{kHz}$                                             |
| $f_S$                    | Internal Sampling Frequency    |                                                                 |   |                                                | 1          |            |                          | 1          |            | $\text{kHz}$                                             |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

**Note 2:** These parameters are guaranteed by design. Thermocouple effects preclude measurements of these voltage levels during automated testing.

**Note 3:** All versions of the LTC2054/LTC2055 are designed, characterized and expected to meet the extended temperature limits of  $-40^\circ\text{C}$  and  $125^\circ\text{C}$ . The LTC2054C/LTC2055C/LTC2054HVC/LTC2055HVC are guaranteed to meet the temperature limits of  $0^\circ\text{C}$  and  $70^\circ\text{C}$ . The LTC2054I/LTC2055I/LTC2054HVI/LTC2055HVI are guaranteed to meet temperature


limits of  $-40^\circ\text{C}$  and  $85^\circ\text{C}$ . The LTC2054H/LTC2055H and LTC2054HVH/LTC2055HVH are guaranteed to meet the temperature limits of  $-40^\circ\text{C}$  and  $125^\circ\text{C}$ .

**Note 4:** Limit is determined by high speed automated test capability. See Typical Characteristic curves for actual typical performance. For tighter specifications, please consult Linear Technology Marketing.

**Note 5:** The  $\theta_{JA}$  specified for the DD package is with minimal PCB heat spreading metal. Using expanded metal area on all layers of a board reduces this value.


# TYPICAL PERFORMANCE CHARACTERISTICS

**Common Mode Rejection Ratio vs Frequency**

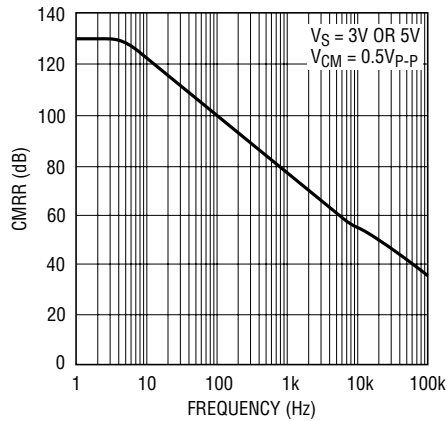


20545 G01

**DC CMRR vs Common Mode Input Range**

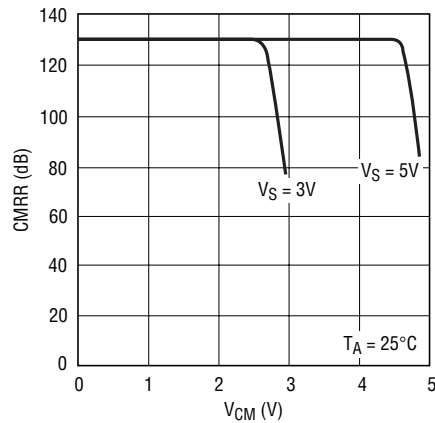


20545 G02

**PSRR vs Frequency**

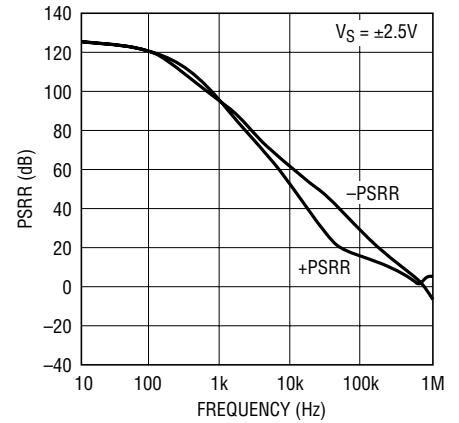


20545 G03

**Output Voltage Swing vs Load Resistance**

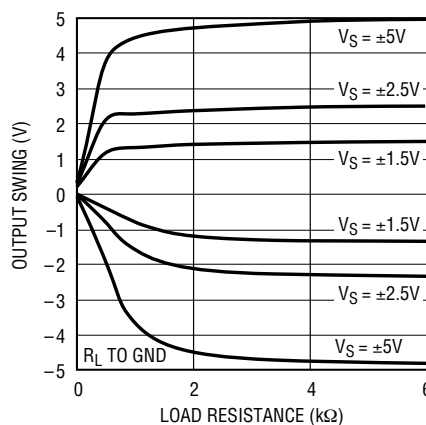


20545 G04

**Output Swing vs Load Current**

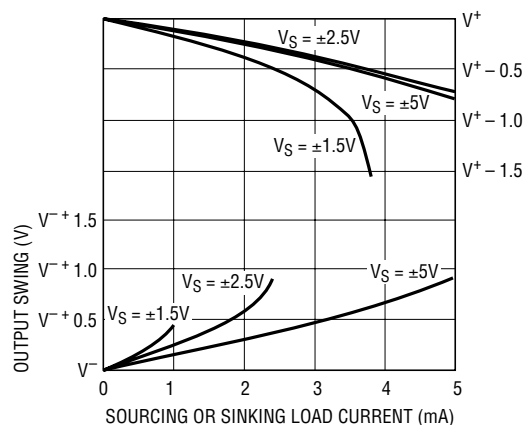


20545 G06

**Short-Circuit Output Current vs Supply Voltage**

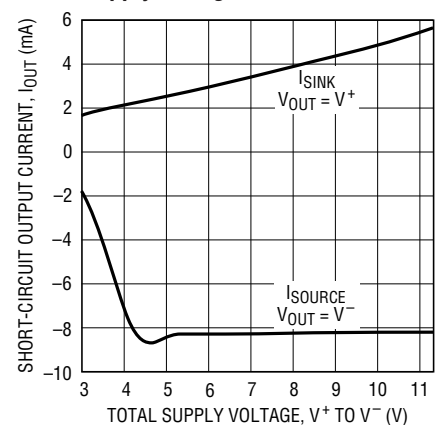


20545 G14

**Gain/Phase vs Frequency**

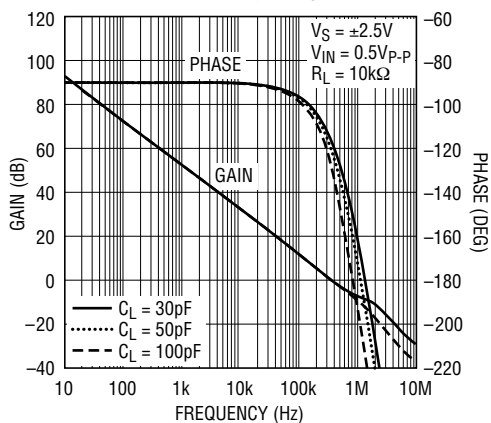


20545 G07

**Input Bias Current vs Temperature**

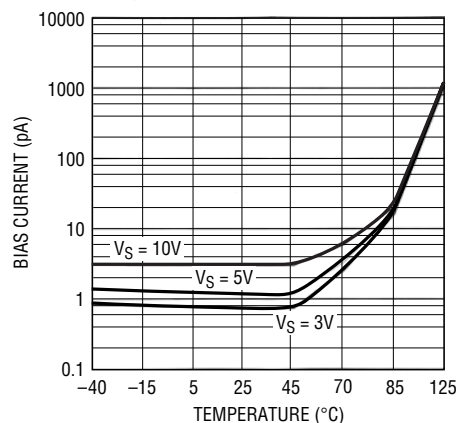

20545 G08

**Input Bias Current vs Input Common Mode Voltage**

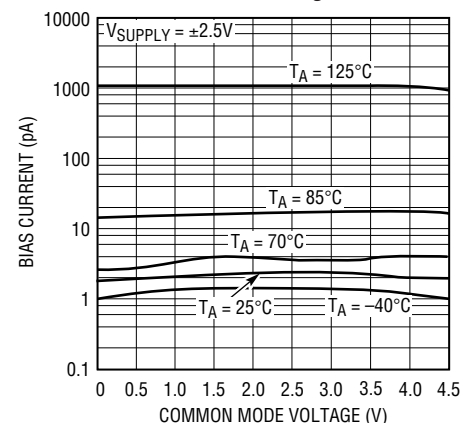


20545 G09

sn20545 20545fas

## TYPICAL PERFORMANCE CHARACTERISTICS


### Transient Response

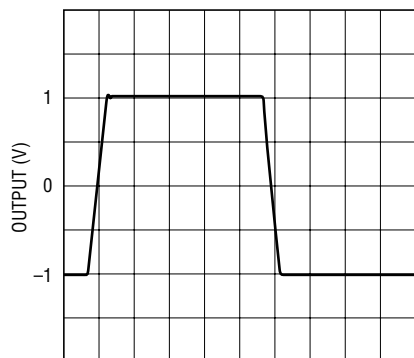

$A_V = 1$   
 $R_L = 100k$   
 $C_L = 50pF$   
 $V_S = \pm 2.5V$   
 $V_{IN} = 10kHz\ 2V_{p-p}$

20545 G10


### Output Overload Recovery

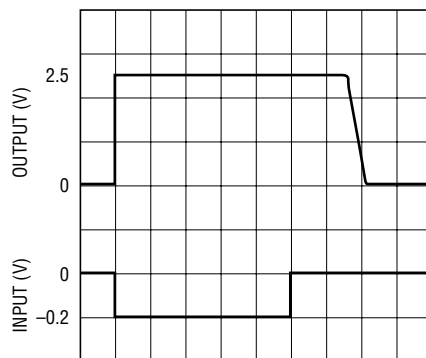

$A_V = -100$   
 $R_L = 100k$   
 $V_S = \pm 2.5V$

20545 G11


### Output Overload Recovery

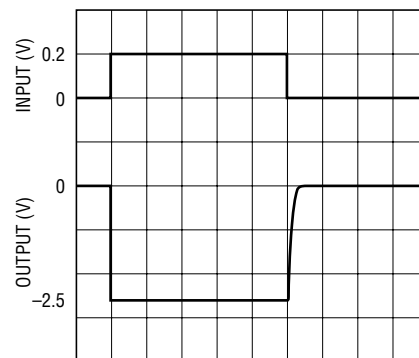

$A_V = -100$   
 $R_L = 100k$   
 $V_S = \pm 2.5V$

20545 G12


### Common Mode Input Range vs Supply Voltage

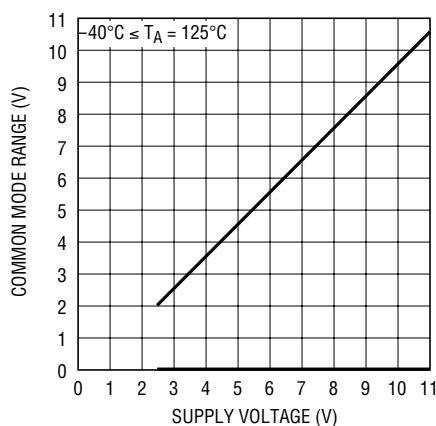

$-40^\circ C \leq T_A \leq 125^\circ C$


20545 G13

### LTC2054 Supply Current vs Supply Voltage

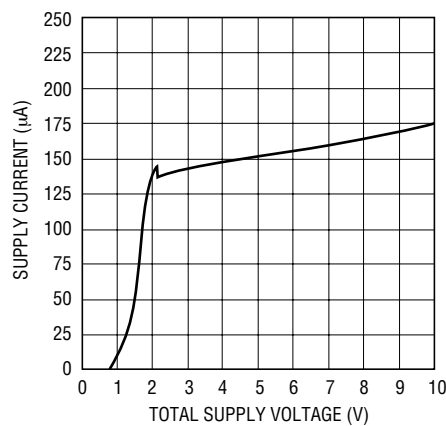


20545 G15

### LTC2054 Supply Current vs Temperature

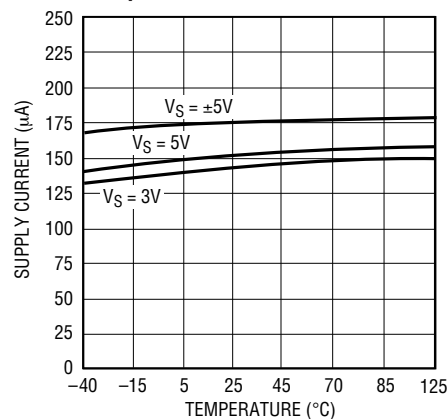


20545 G16

### LTC2055 Supply Current (Per Amplifier) vs Supply Voltage

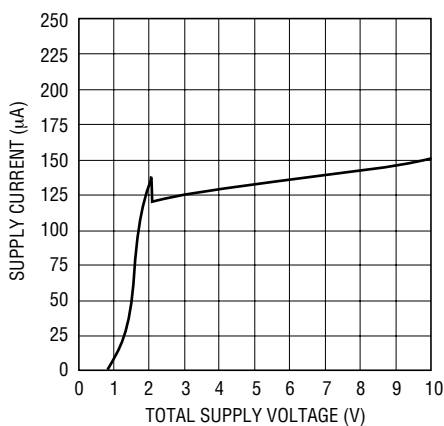


20545 G17

### LTC2055 Supply Current (Per Amplifier) vs Temperature

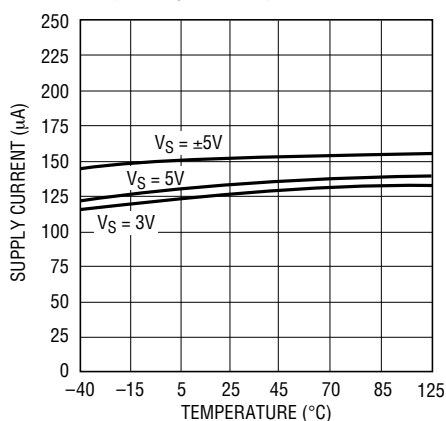

20545 G18


### Noise Spectrum

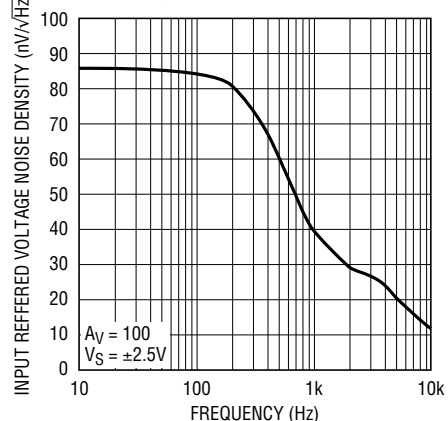


20545 G19

## TEST CIRCUITS

**Electrical Characteristics  
Test Circuit**

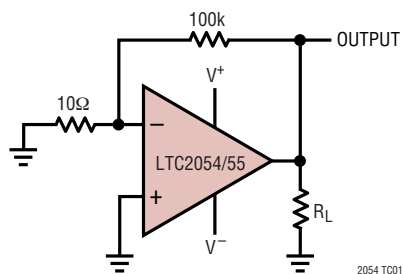

**DC-10Hz Noise Test Circuit**

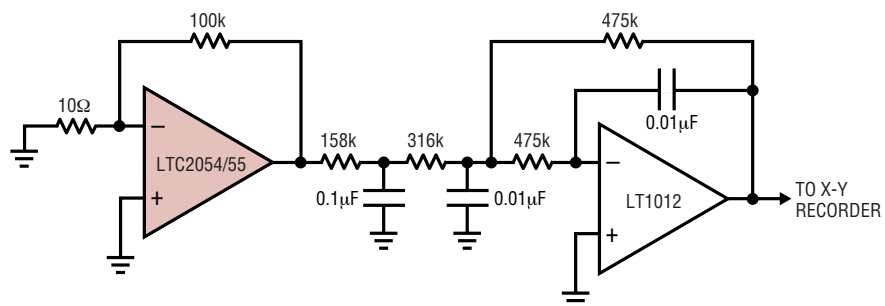

FOR 1Hz NOISE BW INCREASE ALL THE CAPACITORS BY A FACTOR OF 10.

## APPLICATIONS INFORMATION

### Clock Feedthrough, Input Bias Current

The LTC2054 and LTC2055 use auto-zeroing circuitry to achieve an almost zero DC offset over temperature, common mode voltage, and power supply voltage. The frequency of the clock used for auto-zeroing is typically 1.0kHz. The term clock feedthrough is broadly used to indicate visibility of this clock frequency in the op amp output spectrum. There are typically two types of clock feedthrough in auto zeroed op amps like the LTC2054/LTC2055.


The first form of clock feedthrough is caused by the settling of the internal sampling capacitor and is input referred; that is, it is multiplied by the closed loop gain of the op amp. This form of clock feedthrough is independent of the magnitude of the input source resistance or the magnitude of the gain setting resistors. The LTC2054/LTC2055 have a residue clock feedthrough of less than  $0.2\mu\text{V}_{\text{RMS}}$  input referred at 1.0kHz.

The second form of clock feedthrough is caused by the small amount of charge injection occurring during the sampling and holding of the op amp's input offset voltage. The current spikes are multiplied by the impedance seen at the input terminals of the op amp, appearing at the output multiplied by the closed loop gain of the op amp. To reduce this form of clock feedthrough, use smaller valued gain setting resistors and minimize the source resistance at the input. If the resistance seen at the inputs is less than 10k, this form of clock feedthrough is less than the amount of residue clock feedthrough from the first form described above.


Placing a capacitor across the feedback resistor reduces either form of clock feedthrough by limiting the bandwidth of the closed loop gain.

Input bias current is defined as the DC current into the input pins of the op amp. The same current spikes that

LTC2054/LTC2055 DC to 1Hz Noise

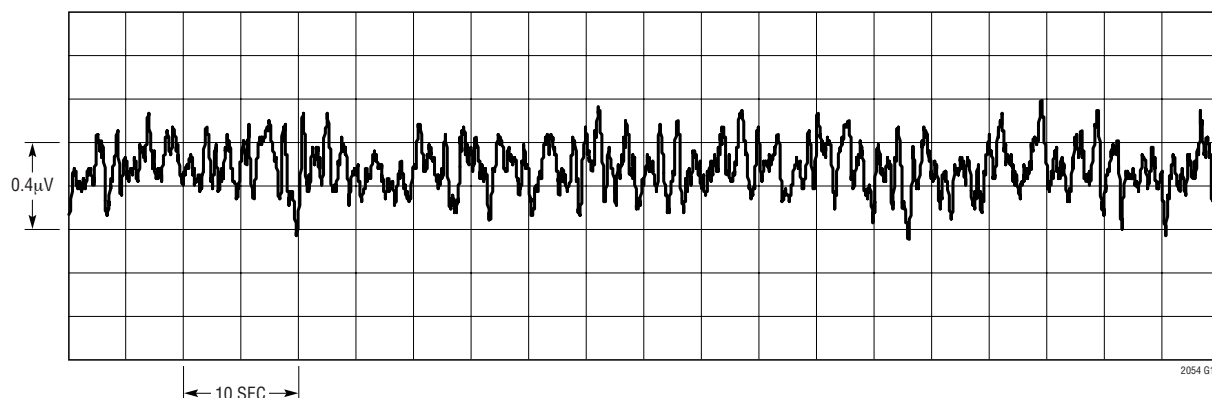

LTC2054/LTC2055 DC to 10Hz Noise

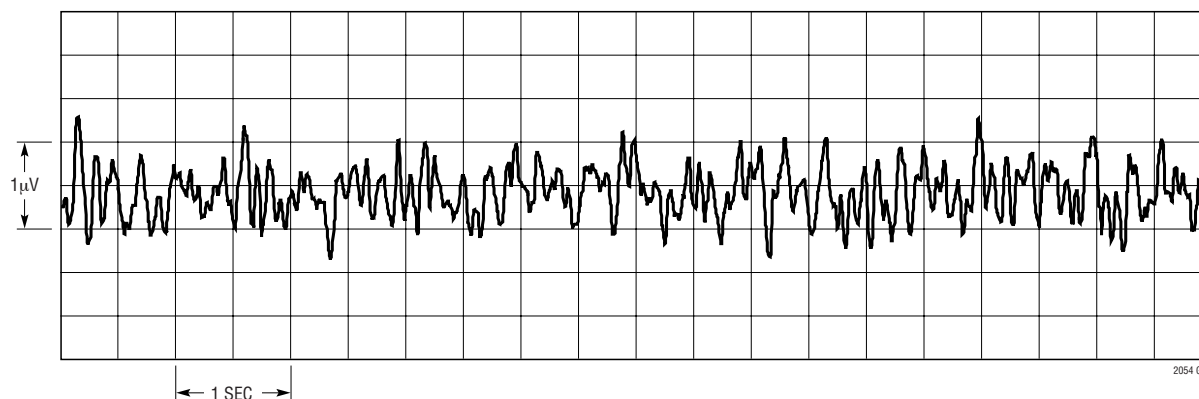

sn20545 20545fas

## APPLICATIONS INFORMATION


cause the second form of clock feedthrough described above, when averaged, dominate the DC input bias current of the op amp below 70°C.

At temperatures above 70°C, the leakage of the ESD protection diodes on the inputs increases the input bias currents of both inputs in the positive direction, while the current caused by the charge injection stays relatively constant. At elevated temperatures (above 70°C) the leakage current begins to dominate and both the negative and positive pins' input bias currents are in the positive direction (into the pins).

### Extended Common Mode Range


The LTC2054/LTC2055 input stage is designed to allow nearly rail-to-rail input common mode signals. In addition, signals that extend beyond the allowed input common mode range do not cause output phase inversion.

**Voltage Follower with Input Exceeding the Common Mode Range**

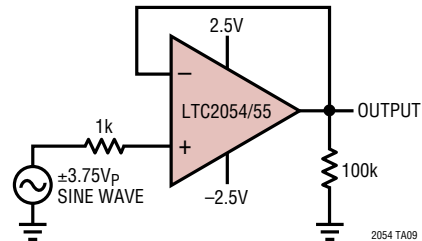

2054 TA09


**LTC2054/LTC2055  
Extended Common Mode Range**

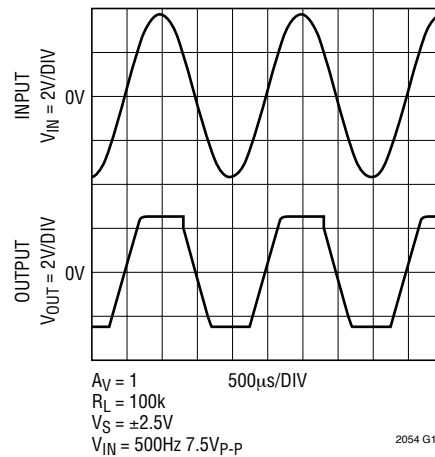

2054 G19

## TYPICAL APPLICATIONS


**Simple Differential Bridge Amplifier**

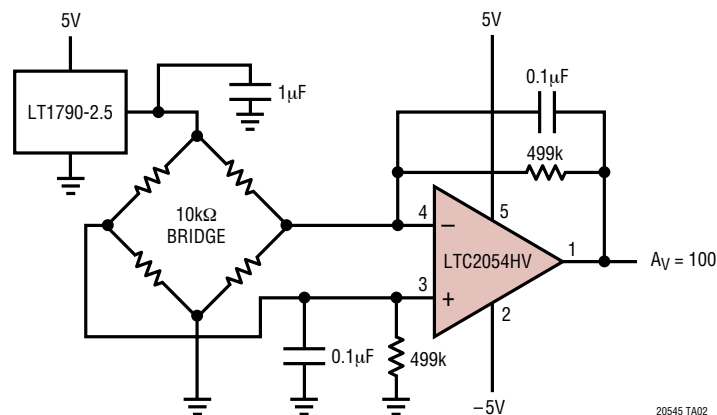


20545 TA02

## TYPICAL APPLICATIONS


## Ground Referred Precision Current Sources

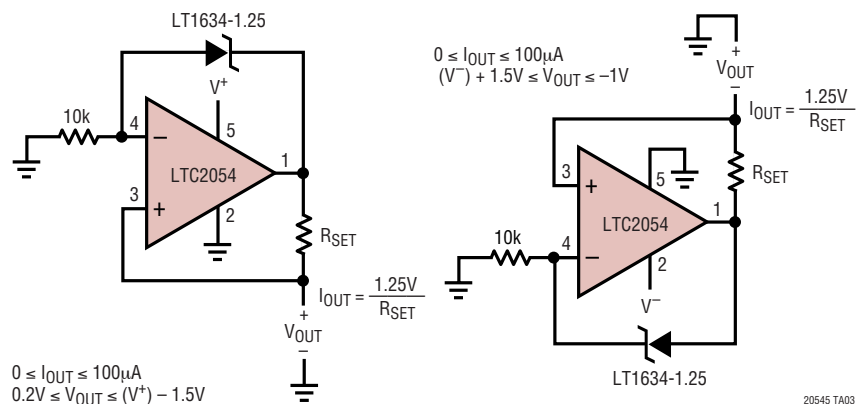

## Instrumentation Amplifier with 100V Common Mode Input Voltage

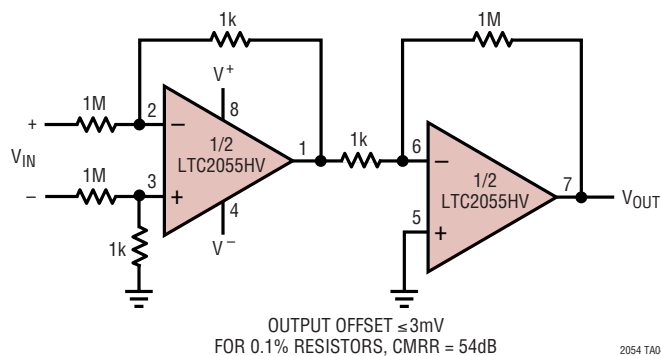


## Gain of 1001 Single Supply Instrumentation Amplifier

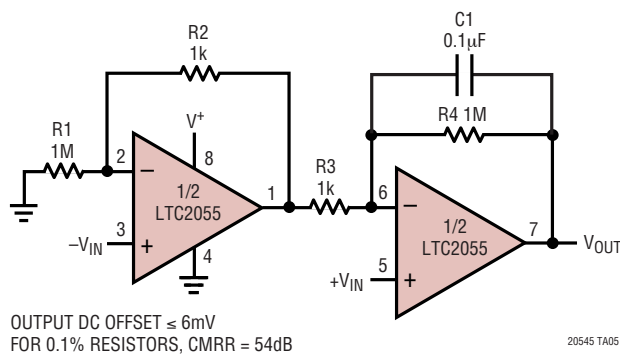


# PACKAGE DESCRIPTION


## DD Package 8-Lead Plastic DFN (3mm × 3mm) (Reference LTC DWG # 05-08-1698)

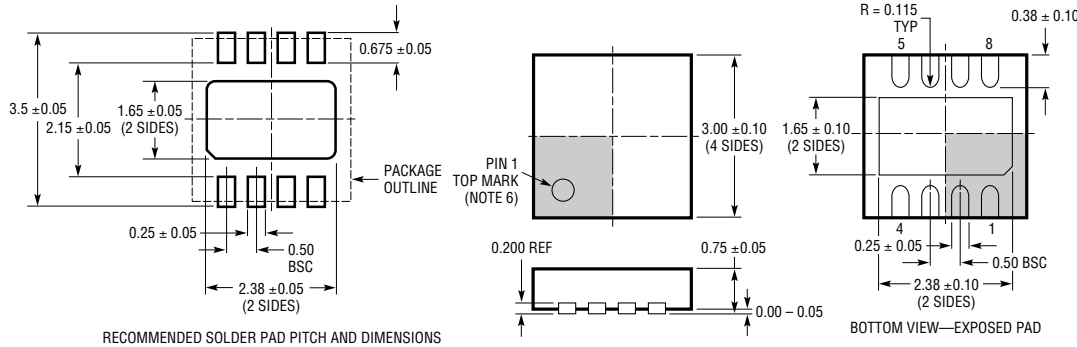

## MS8 Package 8-Lead Plastic MSOP (Reference LTC DWG # 05-08-1660)

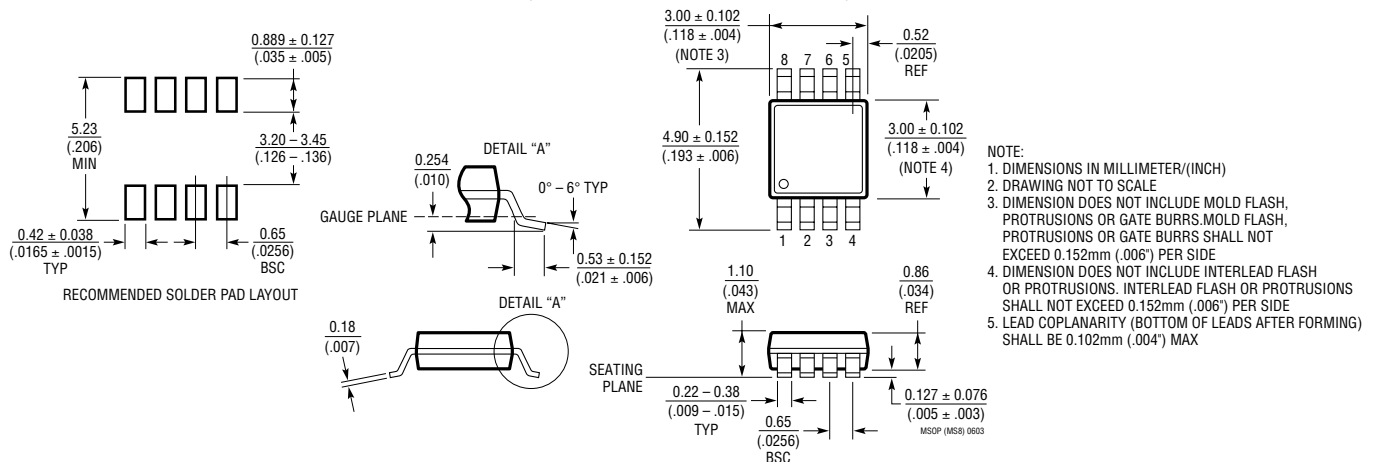


## S5 Package 5-Lead Plastic TSOT-23 (Reference LTC DWG # 05-08-1635)

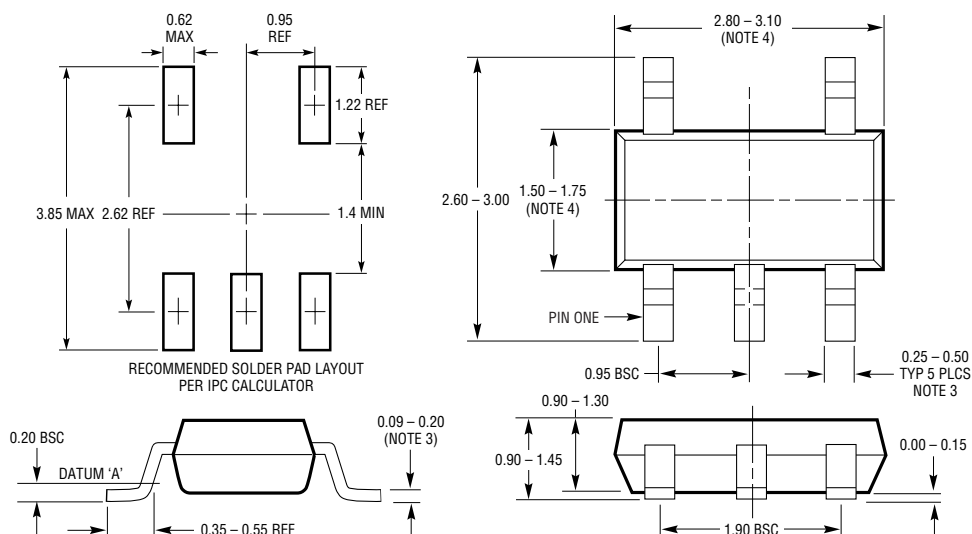


## TYPICAL APPLICATIONS


Low Power, Bidirectional 60V Precision Hi Side Current Sense

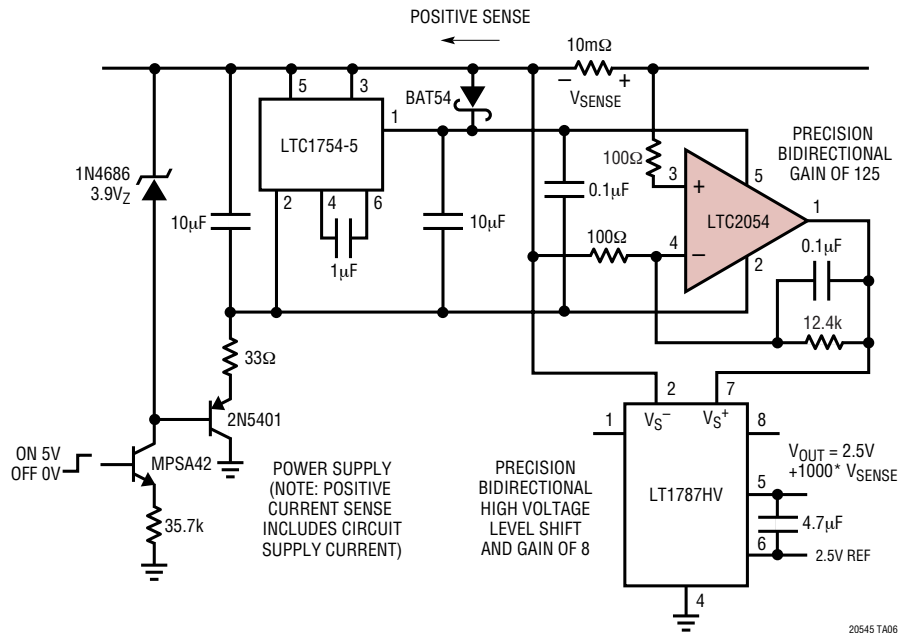

Precision Low Drift Integrator

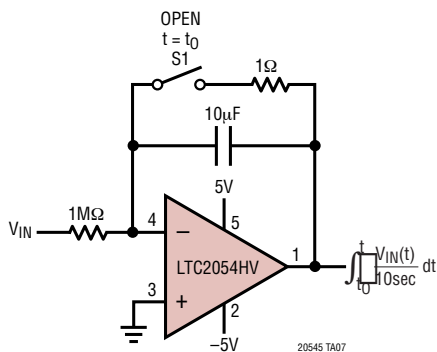

Ultra-Precision, Wide Dynamic Range 10Hz Bandwidth Photodiode Amplifier

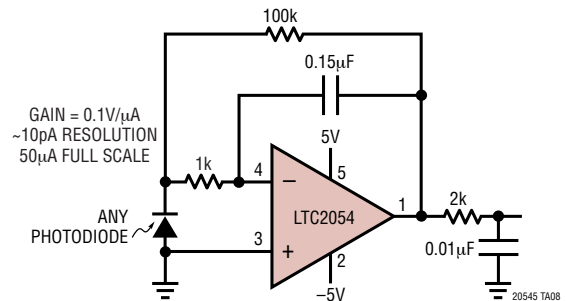

## RELATED PARTS

| PART NUMBER     | DESCRIPTION                                              | COMMENTS                                                                     |
|-----------------|----------------------------------------------------------|------------------------------------------------------------------------------|
| LTC1049         | Low Power Zero-Drift Op Amp                              | Low Supply Current 200μA                                                     |
| LTC1050         | Precision Zero-Drift Op Amp                              | Single Supply Operation 4.75V to 16V, Noise Tested and Guaranteed            |
| LTC1051/LTC1053 | Precision Zero-Drift Op Amp                              | Dual/Quad Version of the LTC1050                                             |
| LTC1150         | ±15V Zero-Drift Op Amp                                   | High Voltage Operation ±18V                                                  |
| LTC1152         | Rail-to-Rail Input and Output Zero-Drift Op Amp          | Single Zero-Drift Op Amp with Rail-to-Rail Input and Output and Shutdown     |
| LT1677          | Low Noise Rail-to-Rail Input and Output Precision Op Amp | V <sub>OS</sub> = 90μV, V <sub>S</sub> = 2.7V to 44V                         |
| LT1884/LT1885   | Rail-to-Rail Output Precision Op Amp                     | V <sub>OS</sub> = 50μV, I <sub>B</sub> = 400pA, V <sub>S</sub> = 2.7V to 40V |
| LTC2050         | Zero-Drift Op Amp                                        | Enhanced Output Drive Capability                                             |
| LTC2051/LTC2052 | Dual/Quad Zero-Drift Op Amp                              | Dual/Quad Version of the LTC2050 in MS8/GN16 Package                         |
| LTC2053         | Zero-Drift Instrumentation Amp                           | Rail-to-Rail Input                                                           |

sn20545 20545fas



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.