1.1A, 35MHz Current Feedback Amplifier

FEATURES

- **1.1A Minimum Output Drive Current**
- **35MHz Bandwidth, A_V = 2, R_L = 10Ω**
- **900V/µs Slew Rate, A_V = 2, R_L = 10Ω**
- High Input Impedance: 10MΩ
- Wide Supply Range: ±5V to ±15V (TO-220 and DD Packages)
- Enhanced θ_{JA} SO-16 Package for ±5V Operation
- Shutdown Mode: I_S < 200µA
- Adjustable Supply Current
- Stable with C_L = 10,000pF
- Operating Temperature Range: –40°C to 85°C
- Available in 7-Lead DD, TO-220 and
- 16-Lead SO Packages

APPLICATIONS

- Cable Drivers
- Buffers
- Test Equipment Amplifiers
- Video Amplifiers
- ADSL Drivers

DESCRIPTION

The LT®1210 is a current feedback amplifier with high output current and excellent large-signal characteristics. The combination of high slew rate, 1.1A output drive and ±15V operation enables the device to deliver significant power at frequencies in the 1MHz to 2MHz range. Short-circuit protection and thermal shutdown ensure the device's ruggedness. The LT1210 is stable with large capacitive loads, and can easily supply the large currents required by the capacitive loading. A shutdown feature switches the device into a high impedance and low supply current mode, reducing dissipation when the device is not in use. For lower bandwidth applications, the supply current can be reduced with a single external resistor.

The LT1210 is available in the TO-220 and DD packages for operation with supplies up to ±15V. For ±5V applications the device is also available in a low thermal resistance SO-16 package.

All registered trademarks and trademarks are the property of their respective owners.

TYPICAL APPLICATION

Twisted Pair Driver

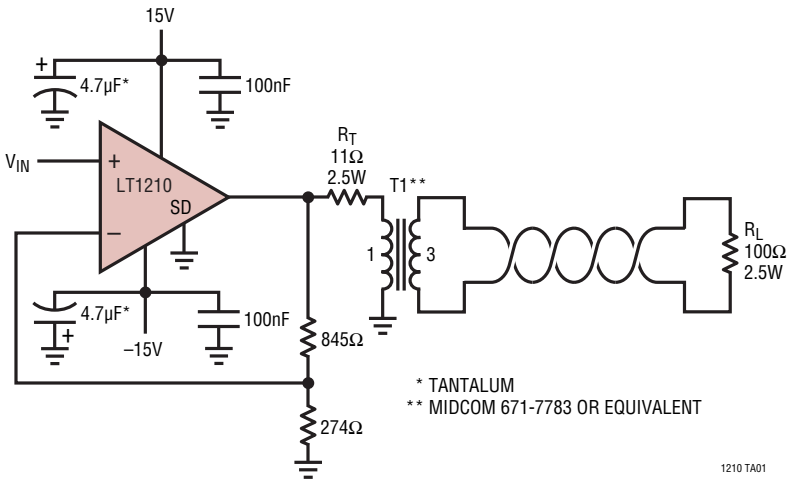

Total Harmonic Distortion vs Frequency

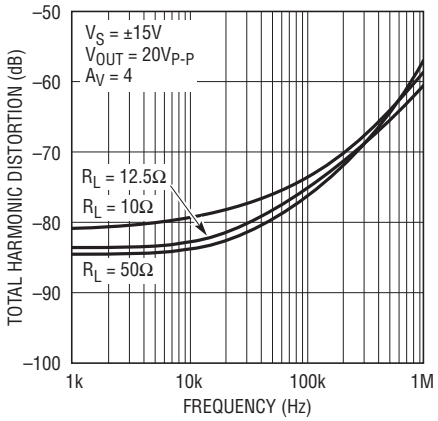

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage ..... ±18V
Input Current..... ±15mA
Output Short-Circuit Duration
(Note 2) .....Thermally Limited
Operating Temperature Range (Note 3)
LT1210C.....–40°C to 85°C
LT1210I.....–40°C to 85°C
Specified Temperature Range (Note 4)
LT1210C.....0°C to 70°C
LT1210I.....–40°C to 85°C
Junction Temperature ..... 150°C
Storage Temperature Range .....–65°C to 150°C
Lead Temperature (Soldering, 10 sec).....300°C

PIN CONFIGURATION



R PACKAGE
7-LEAD PLASTIC D
T_{JMAX} = 150°C, θ_{JA} = 25°C/WD



S PACKAGE
16-LEAD PLASTIC SO
T_{JMAX} = 150°C, θ_{JA} = 40°C/W (Note 5)

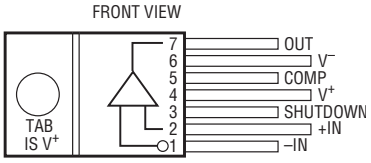

T7 PACKAGE
7-LEAD TO-220
T_{JMAX} = 150°C, θ_{JC} = 5°C/W

ORDER INFORMATION http://www.linear.com/product/LT1210#orderinfo

LEAD FREE FINISH	TAPE AND REEL	PART MARKING*	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LT1210CR#PBF	LT1210CR#TRPBF	LT1210R	7-Lead Plastic DDPAK	0°C to 70°C
LT1210IR#PBF	LT1210IR#TRPBF	LT1210R	7-Lead Plastic DDPAK	–40°C to 85°C
LT1210CS#PBF	LT1210CS#TRPBF	LT1210CS	16-Lead Plastic SOIC	0°C to 70°C
LT1210CT7#PBF	N/A	LT1210CT7	7-Lead TO-220	0°C to 70°C

Consult ADI Marketing for parts specified with wider operating temperature ranges. *The temperature grade is identified by a label on the shipping container.

For more information on lead free part marking, go to: http://www.linear.com/leadfree/
For more information on tape and reel specifications, go to: http://www.linear.com/tapeandreel/. Some packages are available in 500 unit reels through designated sales channels with #TRMPBF suffix.

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_{CM} = 0V, ±5V ≤ V_S ≤ ±15V, pulse tested, V_{SD} = 0V, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage		 ●		±3	±15 ±20	mV mV
	Input Offset Voltage Drift		●		10		µV/°C
I_{IN}^+	Noninverting Input Current		 ●		±2	±5 ±20	µA µA
I_{IN}^-	Inverting Input Current		 ●		±10	±60 ±100	µA µA
e_n	Input Noise Voltage Density	f = 10kHz, R_F = 1kΩ, R_G = 10Ω, R_S = 0Ω			3.0		nV/√Hz
$+i_n$	Input Noise Current Density	f = 10kHz, R_F = 1kΩ, R_G = 10Ω, R_S = 10kΩ			2.0		pA/√Hz
$–i_n$	Input Noise Current Density	f = 10kHz, R_F = 1kΩ, R_G = 10Ω, R_S = 10kΩ			40		pA/√Hz
R_{IN}	Input Resistance	V_{IN} = ±12V, V_S = ±15V V_{IN} = ±2V, V_S = ±5V	● ●	1.50 0.25	10 5		MΩ MΩ
C_{IN}	Input Capacitance	V_S = ±15V			2		pF
	Input Voltage Range	V_S = ±15V V_S = ±5V	● ●	±12 ±2	±13.5 ±3.5		V V
CMRR	Common Mode Rejection Ratio	V_S = ±15V, V_{CM} = ±12V V_S = ±5V, V_{CM} = ±2V	● ●	55 50	62 60		dB dB
	Inverting Input Current Common Mode Rejection	V_S = ±15V, V_{CM} = ±12V V_S = ±5V, V_{CM} = ±2V	● ●		0.1 0.1	10 10	µA/V µA/V
PSRR	Power Supply Rejection Ratio	V_S = ±5V to ±15V	●	60	77		dB
	Noninverting Input Current Power Supply Rejection	V_S = ±5V to ±15V	●		30	500	nA/V
	Inverting Input Current Power Supply Rejection	V_S = ±5V to ±15V	●		0.7	5	µA/V
A_V	Large-Signal Voltage Gain	T_A = 25°C, V_S = ±15V, V_{OUT} = ±10V, R_L = 10Ω (Note 5)		55	71		dB
		V_S = ±15V, V_{OUT} = ±8.5V, R_L = 10Ω (Note 5)	●	55	68		dB
		V_S = ±5V, V_{OUT} = ±2V, R_L = 10Ω	●	55	68		dB
R_{OL}	Transresistance, $\Delta V_{OUT}/\Delta I_{IN}^-$	T_A = 25°C, V_S = ±15V, V_{OUT} = ±10V, R_L = 10Ω (Note 5)		100	260		kΩ
		V_S = ±15V, V_{OUT} = ±8.5V, R_L = 10Ω (Note 5)	●	75	200		kΩ
		V_S = ±5V, V_{OUT} = ±2V, R_L = 10Ω	●	75	200		kΩ
V_{OUT}	Maximum Output Voltage Swing	T_A = 25°C, V_S = ±15V, R_L = 10Ω (Note 5)	 ●	±10.0 ±8.5	±11.5		V V
		T_A = 25°C, V_S = ±5V, R_L = 10Ω	 ●	±2.5 ±2.0	±3.0		V V
I_{OUT}	Maximum Output Current (Note 5)	V_S = ±15V, R_L = 1Ω	●	1.1	2.0		A
I_S	Supply Current (Note 5)	T_A = 25°C, V_S = ±15V, V_{SD} = 0V	 ●		35	50 65	mA mA
	Supply Current, R_{SD} = 51kΩ (Notes 5, 6)	T_A = 25°C, V_S = ±15V			15	30	mA
	Positive Supply Current, Shutdown	V_S = ±15V, V_{SD} = 15V	●			200	µA
	Output Leakage Current, Shutdown	V_S = ±15V, V_{SD} = 15V	●			10	µA

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_{CM} = 0V, ±5V ≤ V_S ≤ ±15V, pulse tested, V_{SD} = 0V, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
SR	Slew Rate (Note 7) Slew Rate (Note 5)	T_A = 25°C, A_V = 2, R_L = 400Ω T_A = 25°C, A_V = 2, R_L = 10Ω		400	900 900		V/µs V/µs
	Differential Gain (Notes 5, 8)	V_S = ±15V, R_F = 750Ω, R_G = 750Ω, R_L = 15Ω			0.3		%
	Differential Phase (Notes 5, 8)	V_S = ±15V, R_F = 750Ω, R_G = 750Ω, R_L = 15Ω			0.1		DEG
BW	Small-Signal Bandwidth	A_V = 2, V_S = ±15V, Peaking ≤ 1dB, R_F = R_G = 680Ω, R_L = 100Ω			55		MHz
		A_V = 2, V_S = ±15V, Peaking ≤ 1dB, R_F = R_G = 576Ω, R_L = 10Ω			35		MHz

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: A heat sink may be required to keep the junction temperature below the Absolute Maximum rating. Applies to short circuits to ground only. A short circuit between the output and either supply may permanently damage the part when operated on supplies greater than ±10V.

Note 3: The LT1210C/LT1210I are guaranteed functional over the temperature range of –40°C to 85°C.

Note 4: The LT1210C is guaranteed to meet specified performance from 0°C to 70°C. The LT1210C is designed, characterized and expected to meet specified performance from –40°C to 85°C but not tested or QA sampled at these temperatures. The LT1210I is guaranteed to meet specified performance from –40°C to 85°C.

Note 5: SO package is recommended for ±5V supplies only, as the power dissipation of the SO package limits performance on higher supplies. For supply voltages greater than ±5V, use the TO-220 or DD package. See Thermal Considerations in the Applications Information section for details on calculating junction temperature. If the maximum dissipation of the package is exceeded, the device will go into thermal shutdown.

Note 6: R_{SD} is connected between the Shutdown pin and ground.

Note 7: Slew rate is measured at ±5V on a ±10V output signal while operating on ±15V supplies with R_F = 1.5kΩ, R_G = 1.5kΩ and R_L = 400Ω.

Note 8: NTSC composite video with an output level of 2V.

SMALL-SIGNAL BANDWIDTH

R_{SD} = 0Ω, I_S = 30mA, V_S = ±5V, Peaking ≤ 1dB

A_V	R_L (Ω)	R_F (Ω)	R_G (Ω)	–3dB BW (MHz)
–1	150	549	549	52.5
	30	590	590	39.7
	10	619	619	26.5
1	150	604	–	53.5
	30	649	–	39.7
	10	619	–	27.4
2	150	562	562	51.8
	30	590	590	38.8
	10	576	576	27.4
10	150	392	43.2	48.4
	30	383	42.2	40.3
	10	215	23.7	36.0

R_{SD} = 0Ω, I_S = 35mA, V_S = ±15V, Peaking ≤ 1dB

A_V	R_L (Ω)	R_F (Ω)	R_G (Ω)	–3dB BW (MHz)
–1	150	604	604	66.2
	30	649	649	48.4
	10	665	665	46.5
1	150	750	–	56.8
	30	866	–	35.4
	10	845	–	24.7
2	150	665	665	52.5
	30	715	715	38.9
	10	576	576	35.0
10	150	453	49.9	61.5
	30	432	47.5	43.1
	10	221	24.3	45.5

R_{SD} = 7.5kΩ, I_S = 15mA, V_S = ±5V, Peaking ≤ 1dB

A_V	R_L (Ω)	R_F (Ω)	R_G (Ω)	–3dB BW (MHz)
–1	150	562	562	39.7
	30	619	619	28.9
	10	604	604	20.5
1	150	634	–	41.9
	30	681	–	29.7
	10	649	–	20.7
2	150	576	576	40.2
	30	604	604	29.6
	10	576	576	21.6
10	150	324	35.7	39.5
	30	324	35.7	32.3
	10	210	23.2	27.7

R_{SD} = 47.5kΩ, I_S = 18mA, V_S = ±15V, Peaking ≤ 1dB

A_V	R_L (Ω)	R_F (Ω)	R_G (Ω)	–3dB BW (MHz)
–1	150	619	619	47.8
	30	698	698	32.3
	10	698	698	22.2
1	150	732	–	51.4
	30	806	–	33.9
	10	768	–	22.5
2	150	634	634	48.4
	30	698	698	33.0
	10	681	681	22.5
10	150	348	38.3	46.8
	30	357	39.2	36.7
	10	205	22.6	31.3

R_{SD} = 15kΩ, I_S = 7.5mA, V_S = ±5V, Peaking ≤ 1dB

A_V	R_L (Ω)	R_F (Ω)	R_G (Ω)	–3dB BW (MHz)
–1	150	536	536	28.2
	30	549	549	20.0
	10	464	464	15.0
1	150	619	–	28.6
	30	634	–	19.8
	10	511	–	14.9
2	150	536	536	28.3
	30	549	549	19.9
	10	412	412	15.7
10	150	150	16.5	31.5
	30	118	13.0	27.1
	10	100	11.0	19.4

R_{SD} = 82.5kΩ, I_S = 9mA, V_S = ±15V, Peaking ≤ 1dB

A_V	R_L (Ω)	R_F (Ω)	R_G (Ω)	–3dB BW (MHz)
–1	150	590	590	34.8
	30	649	649	22.5
	10	576	576	16.3
1	150	715	–	35.5
	30	768	–	22.5
	10	649	–	16.1
2	150	590	590	35.3
	30	665	665	22.5
	10	549	549	16.8
10	150	182	20.0	37.2
	30	182	20.0	28.9
	10	100	11.0	22.5

TYPICAL PERFORMANCE CHARACTERISTICS

Bandwidth vs Supply Voltage

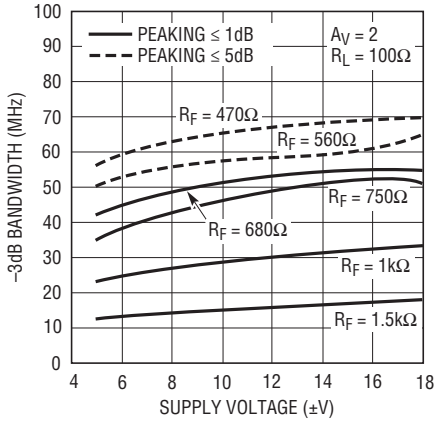

Bandwidth vs Supply Voltage

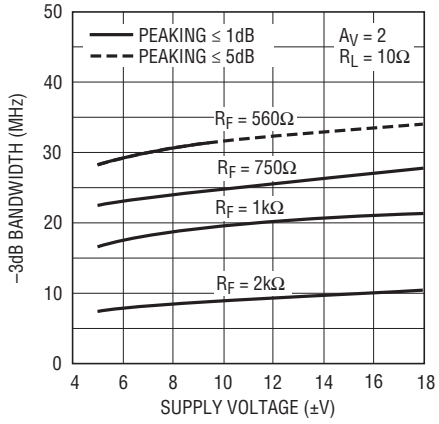

Bandwidth and Feedback Resistance vs Capacitive Load for Peaking ≤ 1dB

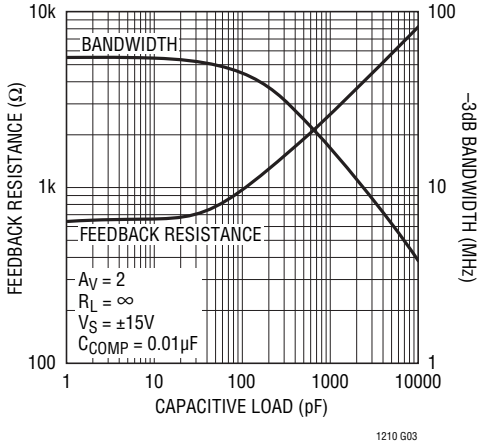

Bandwidth vs Supply Voltage

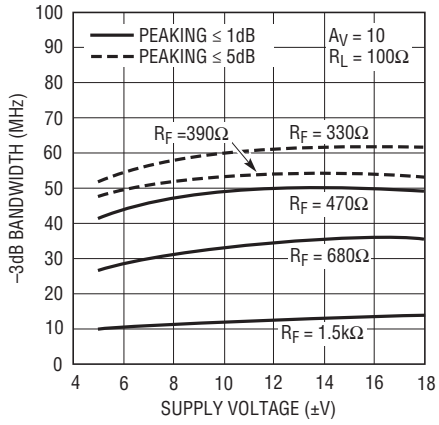

Bandwidth vs Supply Voltage

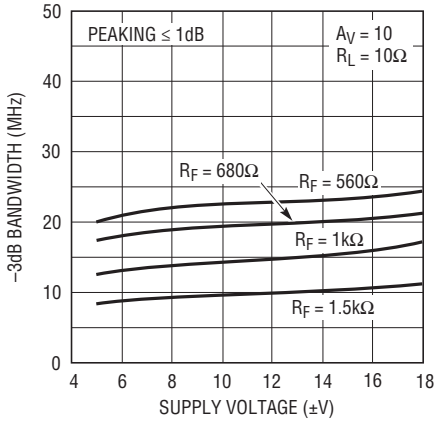

Bandwidth and Feedback Resistance vs Capacitive Load for Peaking ≤ 5dB

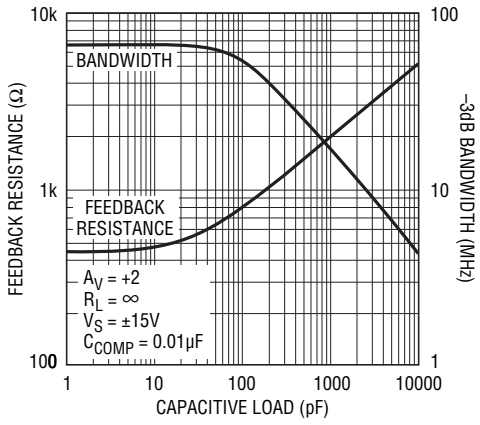

Differential Phase vs Supply Voltage

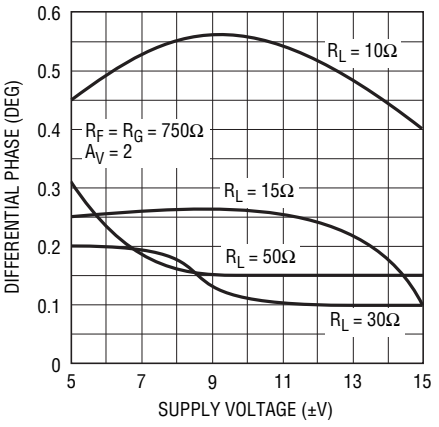

Differential Gain vs Supply Voltage

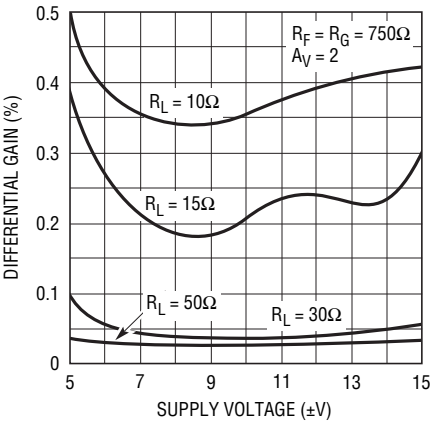

Spot Noise Voltage and Current vs Frequency

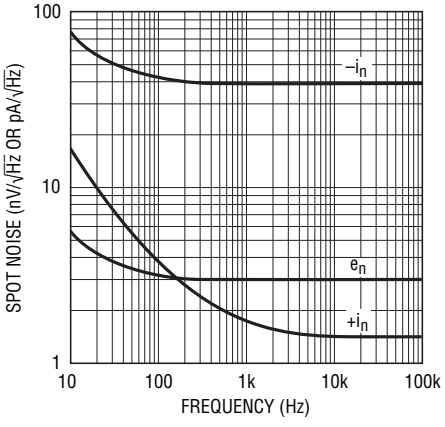

Rev C

TYPICAL PERFORMANCE CHARACTERISTICS

Supply Current vs Supply Voltage

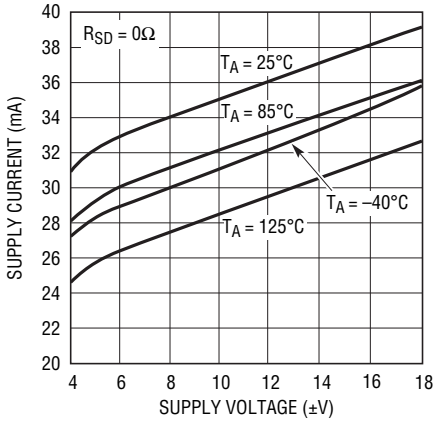

Supply Current vs Ambient Temperature, V_S = ±5V

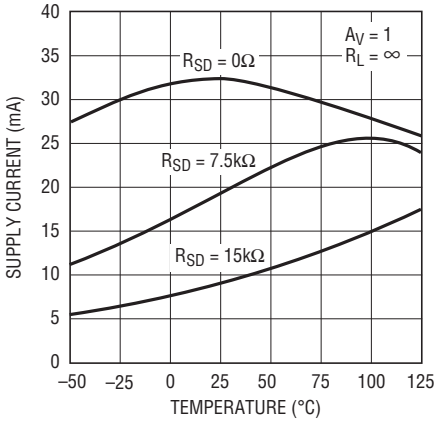

Supply Current vs Ambient Temperature, V_S = ±15V

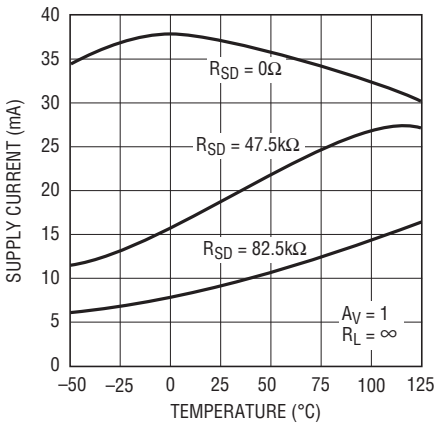

Supply Current vs Shutdown Pin Current

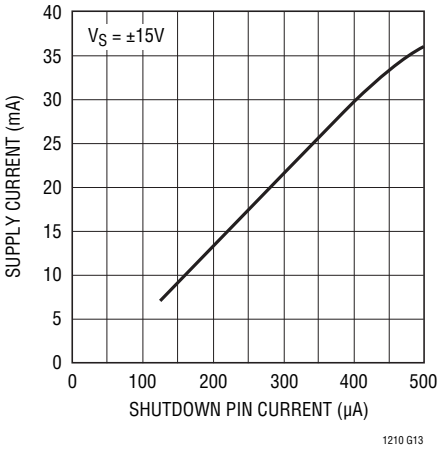

Input Common Mode Limit vs Junction Temperature

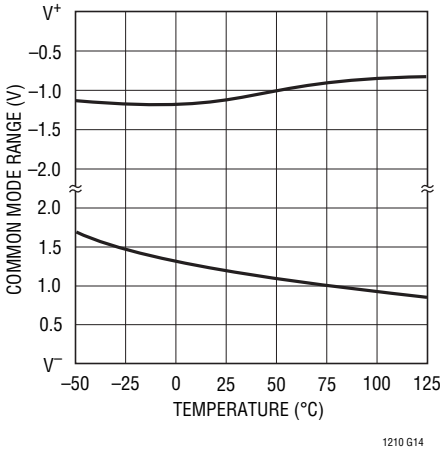

Output Short-Circuit Current vs Junction Temperature

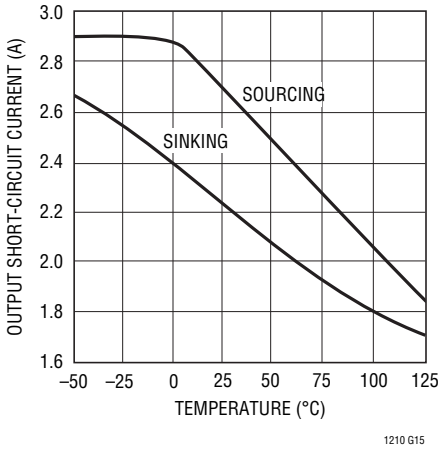

Output Saturation Voltage vs Junction Temperature

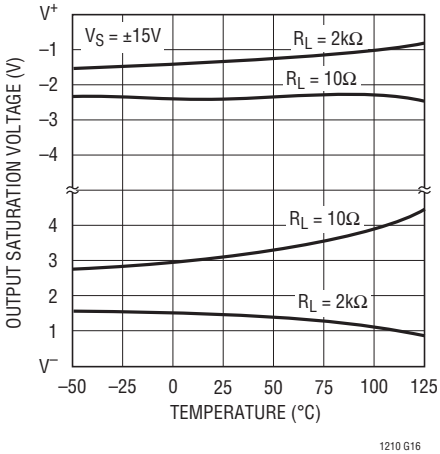

Power Supply Rejection Ratio vs Frequency

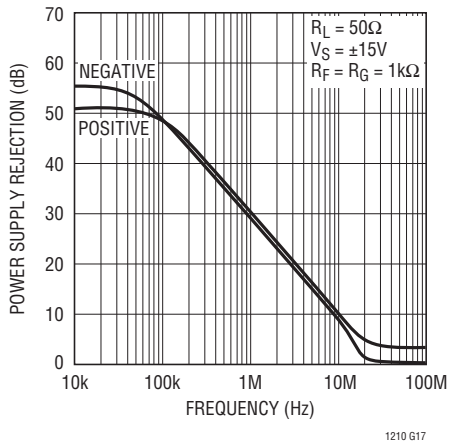

Supply Current vs Large-Signal Output Frequency (No Load)

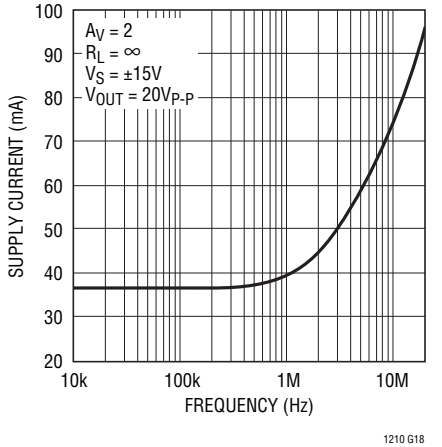

TYPICAL PERFORMANCE CHARACTERISTICS

Output Impedance vs Frequency

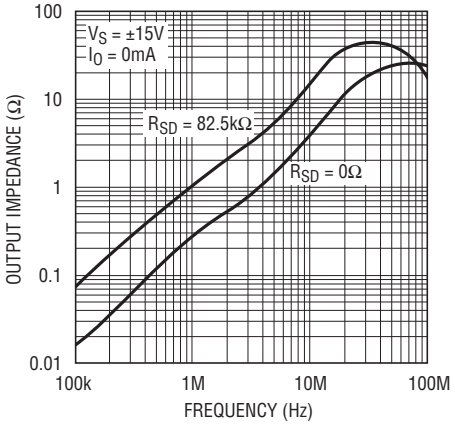

Output Impedance in Shutdown vs Frequency

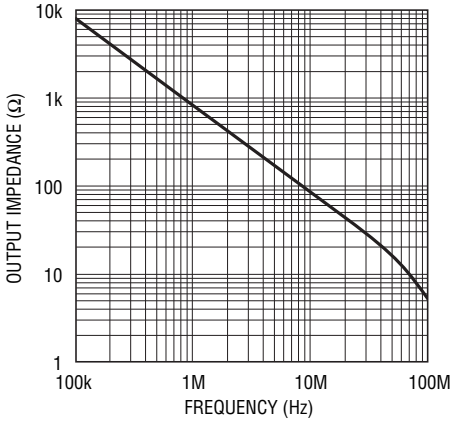

Large-Signal Voltage Gain vs Frequency

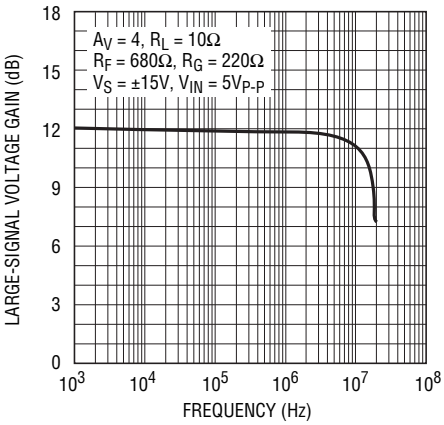

3rd Order Intercept vs Frequency

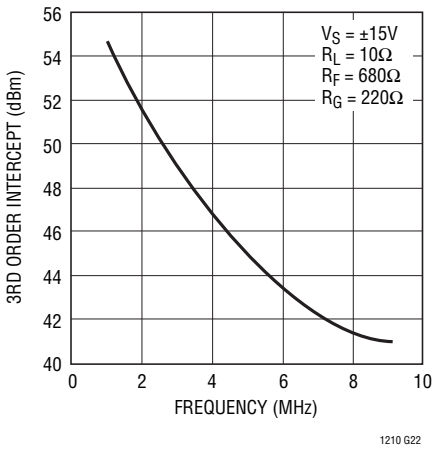

Test Circuit for 3rd Order Intercept

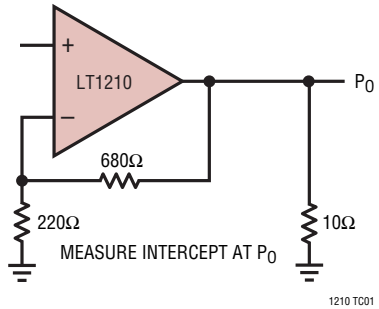

APPLICATIONS INFORMATION

The LT1210 is a current feedback amplifier with high output current drive capability. The device is stable with large capacitive loads and can easily supply the high currents required by capacitive loads. The amplifier will drive low impedance loads such as cables with excellent linearity at high frequencies.

Feedback Resistor Selection

The optimum value for the feedback resistors is a function of the operating conditions of the device, the load impedance and the desired flatness of response. The Typical AC Performance tables give the values which result in less than 1dB of peaking for various resistive loads and operating conditions. If this level of flatness is not required, a higher bandwidth can be obtained by use of a lower feedback resistor. The characteristic curves of Bandwidth vs Supply Voltage indicate feedback resistors for peaking up to 5dB. These curves use a solid line when the response has less than 1dB of peaking and a dashed line when the response has 1dB to 5dB of peaking. The curves stop where the response has more than 5dB of peaking.

For resistive loads, the COMP pin should be left open (see Capacitive Loads section).

Capacitive Loads

The LT1210 includes an optional compensation network for driving capacitive loads. This network eliminates most of the output stage peaking associated with capacitive loads, allowing the frequency response to be flattened. Figure 1 shows the effect of the network on a 200pF load. Without the optional compensation, there is a 6dB peak at 40MHz caused by the effect of the capacitance on the output stage. Adding a 0.01µF bypass capacitor between the output and the COMP pins connects the compensation and greatly reduces the peaking. A lower value feedback resistor can now be used, resulting in a response which is flat to ±1dB to 40MHz. The network has the greatest effect for C_L in the range of 0pF to 1000pF. The graphs of Bandwidth and Feedback Resistance vs Capacitive Load can be used to select the appropriate value of feedback resistor. The values shown are for 1dB and 5dB peaking at a gain of 2 with no resistive load. This is a worst-case condition, as the amplifier is more stable at higher gains and with some resistive load in parallel with the capacitance.

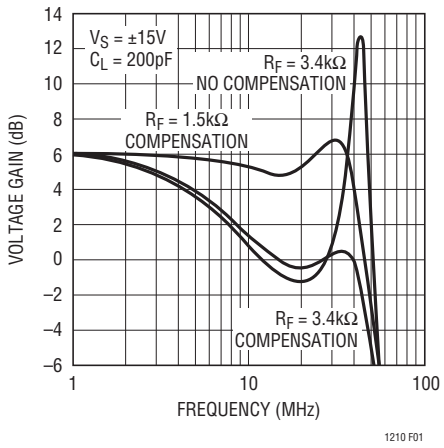

Figure 1.

Also shown is the –3dB bandwidth with the suggested feedback resistor vs the load capacitance.

Although the optional compensation works well with capacitive loads, it simply reduces the bandwidth when it is connected with resistive loads. For instance, with a 10Ω load, the bandwidth drops from 35MHz to 26MHz when the compensation is connected. Hence, the compensation was made optional. To disconnect the optional compensation, leave the COMP pin open.

Shutdown/Current Set

If the shutdown feature is not used, the SHUTDOWN pin must be connected to ground or V^-.

The Shutdown pin can be used to either turn off the biasing for the amplifier, reducing the quiescent current to less than 200µA, or to control the quiescent current in normal operation.

The total bias current in the LT1210 is controlled by the current flowing out of the Shutdown pin. When the Shutdown pin is open or driven to the positive supply, the part is shut down. In the shutdown mode, the output looks like a 70pF capacitor and the supply current is typically less than 100µA. The Shutdown pin is referenced to the positive supply through an internal bias circuit (see the Simplified Schematic). An easy way to force shutdown is to use open-drain (collector) logic. The circuit shown in Figure 2 uses a 74C906 buffer to interface between 5V logic and the LT1210. The switching time between the active and shutdown states is about 1µs. A 24kΩ pull-up

APPLICATIONS INFORMATION

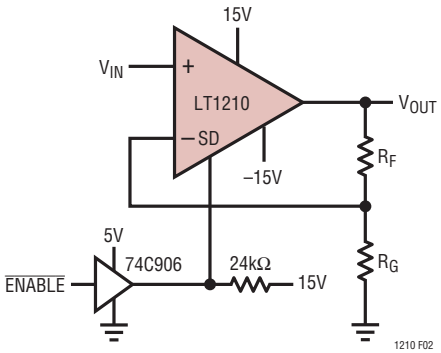

Figure 2. Shutdown Interface

resistor speeds up the turn-off time and ensures that the LT1210 is completely turned off. Because the pin is referenced to the positive supply, the logic used should have a breakdown voltage of greater than the positive supply voltage. No other circuitry is necessary as the internal circuit limits the Shutdown pin current to about 500µA. Figure 3 shows the resulting waveforms.

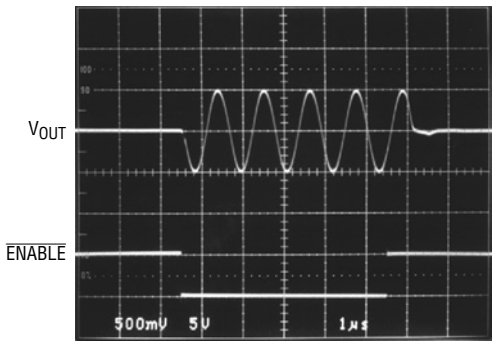

A_V = 1 $R_{PULL-UP}$ = 24k
R_F = 825Ω V_{IN} = 1V_{P-P}
R_L = 50Ω V_S = ±15V

Figure 3. Shutdown Operation

For applications where the full bandwidth of the amplifier is not required, the quiescent current of the device may be reduced by connecting a resistor from the Shutdown pin to ground. The quiescent current will be approximately 65 times the current in the Shutdown pin. The voltage across the resistor in this condition is $V^+ – 3V_{BE}$. For example, a 82kΩ resistor will set the quiescent supply current to 9mA with V_S = ±15V.

The photos in Figure 4 show the effect of reducing the quiescent supply current on the large-signal response. The quiescent current can be reduced to 9mA in the inverting configuration without much change in response. In noninverting mode, however, the slew rate is reduced as the quiescent current is reduced.

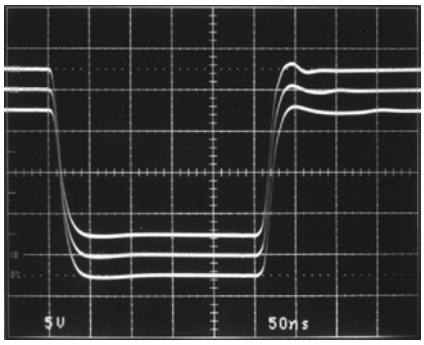

R_F = 750Ω I_Q = 9mA, 18mA, 36mA
R_L = 10Ω V_S = ±15V

(a) A_V = –1

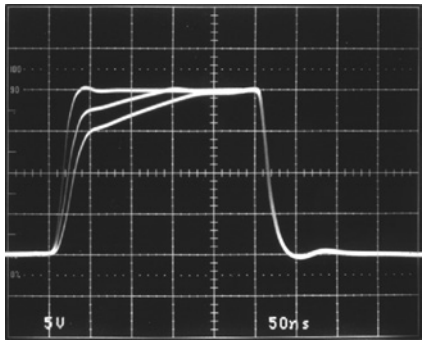

R_F = 750Ω I_Q = 9mA, 18mA, 36mA
R_L = 10Ω V_S = ±15V

(b) A_V = 2

Figure 4. Large-Signal Response vs I_Q

Slew Rate

Unlike a traditional op amp, the slew rate of a current feedback amplifier is not independent of the amplifier gain configuration. There are slew rate limitations in both the input stage and the output stage. In the inverting mode, and for higher gains in the noninverting mode, the signal amplitude on the input pins is small and the overall slew rate is that of the output stage. The input stage slew rate is related to the quiescent current and will be reduced as the supply current is reduced. The output slew rate is set by the value of the feedback resistors and the internal capacitance. Larger feedback resistors will reduce the slew rate as will lower supply voltages, similar to the way

APPLICATIONS INFORMATION

the bandwidth is reduced. The photos in Figure 5 show the large-signal response of the LT1210 for various gain configurations. The slew rate varies from 770V/µs for a gain of 1, to 1100V/µs for a gain of –1.

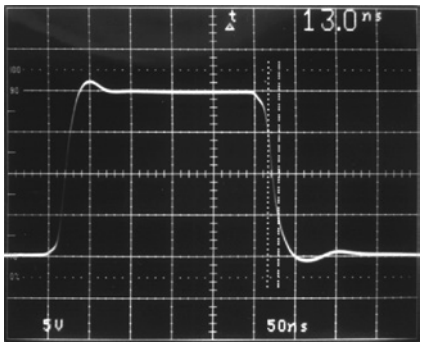

R_F = 825Ω V_S = ±15V
R_L = 10Ω
1210 F05a

(a) A_V = 1

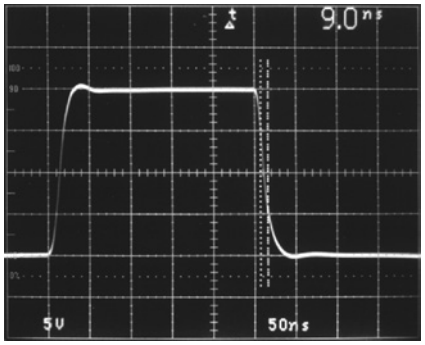

R_F = R_G = 750Ω V_S = ±15V
R_L = 10Ω
1210 F05b

(b) A_V = –1

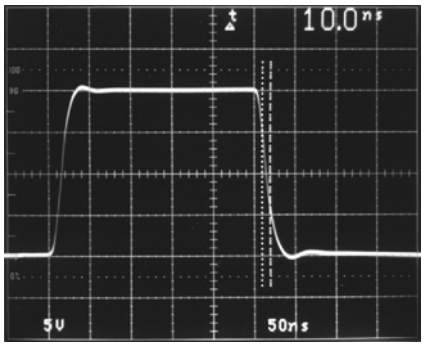

R_F = R_G = 750Ω V_S = ±15V
R_L = 10Ω
1210 F05c

(c) A_V = 2

Figure 5. Large-Signal Response

When the LT1210 is used to drive capacitive loads, the available output current can limit the overall slew rate. In the fastest configuration, the LT1210 is capable of a slew rate of over 1V/ns. The current required to slew a capacitor at this rate is 1mA per picofarad of capacitance, so 10,000pF would require 10A! The photo (Figure 6) shows the large-signal behavior with C_L = 10,000pF. The slew rate is about 150V/µs, determined by the current limit of 1.5A.

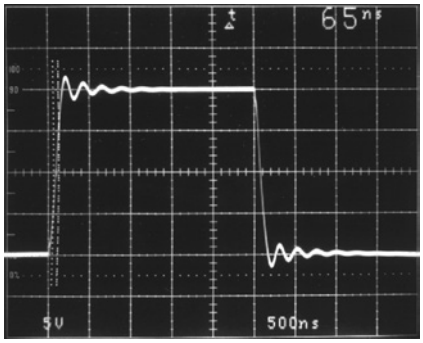

R_F = R_G = 3kΩ V_S = ±15V
R_L = ∞
1210 F06

Figure 6. Large-Signal Response, C_L = 10,000pF

Differential Input Signal Swing

The differential input swing is limited to about ±6V by an ESD protection device connected between the inputs. In normal operation, the differential voltage between the input pins is small, so this clamp has no effect; however, in the shutdown mode the differential swing can be the same as the input swing. The clamp voltage will then set the maximum allowable input voltage. To allow for some margin, it is recommended that the input signal be less than ±5V when the device is shut down.

Capacitance on the Inverting Input

Current feedback amplifiers require resistive feedback from the output to the inverting input for stable operation. Take care to minimize the stray capacitance between the output and the inverting input. Capacitance on the inverting input to ground will cause peaking in the frequency response (and overshoot in the transient response), but it does not degrade the stability of the amplifier.

APPLICATIONS INFORMATION

Power Supplies

The LT1210 will operate from single or split supplies from ±5V (10V total) to ±15V (30V total). It is not necessary to use equal value split supplies, however the offset voltage and inverting input bias current will change. The offset voltage changes about 500µV per volt of supply mismatch. The inverting bias current can change as much as 5µA per volt of supply mismatch, though typically the change is less than 0.5µA per volt.

Power Supply Bypassing

To obtain the maximum output and the minimum distortion from the LT1210, the power supply rails should be well bypassed. For example, with the output stage pouring 1A current peaks into the load, a 1Ω power supply impedance will cause a droop of 1V, reducing the available output swing by that amount. Surface mount tantalum and ceramic capacitors make excellent low ESR bypass elements when placed close to the chip. For frequencies above 100kHz, use 1µF and 100nF ceramic capacitors. If significant power must be delivered below 100kHz, capacitive reactance becomes the limiting factor. Larger ceramic or tantalum capacitors, such as 4.7µF, are recommended in place of the 1µF unit mentioned above.

Inadequate bypassing is evidenced by reduced output swing and “distorted” clipping effects when the output is driven to the rails. If this is observed, check the supply pins of the device for ripple directly related to the output waveform. Significant supply modulation indicates poor bypassing.

Thermal Considerations

The LT1210 contains a thermal shutdown feature which protects against excessive internal (junction) temperature. If the junction temperature of the device exceeds the protection threshold, the device will begin cycling between normal operation and an off state. The cycling is not harmful to the part. The thermal cycling occurs at a slow rate, typically 10ms to several seconds, which depends on the power dissipation and the thermal time constants of the package and heat sinking. Raising the ambient temperature until the device begins thermal shutdown gives a good indication of how much margin there is in the thermal design.

For surface mount devices heat sinking is accomplished by using the heat spreading capabilities of the PC board and its copper traces. Experiments have shown that the heat spreading copper layer does not need to be electrically connected to the tab of the device. The PCB material can be very effective at transmitting heat between the pad area attached to the tab of the device, and a ground or power plane layer either inside or on the opposite side of the board. Although the actual thermal resistance of the PCB material is high, the length/area ratio of the thermal resistance between the layer is small. Copper board stiffeners and plated through holes can also be used to spread the heat generated by the device.

Table 1 and Table 2 list thermal resistance for each package. For the TO-220 package, thermal resistance is given for junction-to-case only since this package is usually mounted to a heat sink. Measured values of thermal resistance for several different board sizes and copper areas are listed for each surface mount package. All measurements were taken in still air on 3/32" FR-4 board with 2 oz copper. This data can be used as a rough guideline in estimating thermal resistance. The thermal resistance for each application will be affected by thermal interactions with other components as well as board size and shape.

Table 1. R Package, 7-Lead DD

COPPER AREA		BOARD AREA	THERMAL RESISTANCE (JUNCTION-TO-AMBIENT)
TOPSIDE*	BACKSIDE		
2500 sq. mm	2500 sq. mm	2500 sq. mm	25°C/W
1000 sq. mm	2500 sq. mm	2500 sq. mm	27°C/W
125 sq. mm	2500 sq. mm	2500 sq. mm	35°C/W

*Tab of device attached to topside copper

Table 2. Fused 16-Lead SO Package

COPPER AREA		BOARD AREA	THERMAL RESISTANCE (JUNCTION-TO-AMBIENT)
TOPSIDE*	BACKSIDE		
2500 sq. mm	2500 sq. mm	5000 sq. mm	40°C/W
1000 sq. mm	2500 sq. mm	3500 sq. mm	46°C/W
600 sq. mm	2500 sq. mm	3100 sq. mm	48°C/W
180 sq. mm	2500 sq. mm	2680 sq. mm	49°C/W
180 sq. mm	1000 sq. mm	1180 sq. mm	56°C/W
180 sq. mm	600 sq. mm	780 sq. mm	58°C/W
180 sq. mm	300 sq. mm	480 sq. mm	59°C/W
180 sq. mm	100 sq. mm	280 sq. mm	60°C/W
180 sq. mm	0 sq. mm	180 sq. mm	61°C/W

Rev C

APPLICATIONS INFORMATION

T7 Package, 7-Lead TO-220

Thermal Resistance (Junction-to-Case) = 5°C/W

Calculating Junction Temperature

The junction temperature can be calculated from the equation:

$$T_J = (P_D)(\theta_{JA}) + T_A$$

where:

T_J = Junction Temperature

T_A = Ambient Temperature

P_D = Device Dissipation

θ_{JA} = Thermal Resistance (Junction-to-Ambient)

As an example, calculate the junction temperature for the circuit in Figure 7 for the SO and R packages assuming a 70°C ambient temperature.

The device dissipation can be found by measuring the supply currents, calculating the total dissipation and then subtracting the dissipation in the load and feedback network.

$$P_D = (76mA)(10V) - (1.4V)^2/\ 10 = 0.56W$$

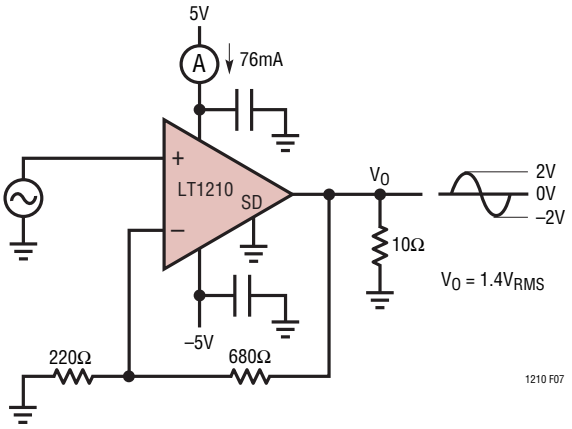

Figure 7.

then:

$T_J = (0.56W)(46°C/W) + 70°C = 96°C$
for the SO package with 1000 sq. mm topside heat sinking

$T_J = (0.56W)(27°C/W) + 70°C = 85°C$
for the R package with 1000 sq. mm topside heat sinking

Since the maximum junction temperature is 150°C, both packages are clearly acceptable.

TYPICAL APPLICATIONS

Precision × 10 High Current Amplifier

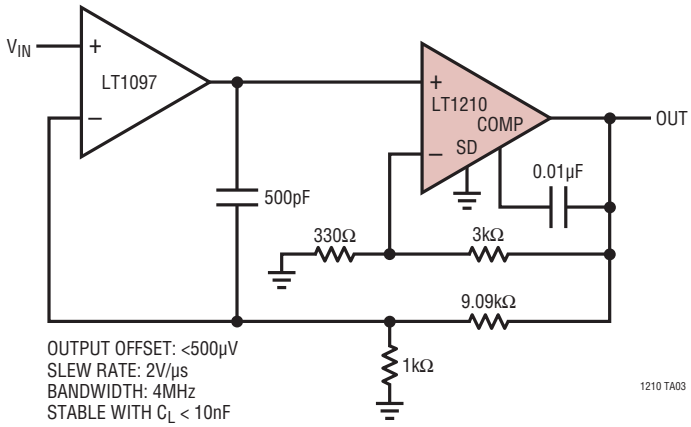

OUTPUT OFFSET: <500µV
SLEW RATE: 2V/µs
BANDWIDTH: 4MHz
STABLE WITH C_L < 10nF

CMOS Logic to Shutdown Interface

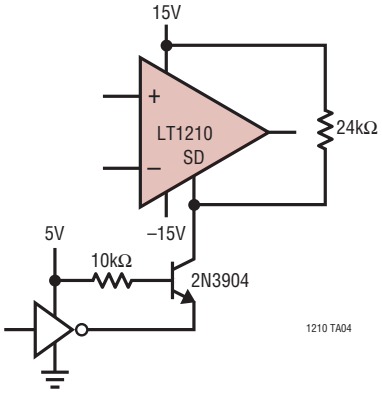

Distribution Amplifier

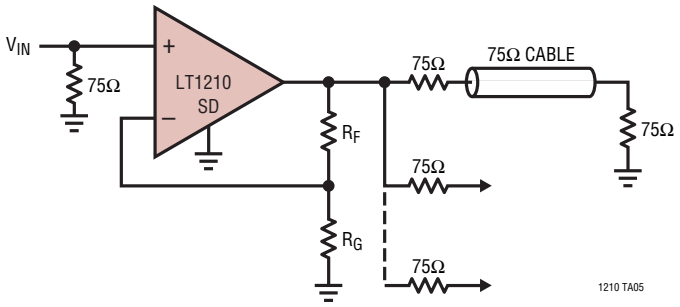

Buffer A_V = 1



* OPTIONAL, USE WITH CAPACITIVE LOADS

** VALUE OF R_F DEPENDS ON SUPPLY VOLTAGE AND LOADING. SELECT FROM TYPICAL AC PERFORMANCE TABLE OR DETERMINE EMPIRICALLY

SIMPLIFIED SCHEMATIC

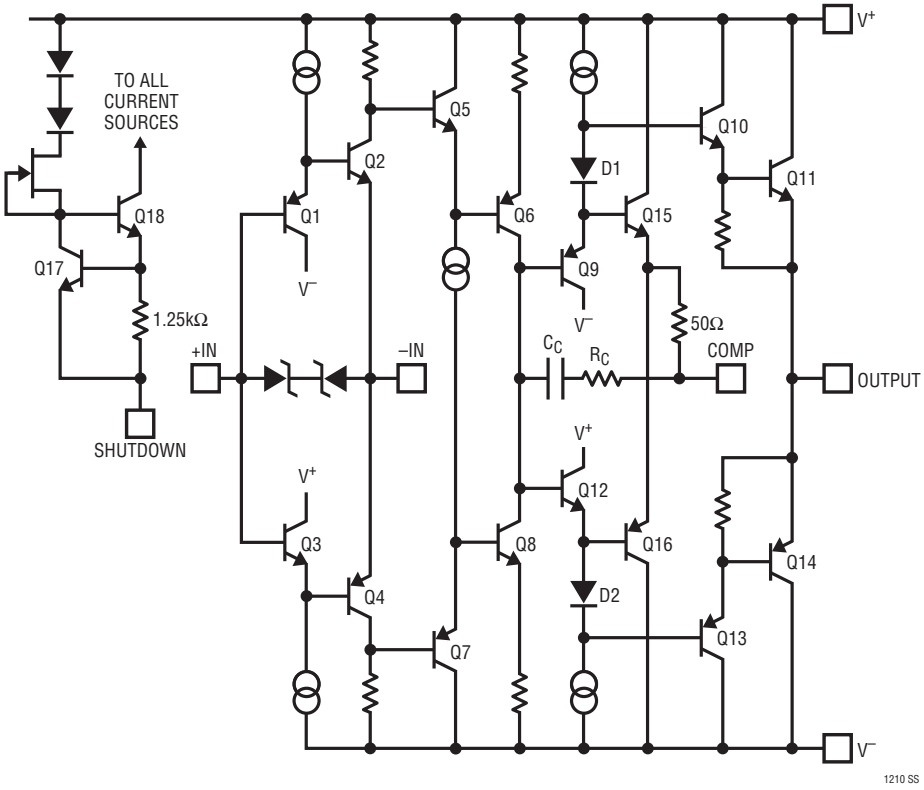

PACKAGE DESCRIPTION

Please refer to http://www.linear.com/product/LT1210#packaging for the most recent package drawings.

R Package
7-Lead Plastic DD Pak
(Reference LTC DWG # 05-08-1462 Rev G)

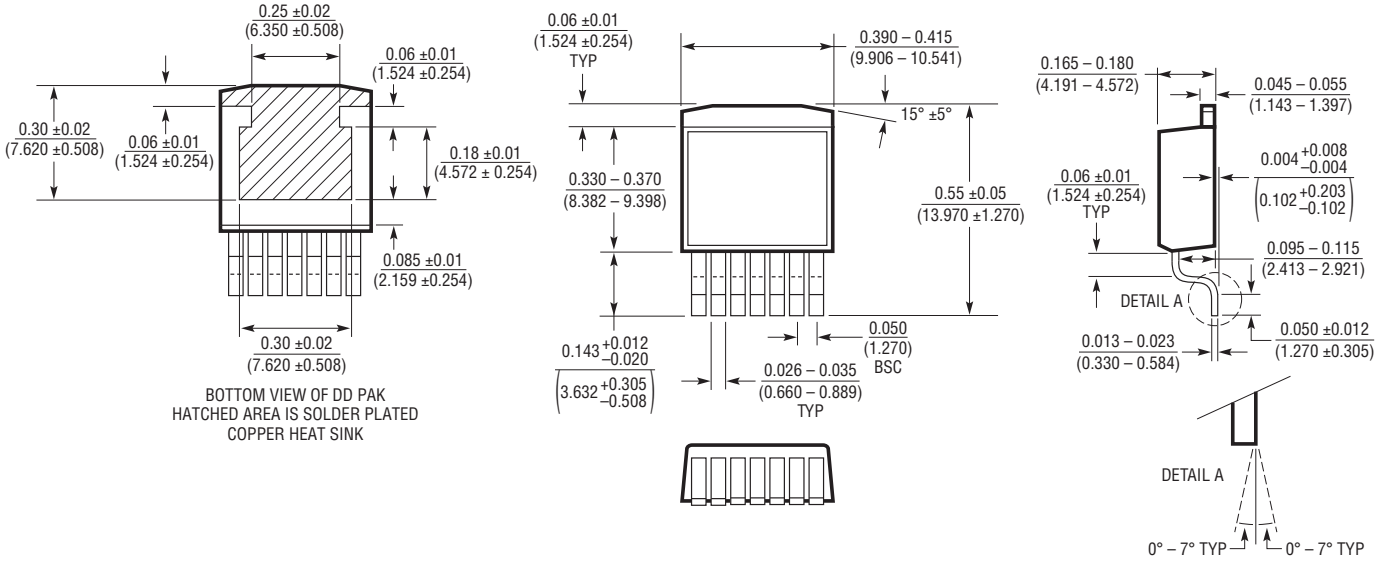

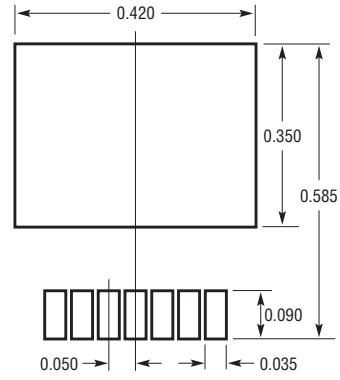

RECOMMENDED SOLDER PAD LAYOUT

NOTE:
1. DIMENSIONS IN INCH/(MILLIMETER)
2. DRAWING NOT TO SCALE

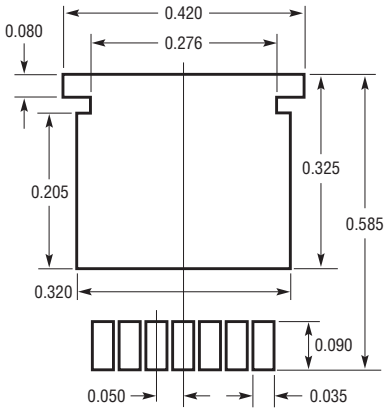

RECOMMENDED SOLDER PAD LAYOUT
FOR THICKER SOLDER PASTE APPLICATIONS

R (DD7) 0416 REV G

PACKAGE DESCRIPTION

Please refer to http://www.linear.com/product/LT1210#packaging for the most recent package drawings.

S Package
16-Lead Plastic Small Outline (Narrow .150 Inch)
(Reference LTC DWG # 05-08-1610 Rev G)

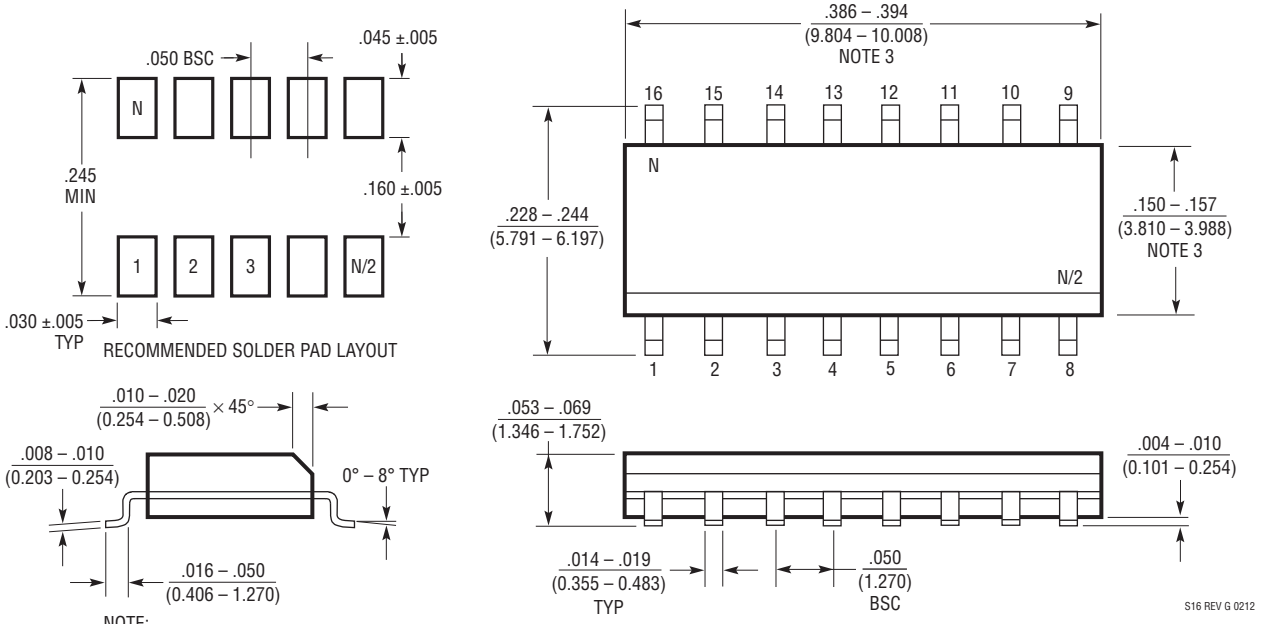

NOTE:
1. DIMENSIONS IN $\frac{\text{INCHES}}{(\text{MILLIMETERS})}$
2. DRAWING NOT TO SCALE
3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
   MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)
4. PIN 1 CAN BE BEVEL EDGE OR A DIMPLE

PACKAGE DESCRIPTION

Please refer to http://www.linear.com/product/LT1210#packaging for the most recent package drawings.

T7 Package
7-Lead Plastic TO-220 (Standard)
(Reference LTC DWG # 05-08-1422)

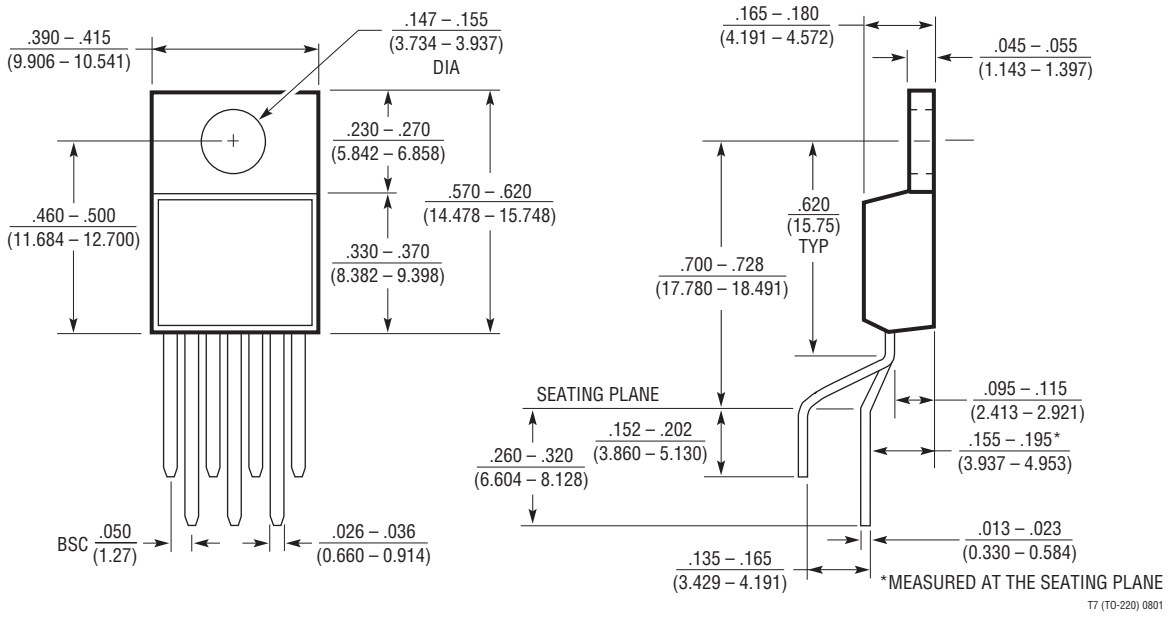

REVISION HISTORY (Revision history begins at Rev B)

REV	DATE	DESCRIPTION	PAGE NUMBER
B	11/15	Added LT1210IR#PBF	1 to 3, 20
C	04/18	Added Ohmic symbols	1 to 20

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

TYPICAL APPLICATION

Wideband 9W Bridge Amplifier

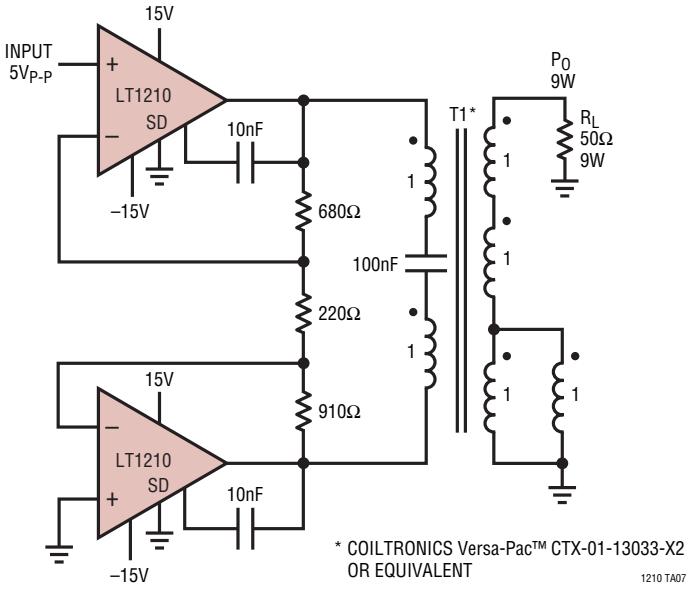

Frequency Response

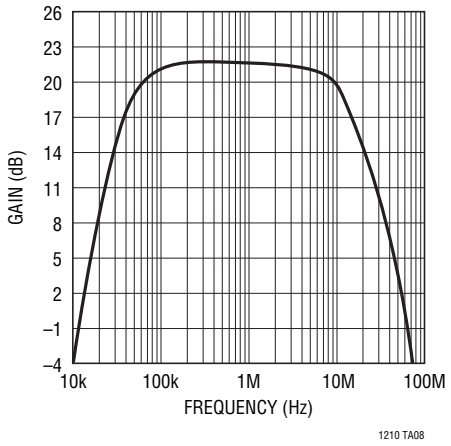

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1010	Fast ±150mA Power Buffer	20MHz Bandwidth, 75V/µs Slew Rate
LT1166	Power Output Stage Automatic Bias System	Sets Class AB Bias Currents for High Voltage/High Power Output Stages
LT1206	Single 250mA, 60MHz Current Feedback Amplifier	Shutdown Function, Stable with C_L = 10,000pF, 900V/µs Slew Rate
LT1207	Dual 250mA, 60MHz Current Feedback Amplifier	Dual Version of LT1206
LT1227	Single 140MHz Current Feedback Amplifier	Shutdown Function, 1100V/µs Slew Rate
LT1360	Single 50MHz, 800V/µs Op Amp	Voltage Feedback, Stable with C_L = 10,000pF
LT1363	Single 70MHz, 1000V/µs Op Amp	Voltage Feedback, Stable with C_L = 10,000pF
LTC6090/ LTC6090-5	140V Operational Amplifier	50pA I_B, 1.6mV V_{OS}, 9.5V to 140V V_S, 4.5µA I_S RR Output
LTC6091	140V Operational Amplifier	50pA I_B, 1.6mV V_{OS}, 9.5V to 140V V_S, 4.5µA I_S RR Output

© ANALOG DEVICES, INC. 1996-2018

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.