

**LC75281E****Parametric Equalizer System****Overview**

The LC75281E is a four-band stereo parametric equalizer. A parametric equalizer is a fully general equalizer that allows all three parameters that define an equalizer's characteristics, i.e., the center frequency, gain, and Q, to be set independently.

Functions


- Four-band (low, low mid, high mid, and high) left and right channels parametric equalizer
- For each band:
 - Center frequency: 11 positions
 - Gain: 13 positions in $\pm 2\text{dB}$ steps
 - Q: Variable over 8 positions
- The center frequency, gain, and Q control settings are set using serial data input in the CCB format.

Features

- A parametric equalizer with the following features can be implemented with just two ICs: this IC and a microcontroller.
- The center frequency, gain, and Q can be controlled by a single operation.
- Memory recall by a single operation can be implemented using preset values.
- Either shelving or peaking characteristics can be selected for the low band.

Package Dimensions

unit: mm

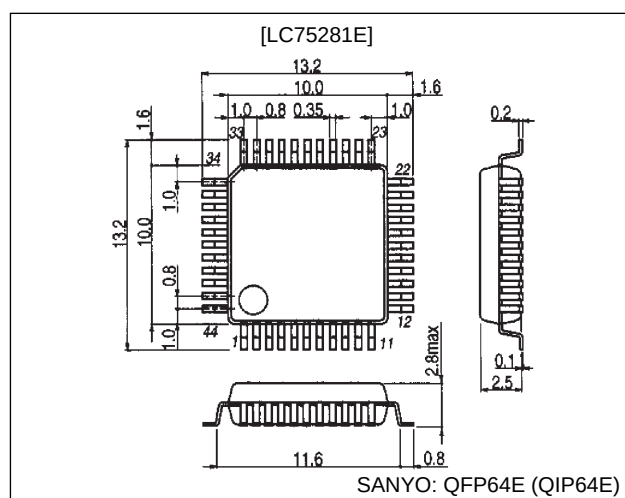3159-QFP64E

- **CCB is a trademark of SANYO ELECTRIC CO., LTD.**
- **CCB is SANYO's original bus format and all the bus addresses are controlled by SANYO.**

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.


■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LC75281E

Pin Assignment

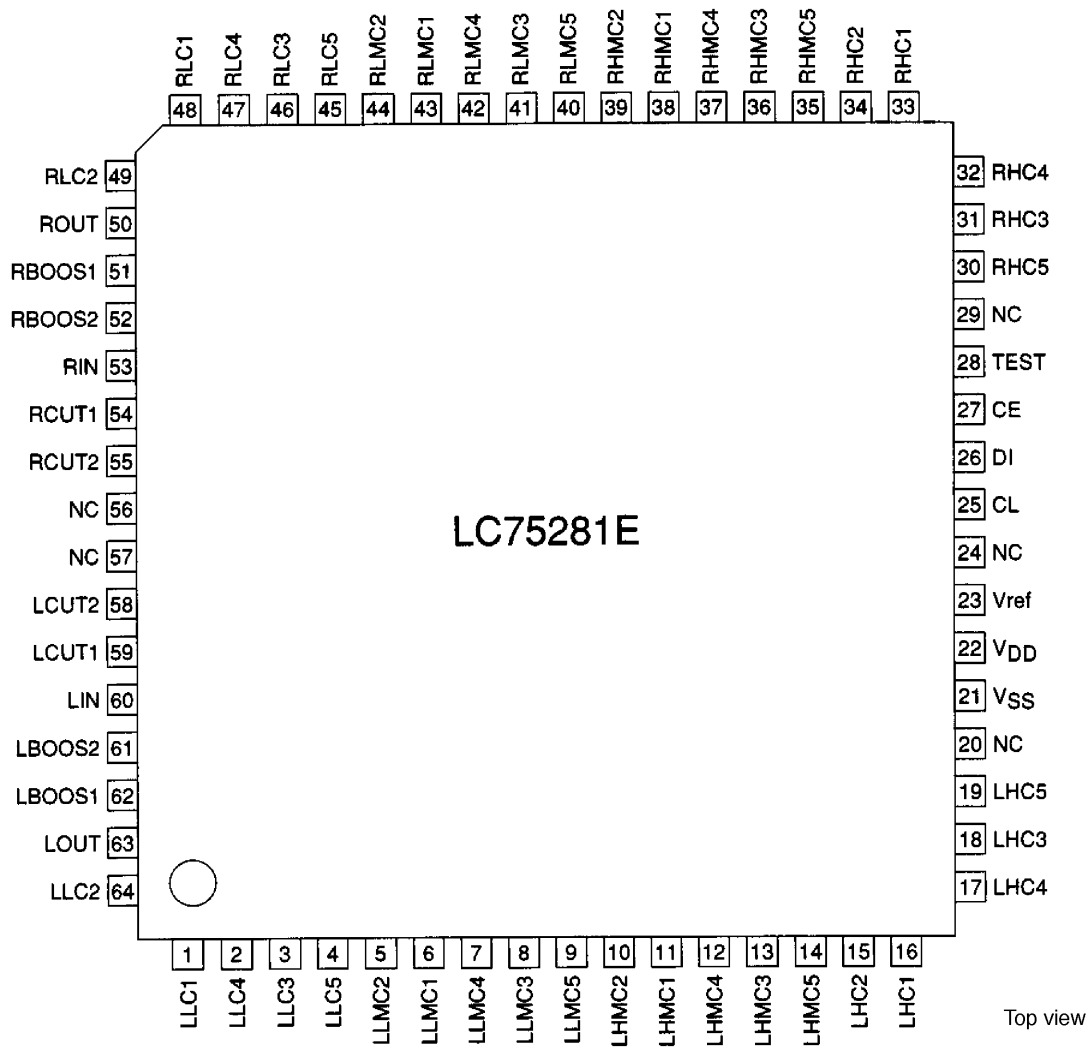

Top view

A10683

Specifications

Absolute Maximum Ratings at Ta = 25°C, V_{SS} = 0 V

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{DD} max		10.5	V
Maximum input voltage	V _{IN1} max	LIN, RIN	0 to V _{DD}	V
	V _{IN2} max	CL, CE, DI	0 to V _{DD}	V
Allowable power dissipation	Pd max	Ta ≤ 85°C	300	mW
Operating temperature	Topr		−40 to +85	°C
Storage temperature	Tstg		−50 to +125	°C

Allowable Operating Ranges at Ta = −40 to +85°C, V_{SS} = 0 V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Supply voltage	V _{DD}		6.0		9.0	V
High-level input voltage	V _{IH}	CL, CE, DI	4.0		V _{DD}	V
Low-level input voltage	V _{IL}	CL, CE, DI	V _{SS}		1.0	V
Input voltage range	V _{IN}	LIN, RIN	0		V _{DD}	V
Load resistance	R _L	LOUT, ROUT, MIXOUT	1			kΩ
Input pulse width	t _{ow}	CL	1			μs
Setup time	t _{setup}	CL, CE, DI	1			μs
Hold time	t _{hold}	CL, CE, DI	1			μs
Operating frequency	f _{opg}	CL			500	kHz

Electrical Characteristics at Ta = 25°C, f = 1 kHz, V_{DD} = 8 V, V_{SS} = 0 V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current drain	I _{DD}	V _{DD}		36	50	mA
Output voltage	V _O	LOUT, ROUT: THD = 1%		2.2		V _{rms}
Total harmonic distortion	THD1	LOUT, ROUT: Vo = Flat, V _{IN} = 0 dBV		0.005	0.01	%
	THD2	LOUT, ROUT: Vo = Boost, All bands +2 dB, V _{IN} = −15 dBV		0.1	1	%
Output noise voltage	V _{N1}	LOUT, ROUT: Vo = Flat, R _g = 1 kΩ, IHF-A filters		7	15	μs
	V _{N2}	LOUT, ROUT: Vo = Flat, R _g = 1 kΩ, DIN filters		13		μs
	V _{N3}	LOUT, ROUT, R _g = 1 kΩ, f ₀ = f ₁ , Q = Q1 IHF-A filter, all bands at full boost, with the external constants the same as those for the center frequency (example 1)		58		μs
	V _{N4}	LOUT, ROUT, R _g = 1 kΩ, f ₀ = f ₁ , Q = Q1 IHF-A filters, all bands at full cut, with the external constants the same as those for the center frequency (example 1)		23		μs
Crosstalk between inputs	CT	V _{IN} = 1 V _{rms} , f = 1 kHz	60	80		dB
High-level input current	I _{IH}	CL, DI, CE, V _{IN} = 9 V			1	μA
Low-level input current	I _{IL}	CL, DI, CE, V _{IN} = 0 V	−1			μA
DC variation	V _{DC}	All bands G = +12 dB, Q: Setting switched from Q1 to Q2 With the external constants the same as those for the center frequency (example 1) shown on page 7.	−10		+10	mV

Pin Functions

Pin No.	Pin	Function
64	LLC2	Left channel low band control block. External capacitor connections.
1	LLC1	
2	LLC4	
3	LLC3	
4	LLC5	
5	LLMC2	Left channel low mid band control block. External capacitor connections.
6	LLMC1	
7	LLMC4	
8	LLMC3	


Continued on next page.

LC75281E

Continued from preceding page.

Pin No.	Pin	Function
10 11 12 13 14	LHMC2 LHMC1 LHMC4 LHMC3 LHMC5	Left channel high mid band control block. External capacitor connections.
15 16 17 18 19	LHC2 LHC1 LHC4 LHC3 LHC5	Left channel high band control block. External capacitor connections.
20, 24, 29 56, 57	NC	Unused pins. These pins must be either left open or connected to V_{SS} .
23	Vref	Internal operational amplifier reference voltage generator outputs. Several capacitors with values of about 10 μ F must be connected with this pin to reduce ripple.
21 22	V_{SS} V_{DD}	Power supply. These pins must be connected to the stipulated power supply.
27	CE	Chip enable input. Data is written to the internal latch and the analog switches operate when this pin changes from high to low. Data transfer is enabled when this pin is high.
26 25	DI CL	Serial data and clock inputs for IC control
49 48 47 46 45	RLC2 RLC1 RLC4 RLC3 RLC5	Right channel low band control block. External capacitor connections.
44 43 42 41 40	RLMC2 RLMC1 RLMC4 RLMC3 RLMC5	Right channel low mid band control block. External capacitor connections.
39 38 37 36 35	RHMC2 RHMC1 RHMC4 RHMC3 RHMC5	Right channel high mid band control block. External capacitor connections.
34 33 32 31 30	RHC2 RHC1 RHC4 RHC3 RHC5	Right channel high band control block. External capacitor connections.
58 59 61 62	LCUT2 LCUT1 LBOOS2 LBOOS1	Internal filter DC offset voltage exclusion capacitor connections. Capacitors of about 10 μ F must be connected between pins 61 and 62, and between pins 63 and 64. (These are for the left channel block.)
55 54 52 51	RCUT2 RCUT1 RBOOS2 RBOOS1	Internal filter DC offset voltage exclusion capacitor connections. Capacitors of about 10 μ F must be connected between pins 51 and 52, and between pins 49 and 50. (These are for the right channel block.)
60 53	LIN RIN	Left channel audio signal input (Must be driven with a low load capacitance.) Right channel audio signal input (Must be driven with a low load capacitance.)
63 50	LOUT ROUT	Left channel audio signal output (Must be received with a low load capacitance.) Right channel audio signal output (Must be received with a low load capacitance.)
28	TEST	IC test pin. This pin must be left open when not used for IC test.

Block Diagram

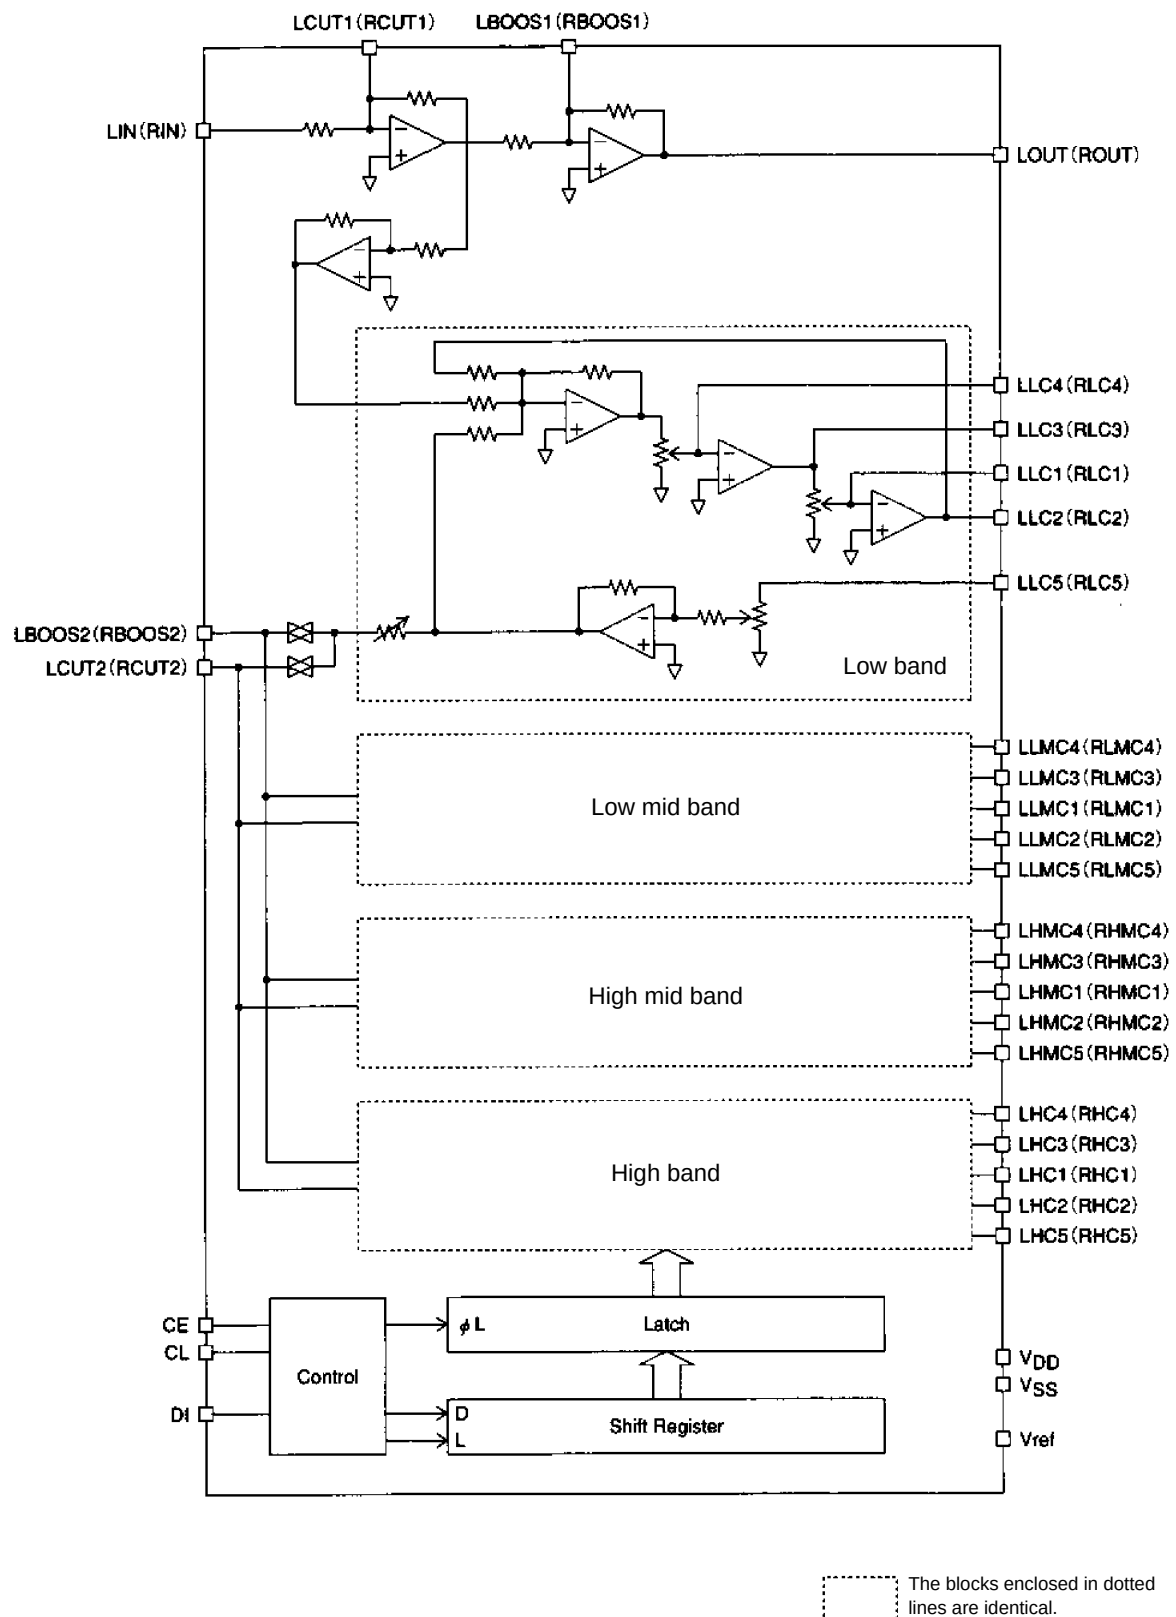

LC75281E

• Center frequency (fo)

Band	f1	f2	f3	f4	f5	f6	f7	f8	f9	f10	f11	External capacitor (μF)
Low	31.5	40	50	63	80	100	125	160	200	250	315	0.047
Low mid	160	200	250	315	400	500	630	800	1 k	1.25 k	1.6 k	0.0094
High mid	630	800	1 k	1.25 k	1.6 k	2 k	2.5 k	3.15 k	4 k	5 k	6.3 k	0.00235
High	1.6 k	2 k	2.5 k	3.15 k	4 k	5 k	6.3 k	8 k	10 k	12.5 k	16 k	0.0094

External capacitor calculations

Figure a shows the LC75281E internal f0 control circuit. The center frequency f0 can be set to one of 11 frequencies in 1/3 octave steps by switching the resistors in the figure.

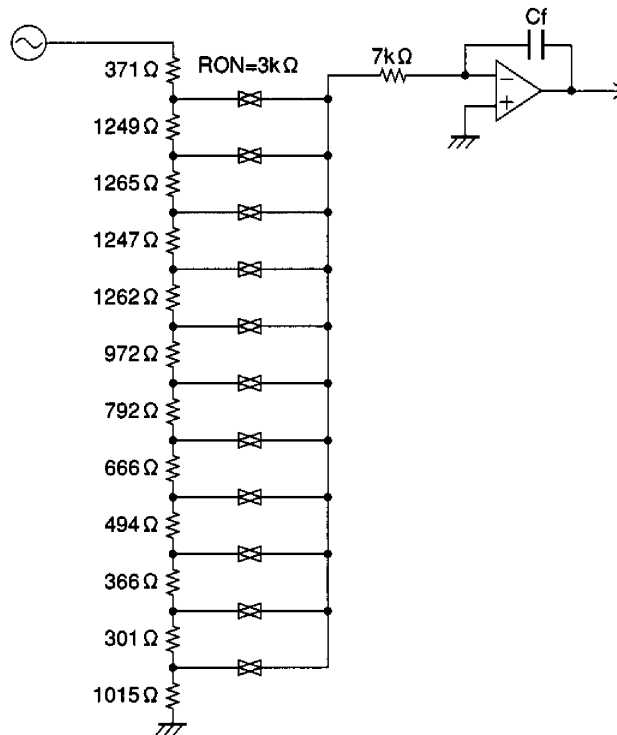



Figure a

A10685

The value of the external capacitor C is determined by substituting the desired center frequency in the following formula.

$$C_f = \frac{1}{2\pi R_f f_{o \max}} \cdot \frac{R_b/R_f}{R_a + (R_b/R_f)}$$

f_{o max}: Corresponds to 315 Hz in the low band row in the preceding table.

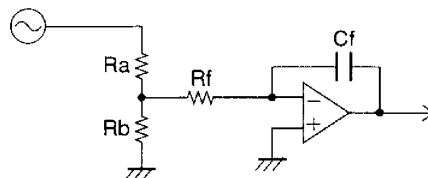

Equivalent Circuit for Cf calculation



A10686

- Gain: 13 positions in 2-dB steps
- Q

	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
Q	0.404	0.667	1.41	2.15	2.87	4.32	5.76	8.65
OCT	3	2	1	2/3	1/2	1/3	1/4	1/6

Data Input Procedure

The LC75281E is controlled by inputting the stipulated serial data to the CE, CL, and DI pins. The data consists of 28 bits, of which 8 bits are the address and 20 bits are the data.

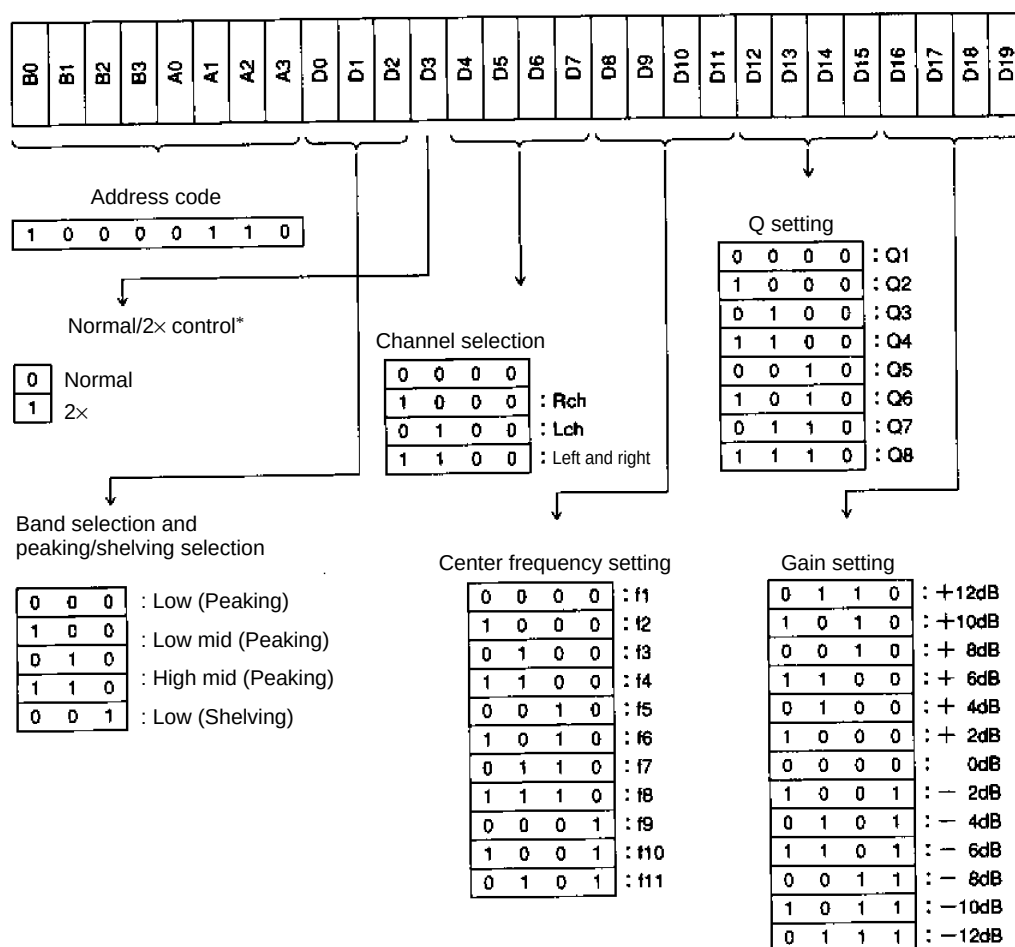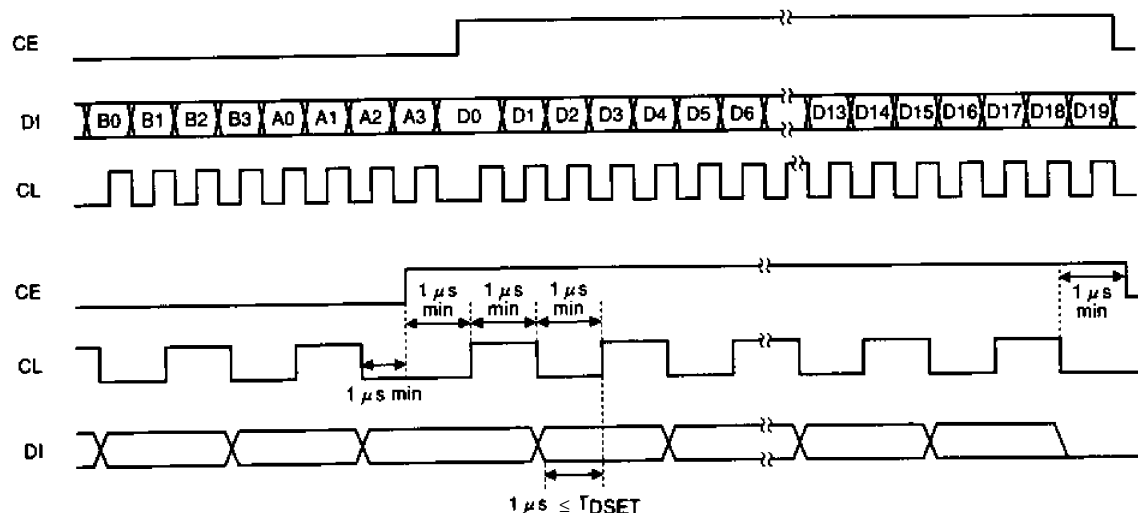


A10697








Note *: The 2x command doubles the center frequency of all bands. When setting this bit to 1, applications must either enter the band data for one of the bands in bits D1 to D19, or must set both bits D4 and D5 to 0, in which case all other bits are ignored.

LC75281E

Sample Application Circuit

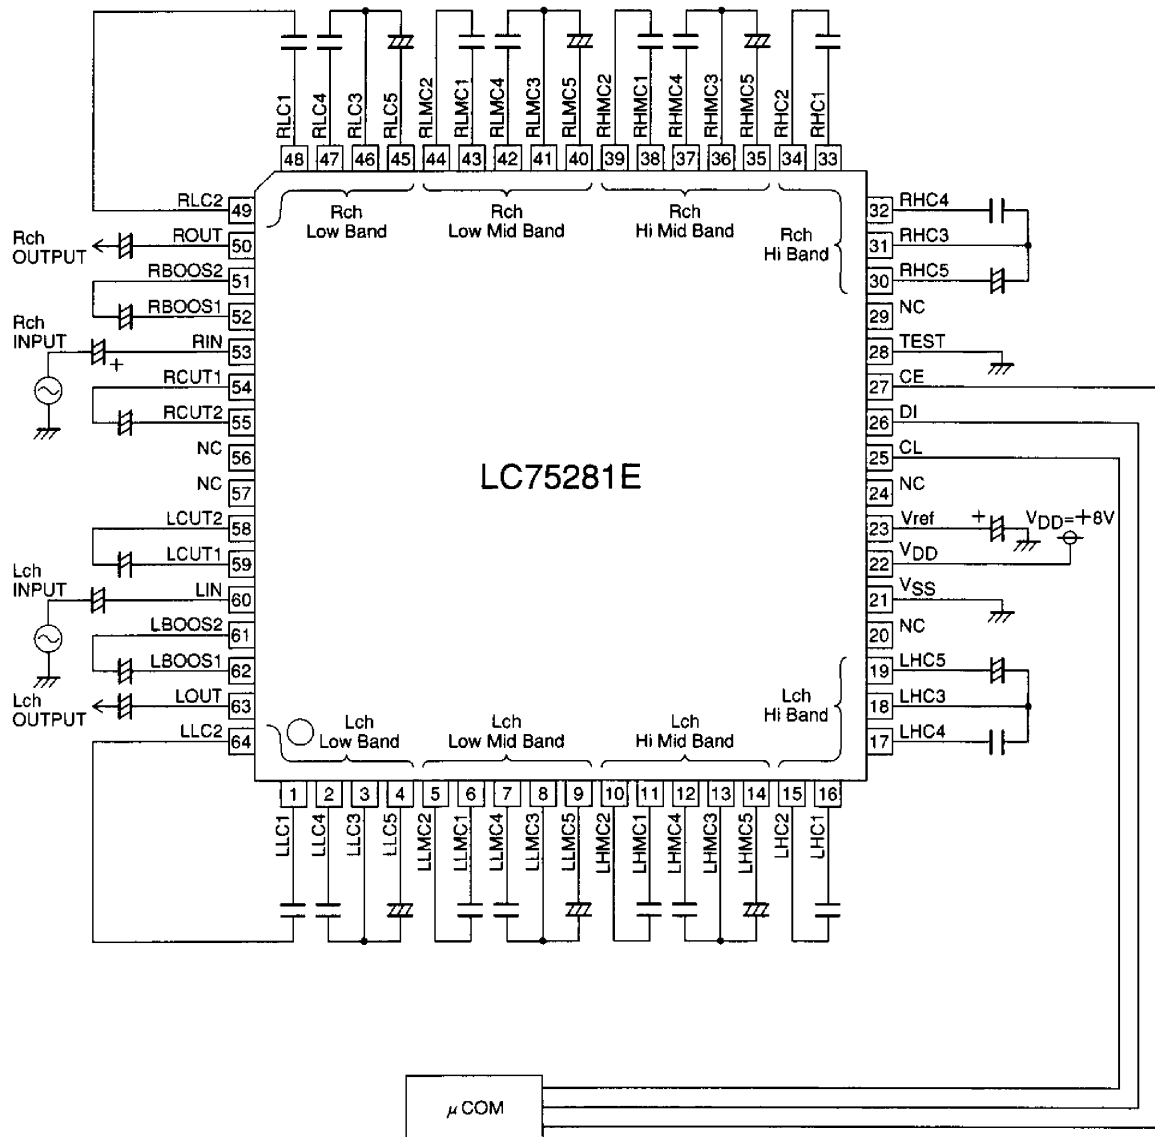

A10688

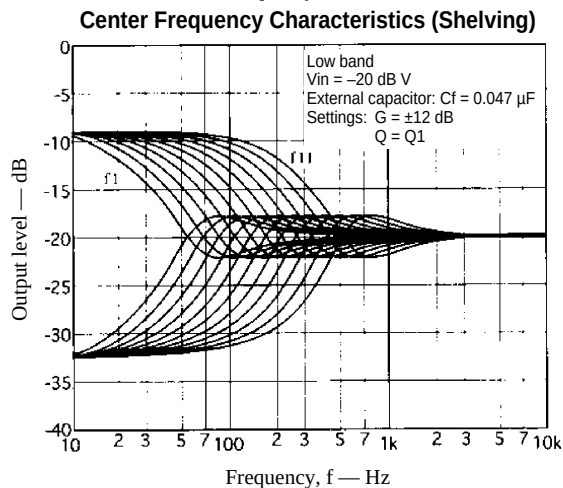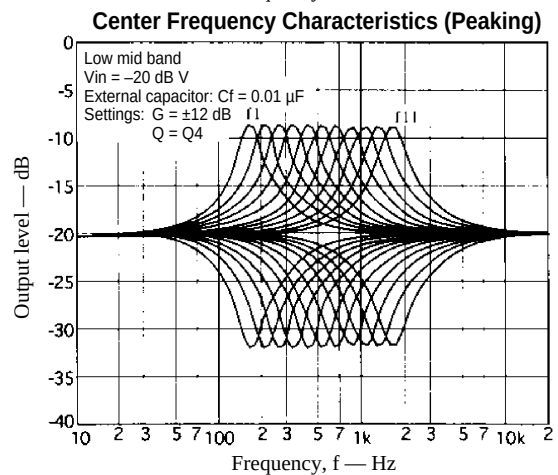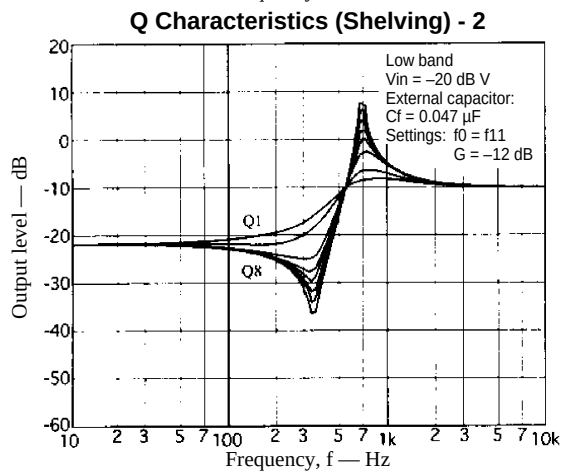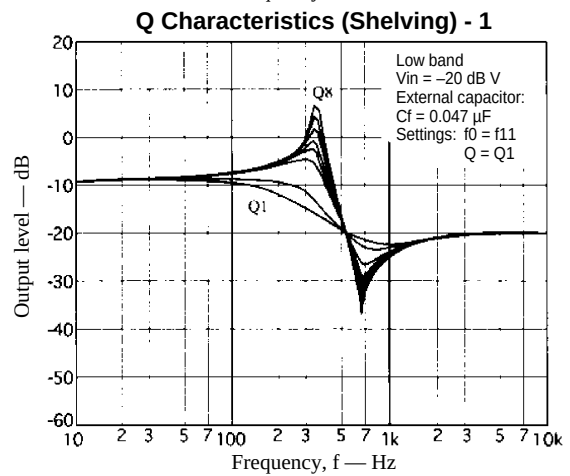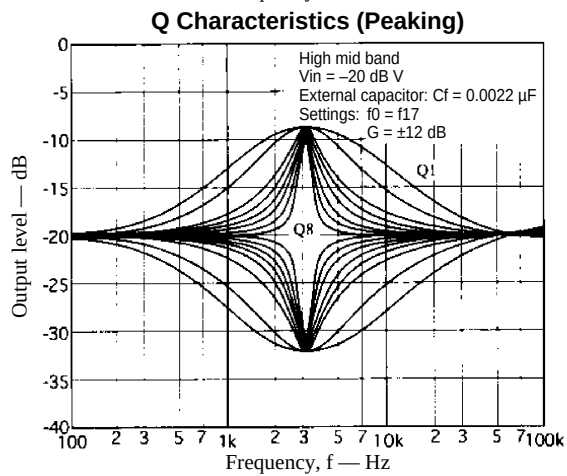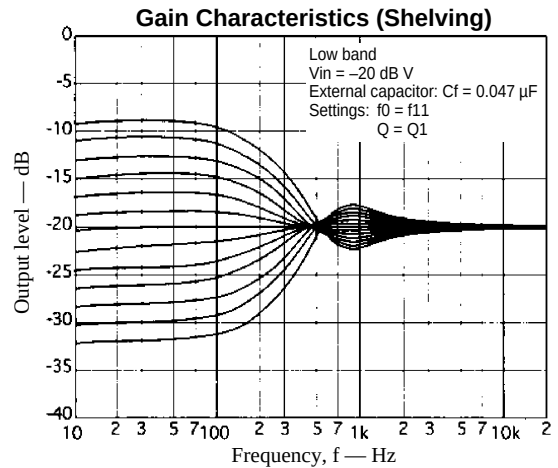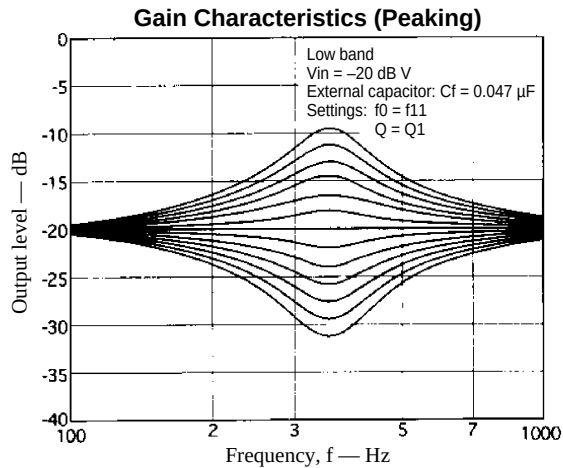

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any and all SANYO products described or contained herein fall under strategic products (including services) controlled under the Foreign Exchange and Foreign Trade Control Law of Japan, such products must not be exported without obtaining export license from the Ministry of International Trade and Industry in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of October, 1998. Specifications and information herein are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.