

## GENERAL DESCRIPTION

The SPX3940 is a 1A, accurate voltage regulator with a low drop out voltage of 280mV (typical) at 1A.

These regulators are specifically designed for low voltage applications that require a low dropout voltage and a fast transient response. They are fully fault protected against over-current, reverse battery, and positive and negative voltage transients.

The SPX3940 is offered in 3-pin SOT223 and TO-263 packages. For a 3A version, refer to the SPX29300 data sheet.

## APPLICATIONS

- **Power Supplies**
- **LCD Monitors**
- **Portable Instrumentation**
- **Medical and Industrial Equipments**

## FEATURES

- **Guaranteed 1.5A Peak Current**
- **1% Output Accuracy SPX3940A**
- **Low Quiescent Current**
- **Low Dropout Voltage of 280mV at 1A**
- **Extremely Tight Load and Line Regulation**
- **Extremely Fast Transient Response**
- **Reverse-battery Protection**
- **Internal Thermal Protection**
- **Internal Short Circuit Current Limit**
- **Replacement for LM3940**
- **Standard SOT223 & TO-263 packages**

## TYPICAL APPLICATION DIAGRAM

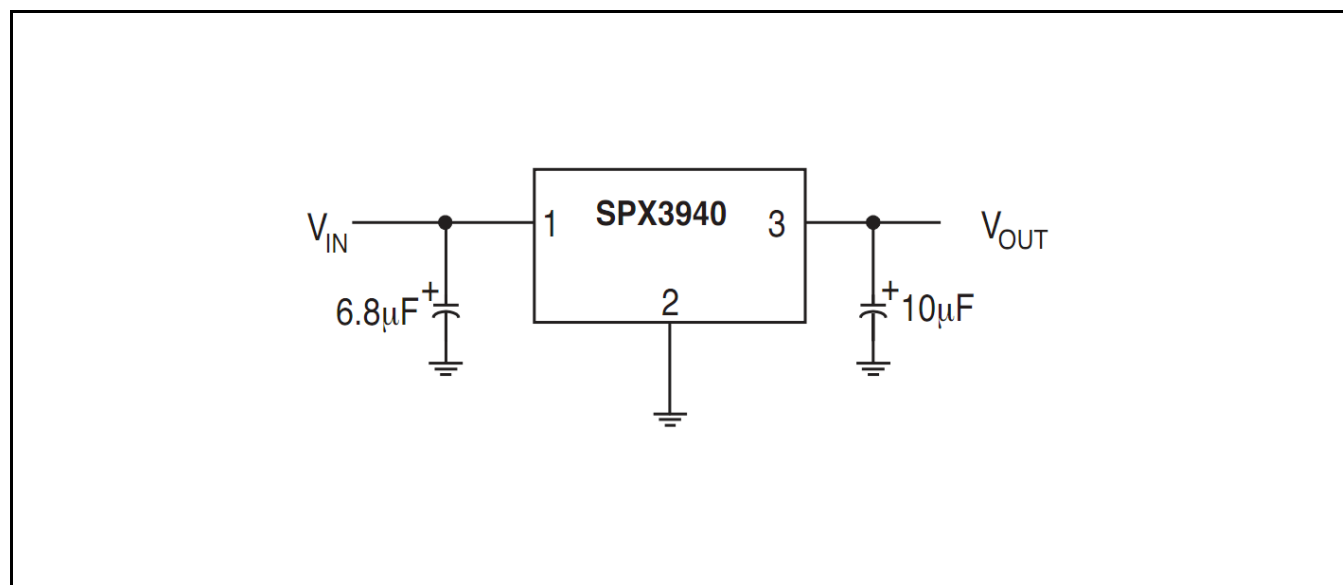


Fig. 1: SPX3940 Application Diagram – Fixed Output Linear Regulator

**ABSOLUTE MAXIMUM RATINGS**

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

Input Voltage  $V_{IN}$  ..... 20V<sup>1</sup>  
Storage Temperature ..... -65°C to 150°C  
Lead Temperature (Soldering, 5 sec) ..... 260°C

**OPERATING RATINGS**

Input Voltage  $V_{IN}$  ..... 16V  
Junction Temperature Range ..... -40°C to 125°C  
Packages Thermal Resistance  
SOT-223 Junction to Case (at  $T_A$ ) ..... 15°C/W  
SOT-223 Junction to Ambient ..... 62.3°C/W  
TO-263 Junction to Case (at  $T_A$ ) ..... 3°C/W  
TO-263 Junction to Ambient ..... 31.4°C/W

Note 1: Maximum positive supply voltage of 20V must be of limited duration (<100ms) and duty cycle (<1%). The maximum continuous supply voltage is 16V.

**ELECTRICAL SPECIFICATIONS**

Specifications with standard type are for an Operating Ambient Temperature of  $T_A = 25^\circ\text{C}$  only; limits applying over the full Operating Junction Temperature range are denoted by a "•". Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at  $T_A = 25^\circ\text{C}$ , and are provided for reference purposes only. Unless otherwise indicated,  $V_{IN} = V_{IN} + 1V$ ,  $I_{OUT} = 10\text{mA}$ ,  $C_{IN} = 6.8\mu\text{F}$ ,  $C_{OUT} = 10\mu\text{F}$ ,  $T_A = 25^\circ\text{C}$ .

| Parameter                                                            | Min.  | Typ. | Max.  | Units         |   | Conditions                                                                |
|----------------------------------------------------------------------|-------|------|-------|---------------|---|---------------------------------------------------------------------------|
| 1.8V version                                                         |       |      |       |               |   |                                                                           |
| Output Voltage - SPX3940A (1%)                                       | 1.782 | 1.8  | 1.818 | V             |   | $I_{OUT}=10mA$<br>$10mA \leq I_{OUT} \leq 1A$ , $6V \leq V_{IN} \leq 16V$ |
|                                                                      | 1.755 | 1.8  | 1.845 |               | • |                                                                           |
| Output Voltage - SPX3940 (2%)                                        | 1.764 | 1.8  | 1.836 | V             |   |                                                                           |
|                                                                      | 1.737 | 1.8  | 1.863 |               | • |                                                                           |
| 2.5V version                                                         |       |      |       |               |   |                                                                           |
| Output Voltage - SPX3940A (1%)                                       | 2.475 | 2.5  | 2.525 | V             |   | $I_{OUT}=10mA$<br>$10mA \leq I_{OUT} \leq 1A$ , $6V \leq V_{IN} \leq 16V$ |
|                                                                      | 2.437 | 2.5  | 2.563 |               | • |                                                                           |
| Output Voltage - SPX3940 (2%)                                        | 2.450 | 2.5  | 2.550 | V             |   |                                                                           |
|                                                                      | 2.412 | 2.5  | 2.588 |               | • |                                                                           |
| 3.3V version                                                         |       |      |       |               |   |                                                                           |
| Output Voltage - SPX3940A (1%)                                       | 3.267 | 3.3  | 3.333 | V             |   | $I_{OUT}=10mA$<br>$10mA \leq I_{OUT} \leq 1A$ , $6V \leq V_{IN} \leq 16V$ |
|                                                                      | 3.217 | 3.3  | 3.383 |               | • |                                                                           |
| Output Voltage - SPX3940 (2%)                                        | 3.234 | 3.3  | 3.366 | V             |   |                                                                           |
|                                                                      | 3.184 | 3.3  | 3.416 |               | • |                                                                           |
| 5.0V version                                                         |       |      |       |               |   |                                                                           |
| Output Voltage - SPX3940A (1%)                                       | 4.950 | 5.0  | 5.050 | V             |   | $I_{OUT}=10mA$<br>$10mA \leq I_{OUT} \leq 1A$ , $6V \leq V_{IN} \leq 16V$ |
|                                                                      | 4.875 | 5.0  | 5.125 |               | • |                                                                           |
| Output Voltage - SPX3940 (2%)                                        | 4.900 | 5.0  | 5.100 | V             |   |                                                                           |
|                                                                      | 4.825 | 5.0  | 5.175 |               | • |                                                                           |
| All Voltage Options                                                  |       |      |       |               |   |                                                                           |
| Line Regulation                                                      |       | 0.2  | 1.0   | %             |   | $I_{OUT}=10mA$ , $(V_{OUT} + 1V) \leq V_{IN} \leq 16V$                    |
| Load Regulation                                                      |       | 0.3  | 1.5   | %             |   | $V_{IN} = V_{OUT} + 1V, 10mA \leq I_{OUT} \leq 1A$                        |
| $\frac{\Delta V}{\Delta T}$ - Output Voltage temperature Coefficient |       | 20   | 100   | ppm/°C        | • |                                                                           |
| Dropout Voltage <sup>2</sup> (except 1.8V version)                   |       | 70   | 200   | mV            | • | $I_{OUT}=100mA$                                                           |
|                                                                      |       | 280  | 550   | mV            | • | $I_{OUT}=1A$                                                              |
| Ground Current <sup>3</sup>                                          |       | 12   | 25    | mA            | • | $I_{OUT}=750mA$ , $V_{IN} = V_{OUT} + 1V$                                 |
|                                                                      |       | 18   |       | mA            |   | $I_{OUT}=1A$                                                              |
| $I_{GNDDO}$ Ground Pin Current at Dropout                            |       | 1.2  |       | mA            |   | $V_{IN} = 0.1V$ less than specified $V_{OUT}$ $I_{OUT}=10mA$ ,            |
| Current Limit                                                        | 1.5   | 2.2  |       | A             |   | $V_{OUT} = 0V^4$                                                          |
| Output Noise Voltage                                                 |       | 400  |       | $\mu V_{RMS}$ |   | 10Hz-100KHz, $I_L=100mA$ , $C_L=10\mu F$                                  |
|                                                                      |       | 260  |       | $\mu V_{RMS}$ |   | 10Hz-100KHz, $I_L=100mA$ , $C_L=33\mu F$                                  |

Note 2: Dropout voltage is defined as the input to output differential when the output voltage drops to 99% of its normal value.

Note 3: Ground pin current is the regulator quiescent current. The total current drawn from the source is the sum of the load current to the ground current.

Note 4:  $V_{IN} = V_{OUT(NOMINAL)} + 1V$ . For example, use  $V_{IN} = 4.3V$  for a 3.3V regulator. Employ pulse-testing procedures to minimize temperature rise.

### BLOCK DIAGRAM

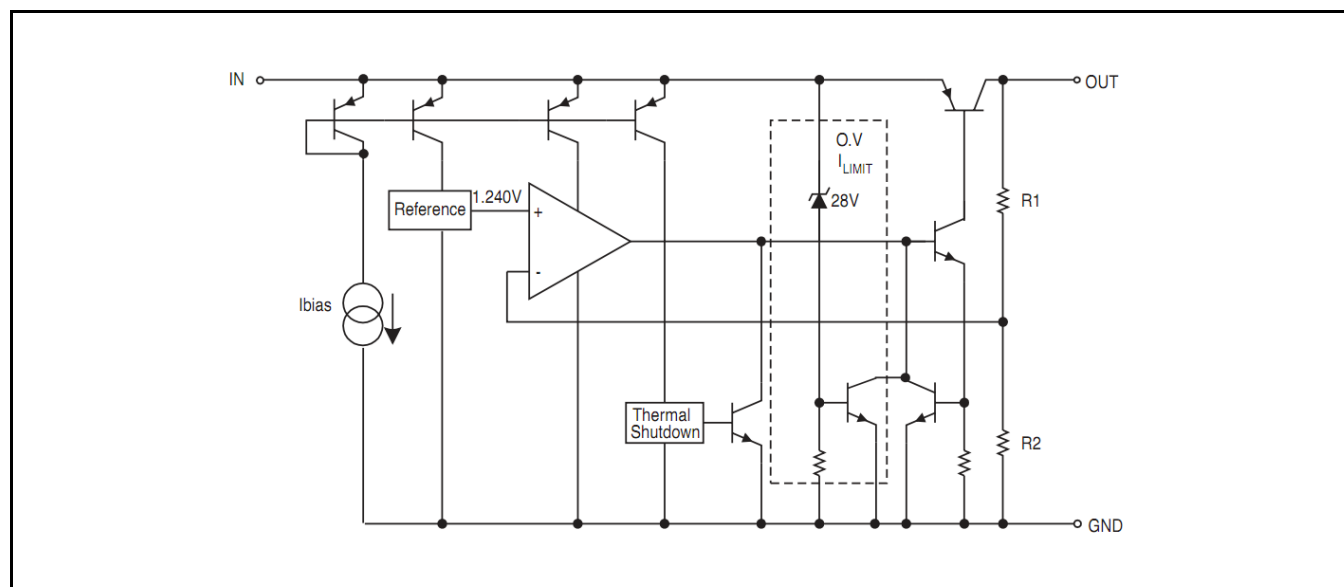


Fig. 2: SPX3940 Block Diagram

### PIN ASSIGNMENT

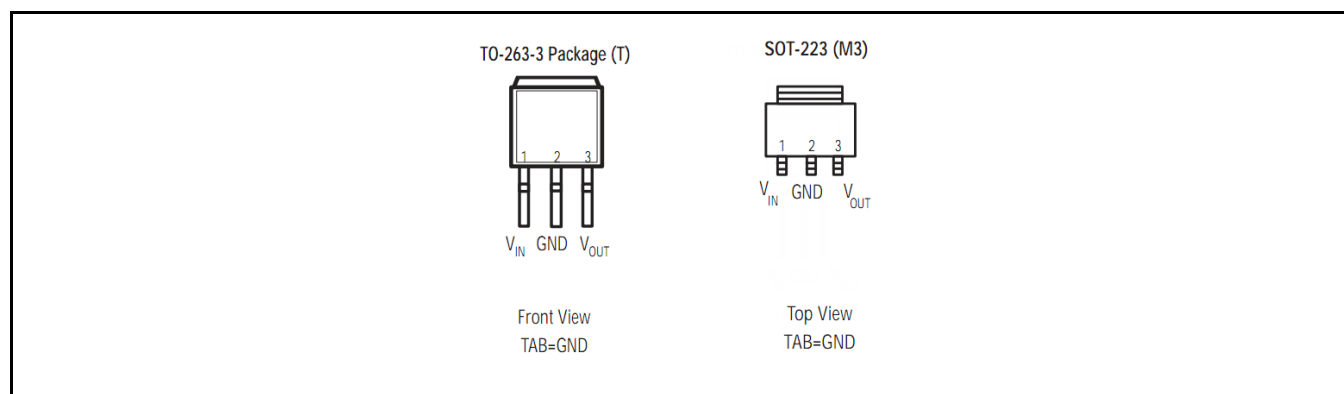


Fig. 3: SPX3940 Pin Assignment


**ORDERING INFORMATION**

| Part Number         | Temperature Range               | Marking                 | Package          | Packing Quantity | Note 1    | Note 2                      |
|---------------------|---------------------------------|-------------------------|------------------|------------------|-----------|-----------------------------|
| SPX3940AM3-L-1-8    | -40°C ≤ T <sub>j</sub> ≤ +125°C | 3940A<br>18YYWWL<br>XXX | 3-pin<br>SOT-223 | 2.5K/Tape & Reel | Lead Free | 1.8V Output<br>Voltage – 1% |
| SPX3940AM3-L-1-8/TR |                                 |                         |                  | Bulk             |           |                             |
| SPX3940AM3-L-2-5    | -40°C ≤ T <sub>j</sub> ≤ +125°C | 3940A<br>25YYWWL<br>XXX | 3-pin<br>SOT-223 | 2.5K/Tape & Reel | Lead Free | 2.5V Output<br>Voltage – 1% |
| SPX3940AM3-L-2-5/TR |                                 |                         |                  | Bulk             |           |                             |
| SPX3940AM3-L-3-3    | -40°C ≤ T <sub>j</sub> ≤ +125°C | 3940A<br>33YYWWL<br>XXX | 3-pin<br>SOT-223 | 2.5K/Tape & Reel | Lead Free | 3.3V Output<br>Voltage – 1% |
| SPX3940AM3-L-3-3/TR |                                 |                         |                  | Bulk             |           |                             |
| SPX3940AM3-L-5-0    | -40°C ≤ T <sub>j</sub> ≤ +125°C | 3940A<br>50YYWWL<br>XXX | 3-pin<br>SOT-223 | 2.5K/Tape & Reel | Lead Free | 5.0V Output<br>Voltage – 1% |
| SPX3940AM3-L-5-0/TR |                                 |                         |                  | Bulk             |           |                             |
| SPX3940AT-L-1-8     | -40°C ≤ T <sub>j</sub> ≤ +125°C | SPX3940AT<br>18YYWWLX   | 3-pin<br>TO-263  | 500/Tape & Reel  | Lead Free | 1.8V Output<br>Voltage – 1% |
| SPX3940AT-L-1-8/TR  |                                 |                         |                  | Bulk             |           |                             |
| SPX3940AT-L-3-3     | -40°C ≤ T <sub>j</sub> ≤ +125°C | SPX3940AT<br>33YYWWLX   | 3-pin<br>TO-263  | 500/Tape & Reel  | Lead Free | 3.3V Output<br>Voltage – 1% |
| SPX3940AT-L-3-3/TR  |                                 |                         |                  | Bulk             |           |                             |
| SPX3940AT-L-5-0     | -40°C ≤ T <sub>j</sub> ≤ +125°C | SPX3940AT<br>50YYWWLX   | 3-pin<br>TO-263  | 500/Tape & Reel  | Lead Free | 5.0V Output<br>Voltage – 1% |
| SPX3940AT-L-5-0/TR  |                                 |                         |                  | Bulk             |           |                             |
| SPX3940M3-L-2-5     | -40°C ≤ T <sub>j</sub> ≤ +125°C | 3940M3<br>25YYWWL       | 3-pin<br>SOT-223 | 2.5K/Tape & Reel | Lead Free | 2.5V Output<br>Voltage – 2% |
| SPX3940M3-L-2-5/TR  |                                 |                         |                  | Bulk             |           |                             |
| SPX3940M3-L-3-3     | -40°C ≤ T <sub>j</sub> ≤ +125°C | 3940M3<br>33YYWWL       | 3-pin<br>SOT-223 | 2.5K/Tape & Reel | Lead Free | 3.3V Output<br>Voltage – 2% |
| SPX3940M3-L-3-3/TR  |                                 |                         |                  | Bulk             |           |                             |
| SPX3940M3-L-5-0     | -40°C ≤ T <sub>j</sub> ≤ +125°C | 3940M3<br>50YYWWL       | 3-pin<br>SOT-223 | 2.5K/Tape & Reel | Lead Free | 5.0V Output<br>Voltage – 2% |
| SPX3940M3-L-5-0/TR  |                                 |                         |                  | Bulk             |           |                             |
| SPX3940T-L-3-3      | -40°C ≤ T <sub>j</sub> ≤ +125°C | SPX3940T<br>33YYWWLX    | 3-pin<br>TO-263  | 500/Tape & Reel  | Lead Free | 3.3V Output<br>Voltage – 2% |
| SPX3940T-L-3-3/TR   |                                 |                         |                  | Bulk             |           |                             |
| SPX3940T-L-5-0      | -40°C ≤ T <sub>j</sub> ≤ +125°C | SPX3940T<br>33YYWWLX    | 3-pin<br>TO-263  | 500/Tape & Reel  | Lead Free | 5.0V Output<br>Voltage – 2% |
| SPX3940T-L-5-0/TR   |                                 |                         |                  | Bulk             |           |                             |

“YY” = Year – “WW” = Work Week – “X” = Lot Number – when applicable.

### TYPICAL PERFORMANCE CHARACTERISTICS

Schematic and BOM from Application Information section of this datasheet.

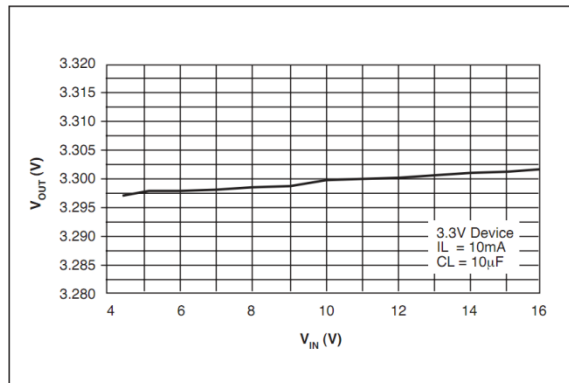


Fig. 4: Line Regulation

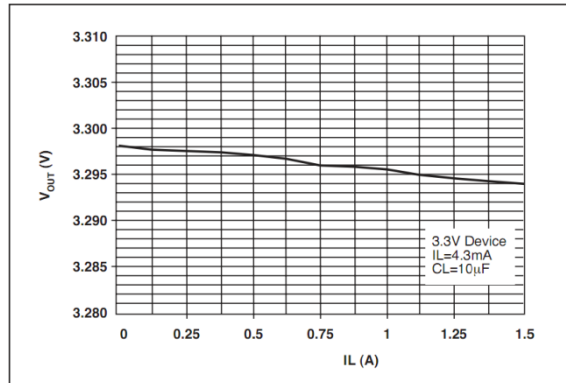


Fig. 5: Load Regulation

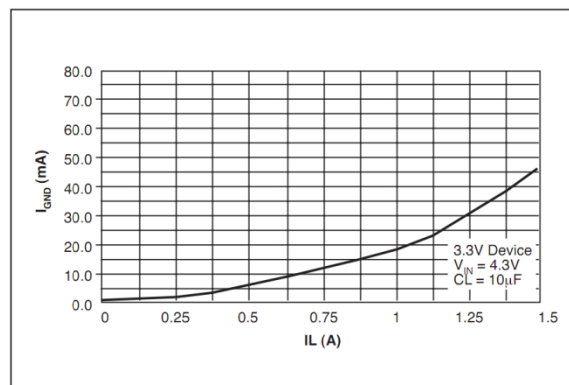


Fig. 6: Ground Current vs Load Current

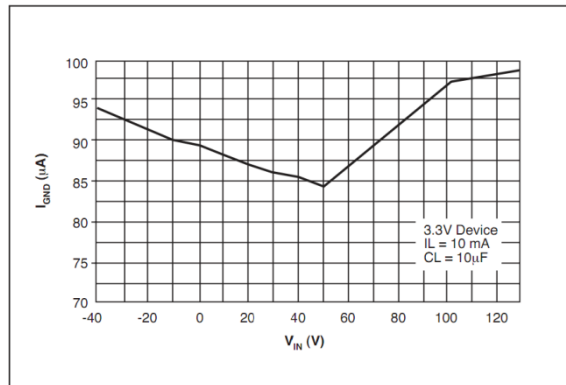


Fig. 7: Ground Current vs Input Voltage

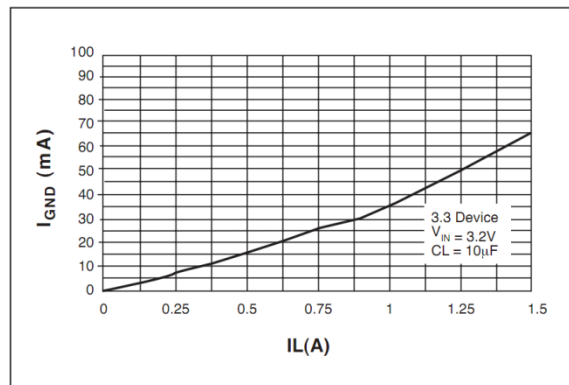


Fig. 8: Ground Current vs Load Current in Dropout

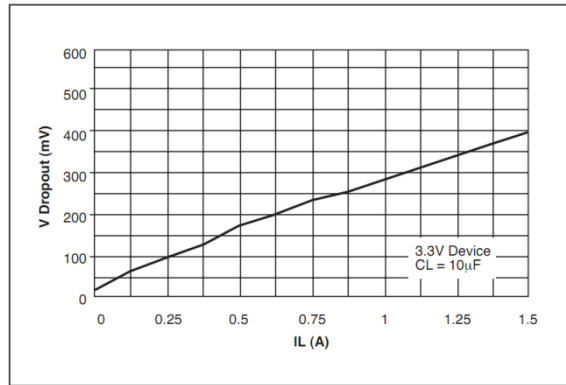


Fig. 9: Dropout Voltage vs Load Current

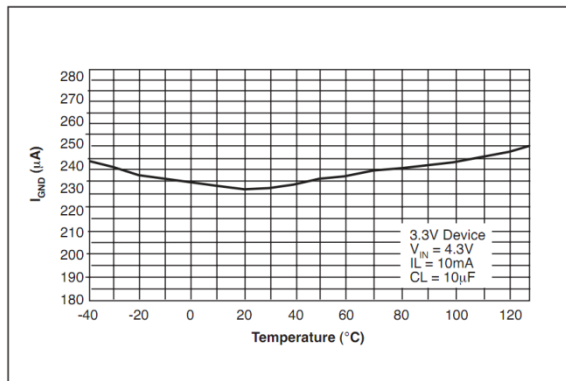


Fig. 10: Ground Current vs Temperature  
 $I_{LOAD}=100mA$

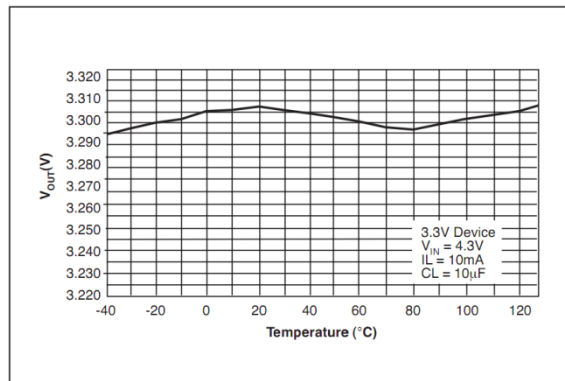


Fig. 11: Output Voltage vs Temperature  
 $I_{LOAD}=100mA$

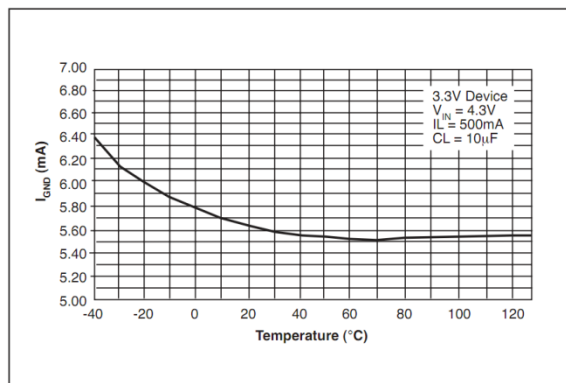


Fig. 12: Ground Current vs Temperature  
 $I_{LOAD}=500mA$

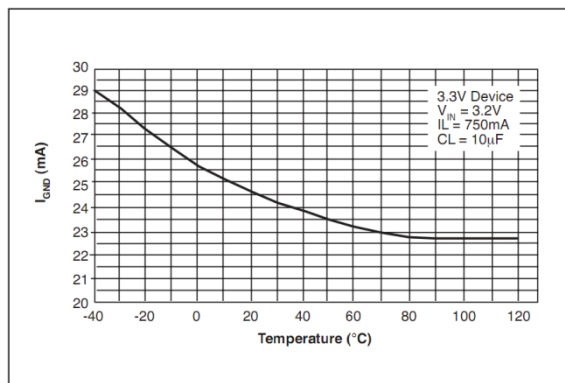


Fig. 13: Ground Current vs Temperature  
Dropout,  $I_{LOAD}=750mA$

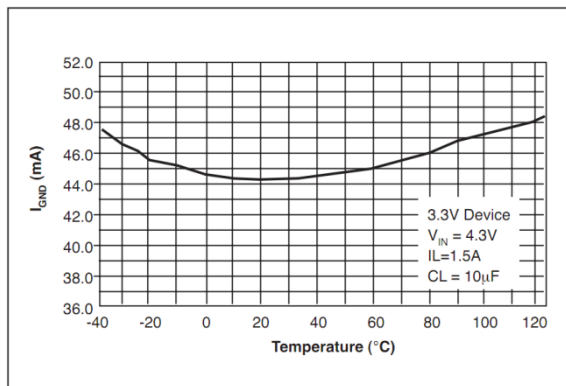


Fig. 14: Ground Current vs Temperature  
 $I_{LOAD}=1.5A$

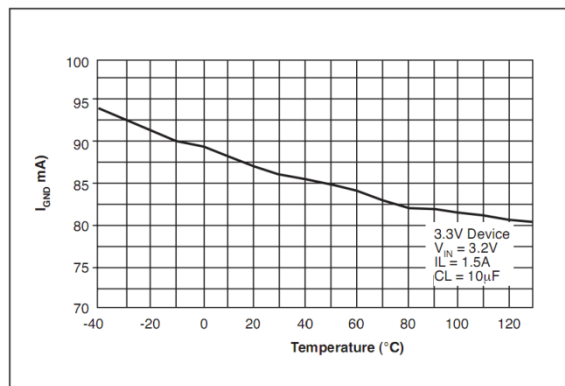


Fig. 15: Ground Current vs Temperature  
Dropout,  $I_{LOAD}=1.5A$

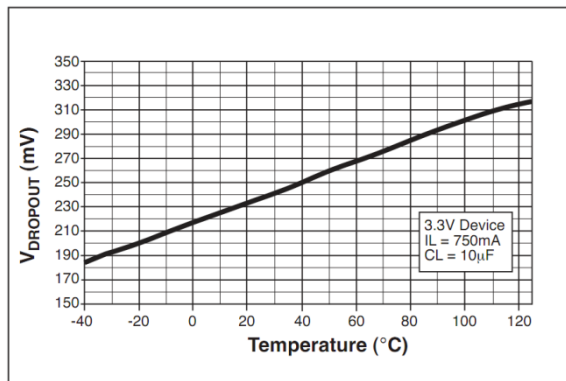


Fig. 16: Dropout Voltage vs Temperature  
 $I_{LOAD}=750mA$

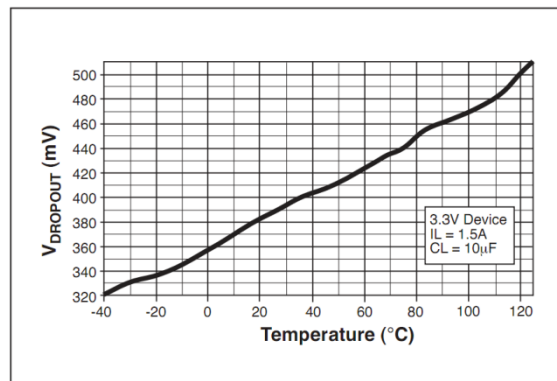


Fig. 17: Dropout Voltage vs Temperature  
 $I_{LOAD}=1.5A$

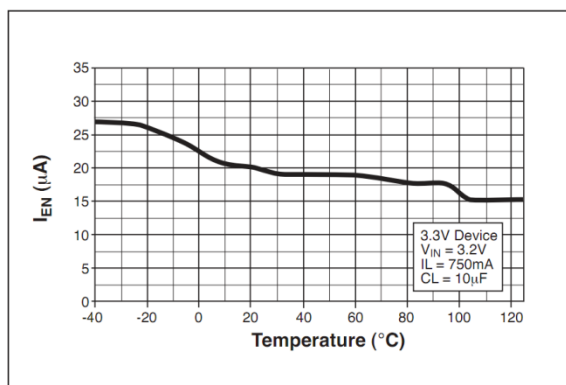


Fig. 18: Enable Current vs Temperature  
 $V_{EN}=16V$

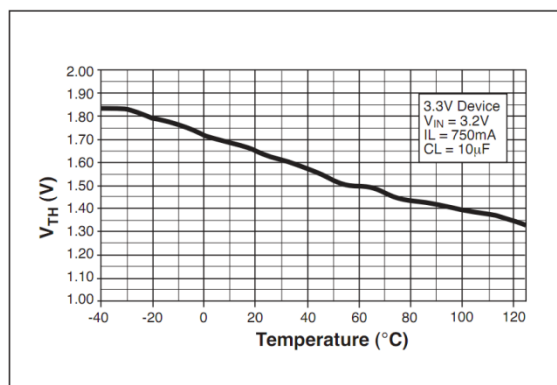


Fig. 19: Enable Threshold vs Temperature

## 1A Low Dropout Voltage Regulator

### THEORY OF OPERATION

The SPX3940 incorporates protection against over-current faults, reversed load insertion, over temperature operation, and positive and negative transient voltage.

### THERMAL CONSIDERATIONS

Although the SPX3940 offers limiting circuitry for overload conditions, it is still necessary to insure that the maximum junction temperature is not exceeded in the application. Heat will flow through the lowest resistance path, the junction-to-case path. In order to insure the best thermal flow of the component, proper mounting is required. Consult heatsink manufacturer for thermal resistance and design of heatsink.

#### TO-220 Design Example:

Assume that  $V_{IN} = 10V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 1.5A$ ,  $T_A = 50^{\circ}C/W$ ,  $\theta_{HA} = 1^{\circ}C/W$ ,  $\theta_{CH} = 2^{\circ}C/W$ , and  $\theta_{JC} = 3^{\circ}C/W$ .

Where  $T_A$  = ambient temperature

$\theta_{HA}$  = heatsink to ambient thermal resistance

$\theta_{CH}$  = case to heatsink thermal resistance

$\theta_{JC}$  = junction to case thermal resistance

The power calculated under these conditions is:

$$P_D = (V_{IN} - V_{OUT}) * I_{OUT} = 7.5W.$$

And the junction temperature is calculated as

$$T_J = T_A + P_D * (\theta_{HA} + \theta_{CH} + \theta_{JC}) \text{ or}$$

$$T_J = 50 + 7.5 * (1 + 2 + 3) = 95^{\circ}C$$

Reliable operation is insured.

### CAPACITOR REQUIREMENTS

The output capacitor is needed to insure stability and minimize the output noise. The value of the capacitor varies with the load. However, a minimum value of  $10\mu F$  aluminum capacitor will guarantee stability over all load conditions. A tantalum capacitor is recommended if a faster load transient response is needed.

If the power source has a high AC impedance, a  $0.1\mu F$  ceramic capacitor between input & ground is recommended.

### MINIMUM LOAD CURRENT

To ensure a proper behavior of the regulator under light load, a minimum load of  $5mA$  for SPX3940 is required.


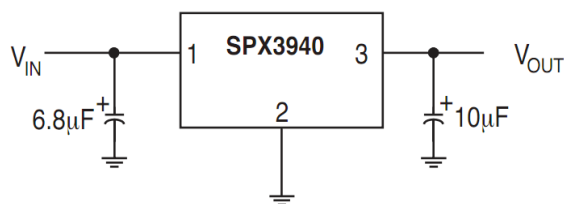


Fig. 20: Fixed Output Linear Regulator




### PACKAGE SPECIFICATION

### 3-PIN SOT-223

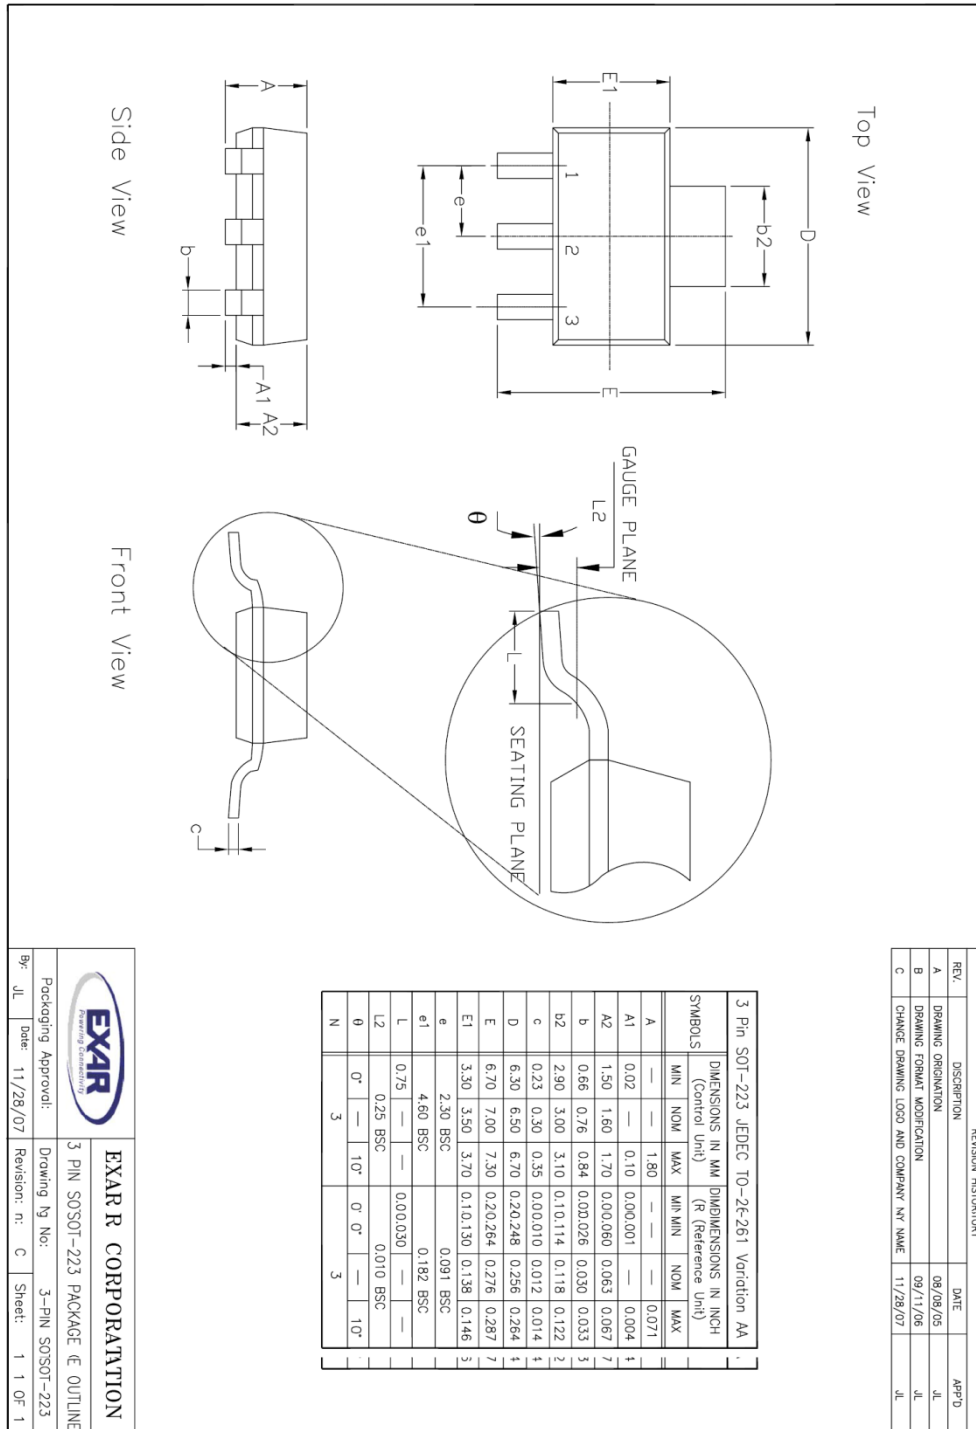

3-PIN TO-263

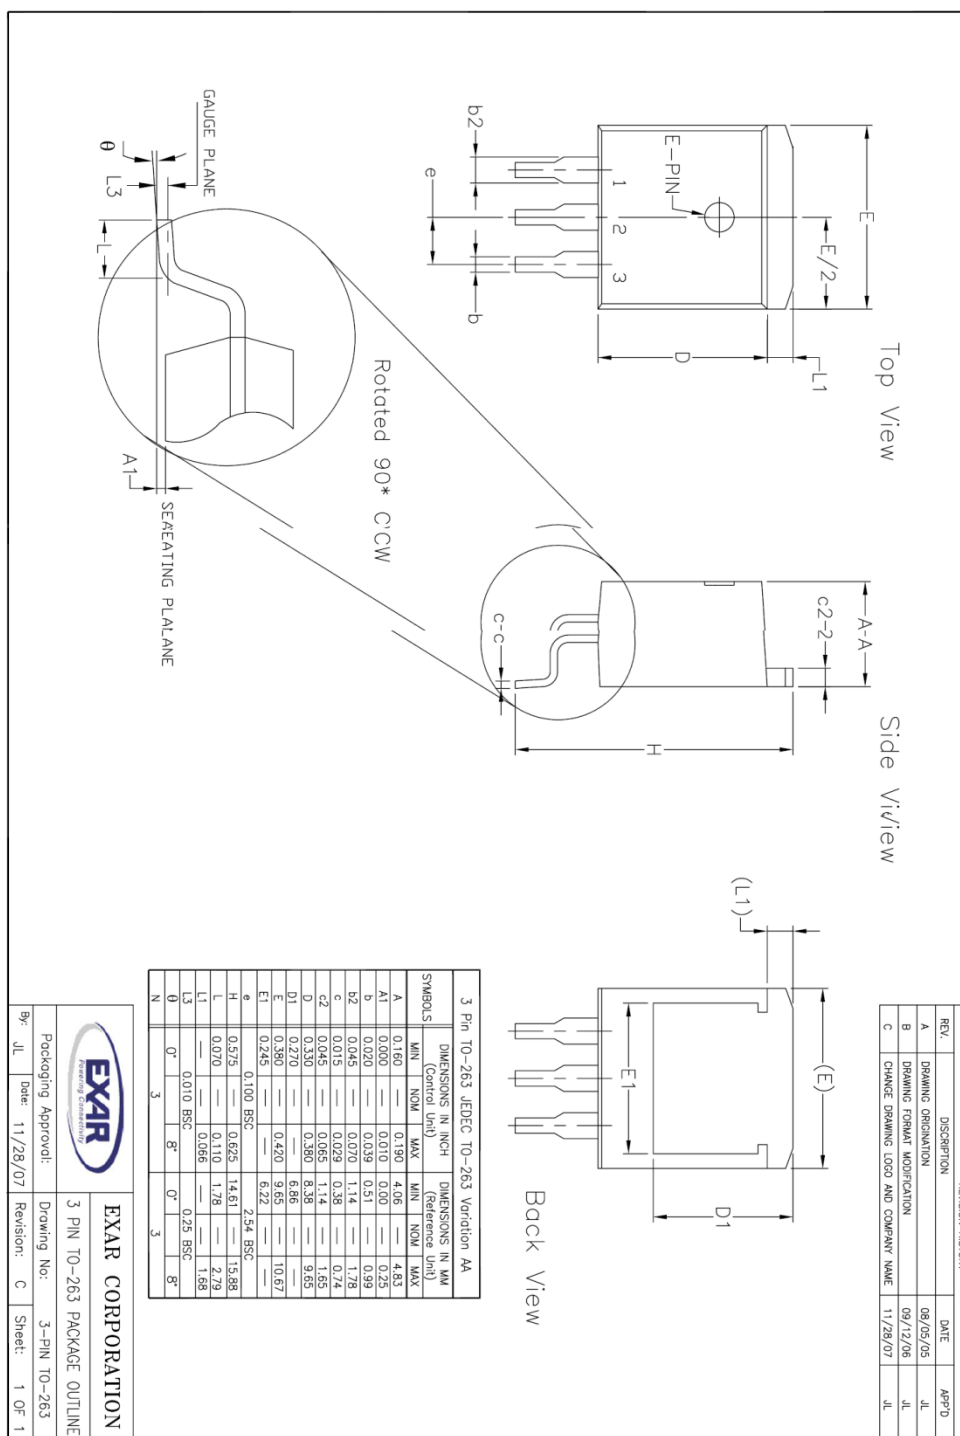

**SPX3940****1A Low Dropout Voltage Regulator****REVISION HISTORY**

| Revision | Date       | Description                                          |
|----------|------------|------------------------------------------------------|
| A        | 04/14/2006 |                                                      |
| 1.0.0    | 02/29/2012 | Reformat of Datasheet<br>Package drawing corrections |
|          |            |                                                      |
|          |            |                                                      |
|          |            |                                                      |
|          |            |                                                      |
|          |            |                                                      |

**FOR FURTHER ASSISTANCE**

Email:

customersupport@exar.com

Exar Technical Documentation:

<http://www.exar.com/TechDoc/default.aspx?>**EXAR CORPORATION****HEADQUARTERS AND SALES OFFICES**

48720 Kato Road

Fremont, CA 94538 – USA

Tel.: +1 (510) 668-7000

Fax: +1 (510) 668-7030

[www.exar.com](http://www.exar.com)**NOTICE**

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.