

## COMPANDER IC FOR CORDLESS TELEPHONE

### FEATURES

- Low operating supply voltage and small consumption current make this IC suitable for its application to the sets using the battery such as the codeless telephone set. etc.



$$V_{CC}(\text{MIN}) = 1.8\text{V} \quad (T_a = 25^\circ\text{C})$$

$$I_{CCQ} = 2.7\text{mA} \quad (\text{Typ.}) \quad (V_{CC} = 3\text{V}, T_a = 25^\circ\text{C})$$

- For noise reduction, compressor and expander are incorporated into a package.
- Wide operating supply voltage range :  $V_{CC} = 1.8 \sim 9\text{V}$
- Recommendable operating supply voltage :  $V_{CC} = 3\text{V}$
- Difference between TA31101P, TA31101F and TA31101AP, TA31101AF

| NAME OF PRODUCT      | INPUT REFERENCE LEVEL (Typ.) |
|----------------------|------------------------------|
| TA31101P, TA31101F   | - 18.5dBV                    |
| TA31101AP, TA31101AF | - 20.0dBV                    |


### BLOCK DIAGRAM

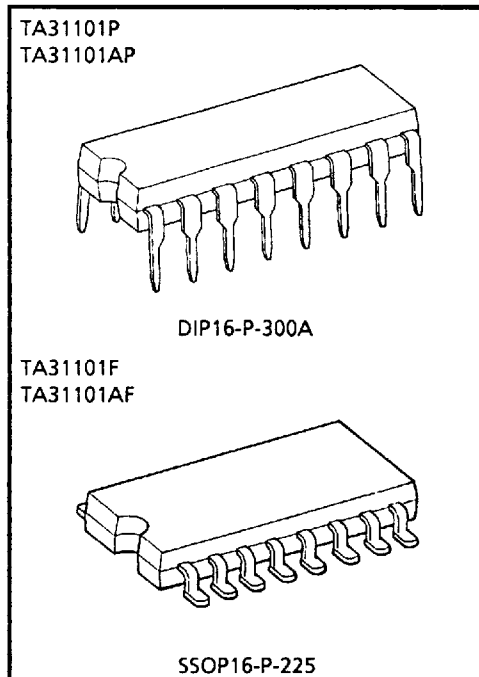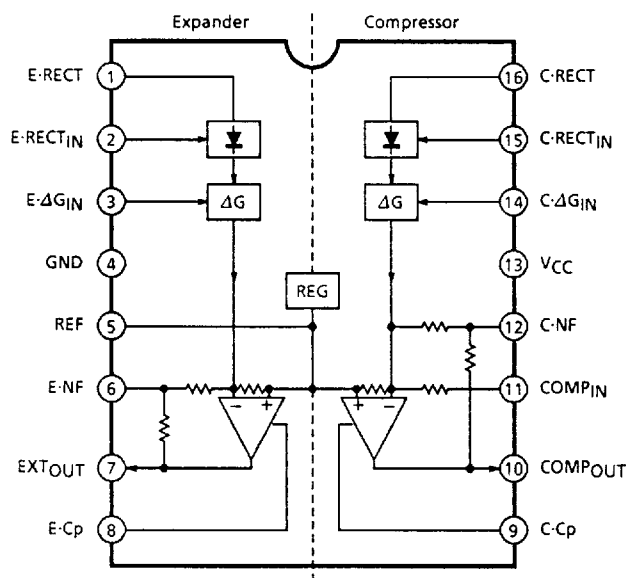


Weight DIP16-P-300A : 1.1g (Typ.)  
SSOP16-P-225 : 0.14g (Typ.)

The compressor and the expander of this IC are individually composed of the rectification circuit, the gain cell and the operation amplification circuit as shown in the figure below.

### Compressor

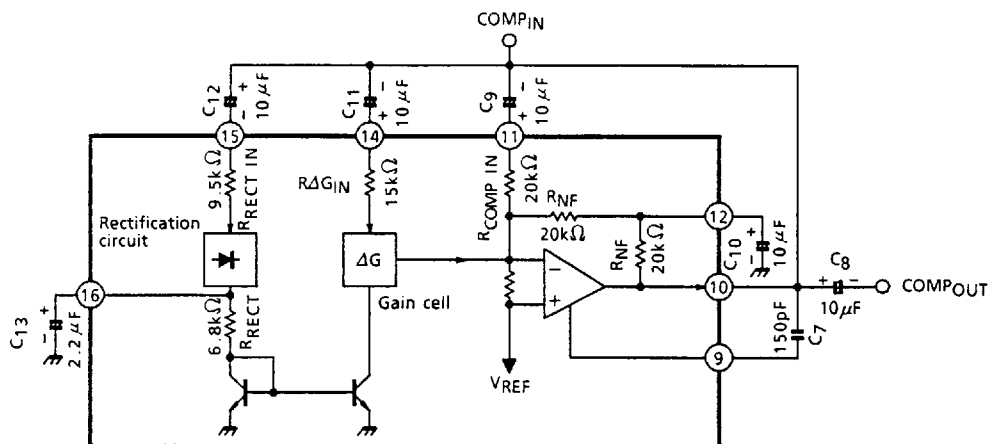


### Expander

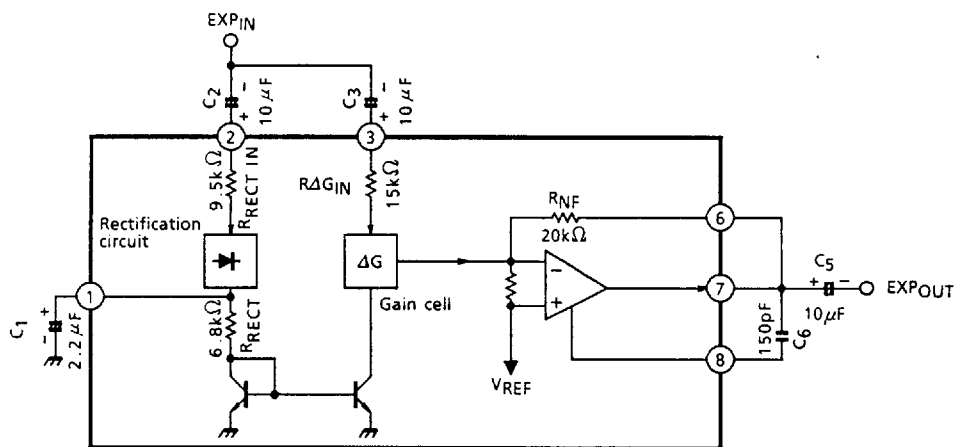

### 1. Rectification circuit

In this circuit, the feedback-type full-wave rectification circuit is applied for improving the precision of detection, and the response characteristics (attack time, recovery time) are determined by the time constant of the smoothing capacitor of the rectifying output current connected to the E-RECT terminal and the C-RECT terminal (pin 1, pin 16) and by the time constant of the internal resistance of IC.

- The internal resistance of E-RECT terminal and C-RECT terminal (pin 1, pin 16) becomes the series resistance of the R-RECT  $6.8\Omega$  and the emitter resistance  $r_e$  in the current miller circuit. The emitter resistance  $r_e$  of transistor varies according to the signal level as shown below.

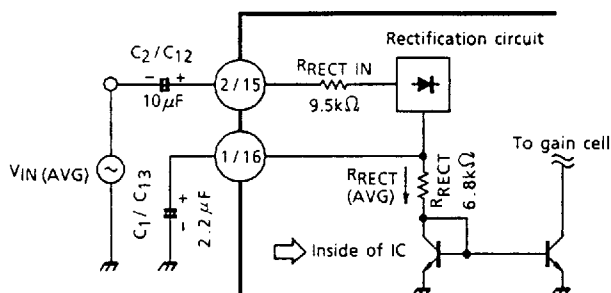

$$3 \cdot \frac{V_{IN (AVG)}}{R_{RECT IN}} = I_{RECT (AVG)}$$

$$r_e = \frac{V_T}{I_{RECT (AVG)}} (\Omega)$$


$V_{IN (AVG)}$  : Mean input signal voltage  
 $I_{RECT (AVG)}$  : Mean rectification output  
 $r_e$  : Emitter resistance  
 $V_T$  : Approx. 26mV  
 (At room temperature)

- The input resistance of the input E-RECT<sub>IN</sub> terminal and C-RECT<sub>IN</sub> terminal (pin 2, pin 15) of the rectification circuit is approximately  $9.5k\Omega$ .

## 2. Gain cell ( $\Delta G$ )

This circuit is a variable gain amplifier for controlling the gain with the rectification output current of the rectification circuit.

The input resistance of the input E- $\Delta G_{IN}$  terminal and C- $\Delta G_{IN}$  terminal of the gain cell (pin 3, pin 14) is approximately  $15k\Omega$ .

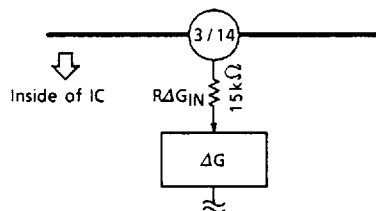

## 3. Operation amplification circuit


In the compressor, since the variable gain amplifier is involved in the feedback loop of the operation amplification circuit, the oscillation is liable to be generated, however, in this circuit, since the C-Cp terminal (pin 9) for phase compensation is provided, the countermeasure can be taken against the oscillation through the external capacitor.

In the compressor, for making the current gain maximum, the capacitor for decoupling the current signal is connected to the C-NF terminal (pin 12).

The cut-off frequency of the compressor is determined by the product of the capacitor  $C_{10}$  connected to the C-NF terminal multiplied by  $R_{NF}$   $20k\Omega$  of the internal resistance.

The cut-off frequency is obtained by the expression below.

$$f_C = \frac{1}{2\pi \cdot C_{10} \cdot R_{NF}}$$

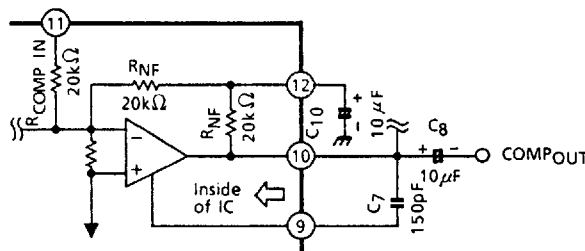

MAXIMUM RATINGS (Ta = 25°C)


| CHARACTERISTIC        |        | SYMBOL           | RATING  | UNIT |
|-----------------------|--------|------------------|---------|------|
| Supply Voltage        |        | V <sub>CC</sub>  | 10      | V    |
| Power Dissipation     | P type | P <sub>D</sub>   | 1000    | mW   |
|                       | F type |                  | 370     |      |
| Operating Temperature |        | T <sub>opr</sub> | -25~75  | °C   |
| Storage Temperature   |        | T <sub>stg</sub> | -55~150 | °C   |

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, V<sub>CC</sub> = 3V, f = 1kHz, Ta = 25°C, 0dB = -20dBV)

| CHARACTERISTIC               |           | SYMBOL           | TEST CIRCUIT | TEST CONDITION                                                     | MIN.  | TYP.  | MAX.  | UNIT              |
|------------------------------|-----------|------------------|--------------|--------------------------------------------------------------------|-------|-------|-------|-------------------|
| Supply Voltage               |           | V <sub>CC</sub>  | —            | —                                                                  | 1.8   | 3.0   | 9.0   | V                 |
| Quiescent Current            |           | I <sub>CCQ</sub> | 1            | V <sub>CC</sub> = 3.0V                                             | —     | 2.7   | 5.0   | mA                |
| Input Reference Level        | TA31101P  | V <sub>REF</sub> | 2            | V <sub>IN</sub> = V <sub>OUT</sub>                                 | -20.0 | -18.5 | -17.0 | dBV               |
|                              | TA31101F  |                  |              |                                                                    |       |       |       |                   |
|                              | TA31101AP |                  |              |                                                                    | -21.5 | -20.0 | -18.5 |                   |
|                              | TA31101AF |                  |              |                                                                    |       |       |       |                   |
| Total Harmonic Distortion    | COMP      | THD <sub>C</sub> | 3            | V <sub>IN</sub> = 0dB                                              | —     | -55   | -46   | dB                |
|                              | EXP       | THD <sub>E</sub> |              |                                                                    | —     | -55   | -46   |                   |
| Output Noise Voltage         | COMP      | V <sub>NOC</sub> | 4            | V <sub>IN</sub> = -∞, f = 15Hz~20kHz                               | —     | 0.5   | —     | mV <sub>rms</sub> |
|                              | EXP       | V <sub>NOE</sub> |              |                                                                    | —     | 15    | —     | μV <sub>rms</sub> |
| Cross Talk                   | C→E       | CT (C→E)         | 5            | V <sub>IN</sub> = 0dBV                                             | —     | -95   | —     | dBV               |
|                              | E→C       | CT (E→C)         | 6            | V <sub>IN</sub> = -12dBV                                           | —     | -55   | —     |                   |
| Ripple Rejection Ratio       | COMP      | RR <sub>C</sub>  | 7            | V <sub>R</sub> = 100mV <sub>rms</sub> , f = 1kHz                   | —     | -30   | —     | dB                |
|                              | EXP       | RR <sub>E</sub>  |              |                                                                    | —     | -60   | —     |                   |
| Maximum Output Voltage (EXP) |           | V <sub>OM</sub>  | 8            | R <sub>L</sub> = 10kΩ                                              | —     | 800   | —     | mV <sub>rms</sub> |
| Output Deviation (Note 1)    | COMP      | V <sub>OC1</sub> | 9            | V <sub>IN</sub> = 20dB                                             | -0.4  | 0.1   | 0.6   | dB                |
|                              |           | V <sub>OC2</sub> |              | V <sub>IN</sub> = -20dB                                            | -0.5  | 0     | 0.5   |                   |
|                              |           | V <sub>OC3</sub> |              | V <sub>IN</sub> = -40dB                                            | -0.6  | -0.1  | 0.4   |                   |
|                              | EXP       | V <sub>OE1</sub> | 9            | V <sub>IN</sub> = 6.5dB                                            | -1.1  | -0.1  | 0.9   |                   |
|                              |           | V <sub>OE2</sub> |              | V <sub>IN</sub> = -10dB                                            | -0.9  | 0.1   | 1.1   |                   |
|                              |           | V <sub>OE3</sub> |              | V <sub>IN</sub> = -25dB                                            | -1.0  | 0     | 1.0   |                   |
| Frequency Characteristic     | COMP      | FRC              | 10           | V <sub>IN</sub> = 0dB, f = 200~3500Hz and f = 1kHz are references. | —     | ±0.1  | —     | dB                |
|                              | EXP       | FRE              |              |                                                                    | —     | ±0.1  | —     |                   |


Note 1 : Output deviation = (V<sub>OUT</sub> - V<sub>REF</sub>) - V<sub>IN</sub> × αβ  
αβ : (COMP = 0.5, EXP = 2)

### TEST CIRCUIT

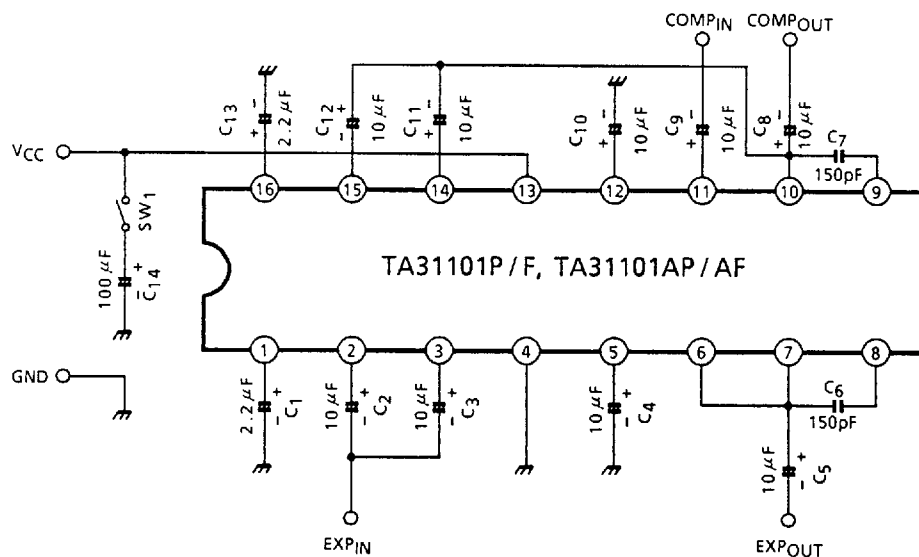


### TEST CIRCUIT


(1) ICCQ

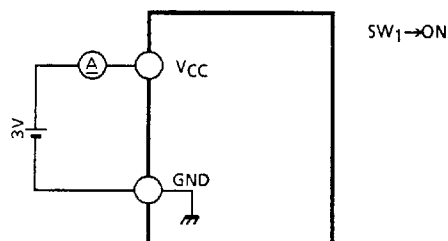


(2)  $V_{REF}$

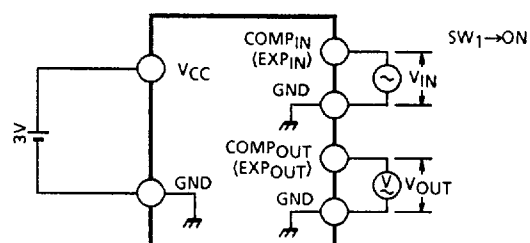


(3) THD<sub>C</sub>, THD<sub>E</sub>

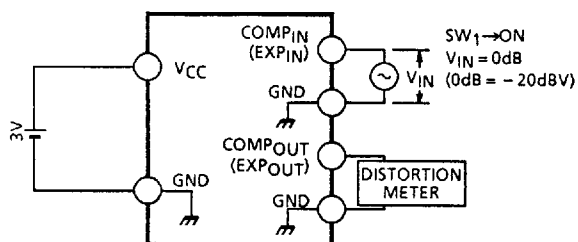


(4)  $V_{NOC}$ ,  $V_{NOE}$

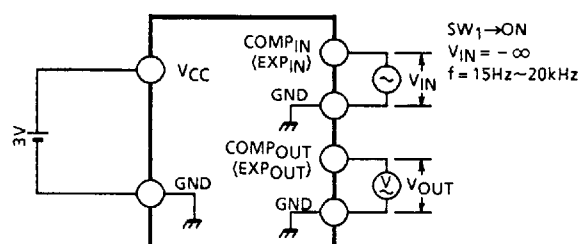


(5) CT (C→E)

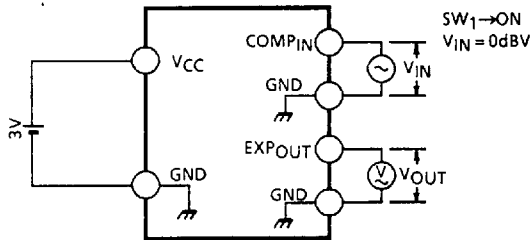


(6) CT (E→C)

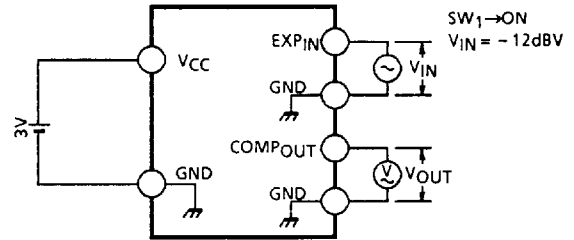


(7) RR<sub>C</sub>, RR<sub>E</sub>

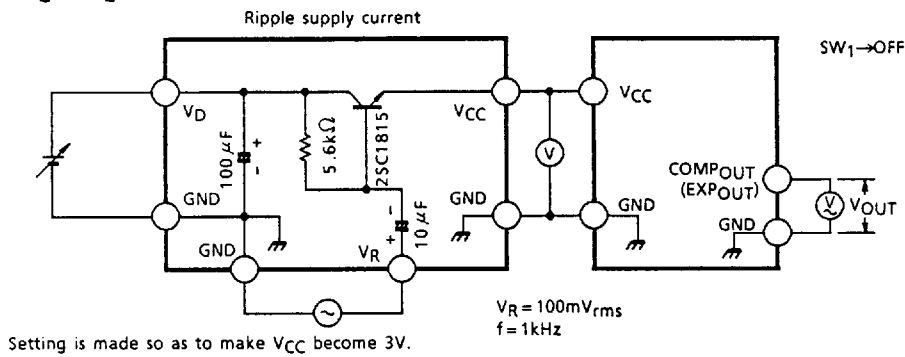

(8) V<sub>OM</sub>

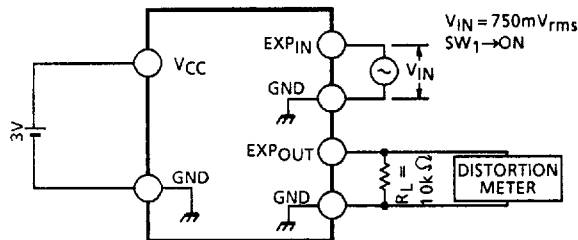

(9) V<sub>OC1, 2, 3</sub>, V<sub>OE1, 2, 3</sub>

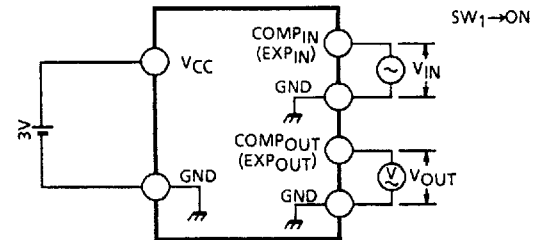

Note : OUTPUT DEVIATION

$$= (V_{OUT} - V_{REF}) - V_{IN} \times \alpha\beta$$

$$\alpha\beta : (\text{COMP} = 0.5, \text{EXP} = 2)$$

$$(0\text{dB} = -20\text{dBV})$$

$$V_{OC1} \rightarrow V_{IN} = +20\text{dB}$$

$$V_{OC2} \rightarrow V_{IN} = -20\text{dB}$$


$$V_{OC3} \rightarrow V_{IN} = -40\text{dB}$$

$$V_{OE1} \rightarrow V_{IN} = +6.5\text{dB}$$


$$V_{OE2} \rightarrow V_{IN} = -10\text{dB}$$

$$V_{OE3} \rightarrow V_{IN} = -25\text{dB}$$


(10) FR<sub>C</sub>, FR<sub>E</sub>

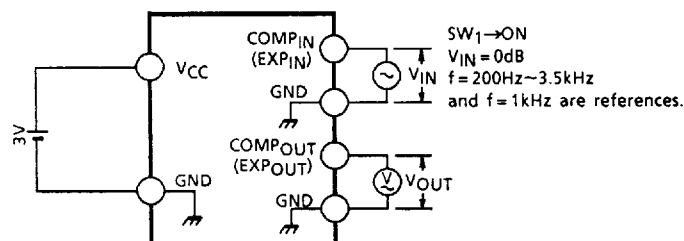


QUIESCENT CURRENT - SUPPLY VOLTAGE

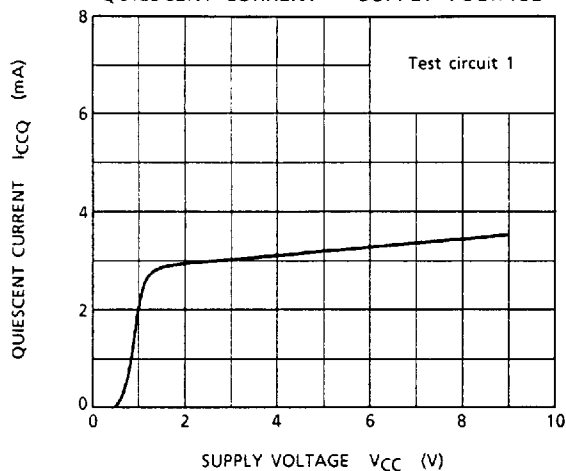


COMPRESSOR INPUT/OUTPUT CHARACTERISTICS (TA31101P, TA31101F)

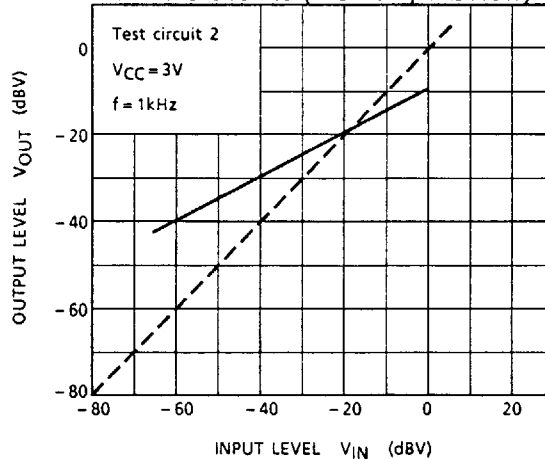


EXPANDER INPUT/OUTPUT CHARACTERISTICS (TA31101P, TA31101F)

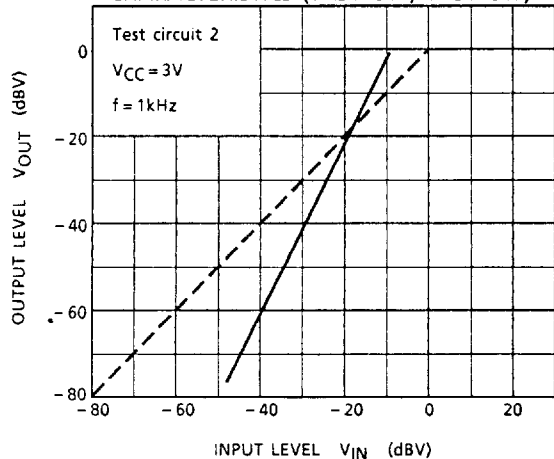


COMPRESSOR INPUT/OUTPUT CHARACTERISTICS (TA31101AP, TA31101AF)






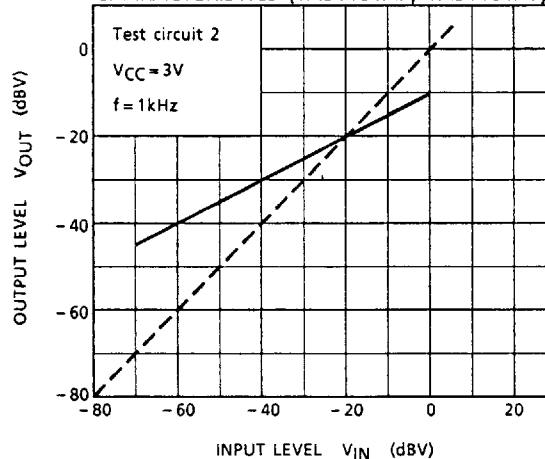


EXPANDER INPUT/OUTPUT CHARACTERISTICS (TA31101AP, TA31101AF)



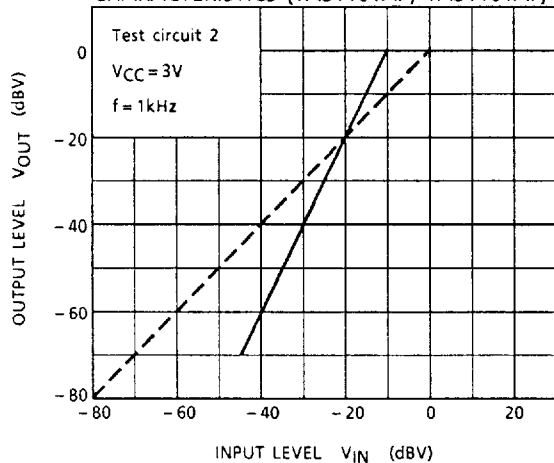


COMPRESSOR INPUT LEVEL - TOTAL HARMONIC DISTORTION

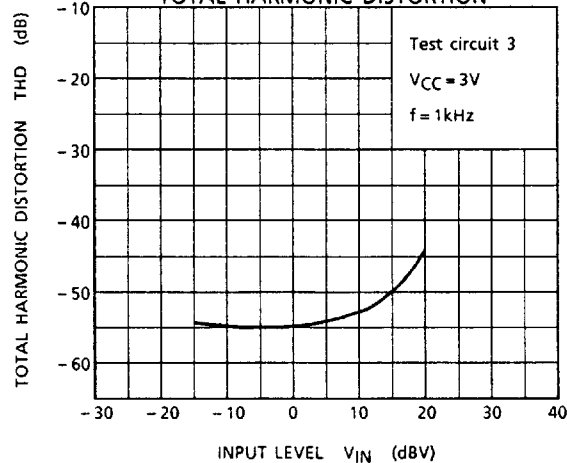


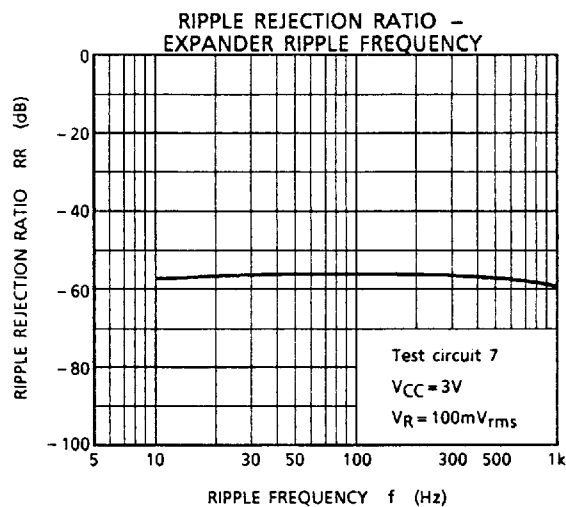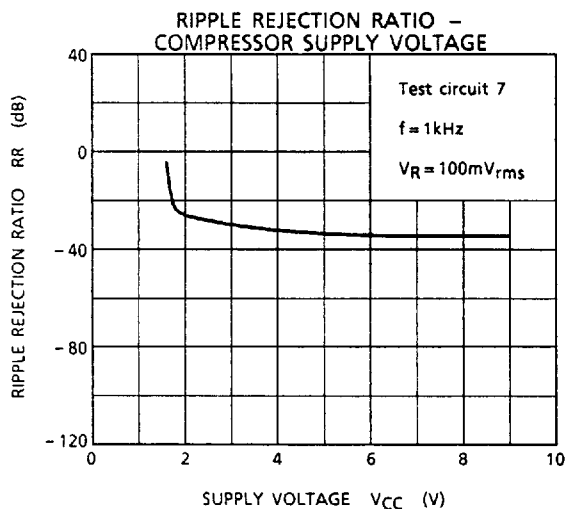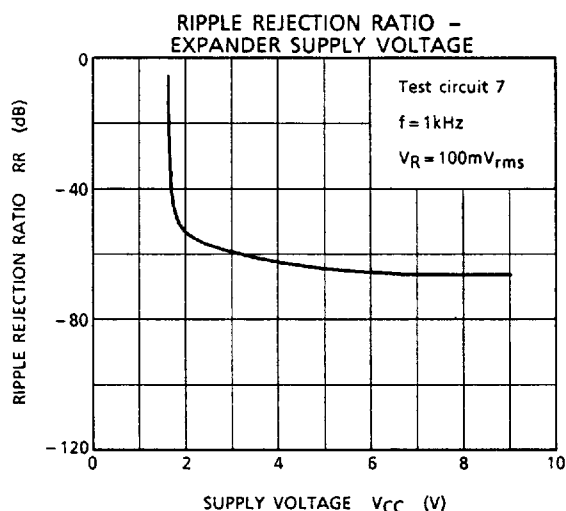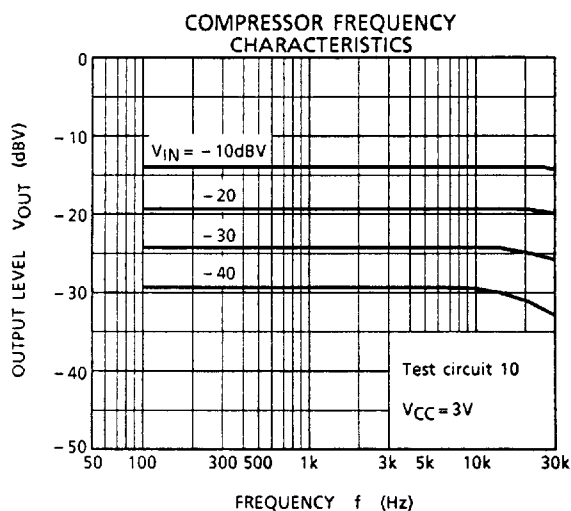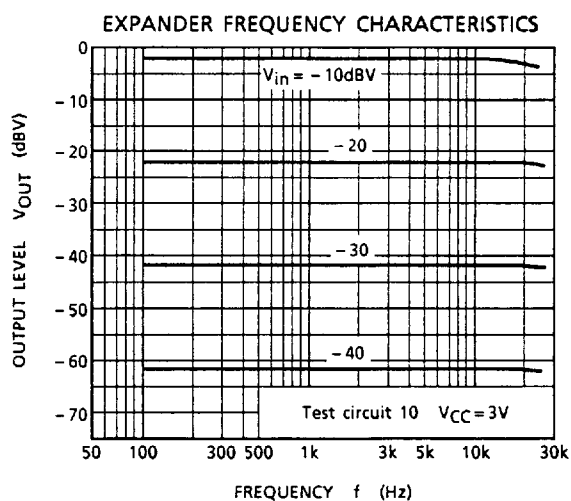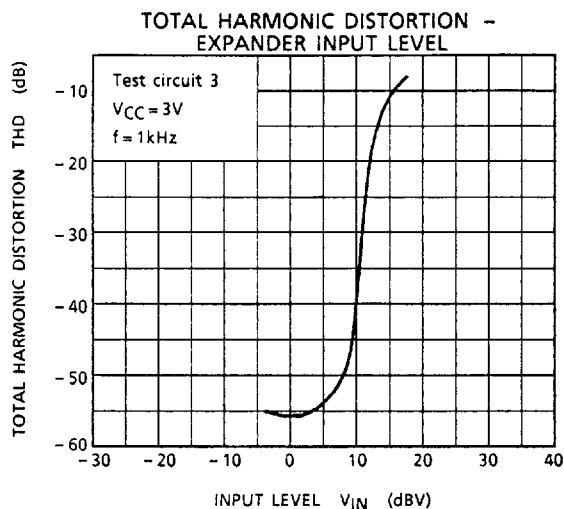



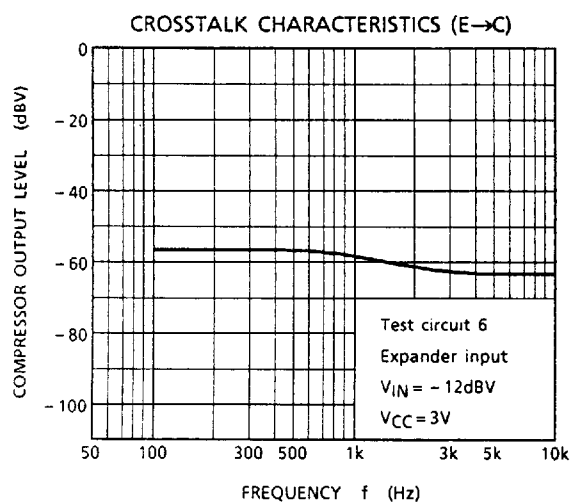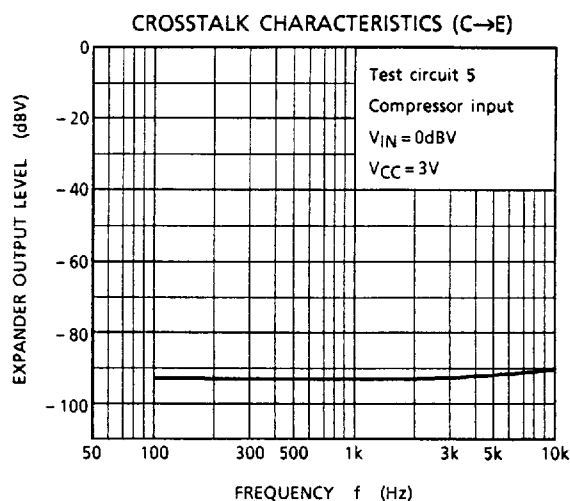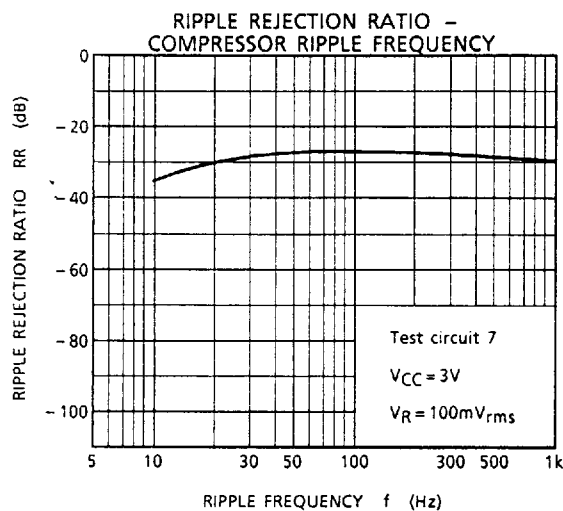


APPLICATION CIRCUIT

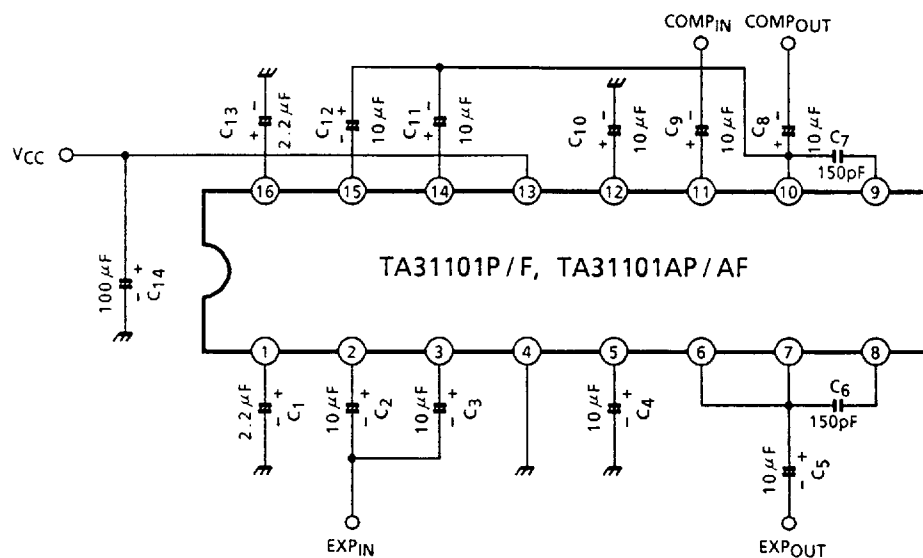

OUTLINE DRAWING  
 DIP16-P-300A





Unit : mm

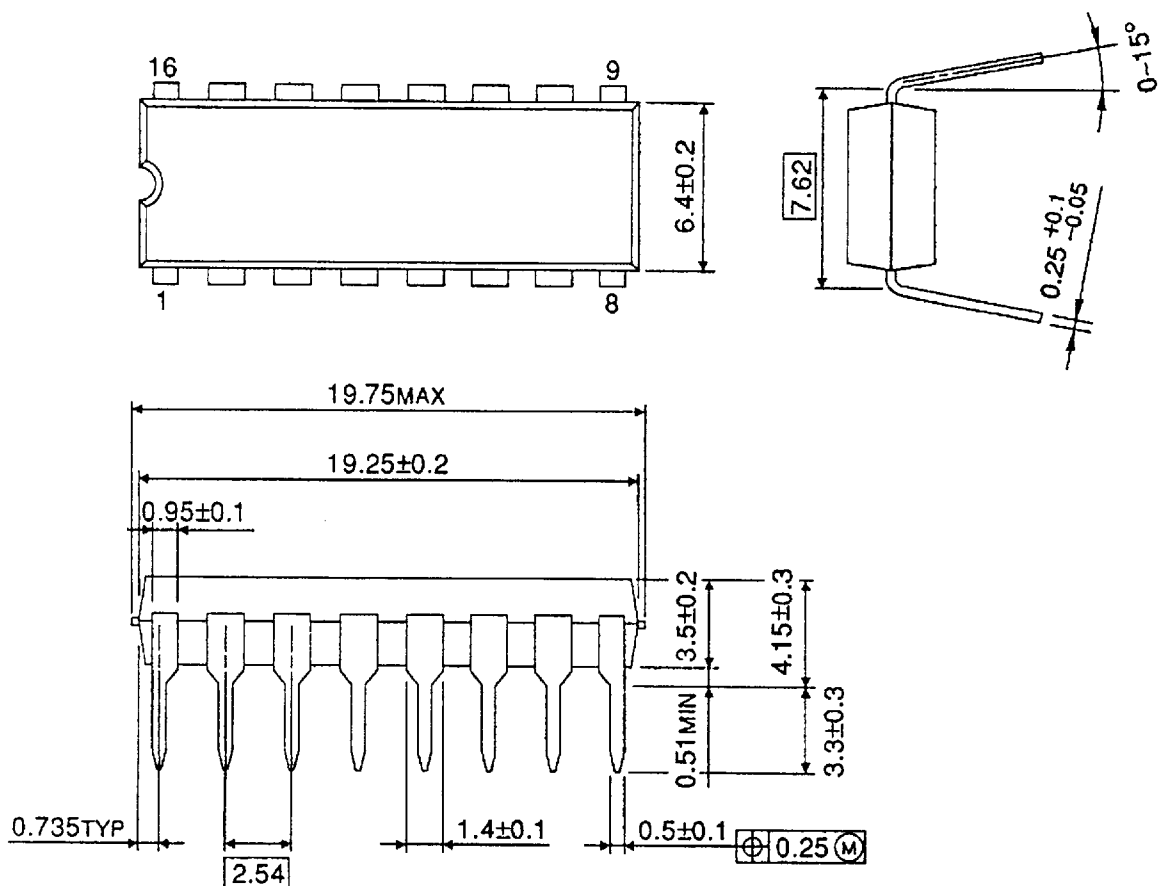

Weight : 1.1g (Typ.)

OUTLINE DRAWING  
 SSOP16-P-225

Unit : mm

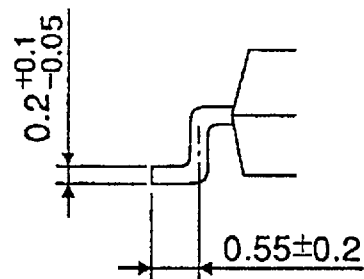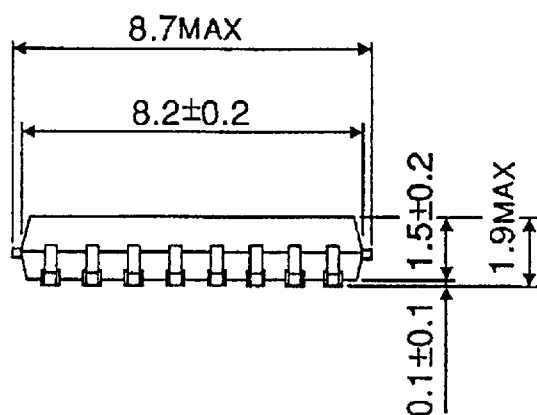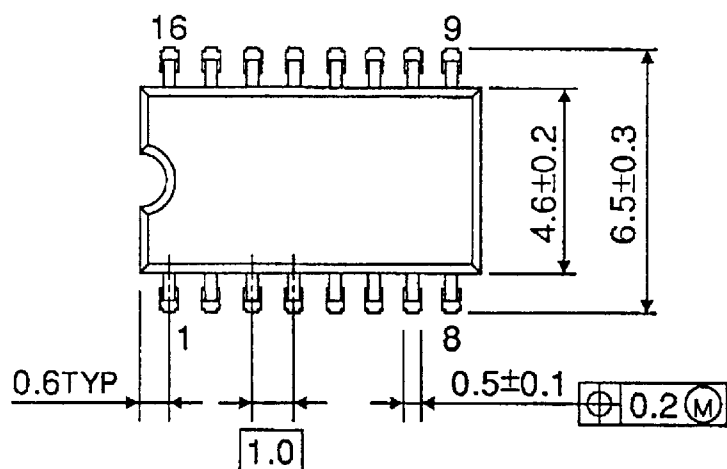

Weight : 0.14g (Typ.)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.