LMC6482 CMOS Dual Rail-To-Rail Input and Output Operational Amplifier

Check for Samples: LMC6482

FEATURES

- **(Typical Unless Otherwise Noted)**
- **Rail-to-Rail Input Common-Mode Voltage Range (Ensured Over Temperature)**
- **Rail-to-Rail Output Swing (within 20mV of Supply Rail, 100kΩ Load)**
- **Ensured 3V, 5V and 15V Performance**
- **Excellent CMRR and PSRR: 82dB**
- **Ultra Low Input Current: 20fA**
- **High Voltage Gain (R_L = 500kΩ): 130dB**
- **Specified for 2kΩ and 600Ω Loads**
- **Available in VSSOP Package**

APPLICATIONS

- **Data Acquisition Systems**
- **Transducer Amplifiers**
- **Hand-held Analytic Instruments**
- **Medical Instrumentation**
- **Active Filter, Peak Detector, Sample and Hold, pH Meter, Current Source**
- **Improved Replacement for TLC272, TLC277**

DESCRIPTION

The LMC6482 provides a common-mode range that extends to both supply rails. This rail-to-rail performance combined with excellent accuracy, due to a high CMRR, makes it unique among rail-to-rail input amplifiers.

It is ideal for systems, such as data acquisition, that require a large input signal range. The LMC6482 is also an excellent upgrade for circuits using limited common-mode range amplifiers such as the TLC272 and TLC277.

Maximum dynamic signal range is assured in low voltage and single supply systems by the LMC6482's rail-to-rail output swing. The LMC6482's rail-to-rail output swing is ensured for loads down to 600Ω.

Ensured low voltage characteristics and low power dissipation make the LMC6482 especially well-suited for battery-operated systems.

LMC6482 is also available in VSSOP package which is almost half the size of a SOIC-8 device.

See the LMC6484 data sheet for a Quad CMOS operational amplifier with these same features.

3V Single Supply Buffer Circuit

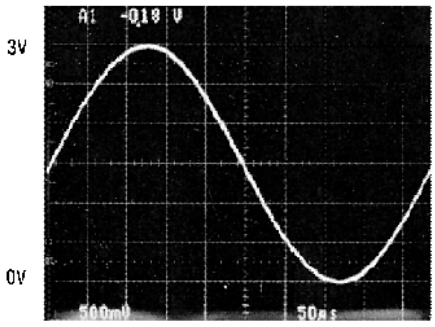

Figure 1. Rail-To-Rail Input



Figure 2.

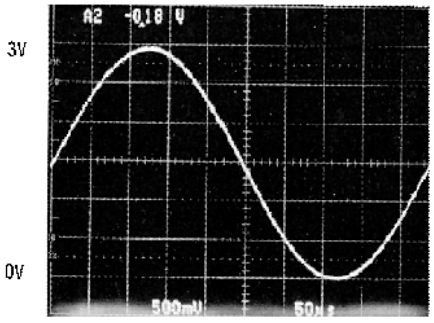

Figure 3. Rail-To-Rail Output

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1997–2013, Texas Instruments Incorporated

Connection Diagram

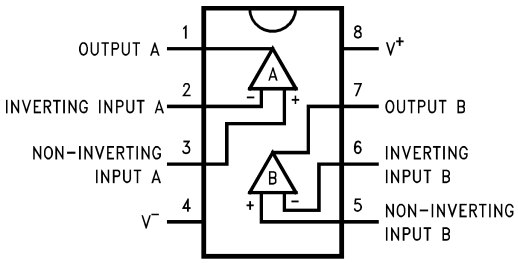

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings(1)(2)

ESD Tolerance (3)	1.5kV
Differential Input Voltage	±Supply Voltage
Voltage at Input/Output Pin	(V^+) +0.3V, (V^-) −0.3V
Supply Voltage ($V^+ - V^-$)	16V
Current at Input Pin (4)	±5mA
Current at Output Pin (5) (6)	±30mA
Current at Power Supply Pin	40mA
Lead Temperature (Soldering, 10 sec.)	260°C
Storage Temperature Range	−65°C to +150°C
Junction Temperature (7)	150°C

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
(2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/Distributors for availability and specifications.
(3) Human body model, 1.5kΩ in series with 100pF. All pins rated per method 3015.6 of MIL-STD-883. This is a Class 1 device rating.
(4) Limiting input pin current is only necessary for input voltages that exceed absolute maximum input voltage ratings.
(5) Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C. Output currents in excess of ±30mA over long term may adversely affect reliability.
(6) Do not short circuit output to V^+, when V^+ is greater than 13V or reliability will be adversely affected.
(7) The maximum power dissipation is a function of $T_{J(max)}$, θ_{JA}, and T_A. The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(max)} - T_A)/\theta_{JA}$. All numbers apply for packages soldered directly into a PC board.

Operating Ratings

Supply Voltage	3.0V ≤ V+ ≤ 15.5V
Junction Temperature Range	
LMC6482AM	−55°C ≤ T_J ≤ +125°C
LMC6482AI, LMC6482I	−40°C ≤ T_J ≤ +85°C
Thermal Resistance (θ_{JA})	
P0008E Package, 8-Pin PDIP	90°C/W
D0008A Package, 8-Pin SOIC	155°C/W
DGK0008A Package, 8-Pin VSSOP	194°C/W

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.

Copyright © 1997–2013, Texas Instruments Incorporated

DC Electrical Characteristics

Unless otherwise specified, all limits specified for T_J = 25°C, V^+ = 5V, V^- = 0V, V_{CM} = V_O = V^+/2 and R_L > 1M. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions		Typ (1)	LMC6482AI Limit (2)	LMC6482I Limit (2)	LMC6482M Limit (2)	Units
V_{OS}	Input Offset Voltage			0.11	0.750	3.0	3.0	mV
					1.35	**3.7**	**3.8**	max
TCV_{OS}	Input Offset Voltage Average Drift			1.0				µV/°C
I_B	Input Current	(3)		0.02	**4.0**	**4.0**	**10.0**	pA
								max
I_{OS}	Input Offset Current	(3)		0.01	**2.0**	**2.0**	**5.0**	pA
								max
C_{IN}	Common-Mode Input Capacitance			3				pF
R_{IN}	Input Resistance			>10				TeraΩ
CMRR	Common Mode Rejection Ratio	0V ≤ V_{CM} ≤ 15.0V V^+ = 15V		82	70	65	65	dB min
					67	**62**	**60**	
		0V ≤ V_{CM} ≤ 5.0V V^+ = 5V		82	70	65	65	
					67	**62**	**60**	
+PSRR	Positive Power Supply Rejection Ratio	5V ≤ V^+ ≤ 15V, V^- = 0V V_O = 2.5V		82	70	65	65	dB
					67	**62**	**60**	min
−PSRR	Negative Power Supply Rejection Ratio	−5V ≤ V^- ≤ −15V, V^+ = 0V V_O = −2.5V		82	70	65	65	dB
					67	**62**	**60**	min
V_{CM}	Input Common-Mode Voltage Range	V^+ = 5V and 15V For CMRR ≥ 50dB		V^- − 0.3	− 0.25	− 0.25	− 0.25	V
					0	**0**	**0**	max
				V^+ + 0.3V	V^+ + 0.25	V^+ + 0.25	V^+ + 0.25	V
					V^+	**V^+**	**V^+**	min
A_V	Large Signal Voltage Gain	R_L = 2kΩ (4) (5)	Sourcing	666	140	120	120	V/mV
					84	**72**	**60**	min
			Sinking	75	35	35	35	V/mV
					20	**20**	**18**	min
		R_L = 600Ω (4) (5)	Sourcing	300	80	50	50	V/mV
					48	**30**	**25**	min
			Sinking	35	20	15	15	V/mV
					13	**10**	**8**	min

(1) Typical Values represent the most likely parametric norm.
(2) All limits are specified by testing or statistical analysis.
(3) Ensured limits are dictated by tester limitations and not device performance. Actual performance is reflected in the typical value.
(4) V^+ = 15V, V_{CM} = 7.5V and R_L connected to 7.5V. For Sourcing tests, 7.5V ≤ V_O ≤ 11.5V. For Sinking tests, 3.5V ≤ V_O ≤ 7.5V.
(5) Ensured limits are dictated by tester limitations and not device performance. Actual performance is reflected in the typical value.

Copyright © 1997–2013, Texas Instruments Incorporated

DC Electrical Characteristics (continued)

Unless otherwise specified, all limits specified for T_J = 25°C, V^+ = 5V, V^- = 0V, $V_{CM} = V_O = V^+/2$ and R_L > 1M. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Typ (1)	LMC6482AI Limit (2)	LMC6482I Limit (2)	LMC6482M Limit (2)	Units
V_O	Output Swing	V^+ = 5V R_L = 2kΩ to $V^+/2$	4.9	4.8	4.8	4.8	V
				4.7	**4.7**	**4.7**	min
			0.1	0.18	0.18	0.18	V
				0.24	**0.24**	**0.24**	max
		V^+ = 5V R_L = 600Ω to $V^+/2$	4.7	4.5	4.5	4.5	V
				4.24	**4.24**	**4.24**	min
			0.3	0.5	0.5	0.5	V
				0.65	**0.65**	**0.65**	max
		V^+ = 15V R_L = 2kΩ to $V^+/2$	14.7	14.4	14.4	14.4	V
				14.2	**14.2**	**14.2**	min
			0.16	0.32	0.32	0.32	V
				0.45	**0.45**	**0.45**	max
		V^+ = 15V R_L = 600Ω to $V^+/2$	14.1	13.4	13.4	13.4	V
				13.0	**13.0**	**13.0**	min
			0.5	1.0	1.0	1.0	V
				1.3	**1.3**	**1.3**	max
I_{SC}	Output Short Circuit Current V^+ = 5V	Sourcing, V_O = 0V	20	16	16	16	mA
				12	**12**	**10**	min
		Sinking, V_O = 5V	15	11	11	11	mA
				9.5	**9.5**	**8.0**	min
I_{SC}	Output Short Circuit Current V^+ = 15V	Sourcing, V_O = 0V	30	28	28	28	mA
				22	**22**	**20**	min
		Sinking, V_O = 12V (6)	30	30	30	30	mA
				24	**24**	**22**	min
I_S	Supply Current	Both Amplifiers V^+ = +5V, $V_O = V^+/2$	1.0	1.4	1.4	1.4	mA
				1.8	**1.8**	**1.9**	max
		Both Amplifiers V^+ = 15V, $V_O = V^+/2$	1.3	1.6	1.6	1.6	mA
				1.9	**1.9**	**2.0**	max

(6) Do not short circuit output to V^+, when V^+ is greater than 13V or reliability will be adversely affected.

AC Electrical Characteristics

Unless otherwise specified, all limits specified for T_J = 25°C, V^+ = 5V, V^- = 0V, $V_{CM} = V_O = V^+/2$, and R_L > 1M. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Typ (1)	LMC6482AI Limit (2)	LMC6482I Limit (2)	LMC6482M Limit (2)	Units
SR	Slew Rate	(3)	1.3	1.0	0.9	0.9	V/µs
				0.7	**0.63**	**0.54**	min
GBW	Gain-Bandwidth Product	V^+ = 15V	1.5				MHz
φ_m	Phase Margin		50				Deg

(1) Typical Values represent the most likely parametric norm.
(2) All limits are specified by testing or statistical analysis.
(3) V^+ = 15V. Connected as Voltage Follower with 10V step input. Number specified is the slower of either the positive or negative slew rates.

Copyright © 1997–2013, Texas Instruments Incorporated

AC Electrical Characteristics (continued)

Unless otherwise specified, all limits specified for T_J = 25°C, V^+ = 5V, V^- = 0V, V_{CM} = V_O = $V^+/2$, and R_L > 1M. **Boldface** limits apply at the temperature extremes.

Parameter		Test Conditions	Typ (1)	LMC6482AI Limit (2)	LMC6482I Limit (2)	LMC6482M Limit (2)	Units
G_m	Gain Margin		15				dB
	Amp-to-Amp Isolation	(4)	150				dB
e_n	Input-Referred Voltage Noise	F = 1kHz V_{cm} = 1V	37				nV/√Hz
I_n	Input-Referred Current Noise	F = 1kHz	0.03				pA/√Hz
T.H.D.	Total Harmonic Distortion	F = 10kHz, A_V = −2 R_L = 10kΩ, V_O = 4.1 V_{PP}	0.01				%
		F = 10kHz, A_V = −2 R_L = 10kΩ, V_O = 8.5 V_{PP} V^+ = 10V	0.01				%

(4) Input referred, V^+ = 15V and R_L = 100 kΩ connected to 7.5V. Each amp excited in turn with 1 kHz to produce V_O = 12 V_{PP}.

DC Electrical Characteristics

Unless otherwise specified, all limits specified for T_J = 25°C, V^+ = 3V, V^- = 0V, V_{CM} = V_O = $V^+/2$ and R_L > 1M.

Parameter		Test Conditions	Typ (1)	LMC6482AI Limit (2)	LMC6482I Limit (2)	LMC6482M Limit (2)	Units
V_{OS}	Input Offset Voltage		0.9	2.0	3.0	3.0	mV
				2.7	**3.7**	**3.8**	max
TCV_{OS}	Input Offset Voltage Average Drift		2.0				µV/°C
I_B	Input Bias Current		0.02				pA
I_{OS}	Input Offset Current		0.01				pA
CMRR	Common Mode Rejection Ratio	0V ≤ V_{CM} ≤ 3V	74	64	60	60	dB min
PSRR	Power Supply Rejection Ratio	3V ≤ V^+ ≤ 15V, V^- = 0V	80	68	60	60	dB min
V_{CM}	Input Common-Mode Voltage Range	For CMRR ≥ 50dB	V^- −0.25	0	0	0	V max
			V^+ + 0.25	V^+	V^+	V^+	V min
V_O	Output Swing	R_L = 2kΩ to $V^+/2$	2.8				V
			0.2				V
		R_L = 600Ω to $V^+/2$	2.7	2.5	2.5	2.5	V min
			0.37	0.6	0.6	0.6	V max
I_S	Supply Current	Both Amplifiers	0.825	1.2	1.2	1.2	mA
				1.5	**1.5**	**1.6**	max

(1) Typical Values represent the most likely parametric norm.
(2) All limits are specified by testing or statistical analysis.

Copyright © 1997–2013, Texas Instruments Incorporated

AC Electrical Characteristics

Unless otherwise specified, $V^+ = 3V$, $V^- = 0V$, $V_{CM} = V_O = V^+/2$, and $R_L > 1M$.

Parameter		Test Conditions	Typ(1)	LMC6482AI	LMC6482I	LMC6482M	Units
				Limit(2)	Limit(2)	Limit(2)	
SR	Slew Rate	(3)	0.9				V/μs
GBW	Gain-Bandwidth Product		1.0				MHz
T.H.D.	Total Harmonic Distortion	F = 10kHz, $A_V = -2$ $R_L = 10k\Omega$, $V_O = 2\ V_{PP}$	0.01				%

(1) Typical Values represent the most likely parametric norm.
(2) All limits are specified by testing or statistical analysis.
(3) Connected as voltage Follower with 2V step input. Number specified is the slower of either the positive or negative slew rates.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

Supply Current vs. Supply Voltage

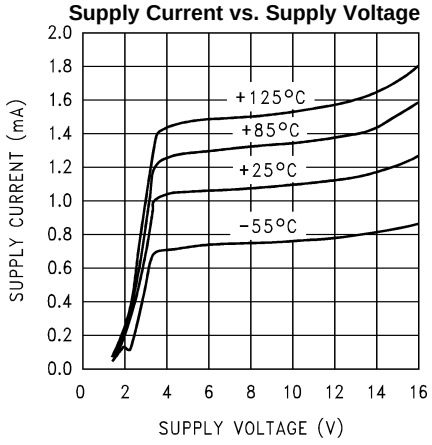

Figure 4.

Input Current vs. Temperature

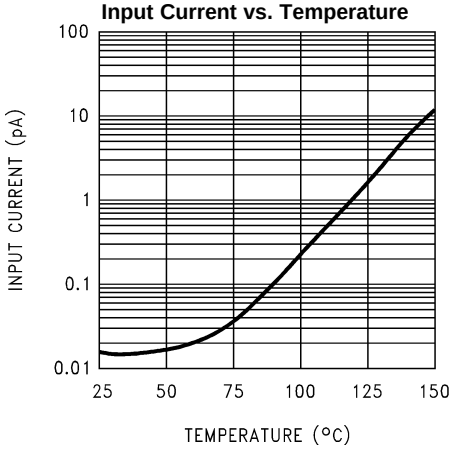

Figure 5.

Sourcing Current vs. Output Voltage

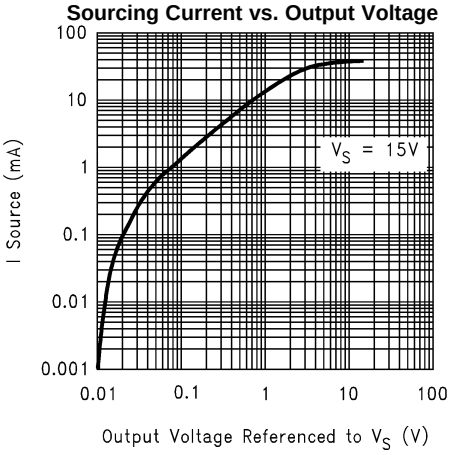

Figure 6.

Sourcing Current vs. Output Voltage

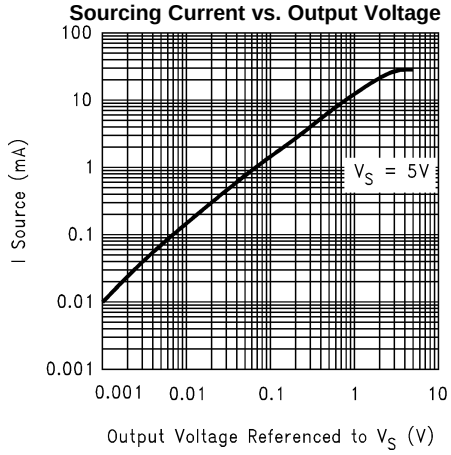

Figure 7.

Sourcing Current vs. Output Voltage

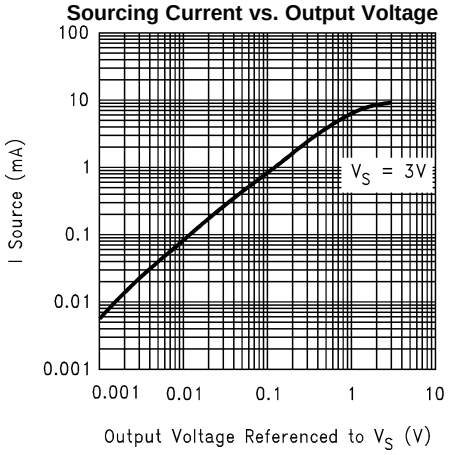

Figure 8.

Sinking Current vs. Output Voltage

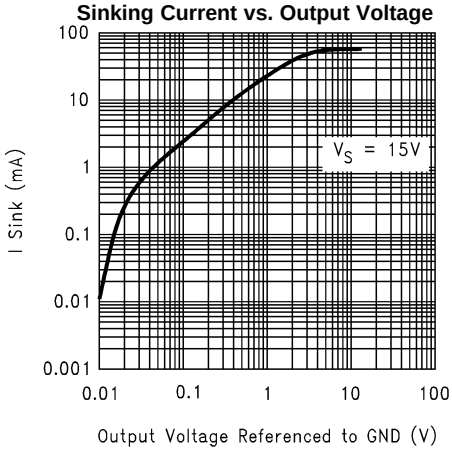

Figure 9.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

Sinking Current vs. Output Voltage

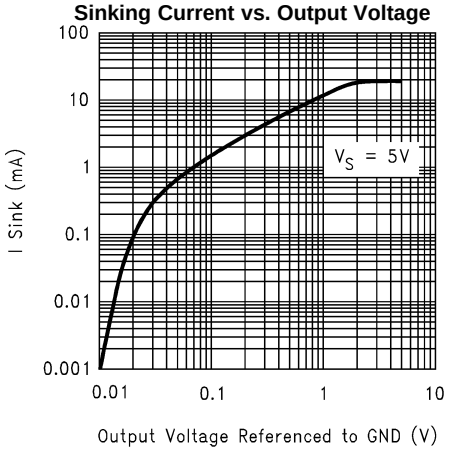

Figure 10.

Sinking Current vs. Output Voltage

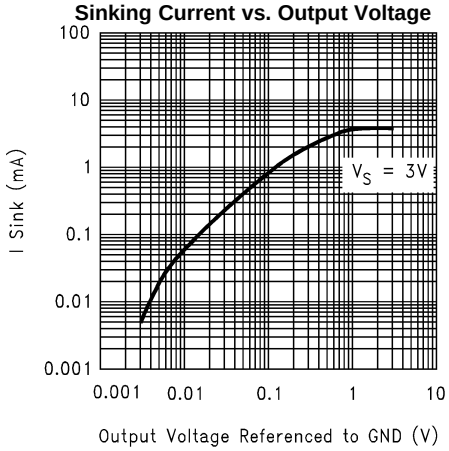

Figure 11.

Output Voltage Swing vs. Supply Voltage

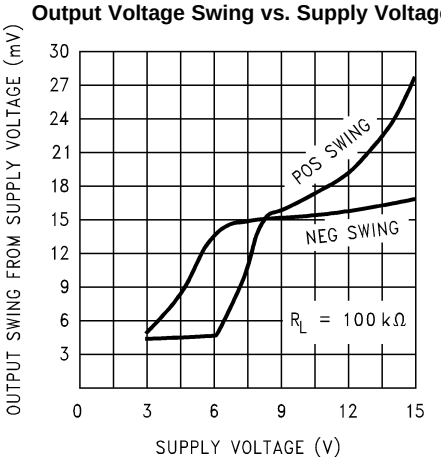

Figure 12.

Input Voltage Noise vs. Frequency

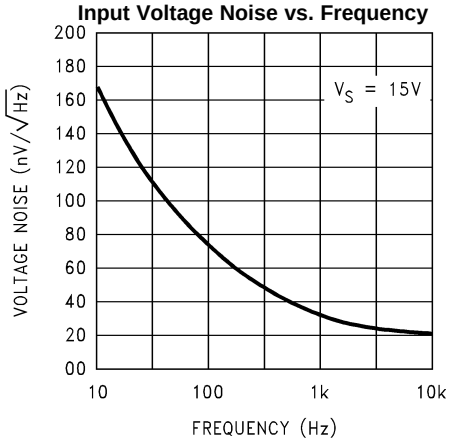

Figure 13.

Input Voltage Noise vs. Input Voltage

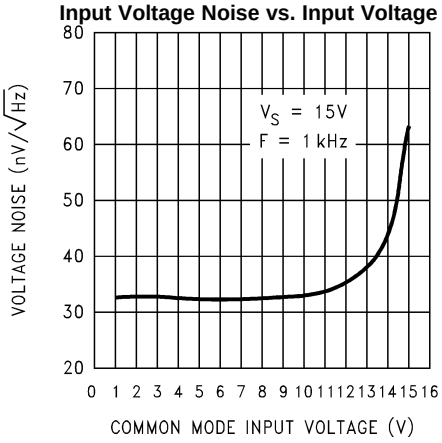

Figure 14.

Input Voltage Noise vs. Input Voltage

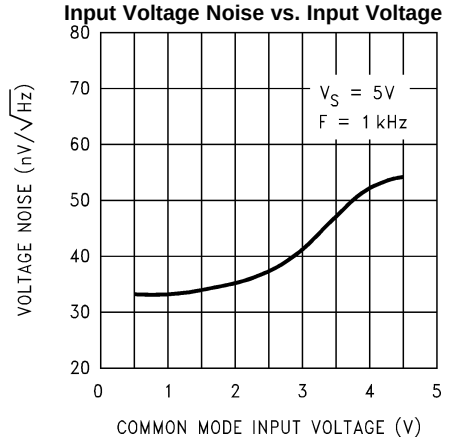

Figure 15.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

Input Voltage Noise vs. Input Voltage

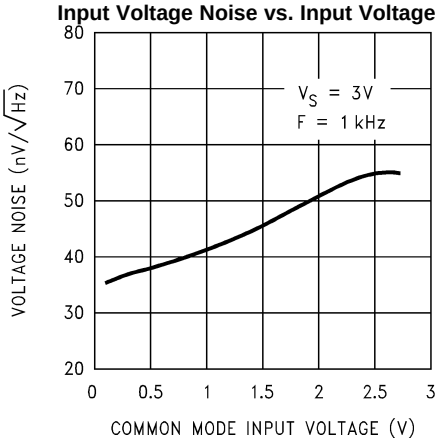

Figure 16.

Crosstalk Rejection vs. Frequency

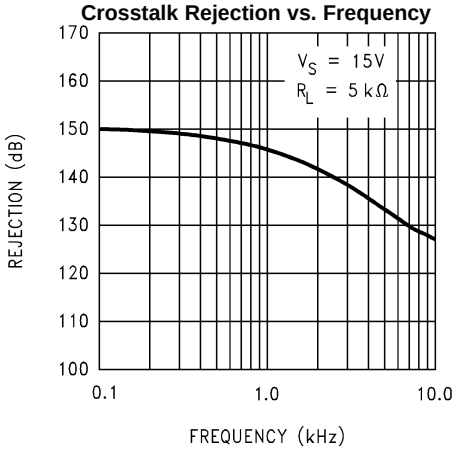

Figure 17.

Crosstalk Rejection vs. Frequency

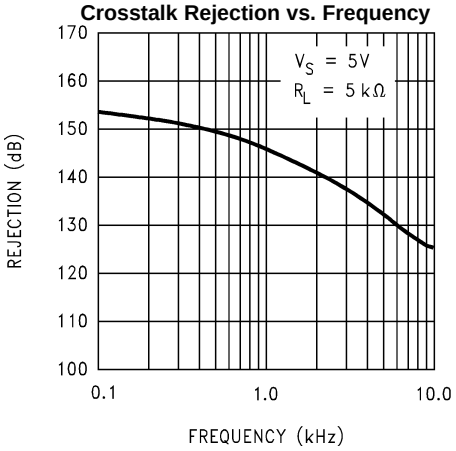

Figure 18.

Positive PSRR vs. Frequency

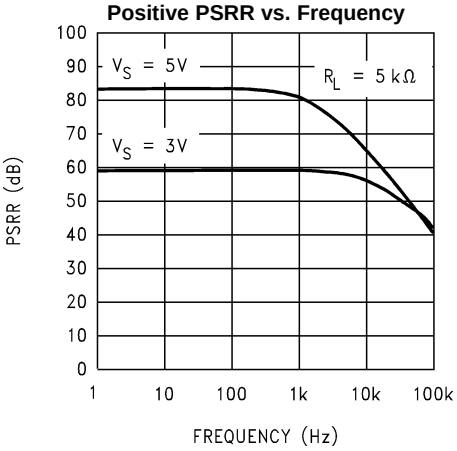

Figure 19.

Negative PSRR vs. Frequency

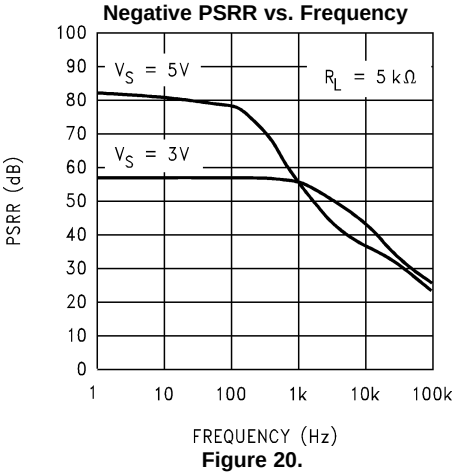

Figure 20.

CMRR vs. Frequency

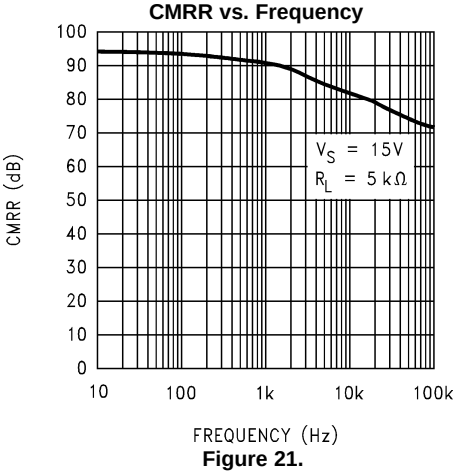

Figure 21.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

CMRR vs. Input Voltage

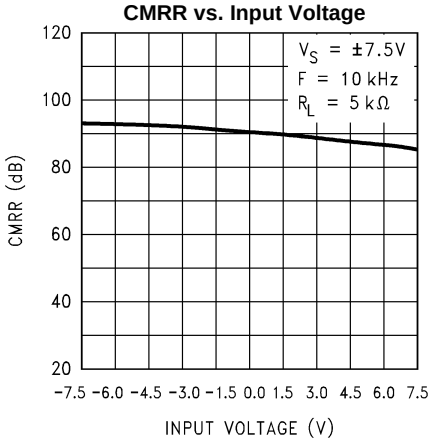

Figure 22.

CMRR vs. Input Voltage

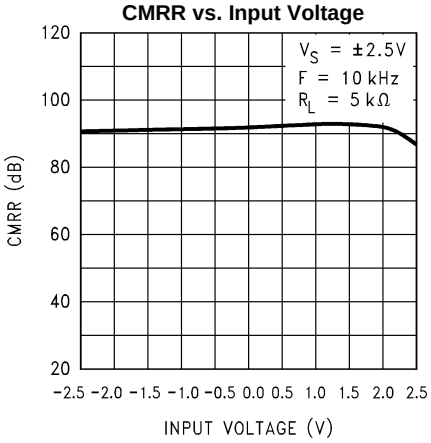

Figure 23.

CMRR vs. Input Voltage

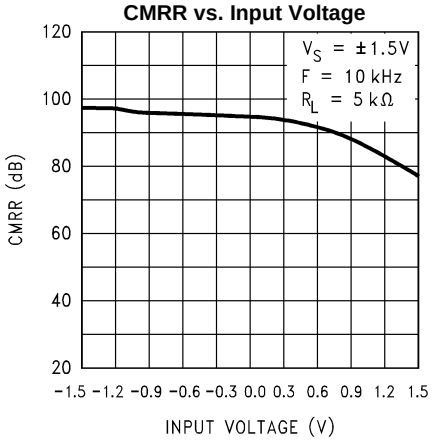

Figure 24.

ΔV_{OS} vs. CMR

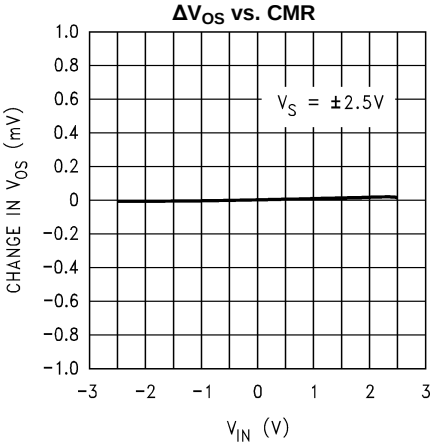

Figure 25.

ΔV_{OS} vs. CMR

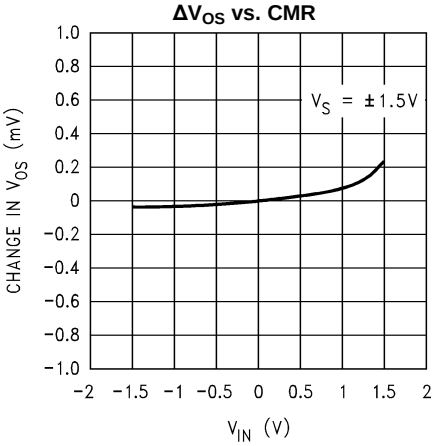

Figure 26.

Input Voltage vs. Output Voltage

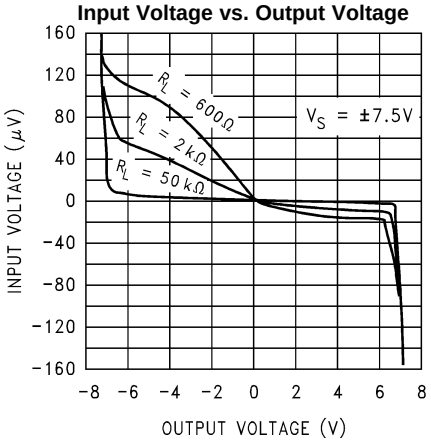

Figure 27.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

Input Voltage vs. Output Voltage

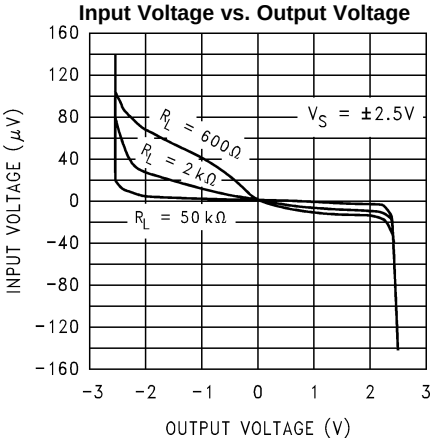

Figure 28.

Open Loop Frequency Response

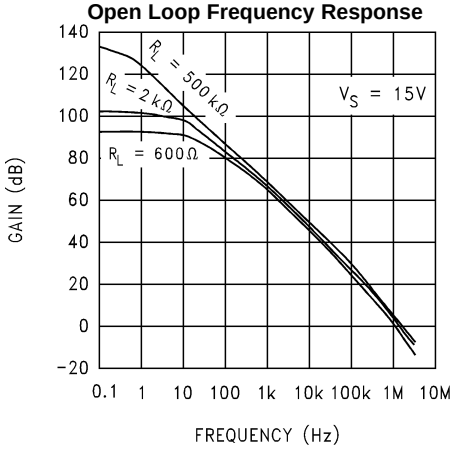

Figure 29.

Open Loop Frequency Response

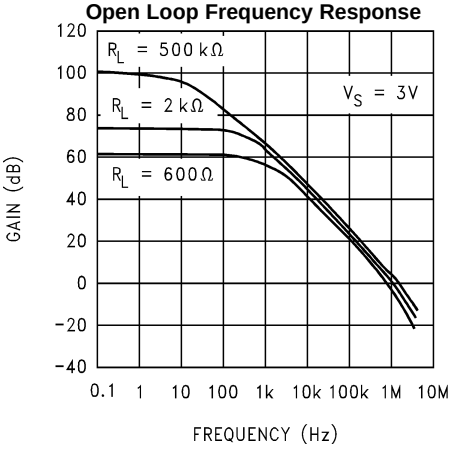

Figure 30.

Open Loop Frequency Response vs. Temperature

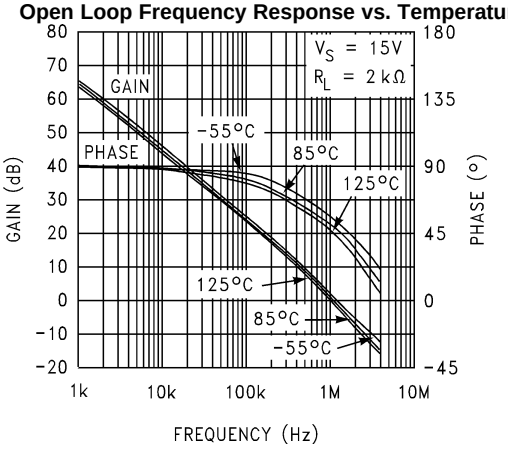

Figure 31.

Maximum Output Swing vs. Frequency

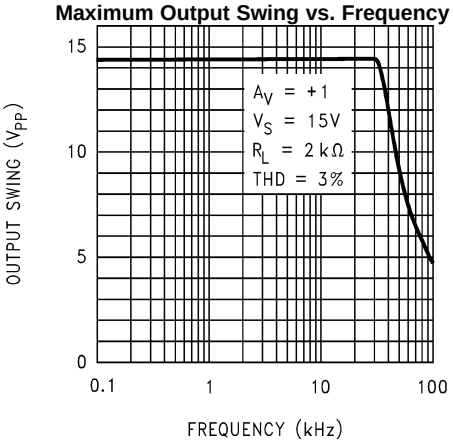

Figure 32.

Gain and Phase vs. Capacitive Load

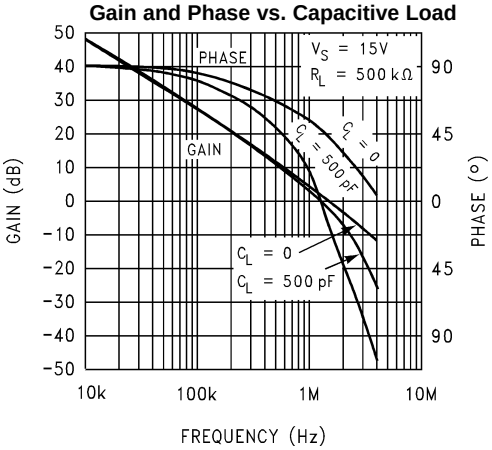

Figure 33.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

Gain and Phase vs. Capacitive Load

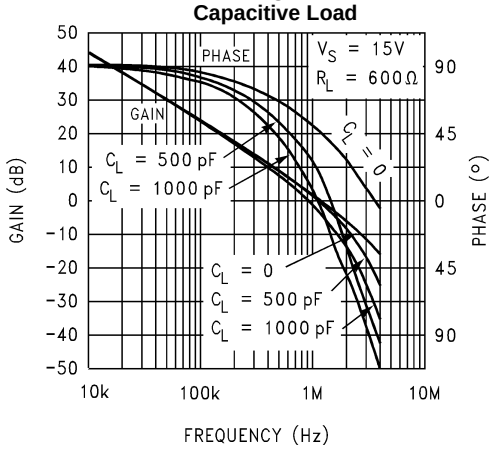

Figure 34.

Open Loop Output Impedance vs. Frequency

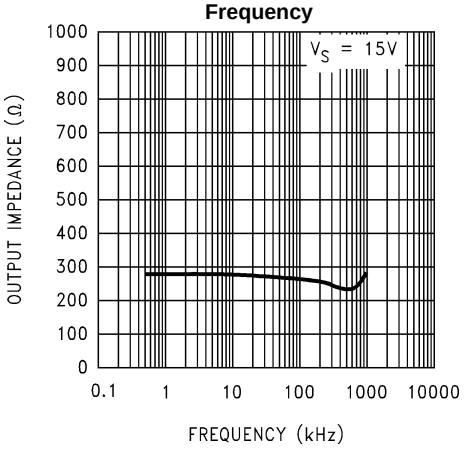

Figure 35.

Open Loop Output Impedance vs. Frequency

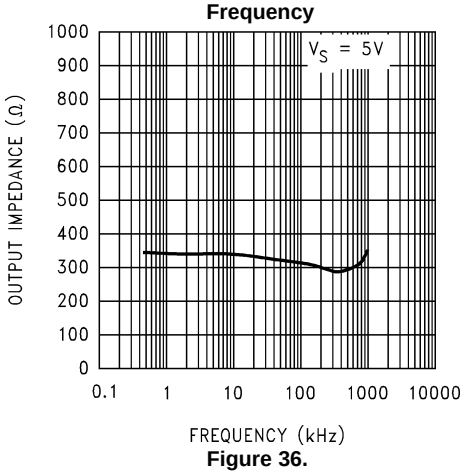

Figure 36.

Slew Rate vs. Supply Voltage

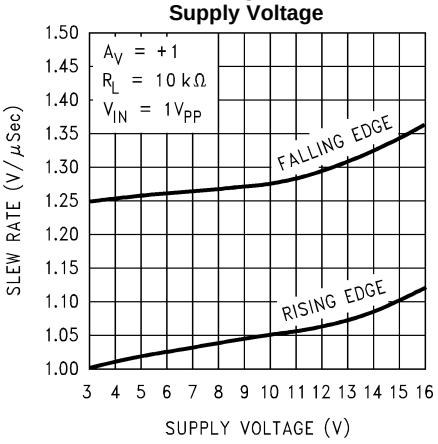

Figure 37.

Non-Inverting Large Signal Pulse Response

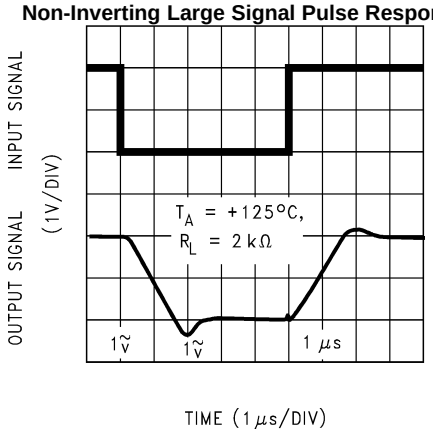

Figure 38.

Non-Inverting Large Signal Pulse Response

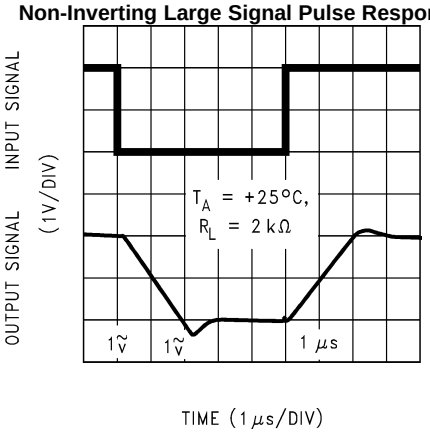

Figure 39.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

Non-Inverting Large Signal Pulse Response

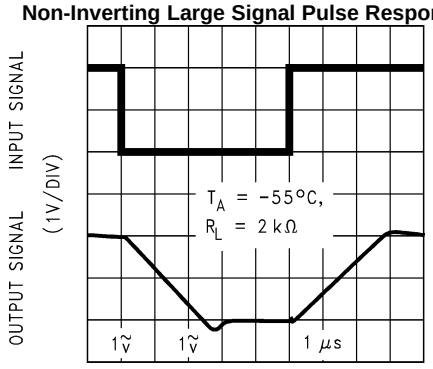

Figure 40.

Non-Inverting Small Signal Pulse Response

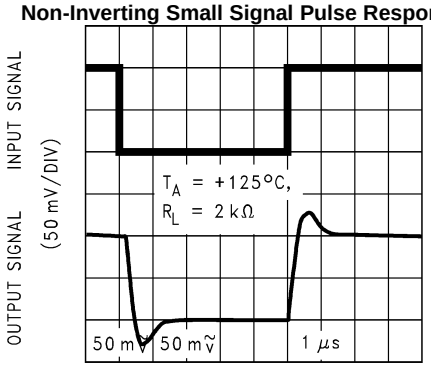

Figure 41.

Non-Inverting Small Signal Pulse Response

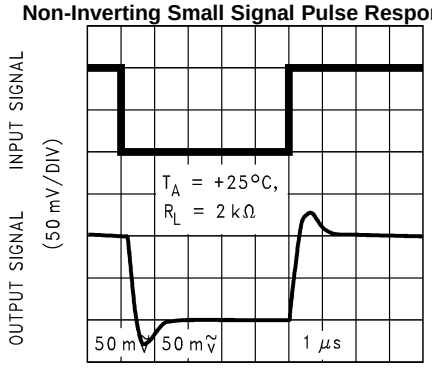

Figure 42.

Non-Inverting Small Signal Pulse Response

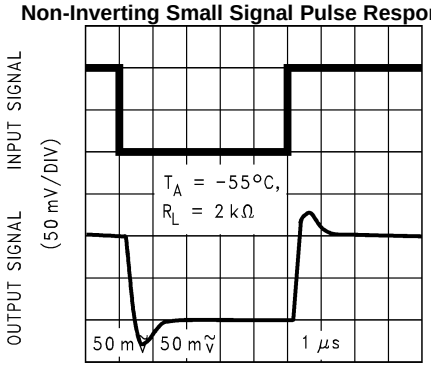

Figure 43.

Inverting Large Signal Pulse Response

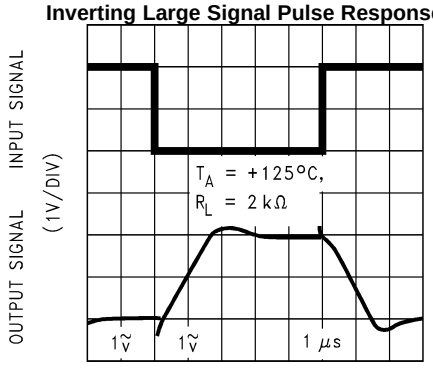

Figure 44.

Inverting Large Signal Pulse Response

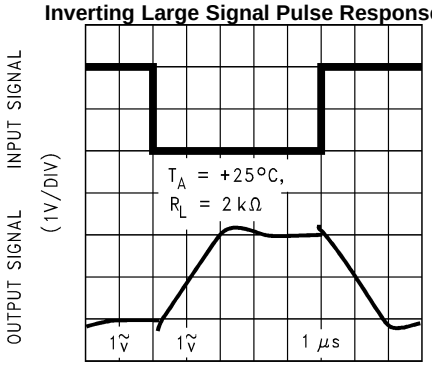

Figure 45.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

Inverting Large Signal Pulse Response

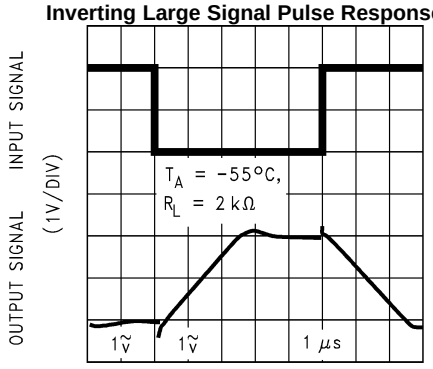

TIME (1 µs/DIV)

Figure 46.

Inverting Small Signal Pulse Response

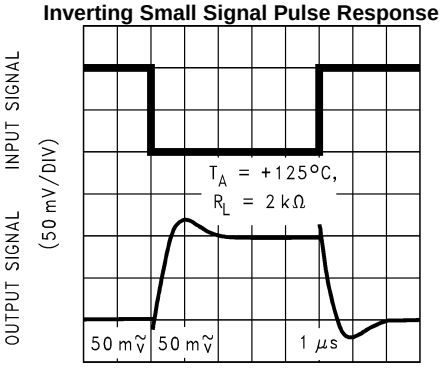

TIME (1 µs/DIV)

Figure 47.

Inverting Small Signal Pulse Response

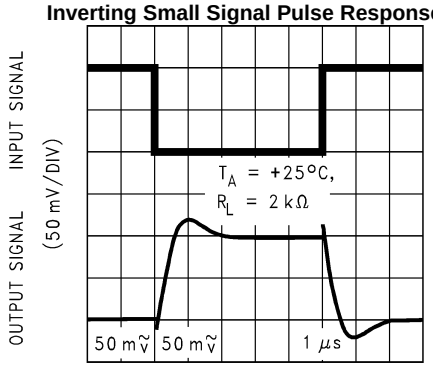

TIME (1 µs/DIV)

Figure 48.

Inverting Small Signal Pulse Response

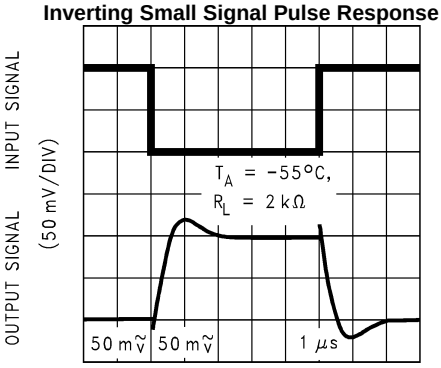

TIME (1 µs/DIV)

Figure 49.

Stability vs. Capacitive Load

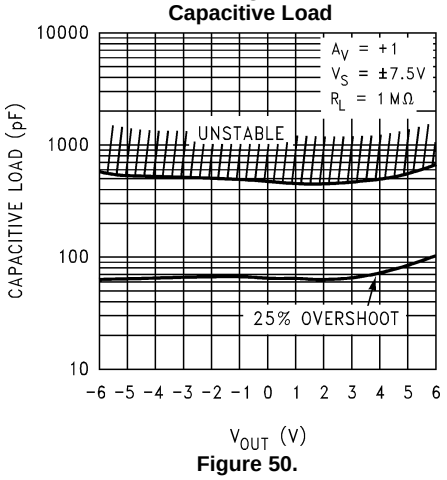

Figure 50.

Stability vs. Capacitive Load

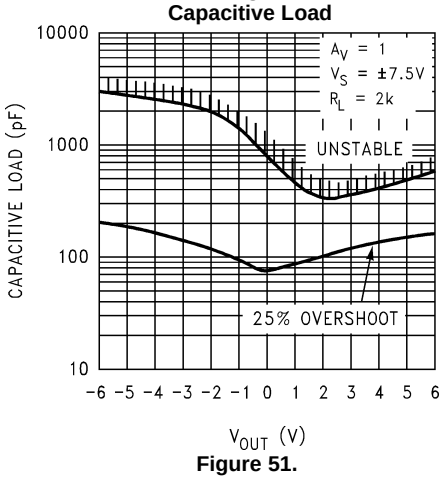

Figure 51.

Copyright © 1997–2013, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

V_S = +15V, Single Supply, T_A = 25°C unless otherwise specified

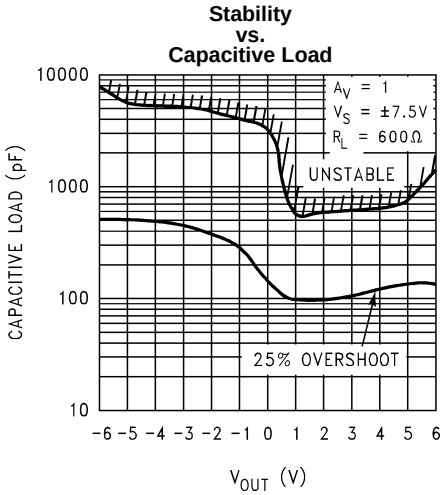

Figure 52.

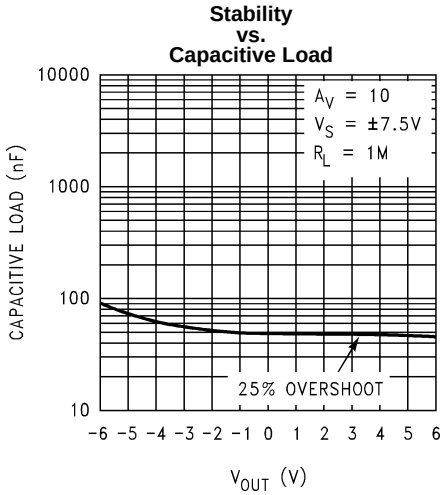

Figure 53.

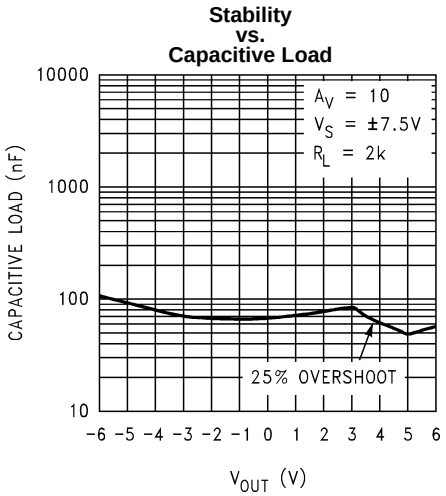

Figure 54.

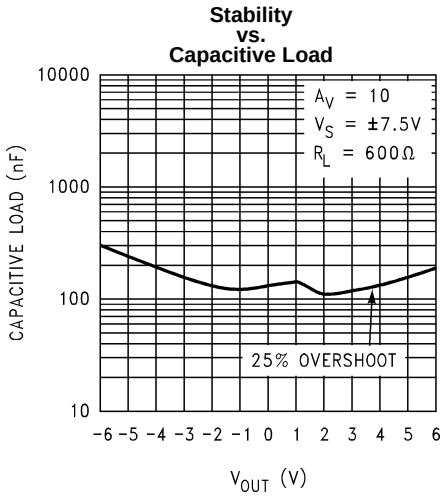

Figure 55.

Copyright © 1997–2013, Texas Instruments Incorporated

APPLICATION INFORMATION

AMPLIFIER TOPOLOGY

The LMC6482 incorporates specially designed wide-compliance range current mirrors and the body effect to extend input common mode range to each supply rail. Complementary paralleled differential input stages, like the type used in other CMOS and bipolar rail-to-rail input amplifiers, were not used because of their inherent accuracy problems due to CMRR, cross-over distortion, and open-loop gain variation.

The LMC6482's input stage design is complemented by an output stage capable of rail-to-rail output swing even when driving a large load. Rail-to-rail output swing is obtained by taking the output directly from the internal integrator instead of an output buffer stage.

INPUT COMMON-MODE VOLTAGE RANGE

Unlike Bi-FET amplifier designs, the LMC6482 does not exhibit phase inversion when an input voltage exceeds the negative supply voltage. Figure 56 shows an input voltage exceeding both supplies with no resulting phase inversion on the output.

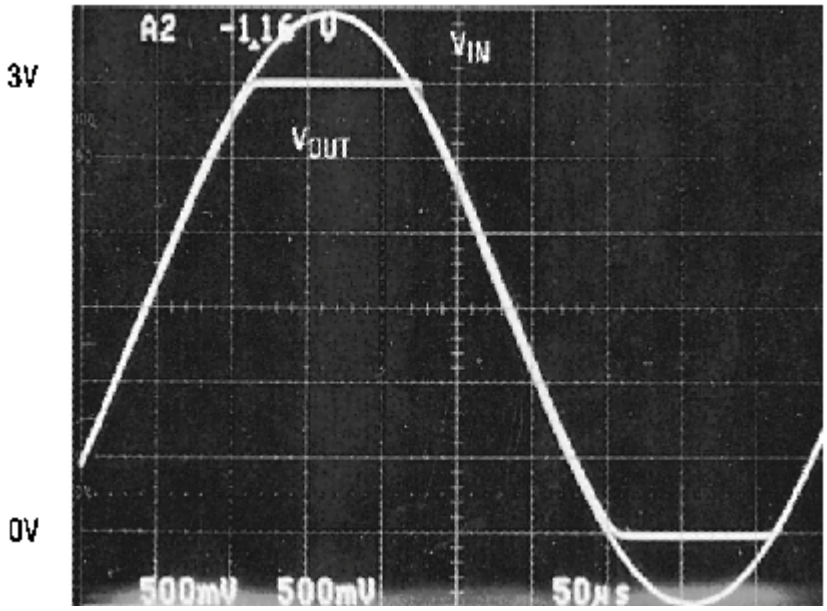

An input voltage signal exceeds the lmc6482 power supply voltages with no output phase inversion.

Figure 56. Input Voltage

The absolute maximum input voltage is 300mV beyond either supply rail at room temperature. Voltages greatly exceeding this absolute maximum rating, as in Figure 57, can cause excessive current to flow in or out of the input pins possibly affecting reliability.

Copyright © 1997–2013, Texas Instruments Incorporated

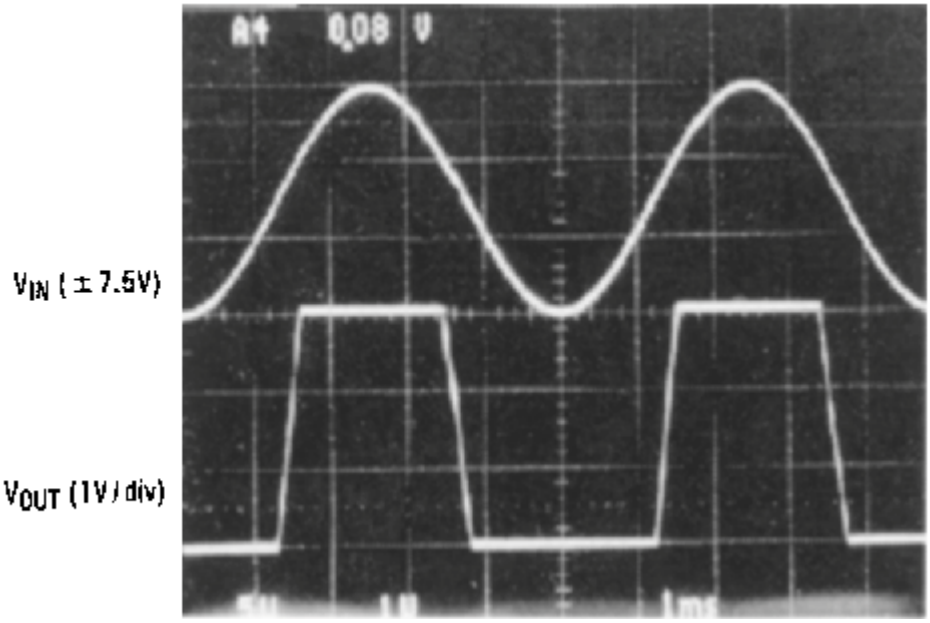

A ±7.5V input signal greatly exceeds the 3V supply in Figure 58 causing no phase inversion due to R_I.

Figure 57. Input Signal

Applications that exceed this rating must externally limit the maximum input current to ±5mA with an input resistor (R_I) as shown in Figure 58.

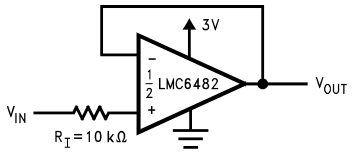

R_I input current protection for voltages exceeding the supply voltages.

Figure 58. R_I Input Current Protection for Voltages Exceeding the Supply Voltages

RAIL-TO-RAIL OUTPUT

The approximated output resistance of the LMC6482 is 180Ω sourcing and 130Ω sinking at V_S = 3V and 110Ω sourcing and 80Ω sinking at Vs = 5V. Using the calculated output resistance, maximum output voltage swing can be estimated as a function of load.

CAPACITIVE LOAD TOLERANCE

The LMC6482 can typically directly drive a 100pF load with V_S = 15V at unity gain without oscillating. The unity gain follower is the most sensitive configuration. Direct capacitive loading reduces the phase margin of op-amps. The combination of the op-amp's output impedance and the capacitive load induces phase lag. This results in either an under damped pulse response or oscillation.

Capacitive load compensation can be accomplished using resistive isolation as shown in Figure 59. This simple technique is useful for isolating the capacitive inputs of multiplexers and A/D converters.

Copyright © 1997–2013, Texas Instruments Incorporated



Figure 59. Resistive Isolation of a 330pF Capacitive Load

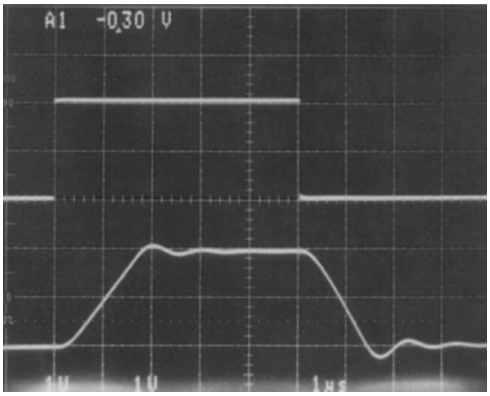

Figure 60. Pulse Response of the LMC6482 Circuit in Figure 59

Improved frequency response is achieved by indirectly driving capacitive loads, as shown in Figure 61.

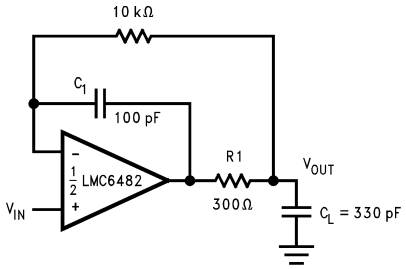

Compensated to handle a 330pF capacitive load.

Figure 61. LMC6482 Noninverting Amplifier

R1 and C1 serve to counteract the loss of phase margin by feeding forward the high frequency component of the output signal back to the amplifiers inverting input, thereby preserving phase margin in the overall feedback loop. The values of R1 and C1 are experimentally determined for the desired pulse response. The resulting pulse response can be seen in Figure 62.

Copyright © 1997–2013, Texas Instruments Incorporated

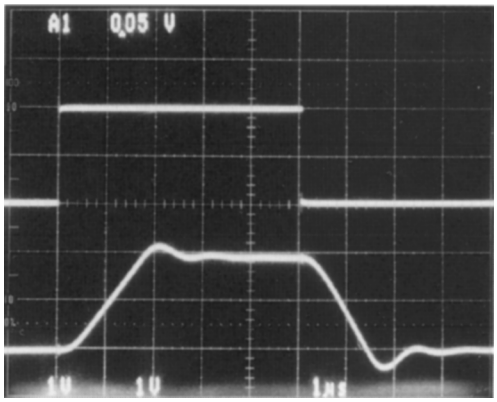

Figure 62. Pulse Response of LMC6482 Circuit in Figure 61

COMPENSATING FOR INPUT CAPACITANCE

It is quite common to use large values of feedback resistance with amplifiers that have ultra-low input current, like the LMC6482. Large feedback resistors can react with small values of input capacitance due to transducers, photo diodes, and circuits board parasitics to reduce phase margins.

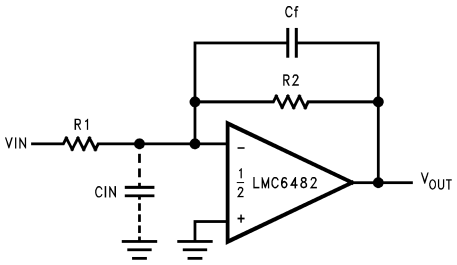

Figure 63. Canceling the Effect of Input Capacitance

Copyright © 1997–2013, Texas Instruments Incorporated

The effect of input capacitance can be compensated for by adding a feedback capacitor. The feedback capacitor (as in Figure 63), C_f, is first estimated by:

$$\frac{1}{2\pi R_1 C_{IN}} \geq \frac{1}{2\pi R_2 C_f} \quad (1)$$

or

$$R_1 C_{IN} \leq R_2 C_f \quad (2)$$

which typically provides significant overcompensation.

Printed circuit board stray capacitance may be larger or smaller than that of a bread-board, so the actual optimum value for C_f may be different. The values of C_f should be checked on the actual circuit. (Refer to the LMC660 quad CMOS amplifier data sheet for a more detailed discussion.)

PRINTED-CIRCUIT-BOARD LAYOUT FOR HIGH-IMPEDANCE WORK

It is generally recognized that any circuit which must operate with less than 1000pA of leakage current requires special layout of the PC board. When one wishes to take advantage of the ultra-low input current of the LMC6482, typically less than 20fA, it is essential to have an excellent layout. Fortunately, the techniques of obtaining low leakages are quite simple. First, the user must not ignore the surface leakage of the PC board, even through it may sometimes appear acceptably low, because under conditions of high humidity or dust or contamination, the surface leakage will be appreciable.

To minimize the effect of any surface leakage, lay out a ring of foil completely surrounding the LM6482's inputs and the terminals of capacitors, diodes, conductors, resistors, relay terminals, etc. connected to the op-amp's inputs, as in Figure 64. To have a significant effect, guard rings should be placed on both the top and bottom of the PC board. This PC foil must then be connected to a voltage which is at the same voltage as the amplifier inputs, since no leakage current can flow between two points at the same potential. For example, a PC board trace-to-pad resistance of $10^{12}\Omega$, which is normally considered a very large resistance, could leak 5pA if the trace were a 5V bus adjacent to the pad of the input. This would cause a 250 times degradation from the LMC6482's actual performance. However, if a guard ring is held within 5 mV of the inputs, then even a resistance of $10^{11}\Omega$ would cause only 0.05pA of leakage current. See Figure 65 through Figure 67 for typical connections of guard rings for standard op-amp configurations.

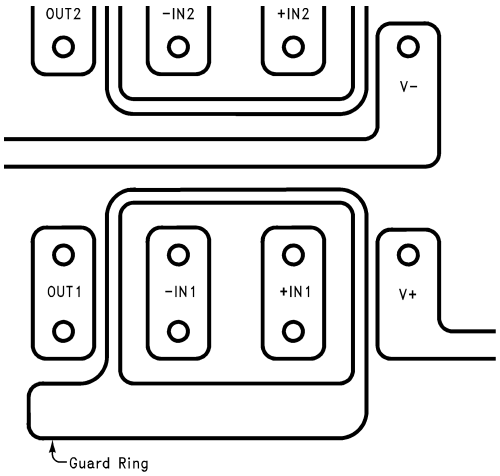

Figure 64. Example of Guard Ring in P.C. Board Layout Typical Connections of Guard Rings

Copyright © 1997–2013, Texas Instruments Incorporated

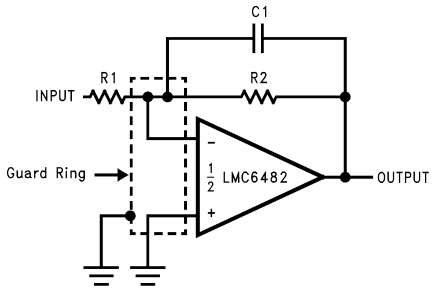

Figure 65. Inverting Amplifier Typical Connections of Guard Rings

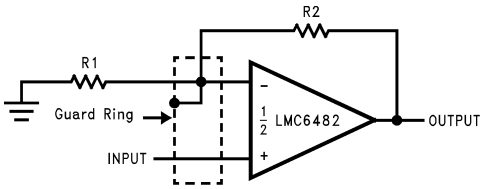

Figure 66. Non-Inverting Amplifier Typical Connections of Guard Rings

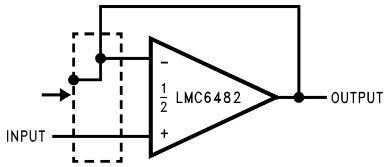

Figure 67. Follower Typical Connections of Guard Rings

The designer should be aware that when it is inappropriate to lay out a PC board for the sake of just a few circuits, there is another technique which is even better than a guard ring on a PC board: Don't insert the amplifier's input pin into the board at all, but bend it up in the air and use only air as an insulator. Air is an excellent insulator. In this case you may have to forego some of the advantages of PC board construction, but the advantages are sometimes well worth the effort of using point-to-point up-in-the-air wiring. See Figure 68.

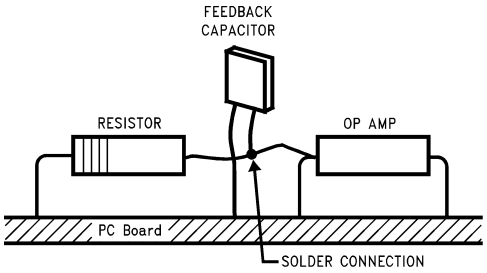

(Input pins are lifted out of PC board and soldered directly to components. All other pins connected to PC board.)

Figure 68. Air Wiring

OFFSET VOLTAGE ADJUSTMENT

Offset voltage adjustment circuits are illustrated in Figure 69 and Figure 70. Large value resistances and potentiometers are used to reduce power consumption while providing typically ±2.5mV of adjustment range, referred to the input, for both configurations with V_S = ±5V.

Copyright © 1997–2013, Texas Instruments Incorporated

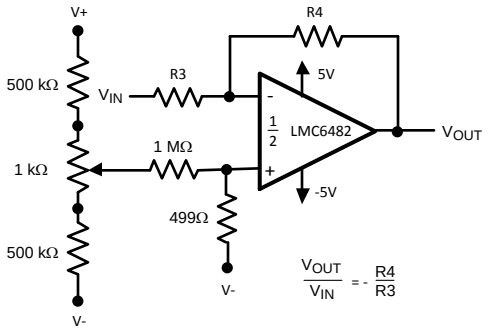

Figure 69. Inverting Configuration Offset Voltage Adjustment

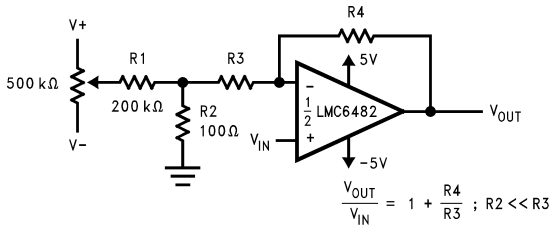

Figure 70. Non-Inverting Configuration Offset Voltage Adjustment

UPGRADING APPLICATIONS

The LMC6484 quads and LMC6482 duals have industry standard pin outs to retrofit existing applications. System performance can be greatly increased by the LMC6482's features. The key benefit of designing in the LMC6482 is increased linear signal range. Most op-amps have limited input common mode ranges. Signals that exceed this range generate a non-linear output response that persists long after the input signal returns to the common mode range.

Linear signal range is vital in applications such as filters where signal peaking can exceed input common mode ranges resulting in output phase inversion or severe distortion.

DATA ACQUISITION SYSTEMS

Low power, single supply data acquisition system solutions are provided by buffering the ADC12038 with the LMC6482 (Figure 71). Capable of using the full supply range, the LMC6482 does not require input signals to be scaled down to meet limited common mode voltage ranges. The LMC4282 CMRR of 82dB maintains integral linearity of a 12-bit data acquisition system to ±0.325 LSB. Other rail-to-rail input amplifiers with only 50dB of CMRR will degrade the accuracy of the data acquisition system to only 8 bits.

Copyright © 1997–2013, Texas Instruments Incorporated

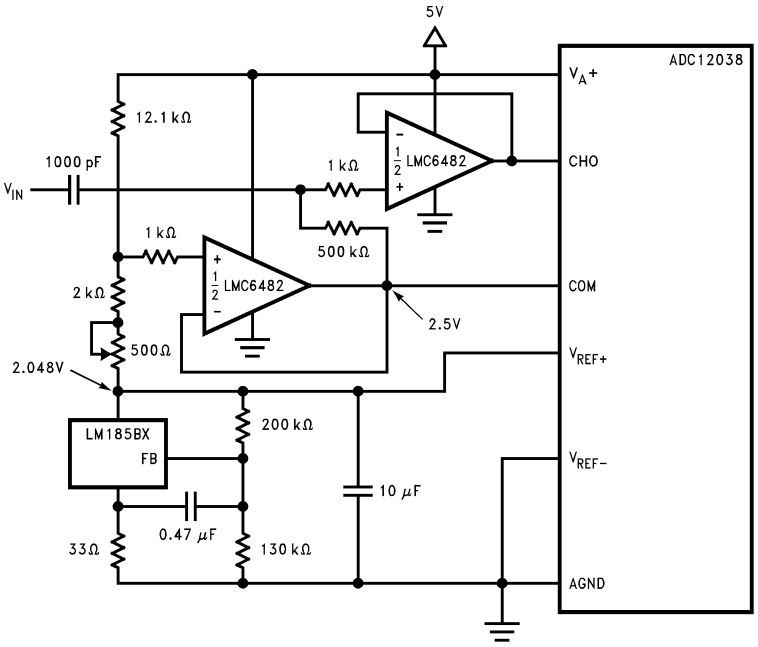

Operating from the same supply voltage, the LMC6482 buffers the ADC12038 maintaining excellent accuracy.

Figure 71. Buffering the ADC12038 with the LMC6482

INSTRUMENTATION CIRCUITS

The LMC6482 has the high input impedance, large common-mode range and high CMRR needed for designing instrumentation circuits. Instrumentation circuits designed with the LMC6482 can reject a larger range of common-mode signals than most in-amps. This makes instrumentation circuits designed with the LMC6482 an excellent choice of noisy or industrial environments. Other applications that benefit from these features include analytic medical instruments, magnetic field detectors, gas detectors, and silicon-based transducers.

A small valued potentiometer is used in series with R_g to set the differential gain of the 3 op-amp instrumentation circuit in Figure 72. This combination is used instead of one large valued potentiometer to increase gain trim accuracy and reduce error due to vibration.

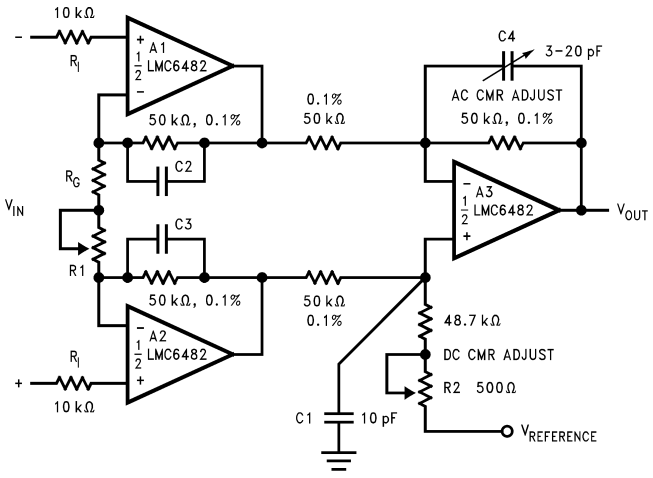

Figure 72. Low Power 3 Op-Amp Instrumentation Amplifier

A 2 op-amp instrumentation amplifier designed for a gain of 100 is shown in Figure 73. Low sensitivity trimming is made for offset voltage, CMRR and gain. Low cost and low power consumption are the main advantages of this two op-amp circuit.

Copyright © 1997–2013, Texas Instruments Incorporated

Higher frequency and larger common-mode range applications are best facilitated by a three op-amp instrumentation amplifier.

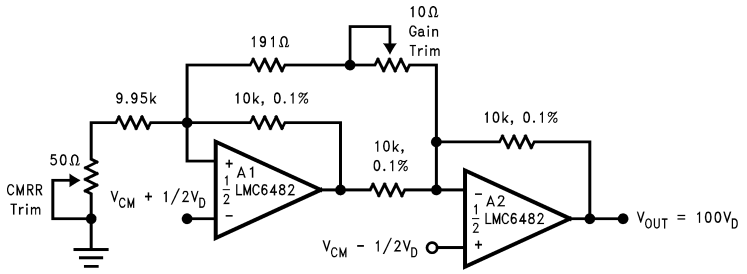

Figure 73. Low-Power Two-Op-Amp Instrumentation Amplifier

SPICE MACROMODEL

A spice macromodel is available for the LMC6482. This model includes accurate simulation of:

- Input common-mode voltage range
- Frequency and transient response
- GBW dependence on loading conditions
- Quiescent and dynamic supply current
- Output swing dependence on loading conditions

and many more characteristics as listed on the macromodel disk.

Contact your local Texas Instruments sales office to obtain an operational amplifier spice model library disk.

Typical Single-Supply Applications

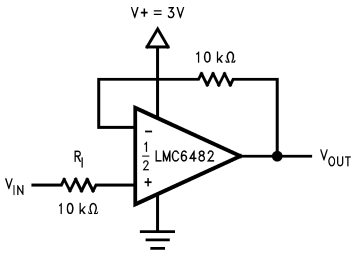

Figure 74. Half-Wave Rectifier with Input Current Protection (R_I)

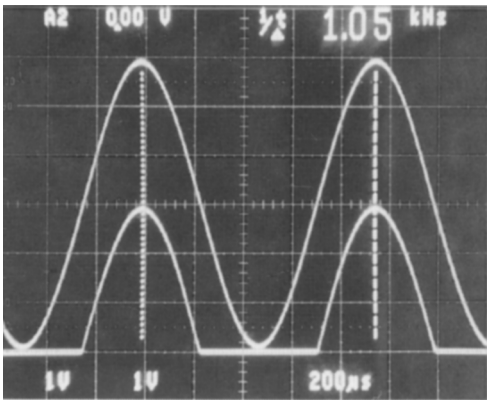

Figure 75. Half-Wave Rectifier Waveform

Copyright © 1997–2013, Texas Instruments Incorporated

The circuit in Figure 74 uses a single supply to half wave rectify a sinusoid centered about ground. R_I limits current into the amplifier caused by the input voltage exceeding the supply voltage. Full wave rectification is provided by the circuit in Figure 76.

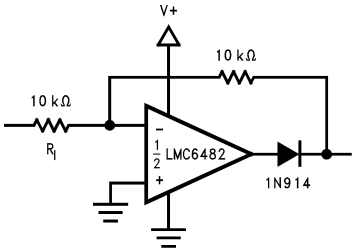

Figure 76. Full Wave Rectifier with Input Current Protection (R_I)

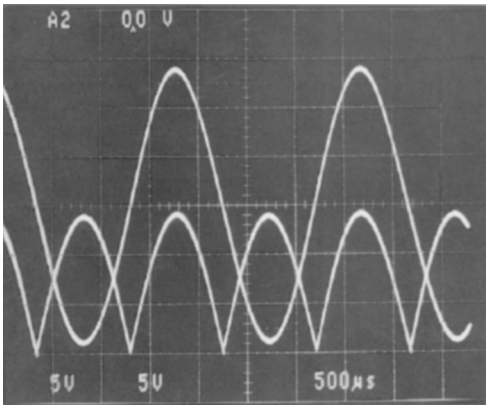

Figure 77. Full Wave Rectifier Waveform



Figure 78. Large Compliance Range Current Source

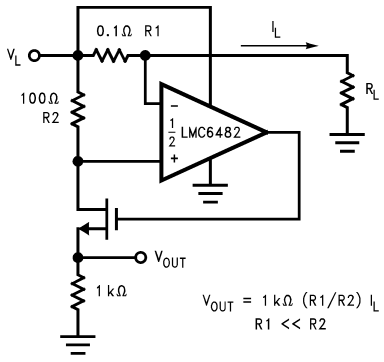

Figure 79. Positive Supply Current Sense

Copyright © 1997–2013, Texas Instruments Incorporated

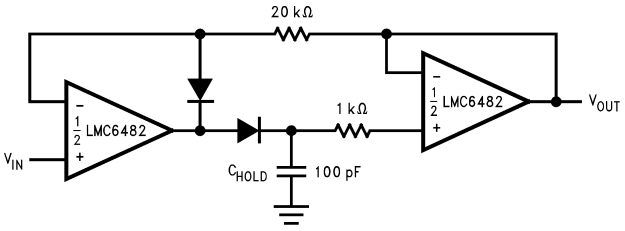

Figure 80. Low Voltage Peak Detector with Rail-to-Rail Peak Capture Range

In Figure 80 dielectric absorption and leakage is minimized by using a polystyrene or polyethylene hold capacitor. The droop rate is primarily determined by the value of C_H and diode leakage current. The ultra-low input current of the LMC6482 has a negligible effect on droop.

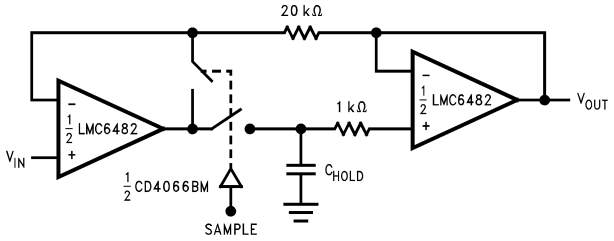

Figure 81. Rail-to-Rail Sample and Hold

The LMC6482's high CMRR (82dB) allows excellent accuracy throughout the circuit's rail-to-rail dynamic capture range.

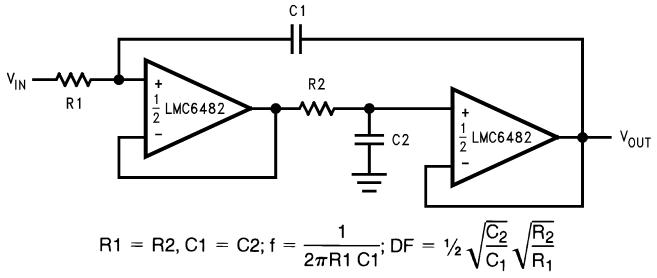

Figure 82. Rail-to-Rail Single Supply Low Pass Filter

The low pass filter circuit in Figure 82 can be used as an anti-aliasing filter with the same voltage supply as the A/D converter.

Filter designs can also take advantage of the LMC6482 ultra-low input current. The ultra-low input current yields negligible offset error even when large value resistors are used. This in turn allows the use of smaller valued capacitors which take less board space and cost less.

Copyright © 1997–2013, Texas Instruments Incorporated

REVISION HISTORY

Changes from Revision C (March 2013) to Revision D	Page
• Changed layout of National Data Sheet to TI format	26

Copyright © 1997–2013, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
LMC6482AIM	NRND	SOIC	D	8	95	TBD	Call TI	Call TI	-40 to 85	LMC64 82AIM	
LMC6482AIM/NOPB	ACTIVE	SOIC	D	8	95	Green (RoHS & no Sb/Br)	SN | CU SN	Level-1-260C-UNLIM	-40 to 85	LMC64 82AIM	Samples
LMC6482AIMX	NRND	SOIC	D	8	2500	TBD	Call TI	Call TI	-40 to 85	LMC64 82AIM	
LMC6482AIMX/NOPB	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	SN | CU SN	Level-1-260C-UNLIM	-40 to 85	LMC64 82AIM	Samples
LMC6482AIN	NRND	PDIP	P	8	40	TBD	Call TI	Call TI	-40 to 85	LMC64 82AIN	
LMC6482AIN/NOPB	ACTIVE	PDIP	P	8	40	Green (RoHS & no Sb/Br)	SN | CU SN	Level-1-NA-UNLIM	-40 to 85	LMC64 82AIN	Samples
LMC6482IM	NRND	SOIC	D	8	95	TBD	Call TI	Call TI	-40 to 85	LMC64 82IM	
LMC6482IM/NOPB	ACTIVE	SOIC	D	8	95	Green (RoHS & no Sb/Br)	SN | CU SN	Level-1-260C-UNLIM	-40 to 85	LMC64 82IM	Samples
LMC6482IMM	NRND	VSSOP	DGK	8	1000	TBD	Call TI	Call TI	-40 to 85	A10	
LMC6482IMM/NOPB	ACTIVE	VSSOP	DGK	8	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	A10	Samples
LMC6482IMMX	NRND	VSSOP	DGK	8	3500	TBD	Call TI	Call TI	-40 to 85	A10	
LMC6482IMMX/NOPB	ACTIVE	VSSOP	DGK	8	3500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	A10	Samples
LMC6482IMX	NRND	SOIC	D	8	2500	TBD	Call TI	Call TI	-40 to 85	LMC64 82IM	
LMC6482IMX/NOPB	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	SN | CU SN	Level-1-260C-UNLIM	-40 to 85	LMC64 82IM	Samples
LMC6482IN	NRND	PDIP	P	8	40	TBD	Call TI	Call TI	-40 to 85	LMC6482IN	
LMC6482IN/NOPB	ACTIVE	PDIP	P	8	40	Green (RoHS & no Sb/Br)	CU SN	Level-1-NA-UNLIM	-40 to 85	LMC6482IN	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

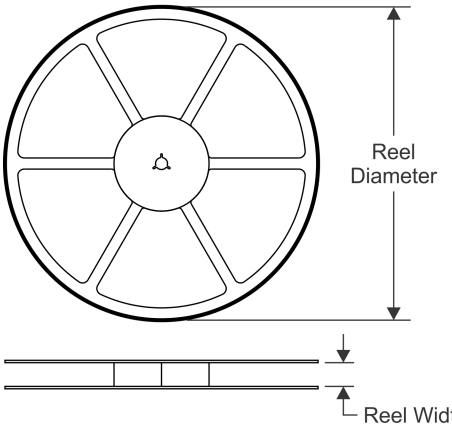

TAPE DIMENSIONS

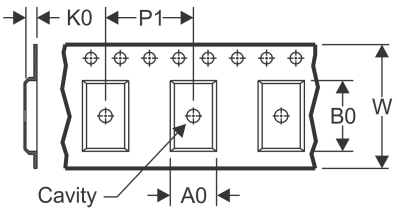

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

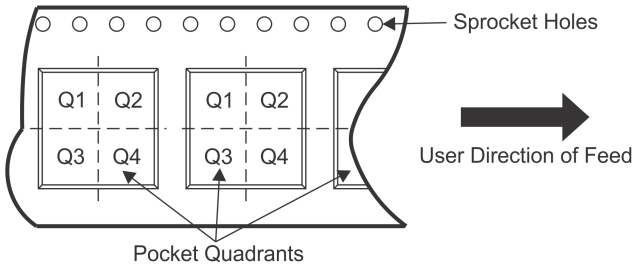

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMC6482AIMX	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMC6482AIMX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMC6482IMM	VSSOP	DGK	8	1000	178.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMC6482IMM/NOPB	VSSOP	DGK	8	1000	178.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMC6482IMMX	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMC6482IMMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMC6482IMX	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1
LMC6482IMX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

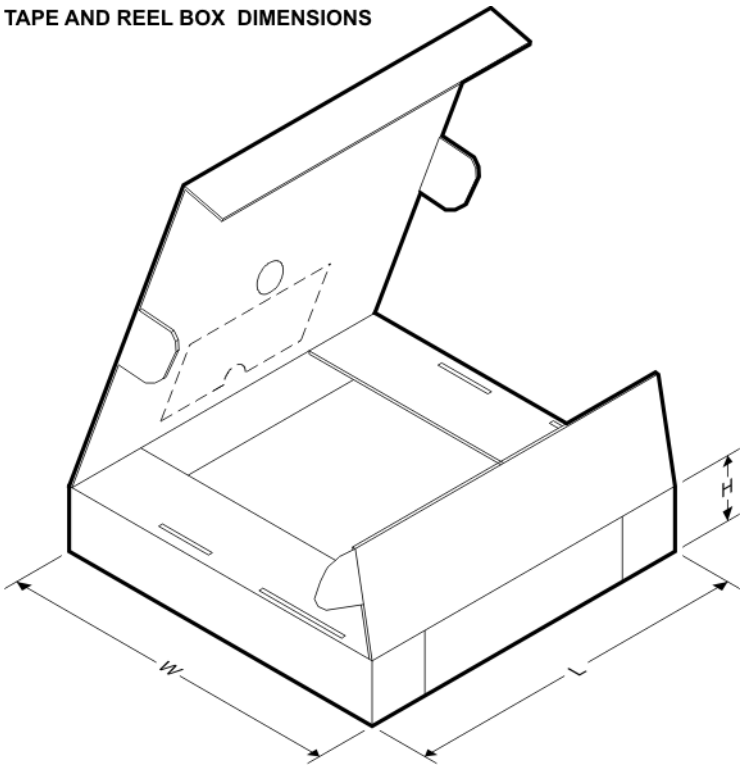

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMC6482AIMX	SOIC	D	8	2500	367.0	367.0	35.0
LMC6482AIMX/NOPB	SOIC	D	8	2500	367.0	367.0	35.0
LMC6482IMM	VSSOP	DGK	8	1000	210.0	185.0	35.0
LMC6482IMM/NOPB	VSSOP	DGK	8	1000	210.0	185.0	35.0
LMC6482IMMX	VSSOP	DGK	8	3500	367.0	367.0	35.0
LMC6482IMMX/NOPB	VSSOP	DGK	8	3500	367.0	367.0	35.0
LMC6482IMX	SOIC	D	8	2500	367.0	367.0	35.0
LMC6482IMX/NOPB	SOIC	D	8	2500	367.0	367.0	35.0

P (R–PDIP–T8) PLASTIC DUAL–IN–LINE PACKAGE

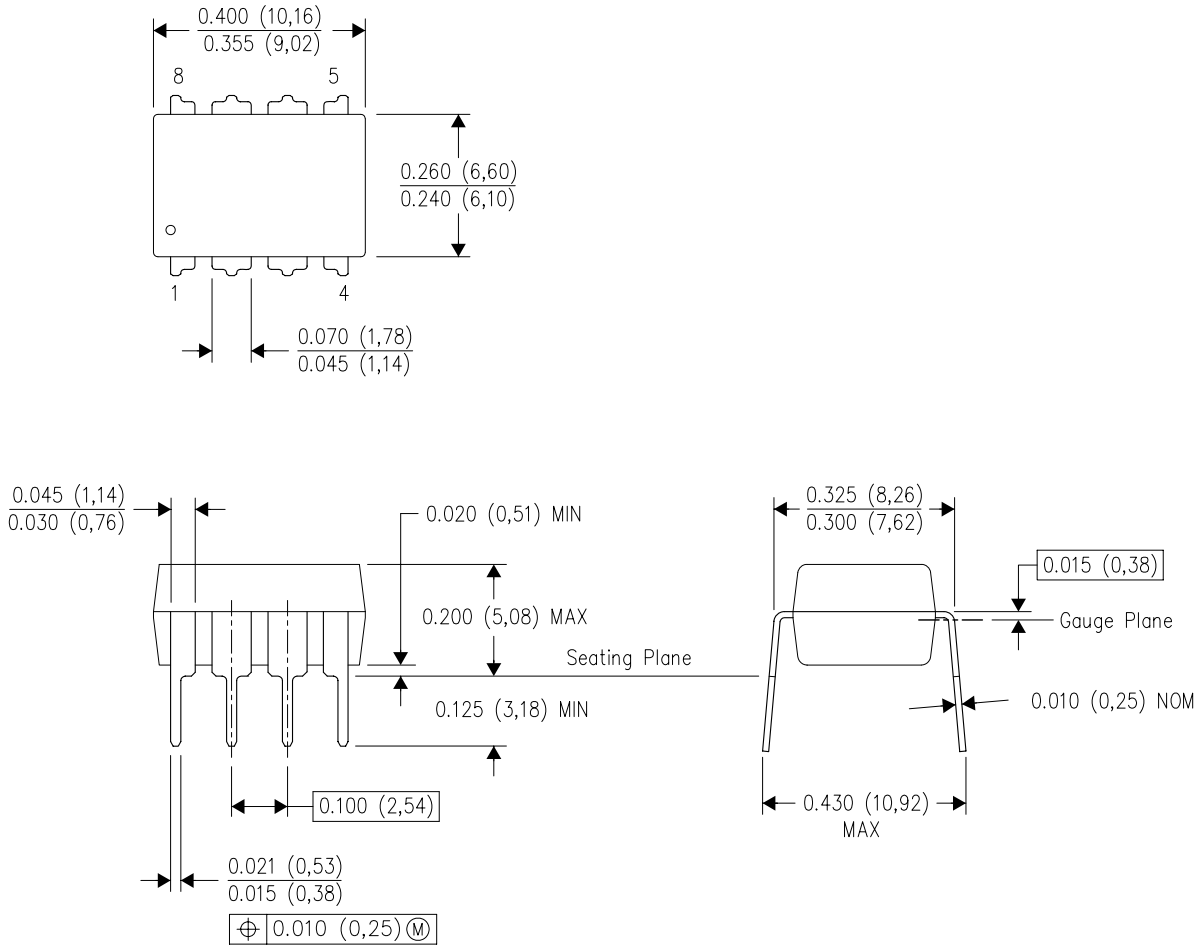

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS–001 variation BA.

DGK (S–PDSO–G8) PLASTIC SMALL–OUTLINE PACKAGE

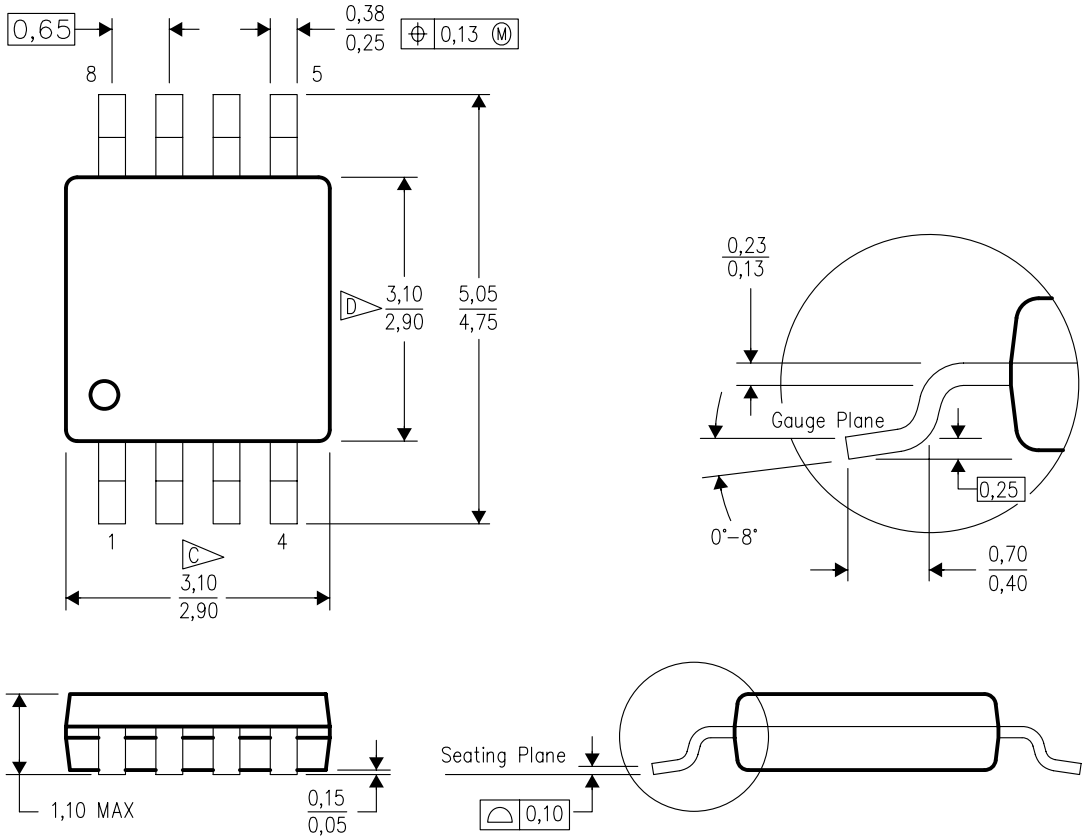

4073329/E 05/06

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
E. Falls within JEDEC MO–187 variation AA, except interlead flash.

D (R–PDSO–G8) PLASTIC SMALL OUTLINE

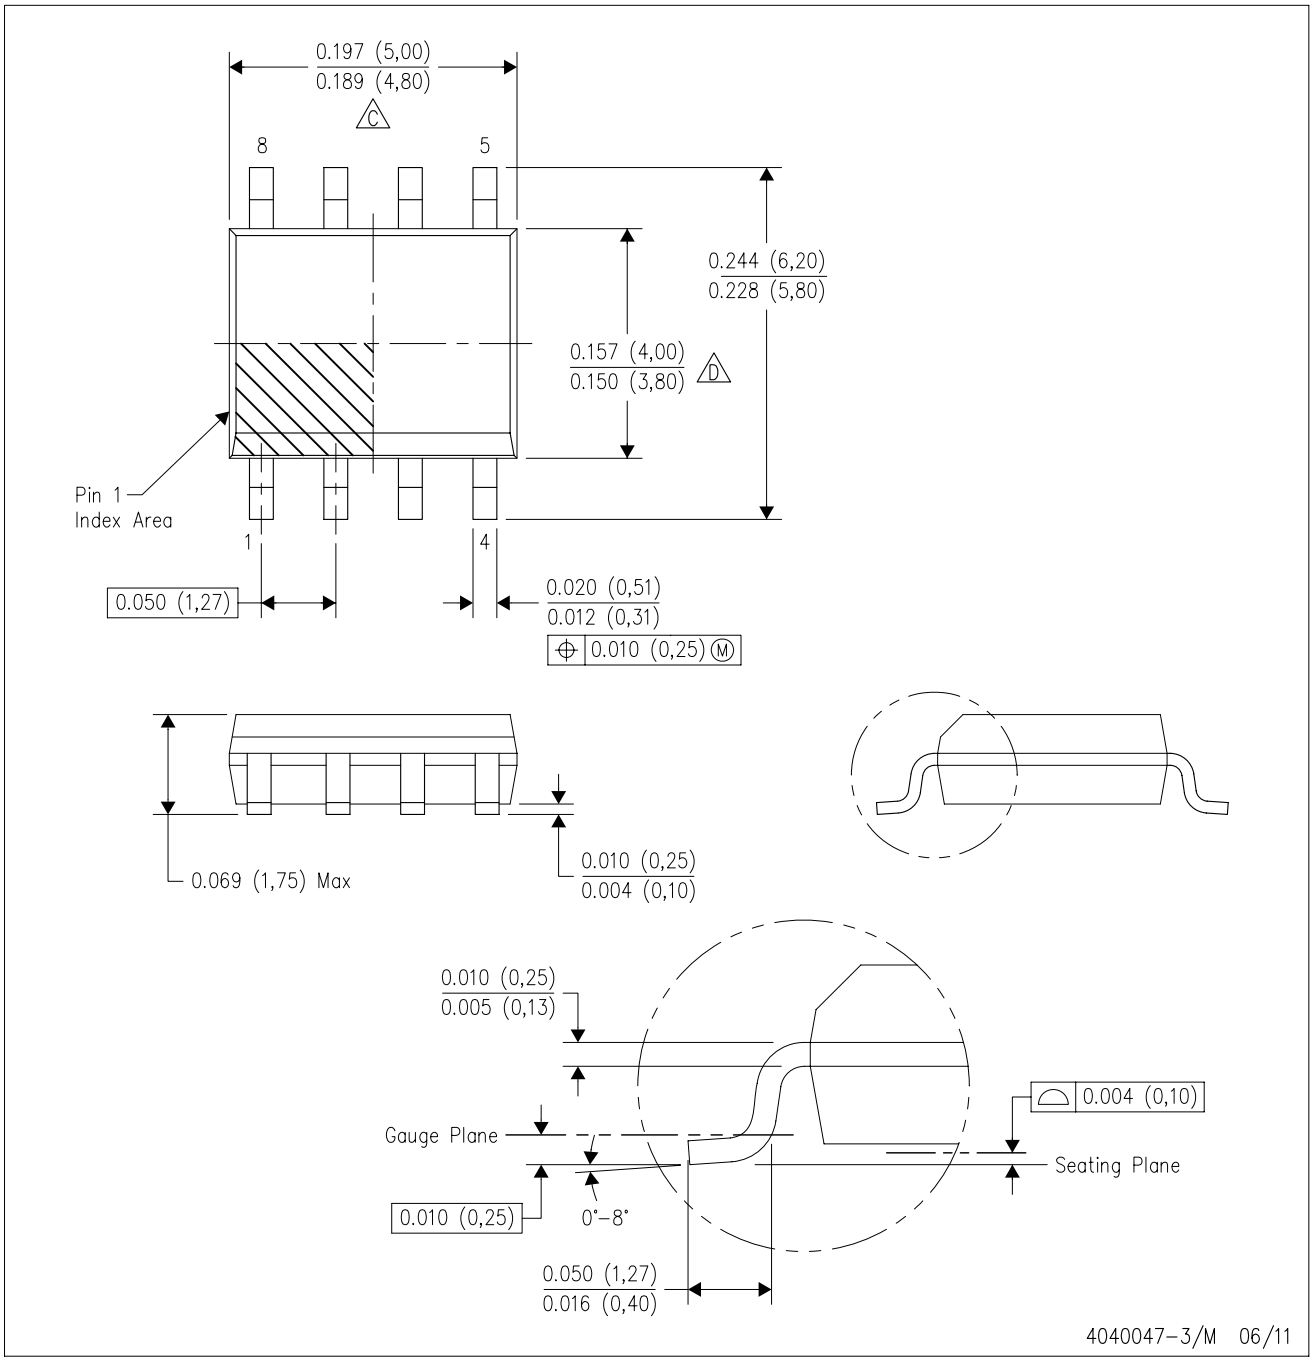

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AA.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2013, Texas Instruments Incorporated

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.