

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1213

DUAL MICROPOWER SYNCHRONOUS BUCK AND BOOST CONVERTER

LTC3523

DESCRIPTION

Demonstration circuit DC1213 is a micropower dual Buck and Boost synchronous converter based on the LTC3522 monolithic regulator. The DC1213 has an input voltage range of 1.8V all the way up to 4.2V depending on the Vout1 settings. Since Vout1 is a boost converter, Vin must be below the Vout1 voltage at all times. The board is configured at the factory for Vout1 at 3.3V @ 200mA with Vin being limited to 1.8V to 3.2V. Vout2 is fixed at 1.2V @ 200mA. See the tables below for all of the Vin vs Vout 1 operating limits as well as the default settings. The converters can be set for Fixed Frequency (PWM) or Burst Mode, which provides high conversion efficiency over a wide range of load currents. Both VOUTs can be sequenced on

startup. Jumpers are provided for shutting down VOUT1 and VOUT2 independently, for Vout sequencing, Changing Switching modes Fixed PWM or burst and for choosing between 3.3V and 5V for VOUT1. The LTC3522 comes in a 16 lead 3x3 QFN package. These features make the DC1213 demo board an ideal circuit for use in Li-Ion battery-powered, hand-held applications such as PDAs, MP3 Players, and Personal Navigation Devices.

Design files for this circuit board are available. Call the LTC factory.

*	JP1 = 3.3V	VIN = 1.8V – 3.2V	VOUT1 = 3.3V @ 200mA
	JP1 = 5.0V	VIN = 2.7V – 4.2V	VOUT1 = 5V @ 200mA
	JP1 = 5.0V	VIN = 1.8V – 2.7V	VOUT1 = 5V @ 125mA

Jumper #	Function	Default Value
JP1	VOUT1 Voltage	3.3V
JP2	VOUT1 Shutdown	ON
JP3	Sequence VOUTs	YES
JP4	VOUT1 Shutdown	ON
JP5	Burst or Fixed PWM mode	Burst

QUICK START PROCEDURE

Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Set Load1 between 0A → 200mA and Load2 between 0A → 200mA.
2. Set the Power Supply to ~ 3.0Vin
3. VIN can be adjusted between 1.8V and 3.2V for VOUT1 = 3.3V and VIN can be adjusted between

2.7V and 4.2V for VOUT1 = 3.3V (note: max output current for VOUT1 is lower than 400mA at VIN below 3.0V).

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1213

DUAL MICROPOWER SYNCHRONOUS BUCK AND BOOST CONVERTER

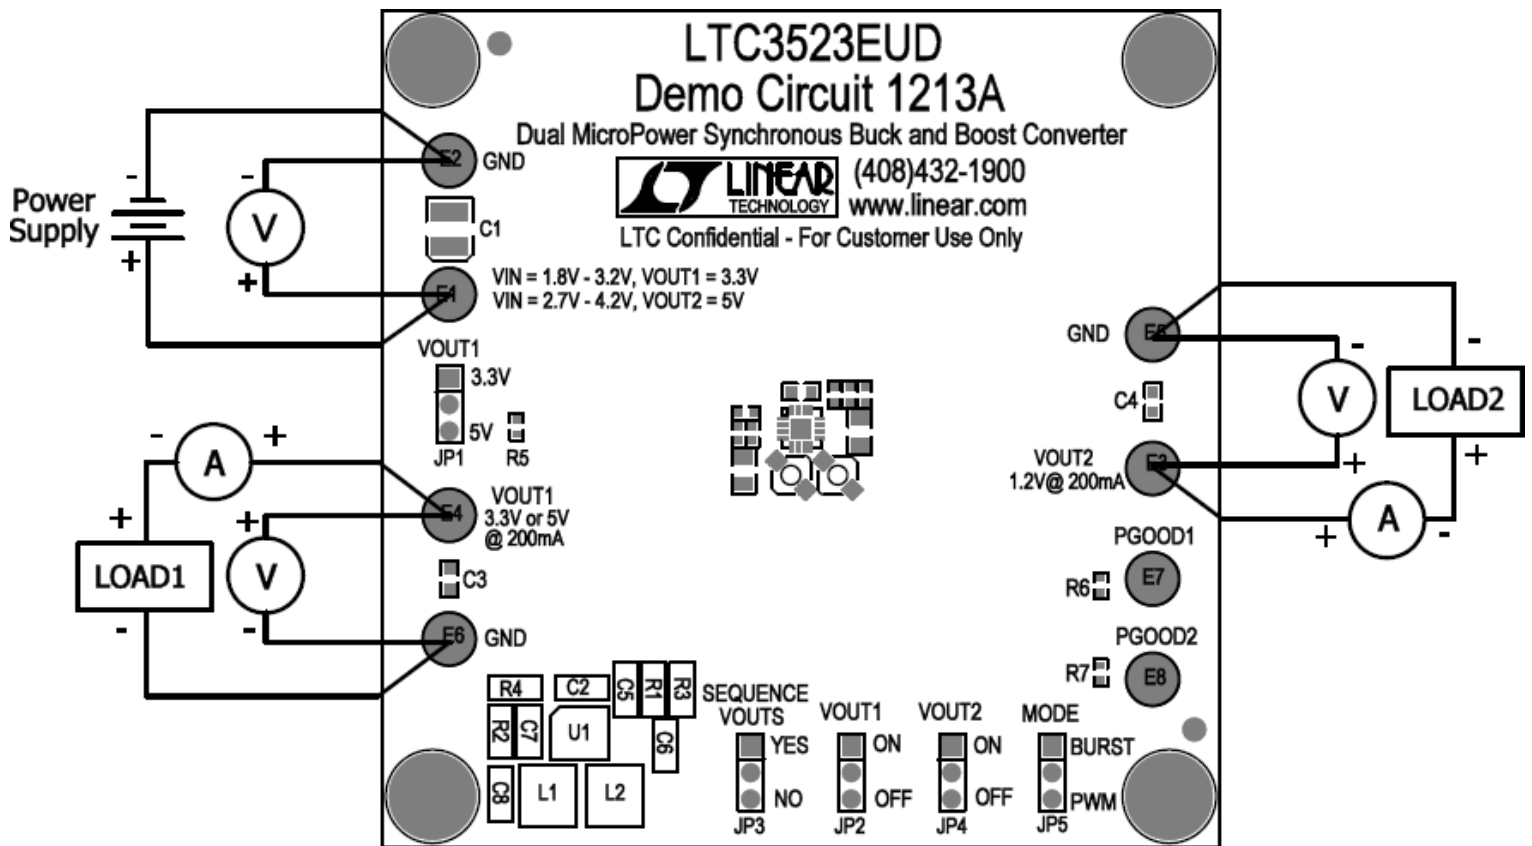


Figure 1. Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1213

DUAL MICROPOWER SYNCHRONOUS BUCK AND BOOST CONVERTER

Item	Quantity	Reference	Part Description	Manufacturer / Part #
REQUIRED CIRCUIT COMPONENTS				
1	1	C1	Cap., Tant. 47uF 10V 20%	AVX TAJB476M010
2	1	C2	Cap., X5R 4.7uF 6.3V 20%	Taiyo Yuden JMK107BJ475MA-T
3	2	C3,C4	Cap., X5R 1uF 6.3V 10%	Taiyo Yuden JMK107BJ105KA-T
4	2	C7,C5	Cap., NPO 100pF 25V 10%	AVX 04023A101KAT2A
5	2	C6,C8	Cap., X5R 10uF 6.3V 20%	Taiyo Yuden JMK107BJ106MA-T
6	2	L1,L2	Inductor, 4.7uH	Sumida CDRH2D18/HP-4R7NC
7	2	R3,R1	Res., Chip 51.1K 1/16W 1%	AAC CR05-5112FM
8	1	R2	Res., Chip 634K 1/16W 1%	AAC CR05-6343FM
9	1	R4	Res., Chip 365K 1/16W 5%	AAC CR05-364JM
10	1	R5	Res., Chip 453K 0.06W 1%	Vishay CRCW0402453KFKED
11	5	R6,R7,R8,R9,R10	Res., Chip 1.0M 1/16W 5%	AAC CR05-105JM
12	1	U1	I.C., DC/DC CONVERTER	Linear Tech. Corp. LTC3523EUD
ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS				
1	0	D1 (Opt)	Schottky Diode, 30V/200mA	Central Semi. CMDSH2-3



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.