

**DUAL LOW NOISE OPERATIONAL AMPLIFIERS****AZ4580****General Description**

The AZ4580 is a monolithic dual low noise operational amplifier. It is specifically designed for audio systems to improve tone control; it can also be used in pre-amplifier, industrial measurement tools and applications where gain and phase matched channels are mandatory.

The IC features internal frequency compensation, low noise, low distortion, high gain and high bandwidth. The AZ4580 can operate under dual power supply voltage up to  $\pm 18V$  or single power supply up to 36V.

The AZ4580 is available in DIP-8, SOIC-8 and TSSOP-8 packages.

**Features**

- Large Signal Voltage Gain: 110dB Typical
- Low Input Noise Voltage:  $0.7\mu V_{RMS}$  (RIAA) Typical
- Wide Gain Bandwidth Product: 15MHz at 10KHz Typical
- Low Distortion: 0.0005% Typical
- Slew Rate:  $7V/\mu s$  Typical

**Applications**

- Audio AC-3 Decoder System
- Audio Amplifier

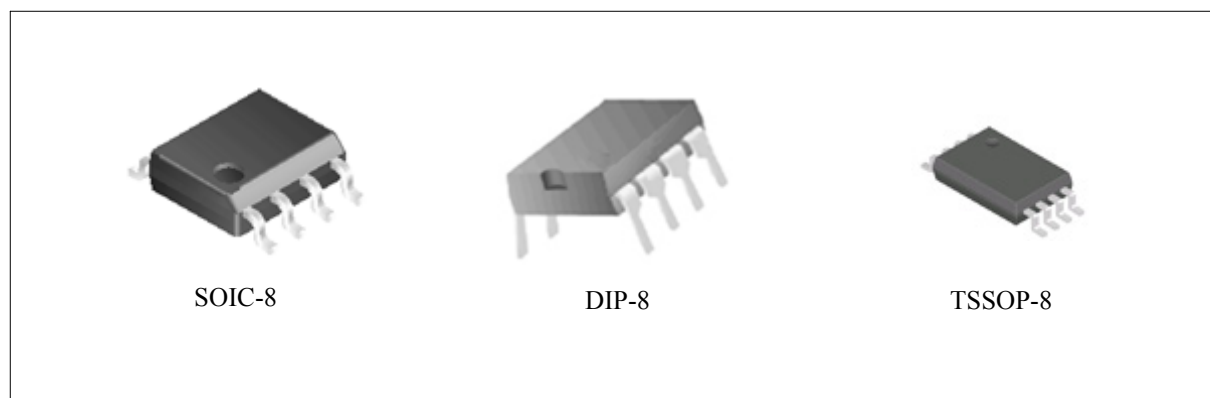


Figure 1. Package Types of AZ4580

# DUAL LOW NOISE OPERATIONAL AMPLIFIERS

**AZ4580**

## Pin Configuration

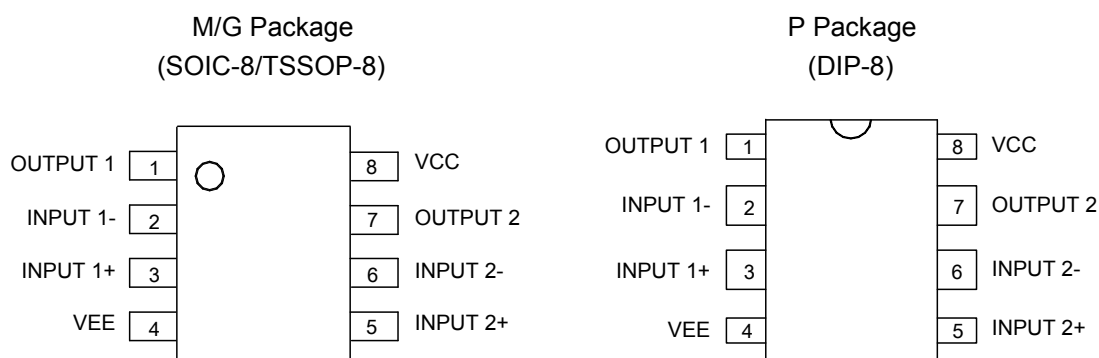


Figure 2. Pin Configuration of AZ4580

## Pin Description

| Pin No. | Function | Pin No. | Function | Pin No. | Function | Pin No. | Function |
|---------|----------|---------|----------|---------|----------|---------|----------|
| 1       | OUTPUT 1 | 2       | INPUT 1- | 3       | INPUT 1+ | 4       | VEE      |
| 5       | INPUT 2+ | 6       | INPUT 2- | 7       | OUTPUT 2 | 8       | VCC      |

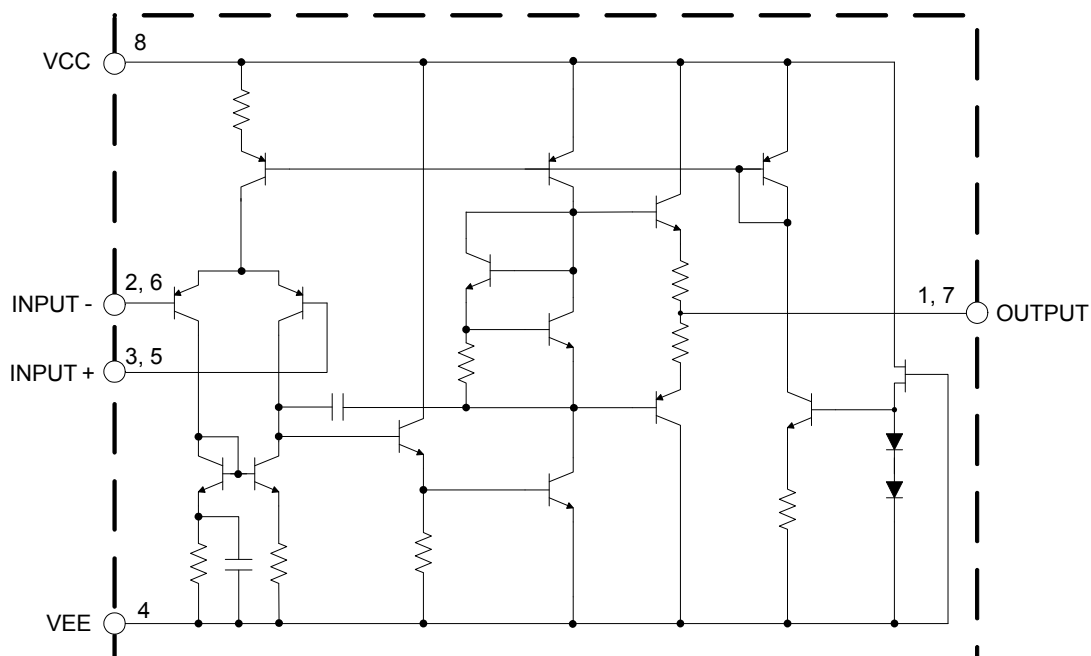
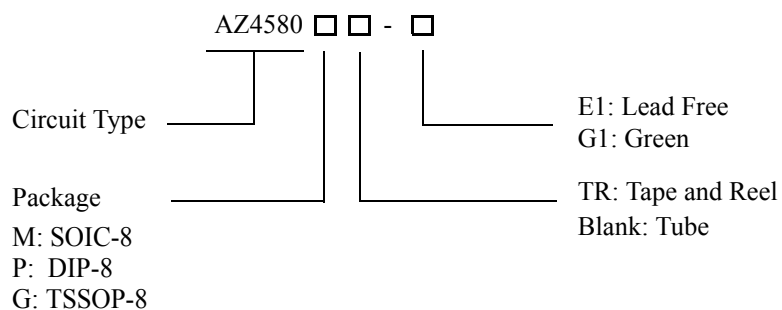
**Functional Block Diagram**


Figure 3. Representative Schematic Diagram of AZ4580 (Each Amplifier)

**DUAL LOW NOISE OPERATIONAL AMPLIFIERS****AZ4580****Ordering Information**

| Package | Temperature Range | Part Number  |              | Marking ID |            | Packing Type |
|---------|-------------------|--------------|--------------|------------|------------|--------------|
|         |                   | Lead Free    | Green        | Lead Free  | Green      |              |
| SOIC-8  | -40 to 85°C       | AZ4580M-E1   | AZ4580M-G1   | 4580M-E1   | 4580M-G1   | Tube         |
|         |                   | AZ4580MTR-E1 | AZ4580MTR-G1 | 4580M-E1   | 4580M-G1   | Tape & Reel  |
| DIP-8   | -40 to 85°C       | AZ4580P-E1   | AZ4580P-G1   | AZ4580P-E1 | AZ4580P-G1 | Tube         |
| TSSOP-8 | -40 to 85°C       | AZ4580GTR-E1 | AZ4580GTR-G1 | EG80       | GG80       | Tape & Reel  |

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

**DUAL LOW NOISE OPERATIONAL AMPLIFIERS****AZ4580****Absolute Maximum Ratings (Note 1)**

| Parameter                                | Smbol            | Value      |     | Unit |
|------------------------------------------|------------------|------------|-----|------|
| Power Supply Voltage                     | V <sub>CC</sub>  | + 20       |     | V    |
|                                          | V <sub>EE</sub>  | - 20       |     |      |
| Input Voltage                            | V <sub>I</sub>   | ± 15       |     | V    |
| Differential Input Voltage               | V <sub>ID</sub>  | ± 30       |     | V    |
| Operating Junction Temperature           | T <sub>J</sub>   | 150        |     | °C   |
| Storage Temperature Range                | T <sub>STG</sub> | -65 to 150 |     | °C   |
| Lead Temperature (Soldering 10s)         | T <sub>L</sub>   | 260        |     | °C   |
| Power Dissipation (T <sub>A</sub> =25°C) | P <sub>D</sub>   | TSSOP-8    | 400 | mW   |
|                                          |                  | SOIC-8     | 500 |      |
|                                          |                  | DIP-8      | 800 |      |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

**Recommended Operating Conditions**

| Parameter                   | Min     | Max      | Unit |
|-----------------------------|---------|----------|------|
| Supply Voltage              | $\pm 2$ | $\pm 18$ | V    |
| Operating Temperature Range | -40     | 85       | °C   |

**DUAL LOW NOISE OPERATIONAL AMPLIFIERS****AZ4580****Electrical Characteristics**Operating Conditions:  $V_{CC}=+15V$ ,  $V_{EE}=-15V$ ,  $T_A=25^{\circ}C$  unless otherwise specified.

| Parameter                                | Conditions                                          | Min      | Typ        | Max | Unit          |
|------------------------------------------|-----------------------------------------------------|----------|------------|-----|---------------|
| Supply Current                           | no load                                             |          | 4          | 7   | mA            |
| Input Offset Voltage                     | $R_S \leq 10K\Omega$                                |          | 0.5        | 3   | mV            |
| Input Offset Current                     | $V_{CM}=0V$                                         |          | 5          | 100 | nA            |
| Input Bias Current                       | $V_{CM}=0V$                                         |          | 150        | 500 | nA            |
| Input Common Mode Voltage Range          |                                                     | $\pm 12$ | $\pm 13.5$ |     | V             |
| Common Mode Rejection Ratio              | $V_{CM}=0V$ to $V_{CC}-1.5V$ , $R_S \leq 10K\Omega$ | 80       | 110        |     | dB            |
| Large Signal Voltage Gain                | $R_L=2K\Omega$ , $V_O=\pm 10V$                      | 90       | 110        |     | dB            |
| Power Supply Rejection Ratio             | $R_S \leq 10K\Omega$                                | 80       | 110        |     | dB            |
| Output Sink Current                      | $V-=1V$ , $V+=0V$ , $V_O=2V$                        |          | 80         |     | mA            |
| Output Source Current                    | $V+=1V$ , $V-=0V$ , $V_O=2V$                        |          | 45         |     | mA            |
| Slew Rate                                | $R_L \geq 2K\Omega$                                 |          | 7          |     | V/ $\mu$ S    |
| Gain Bandwidth Product                   | $R_L=2K\Omega$ , $f=10KHz$                          |          | 15         |     | MHz           |
| Total Harmonic Distortion                | $A_V=20dB$ , $V_O=5V$<br>$R_L=2K\Omega$ , $f=1KHz$  |          | 0.0005     |     | %             |
| Equivalent Input Noise Voltage           | RIAA $R_S=50\Omega$ , 30KHz LPF                     |          | 0.7        |     | $\mu V_{RMS}$ |
| Thermal Resistance<br>(Junction to Case) | DIP-8                                               |          | 43         |     | $^{\circ}C/W$ |
|                                          | SOIC-8                                              |          | 63         |     |               |

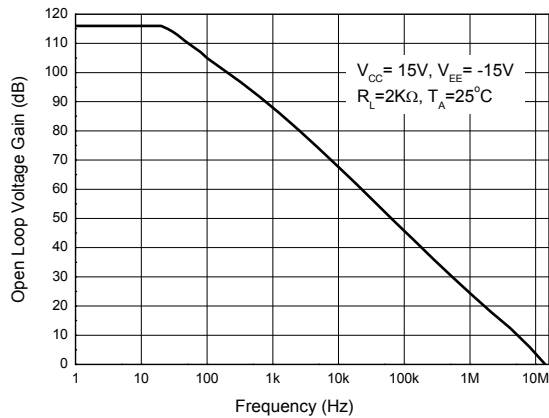
**Typical Performance Characteristics**

Figure 4. Open Loop Voltage Gain vs. Frequency

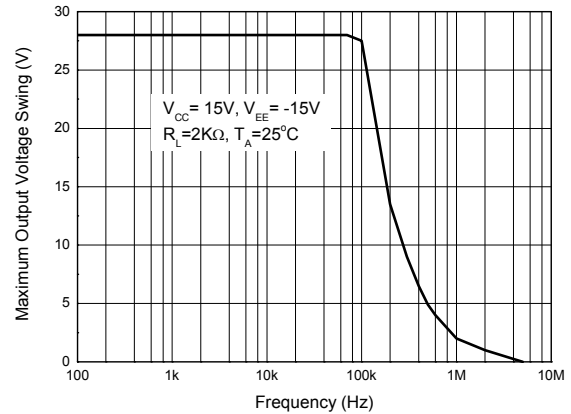


Figure 5. Maximum Output Voltage Swing vs. Frequency

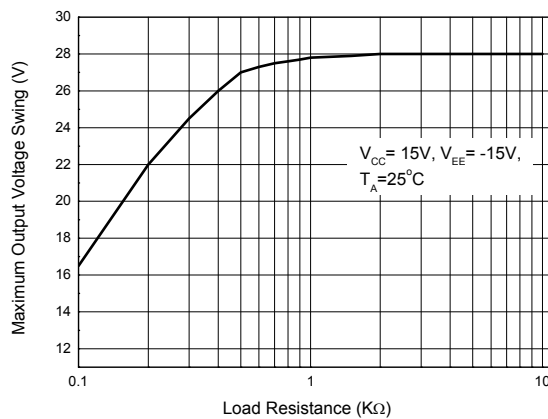


Figure 6. Maximum Output Voltage Swing vs. Load Resistance

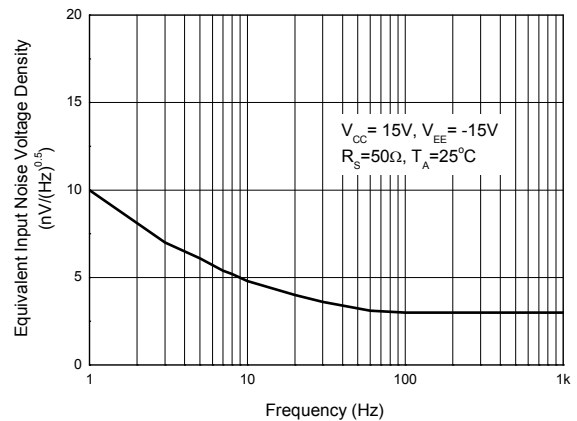


Figure 7. Equivalent Input Noise Voltage Density vs. Frequency

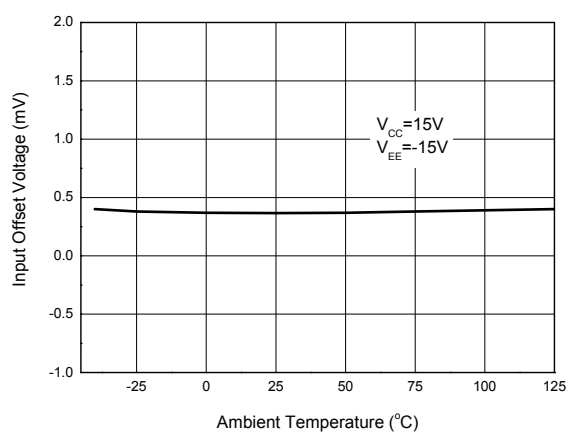
**Typical Performance Characteristics (Continued)**

Figure 8. Input Offset Voltage vs. Temperature

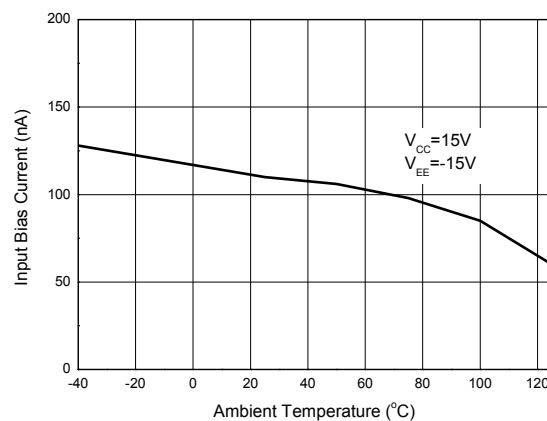


Figure 9. Input Bias Current vs. Temperature

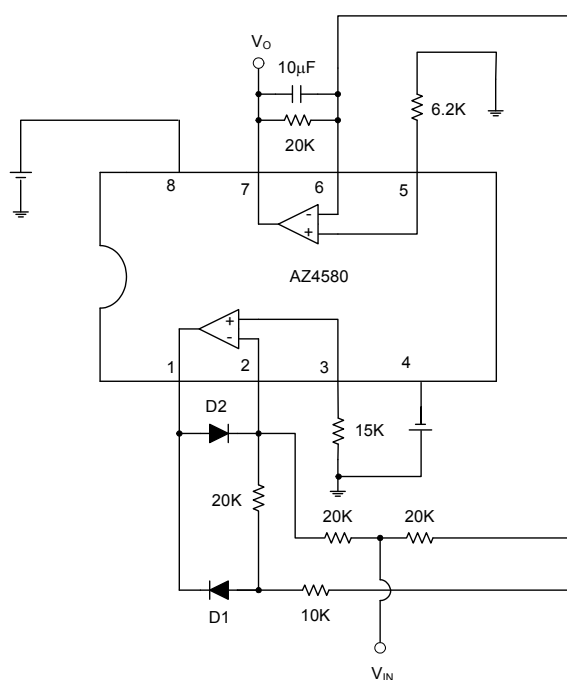
**Typical Applications**

Figure 10. Application of AZ4580 in an AC/DC Converter

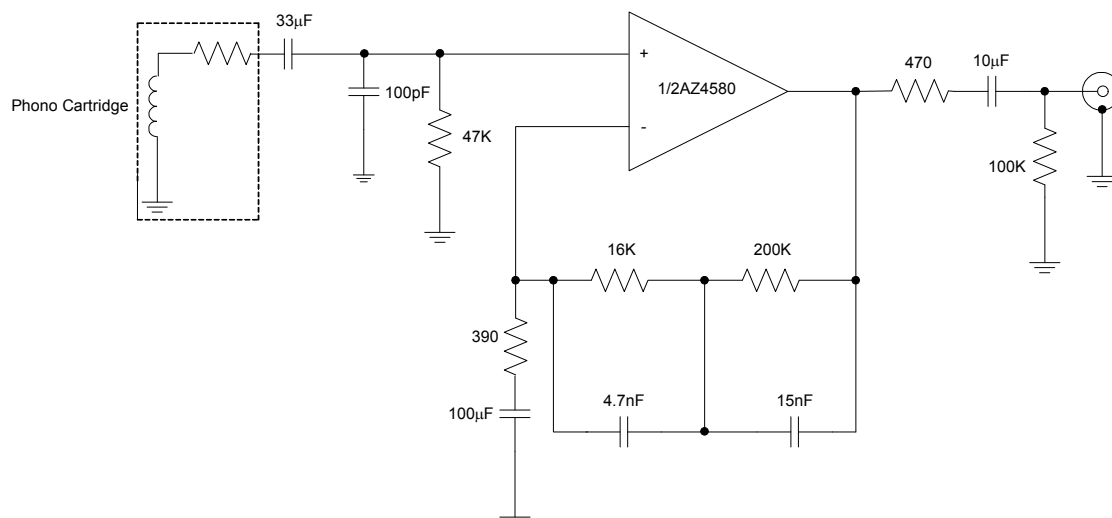
**Typical Applications (Continued)**


Figure 11. Application of AZ4580 in a RIAA Preamp

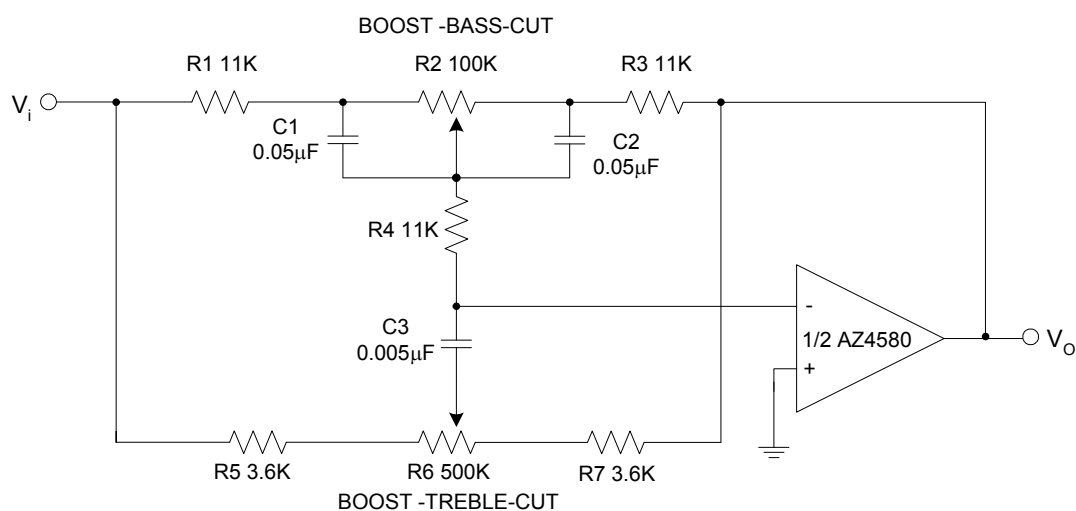
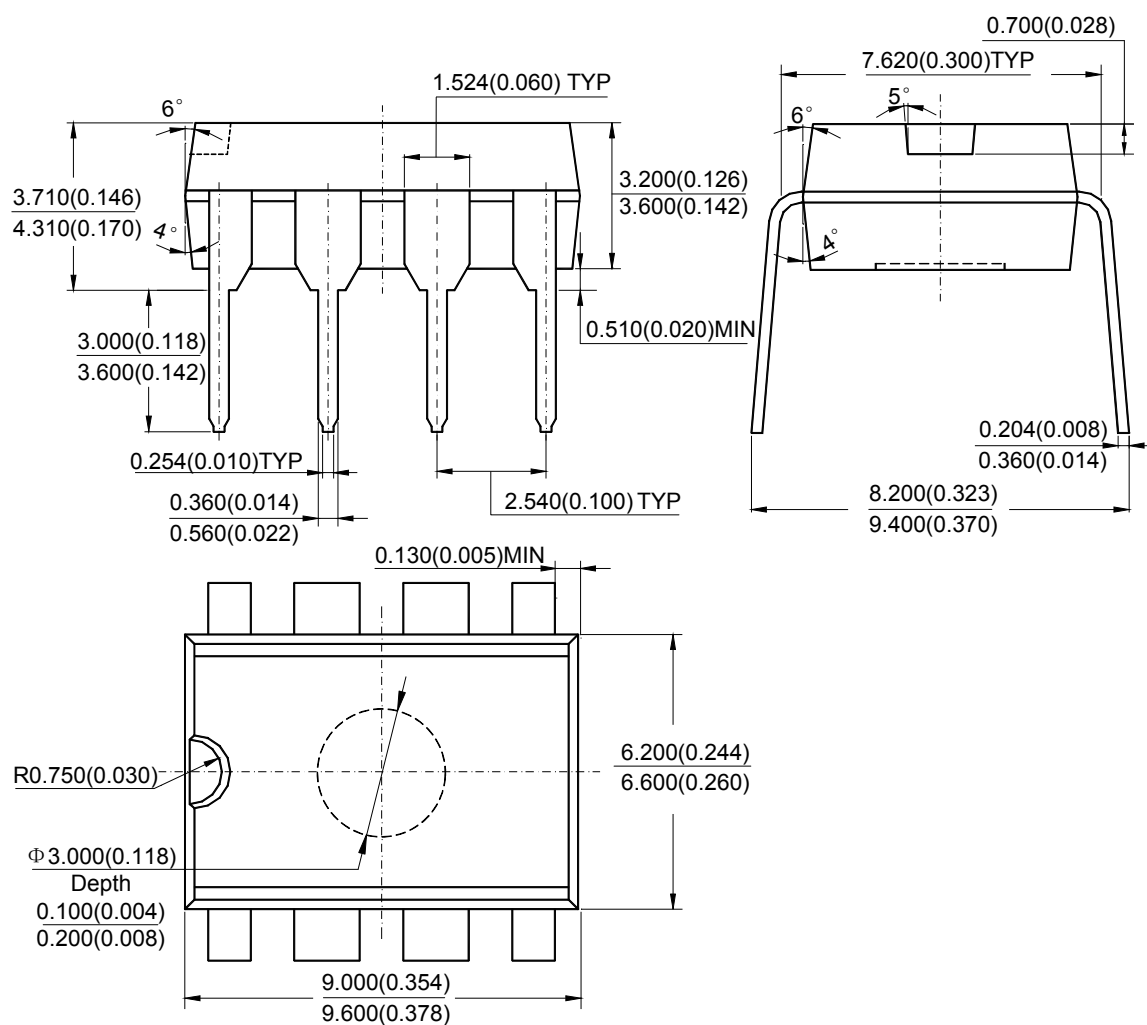
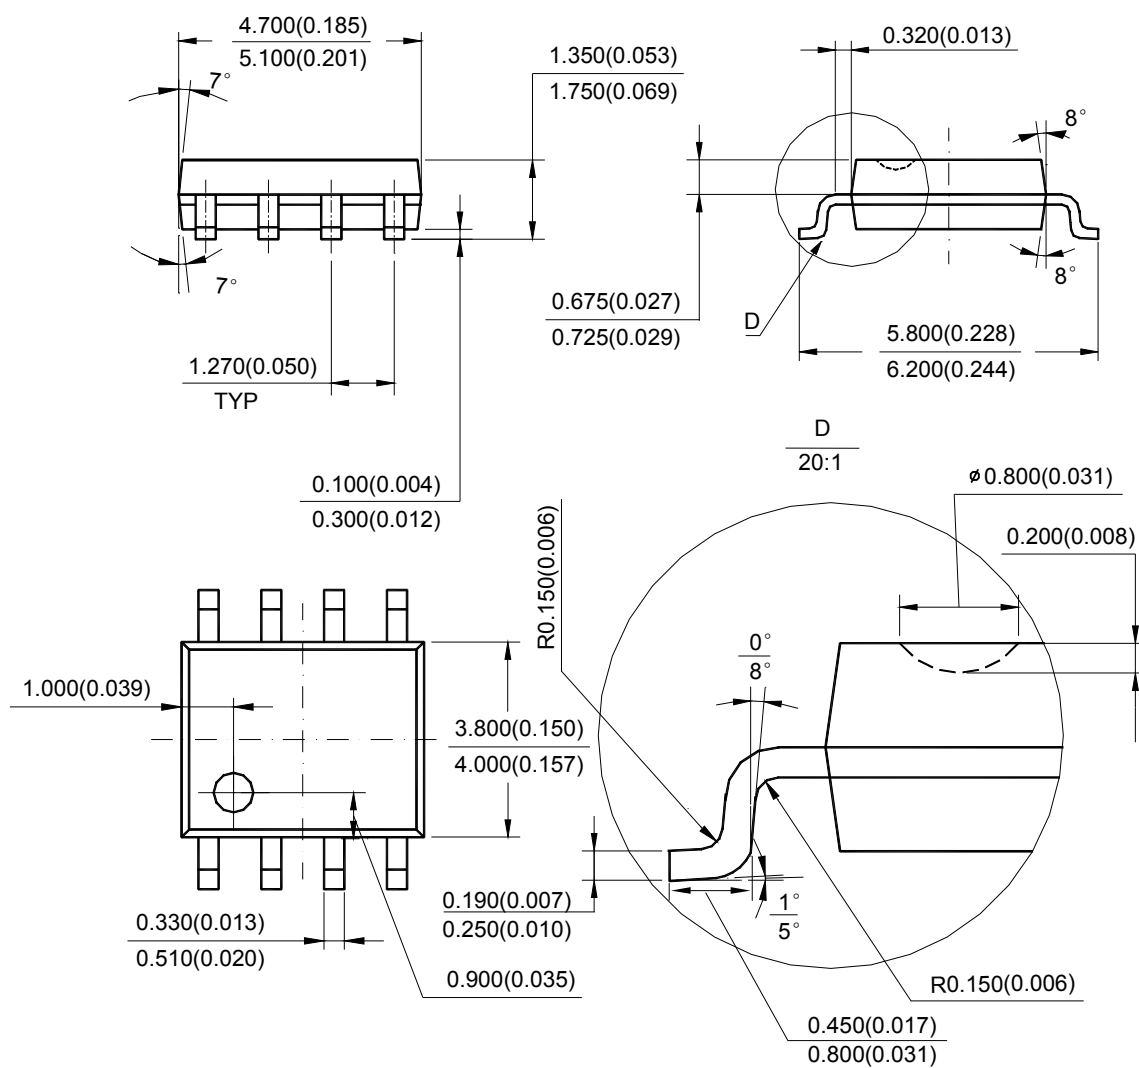






Figure 12. Application of AZ4580 in Tone Control

**DUAL LOW NOISE OPERATIONAL AMPLIFIERS****AZ4580****Mechanical Dimensions****DIP-8****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.

**DUAL LOW NOISE OPERATIONAL AMPLIFIERS****AZ4580****Mechanical Dimensions (Continued)****SOIC-8****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.

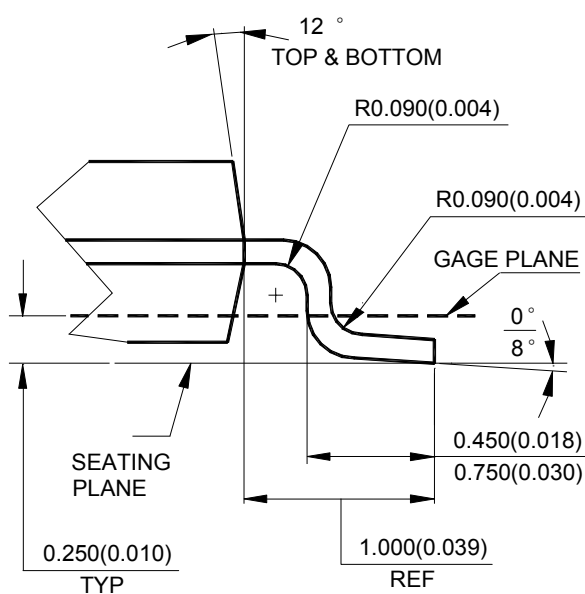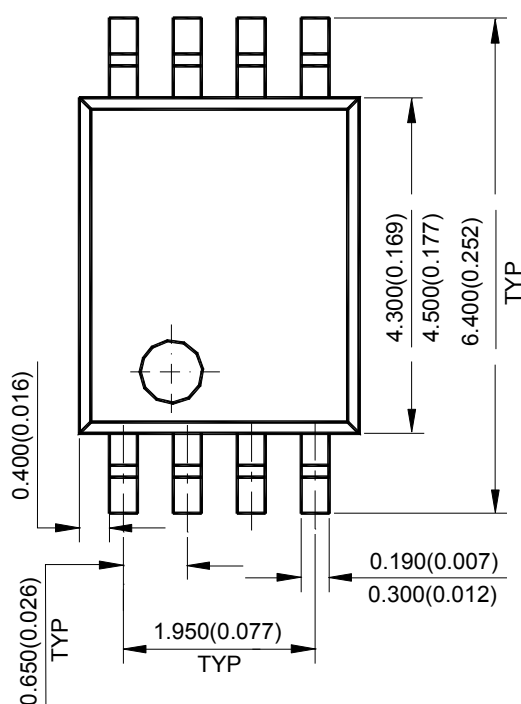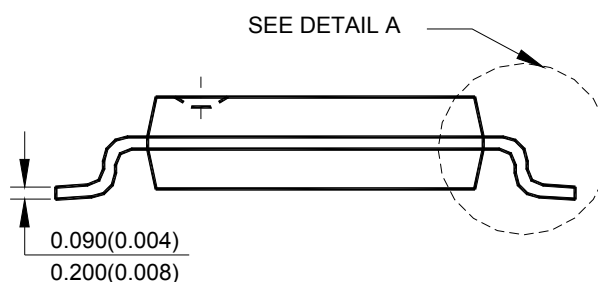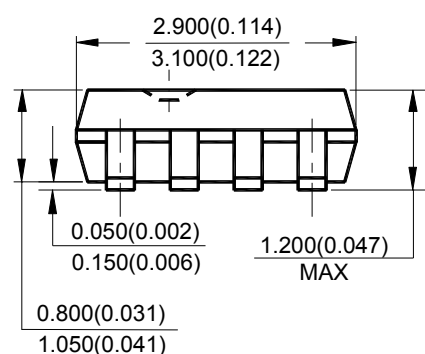**DUAL LOW NOISE OPERATIONAL AMPLIFIERS****AZ4580****Mechanical Dimensions (Continued)****TSSOP-8****Unit: mm(inch)**

DETAIL A

Note: Eject hole, oriented hole and mold mark is optional.



## **BCD Semiconductor Manufacturing Limited**

<http://www.bcdsemi.com>

### **IMPORTANT NOTICE**

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### **MAIN SITE**

##### **- Headquarters**

##### **BCD Semiconductor Manufacturing Limited**

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### **- Wafer Fab**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.**

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

#### **REGIONAL SALES OFFICE**

##### **Shenzhen Office**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office**

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. I.S., Nanshan District, Shenzhen, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### **Taiwan Office**

##### **BCD Semiconductor (Taiwan) Company Limited**

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### **USA Office**

##### **BCD Semiconductor Corp.**

30920 Huntwood Ave. Hayward, CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.