

# Smart High-Side Power Switch For Industrial Applications Four Channels: 4 x 140mΩ Status Feedback



## Product Summary

Operating Voltage	$V_{bb}$	5.5 ... 40V
Operating Temperature	$T_a$	-30 ... +85°C
	Active channels	one                  four parallel
On-state Resistance	$R_{ON}$	140mΩ            35mΩ
Nominal load current	$I_{L(NOM)}$	2.6A              5.3A
Current limitation	$I_{L(Scr)}$	6.5A              6.5A

## Package



Green Product (RoHS compliant)

## General Description

- N channel vertical power MOSFET with charge pump, ground referenced CMOS compatible input and diagnostic feedback, monolithically integrated in Smart SIPMOS® technology.
- Providing embedded protective functions

## Applications

- µC compatible high-side power switch with diagnostic feedback for 12V and 24V grounded loads in industrial applications
- All types of resistive, inductive and capacitive loads
- Most suitable for loads with high inrush currents, so as lamps
- Replaces electromechanical relays, fuses and discrete circuits

## Basic Functions

- Very low standby current
- CMOS compatible input
- Improved electromagnetic compatibility (EMC)
- Fast demagnetization of inductive loads
- Stable behaviour at undervoltage
- Wide operating voltage range
- Logic ground independent from load ground


## Protection Functions

- Short circuit protection
- Overload protection
- Current limitation
- Thermal shutdown
- Overvoltage protection (including load dump) with external resistor
- Reverse battery protection with external resistor
- Loss of ground and loss of  $V_{bb}$  protection
- Electrostatic discharge protection (ESD)


## Diagnostic Function

- Diagnostic feedback with open drain output
- Open load detection in OFF-state
- Feedback of thermal shutdown in ON-state

## Block Diagram

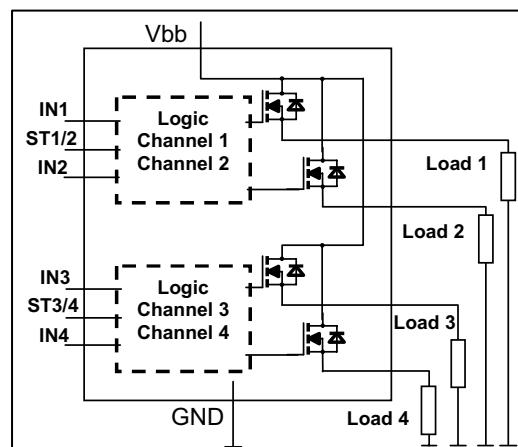

## Functional diagram

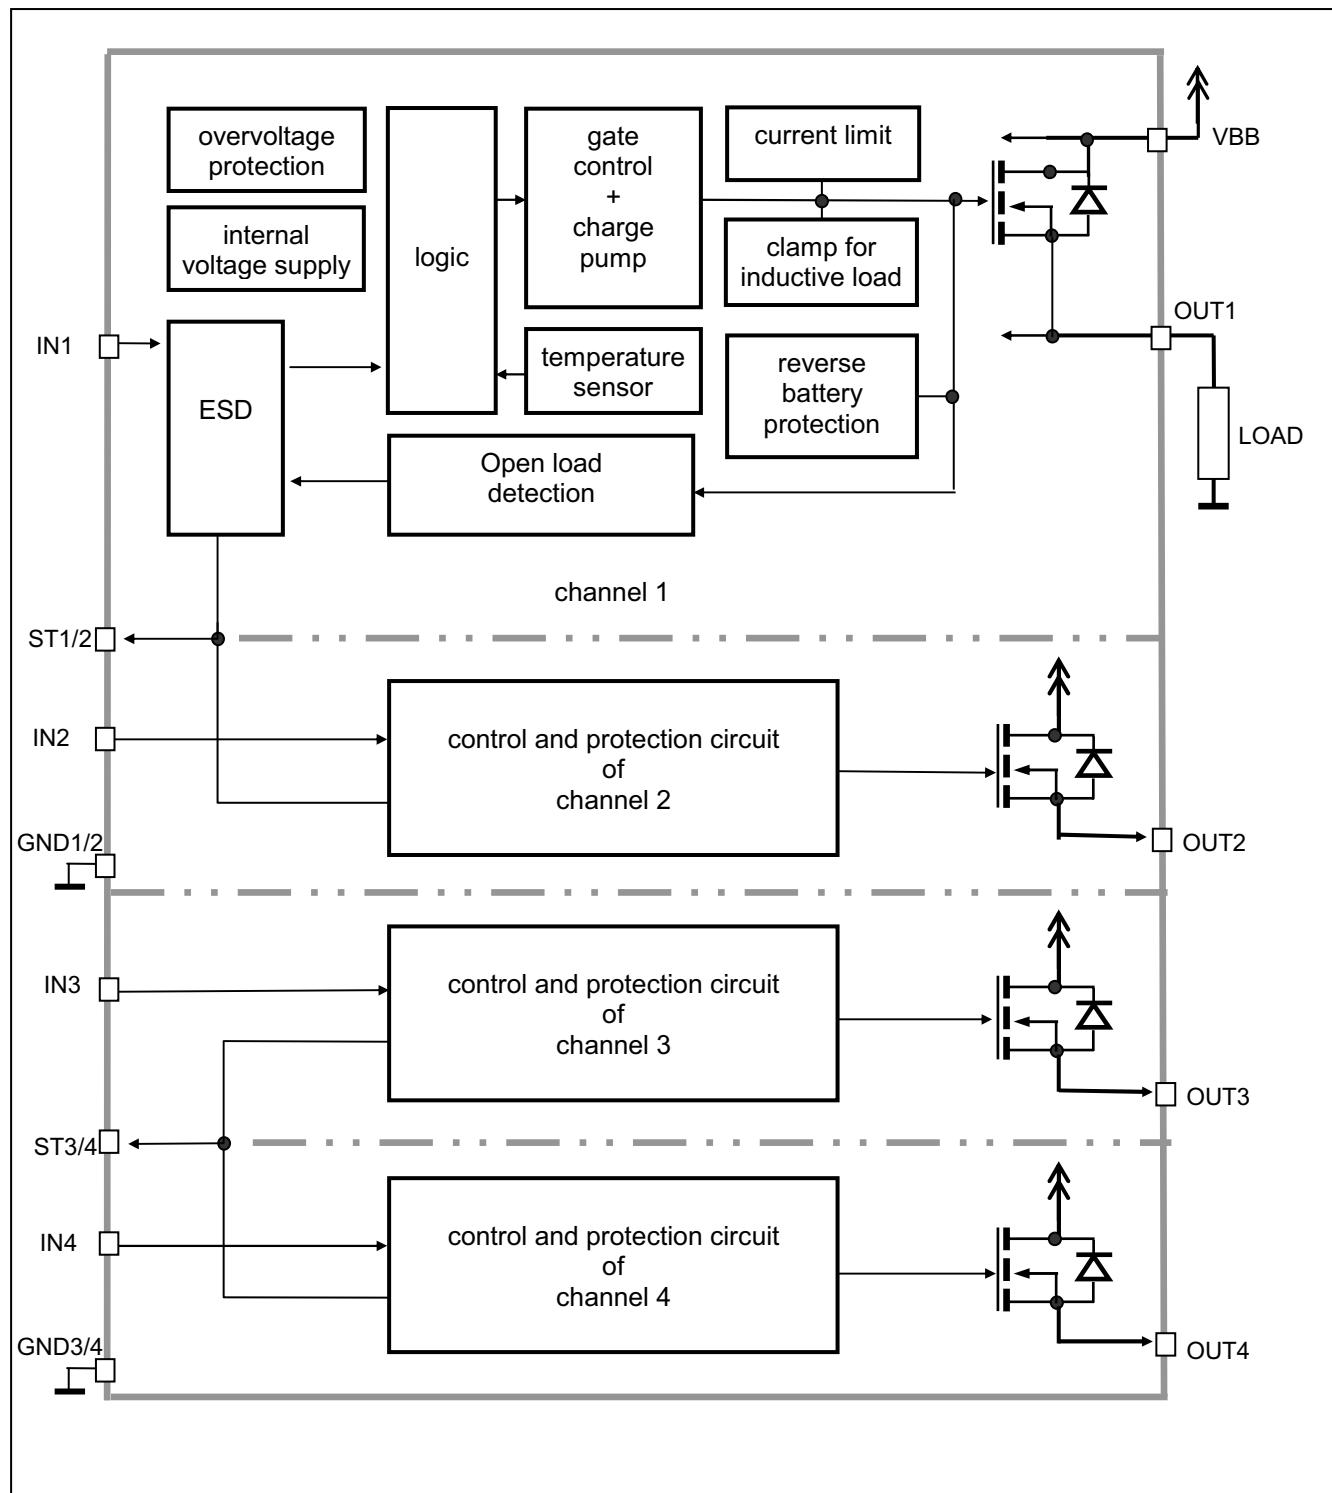

## Pin Definitions and Functions

Pin	Symbol	Function
1,10, 11,12, 15,16, 19,20	V <sub>bb</sub>	<b>Positive power supply voltage.</b> Design the wiring for the simultaneous max. short circuit currents from channel 1 to 2 and also for low thermal resistance
3	IN1	<b>Input 1,2,3,4</b> activates channel 1,2,3,4 in case of logic high signal
5	IN2	
7	IN3	
9	IN4	
18	OUT1	<b>Output 1,2,3,4</b> protected high-side power output of channel 1,2,3,4. Design the wiring for the max. short circuit current
17	OUT2	
14	OUT3	
13	OUT4	
4	ST1/2	<b>Diagnostic feedback 1/2,3/4</b> of channel 1,2,3,4 open drain, low on failure
8	ST3/4	
2	GND1/2	<b>Ground</b> of chip 1 (channel 1,2)
6	GND3/4	<b>Ground</b> of chip 2 (channel 3,4)

## Pin configuration

(top view)

V <sub>bb</sub>	1	•	20	V <sub>bb</sub>
GND1/2	2		19	V <sub>bb</sub>
IN1	3		18	OUT1
ST1/2	4		17	OUT2
IN2	5		16	V <sub>bb</sub>
GND3/4	6		15	V <sub>bb</sub>
IN3	7		14	OUT3
ST3/4	8		13	OUT4
IN4	9		12	V <sub>bb</sub>
V <sub>bb</sub>	10		11	V <sub>bb</sub>

**Maximum Ratings** at  $T_j = 25^\circ\text{C}$  unless otherwise specified

Parameter	Symbol	Values	Unit	
Supply voltage (overvoltage protection see page 6)	$V_{bb}$	43	V	
Supply voltage for full short circuit protection $T_{j,start} = -40 \dots +150^\circ\text{C}$	$V_{bb}$	36	V	
Load current (Short-circuit current, see page 6)	$I_L$	self-limited	A	
Load dump protection <sup>1)</sup> $V_{LoadDump} = V_A + V_s$ , $V_A = 13.5 \text{ V}$ $R_l^{(2)} = 2 \Omega$ , $t_d = 400 \text{ ms}$ ; IN = low or high, each channel loaded with $R_L = 13.5 \Omega$ ,	$V_{LoadDump}^{(3)}$	60	V	
Junction temperature	$T_j$	+150	$^\circ\text{C}$	
Operating temperature range	$T_a$	-30 ... +85		
Storage temperature range	$T_{stg}$	-40 ... +105		
Power dissipation (DC) <sup>4)</sup> (all channels active)	$T_a = 25^\circ\text{C}$ : $T_a = 85^\circ\text{C}$ :	$P_{tot}$	3.6 1.9	W
Maximal switchable inductance, single pulse $V_{bb} = 12 \text{ V}$ , $T_{j,start} = 150^\circ\text{C}^4$ , see diagrams on page 10	$Z_L$	21 25 30	mH	
$I_L = 2.3 \text{ A}$ , $E_{AS} = 76 \text{ mJ}$ , $0 \Omega$ one channel: $I_L = 3.3 \text{ A}$ , $E_{AS} = 182 \text{ mJ}$ , $0 \Omega$ two parallel channels: $I_L = 4.7 \text{ A}$ , $E_{AS} = 460 \text{ mJ}$ , $0 \Omega$ four parallel channels:				
Electrostatic discharge capability (ESD) (Human Body Model)	IN: ST: out to all other pins shorted: acc. MIL-STD883D, method 3015.7 and ESD assn. std. S5.1-1993 R=1.5kΩ; C=100pF	$V_{ESD}$	1.0 4.0 8.0	kV
Input voltage (DC) see internal circuit diagram page 9	$V_{IN}$	-10 ... +16	V	
Current through input pin (DC)	$I_{IN}$	$\pm 0.3$	mA	
Pulsed current through input pin <sup>5)</sup>	$I_{IN}$	$\pm 5.0$		
Current through status pin (DC)	$I_{ST}$	$\pm 5.0$		

1) Supply voltages higher than  $V_{bb(AZ)}$  require an external current limit for the GND and status pins (a  $150\Omega$  resistor for the GND connection is recommended).

2)  $R_l$  = internal resistance of the load dump test pulse generator

3)  $V_{Load dump}$  is setup without the DUT connected to the generator per ISO 7637-1 and DIN 40839

4) Device on 50mm\*50mm\*1.5mm epoxy PCB FR4 with  $6\text{cm}^2$  (one layer, 70μm thick) copper area for  $V_{bb}$  connection. PCB is vertical without blown air. See page 14

5) only for testing

## Thermal Characteristics

Parameter and Conditions	Symbol	Values			Unit
		min	typ	max	
Thermal resistance junction - soldering point <sup>6)7)</sup> junction – ambient <sup>6)</sup> @ 6 cm <sup>2</sup> cooling area	$R_{thjs}$ $R_{thja}$	--	--	17	K/W
		--	--	--	
		--	44	--	
each channel: one channel active: all channels active:		--	35	--	

## Electrical Characteristics

Parameter and Conditions, each of the four channels at $T_j = -40...+150^\circ\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified	Symbol	Values			Unit
		min	typ	max	

## Load Switching Capabilities and Characteristics

On-state resistance ( $V_{bb}$ to OUT); $I_L = 2\text{ A}$ each channel, $T_j = 25^\circ\text{C}$ : $T_j = 150^\circ\text{C}$ : two parallel channels, $T_j = 25^\circ\text{C}$ : four parallel channels, $T_j = 25^\circ\text{C}$ :	$R_{ON}$	--	110	140	$\text{m}\Omega$
see diagram, page 11		--	210	280	
Nominal load current Device on PCB <sup>6)</sup> , $T_a = 85^\circ\text{C}$ , $T_j \leq 150^\circ\text{C}$	$I_{L(\text{NOM})}$	2.3	2.6	--	A
one channel active:		3.3	3.7	--	
two parallel channels active:		4.7	5.3	--	
four parallel channels active:					
Output current while GND disconnected or pulled up <sup>8)</sup> ; $V_{bb} = 32\text{ V}$ , $V_{IN} = 0$ , see diagram page 9	$I_{L(\text{GNDhigh})}$	--	--	2	mA
Turn-on time <sup>9)</sup>	IN $\square$ to 90% $V_{OUT}$ :	$t_{on}$	--	100	$250\text{ }\mu\text{s}$
Turn-off time	IN $\square$ to 10% $V_{OUT}$ :	$t_{off}$	--	100	$270\text{ }\mu\text{s}$
$R_L = 12\Omega$					
Slew rate on <sup>9)</sup>	10 to 30% $V_{OUT}$ , $R_L = 12\Omega$ :	$dV/dt_{on}$	0.2	--	$1.0\text{ V}/\mu\text{s}$
Slew rate off <sup>9)</sup>	70 to 40% $V_{OUT}$ , $R_L = 12\Omega$ :	$-dV/dt_{off}$	0.2	--	$1.1\text{ V}/\mu\text{s}$

- 6) Device on 50mm\*50mm\*1.5mm epoxy PCB FR4 with 6cm<sup>2</sup> (one layer, 70 $\mu\text{m}$  thick) copper area for  $V_{bb}$  connection. PCB is vertical without blown air. See page 14
- 7) Soldering point: upper side of solder edge of device pin 15. See page 14
- 8) not subject to production test, specified by design
- 9) See timing diagram on page 12.

Parameter and Conditions, each of the four channels at $T_j = -40\ldots+150^\circ\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified	Symbol	Values			Unit
		min	typ	max	

### Operating Parameters

Operating voltage	$V_{bb(on)}$	5.5	--	40	V
Undervoltage switch off <sup>10)</sup>	$T_j = -40\ldots25^\circ\text{C}$ : $V_{bb(u\ so)}$	--	--	4.5	V
	$T_j = 125^\circ\text{C}$ :	--	--	4.5 <sup>11)</sup>	
Ovvoltage protection <sup>12)</sup> $I_{bb} = 40\text{ mA}$	$V_{bb(AZ)}$	41	47	52	V
Standby current <sup>13)</sup> $V_{IN} = 0$ ; see diagram page 11	$T_j = -40^\circ\text{C}\ldots25^\circ\text{C}$ : $I_{bb(off)}$	--	9	16	$\mu\text{A}$
	$T_j = 150^\circ\text{C}$ :	--	--	24	
	$T_j = 125^\circ\text{C}$ :	--	--	16 <sup>11)</sup>	
Off-State output current (included in $I_{bb(off)}$ ) $V_{IN} = 0$ ; each channel	$I_{L(off)}$	--	1	5	$\mu\text{A}$
Operating current <sup>14)</sup> , $V_{IN} = 5\text{V}$ , $I_{GND} = I_{GND1} + I_{GND2}$ ,	$I_{GND}$				
one channel on: all channels on:		--	0.5	0.9	mA
		--	1.9	3.3	

### Protection Functions<sup>15)</sup>

Current limit, $V_{out} = 0\text{V}$ , (see timing diagrams, page 12)					
	$T_j = -40^\circ\text{C}$ : $I_{L(lim)}$	--	--	14	A
	$T_j = 25^\circ\text{C}$ :	--	9	--	
	$T_j = +150^\circ\text{C}$ :	5	--	--	
Repetitive short circuit current limit, $T_j = T_{jt}$ each channel two,three or four parallel channels (see timing diagrams, page 12)	$I_{L(SCr)}$	--	6.5	--	A
		--	6.5	--	
Initial short circuit shutdown time $V_{out} = 0\text{V}$ ( $T_{j,start} = 25^\circ\text{C}$ ; see timing diagrams on page 12)	$t_{off(SC)}$	--	2	--	ms
Output clamp (inductive load switch off) <sup>16)</sup> at $V_{ON(CL)} = V_{bb} - V_{OUT}$ , $I_L = 40\text{ mA}$	$V_{ON(CL)}$	41	47	52	V
Thermal overload trip temperature	$T_{jt}$	150	--	--	$^\circ\text{C}$
Thermal hysteresis	$\Delta T_{jt}$	--	10	--	K

<sup>10)</sup> is the voltage, where the device doesn't change its switching condition for 15ms after the supply voltage falling below the lower limit of  $V_{bb(on)}$

<sup>11)</sup> not subject to production test, specified by design

<sup>12)</sup> Supply voltages higher than  $V_{bb(AZ)}$  require an external current limit for the GND and status pins (a  $150\Omega$  resistor for the GND connection is recommended). See also  $V_{ON(CL)}$  in table of protection functions and circuit diagram on page 9.

<sup>13)</sup> Measured with load; for the whole device; all channels off

<sup>14)</sup> Add  $I_{ST}$ , if  $I_{ST} > 0$

<sup>15)</sup> Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.

<sup>16)</sup> If channels are connected in parallel, output clamp is usually accomplished by the channel with the lowest  $V_{ON(CL)}$

Parameter and Conditions, each of the four channels at $T_j = -40\ldots+150^\circ\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified	Symbol	Values			Unit
		min	typ	max	

### Reverse Battery

Reverse battery voltage <sup>17)</sup>	$-V_{bb}$	--	--	32	V
Drain-source diode voltage ( $V_{out} > V_{bb}$ ) $I_L = -2.0\text{ A}$ , $T_j = +150^\circ\text{C}$	$-V_{ON}$	--	600	--	mV

### Diagnostic Characteristics

Open load detection voltage	$V_{OUT(OL)}$	1.7	2.8	4.0	V
-----------------------------	---------------	-----	-----	-----	---

### Input and Status Feedback<sup>18)</sup>

Input resistance (see circuit page 9)	$R_I$	2.5	4.0	6.0	kΩ
Input turn-on threshold voltage	$V_{IN(T+)}$	--	--	2.5	V
Input turn-off threshold voltage	$V_{IN(T-)}$	1.0	--	--	V
Input threshold hysteresis	$\Delta V_{IN(T)}$	--	0.2	--	V
Status change after positive input slope <sup>19)</sup> with open load	$t_{d(STon)}$	--	10	20	μs
Status change after positive input slope <sup>19)</sup> with overload	$t_{d(STon)}$	30	--	--	μs
Status change after negative input slope with open load	$t_{d(SToff)}$	--	--	500	μs
Status change after negative input slope <sup>19)</sup> with overtemperature	$t_{d(SToff)}$	--	--	20	μs
Off state input current $V_{IN} = 0.4\text{ V}$ :	$I_{IN(off)}$	5	--	20	μA
On state input current $V_{IN} = 5\text{ V}$ :	$I_{IN(on)}$	10	35	60	μA
Status output (open drain)					
Zener limit voltage	$I_{ST} = +1.6\text{ mA}$ :	$V_{ST(\text{high})}$	5.4	--	V
ST low voltage	$I_{ST} = +1.6\text{ mA}$ :	$V_{ST(\text{low})}$	--	--	0.6

<sup>17)</sup> Requires a  $150\Omega$  resistor in GND connection. The reverse load current through the intrinsic drain-source diode has to be limited by the connected load. Power dissipation is higher compared to normal operating conditions due to the voltage drop across the drain-source diode. The temperature protection is not active during reverse current operation! Input and Status currents have to be limited (see max. ratings page 4 and circuit page 9).

<sup>18)</sup> If ground resistors  $R_{GND}$  are used, add the voltage drop across these resistors.

<sup>19)</sup> not subject to production test, specified by design

## Truth Table


Channel 1 and 2	Chip 1	IN1	IN2	OUT1	OUT2	ST1/2
Channel 3 and 4 (equivalent to channel 1 and 2)	Chip 2	IN3	IN4	OUT3	OUT4	ST3/4
Normal operation		L	L	L	L	H
		L	H	L	H	H
		H	L	H	L	H
		H	H	H	H	H
Open load	Channel 1 (3)	L	X	Z	X	L <sup>20)</sup>
		H	X	H	X	H
	Channel 2 (4)	X	L	X	Z	L <sup>15)</sup>
		X	H	X	H	H
Overtemperature	both channel	L	L	L	L	H
		X	H	L	L	L
		H	X	L	L	L
	Channel 1 (3)	L	X	L	X	H
		H	X	L	X	L
	Channel 2 (4)	X	L	X	L	H
		X	H	X	L	L

L = "Low" Level  
H = "High" Level

X = don't care      Z = high impedance, potential depends on external circuit  
Status signal valid after the time delay shown in the timing diagrams

Parallel switching of channel 1 and 2 (also channel 3 and 4) is easily possible by connecting the inputs and outputs in parallel (see truth table). If switching channel 1 to 4 in parallel, the status outputs ST1/2 and ST3/4 have to be configured as a 'Wired OR' function with a single pull-up resistor.


## Terms

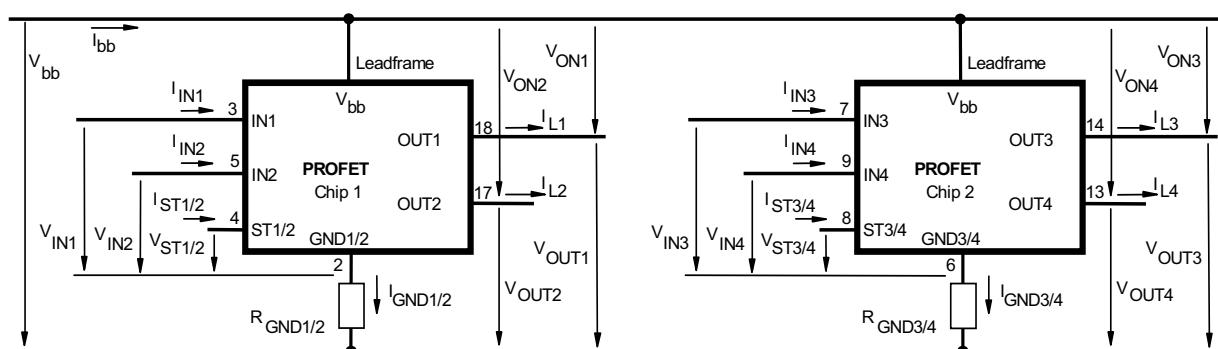


Leadframe ( $V_{bb}$ ) is connected to pin 1,10,11,12,15,16,19,20

External  $R_{GND}$  optional; two resistors  $R_{GND1}, R_{GND2} = 150 \Omega$  or a single resistor  $R_{GND} = 75 \Omega$  for reverse battery protection up to the max. operating voltage.


<sup>20)</sup> L, if potential at the Output exceeds the OpenLoad detection voltage

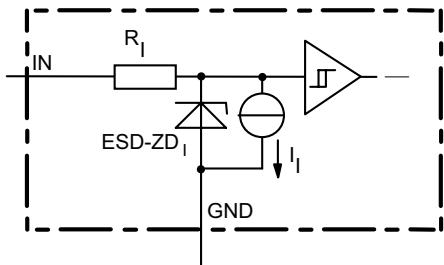**Input circuit (ESD protection), IN1 to IN4**


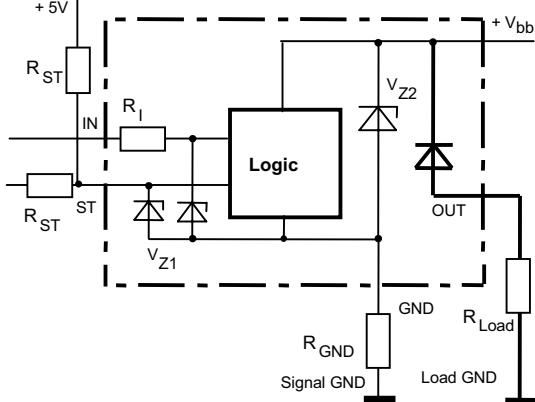
The use of ESD zener diodes as voltage clamp at DC conditions is not recommended.

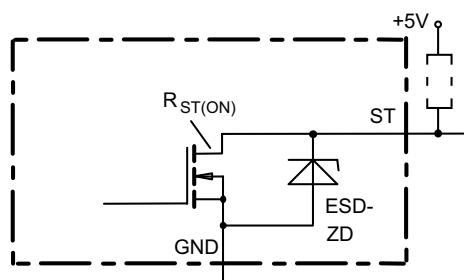**Status output, ST1/2 or ST3/4**


ESD-Zener diode: 6.1 V typ., max 0.3 mA;  $R_{ST(ON)} < 375 \Omega$  at 1.6 mA. The use of ESD zener diodes as voltage clamp at DC conditions is not recommended.

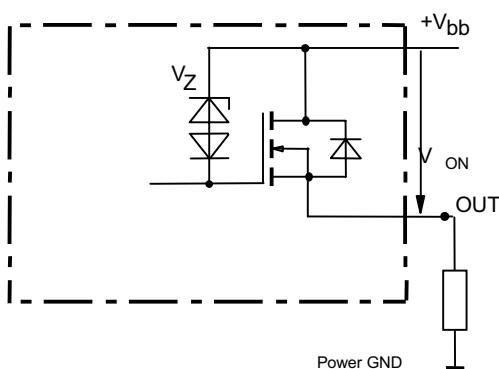**Inductive and overvoltage output clamp, OUT1...4**


$V_{ON}$  clamped to  $V_{ON(CL)} = 47$  V typ.

**Ovvolt. and reverse batt. protection**


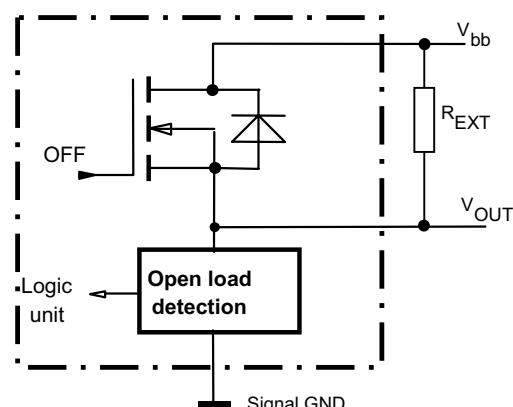
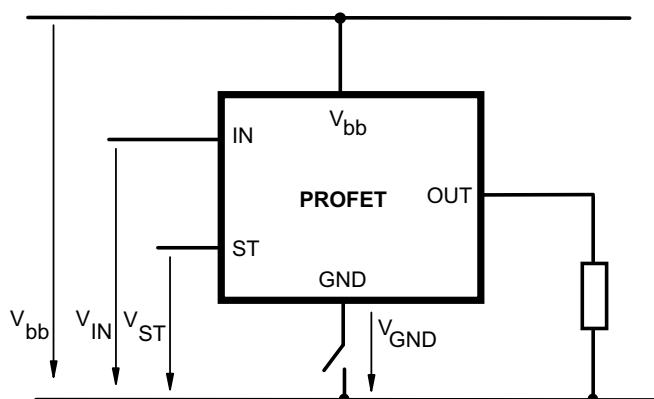
$V_{Z1} = 6.1$  V typ.,  $V_{Z2} = 47$  V typ.,  $R_{GND} = 150 \Omega$ ,  $R_{ST} = 15 \text{ k}\Omega$ ,  $R_I = 3.5 \text{ k}\Omega$  typ.

In case of reverse battery the load current has to be limited by the load. Temperature protection is not active

**Open-load detection, OUT1...4**


OFF-state diagnostic condition:

Open Load, if  $V_{OUT} > 3$  V typ.; IN low


**GND disconnect**


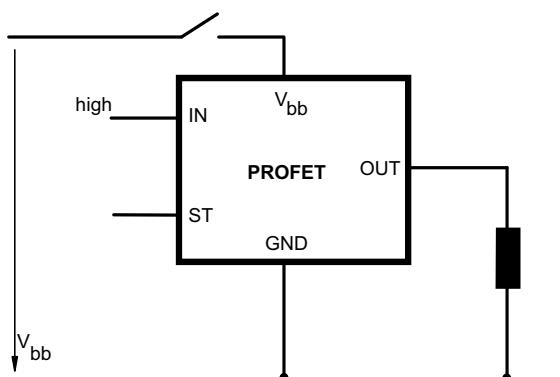
Any kind of load. In case of IN=high is  $V_{OUT} \approx V_{IN} - V_{IN(T+)}$ . Due to  $V_{GND} > 0$ , no  $V_{ST} = \text{low}$  signal available.

### GND disconnect with GND pull up

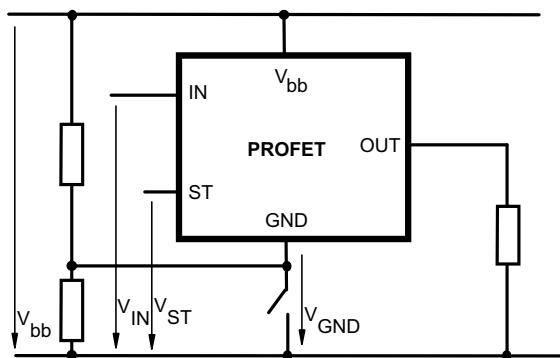

Any kind of load. If  $V_{GND} > V_{IN} - V_{IN(T+)}$  device stays off  
Due to  $V_{GND} > 0$ , no  $V_{ST} = \text{low}$  signal available.


### V<sub>bb</sub> disconnect with energized inductive load



For inductive load currents up to the limits defined by  $Z_L$  (max. ratings and diagram on page 10) each switch is protected against loss of  $V_{bb}$ .

Consider at your PCB layout that in the case of  $V_{bb}$  disconnection with energized inductive load all the load current flows through the GND connection.

### Inductive load switch-off energy dissipation

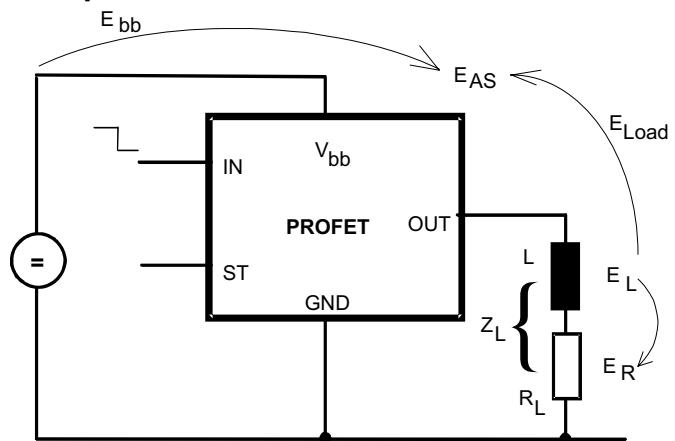

Energy stored in load inductance:

$$E_L = \frac{1}{2} \cdot L \cdot I_L^2$$

While demagnetizing load inductance, the energy dissipated in PROFET is

$$E_{AS} = E_{bb} + E_L - E_R = \int V_{ON(CL)} \cdot i_L(t) dt,$$


with an approximate solution for  $R_L > 0 \Omega$ :

$$E_{AS} = \frac{I_L \cdot L}{2 \cdot R_L} (V_{bb} + |V_{OUT(CL)}|) \ln \left( 1 + \frac{I_L \cdot R_L}{|V_{OUT(CL)}|} \right)$$


### Maximum allowable load inductance for a single switch off (one channel)<sup>4</sup>


$L = f(I_L)$ ;  $T_{j,start} = 150^\circ\text{C}$ ,  $V_{bb} = 12\text{ V}$ ,  $R_L = 0 \Omega$

$Z_L$  [mH]

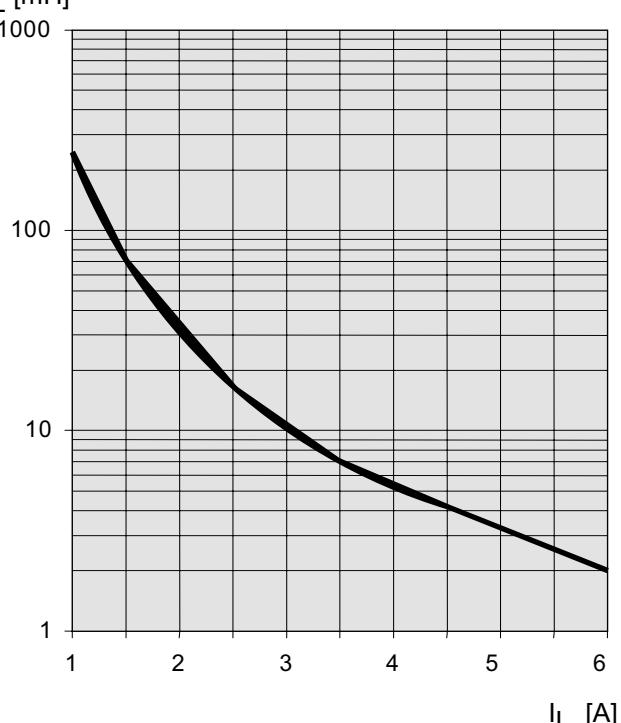

**Typ. on-state resistance**
 $R_{ON} = f(V_{bb}, T_j)$ ;  $I_L = 2 \text{ A}$ , IN = high

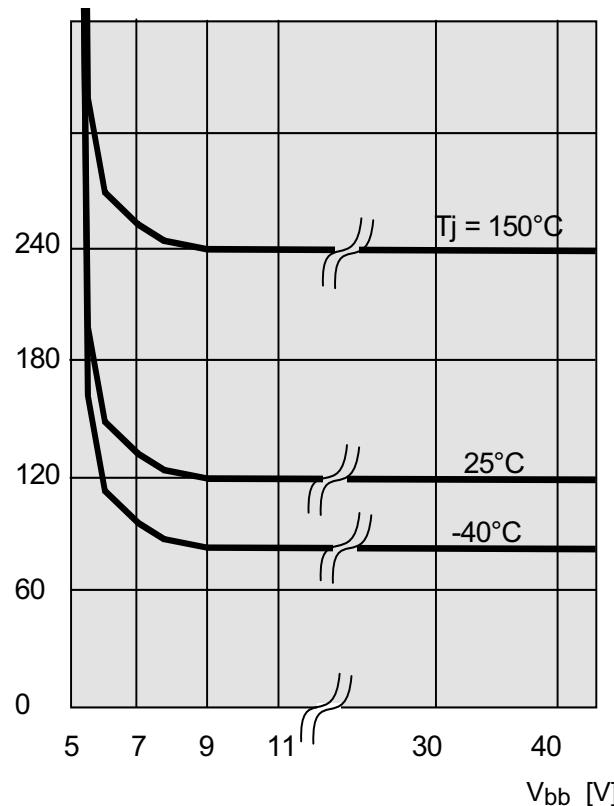
 $R_{ON}$  [mOhm]

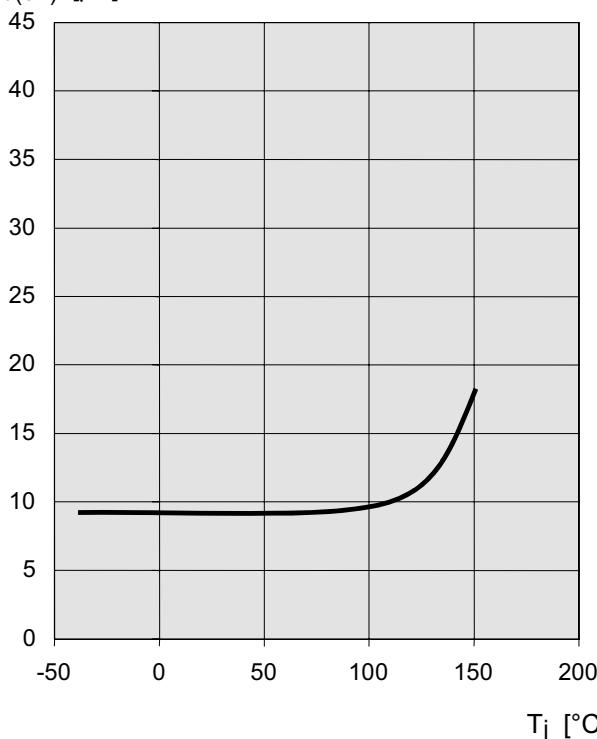**Typ. standby current**
 $I_{bb(off)} = f(T_j)$ ;  $V_{bb} = 9 \dots 34 \text{ V}$ , IN1,2,3,4 = low

 $I_{bb(off)}$  [ $\mu\text{A}$ ]


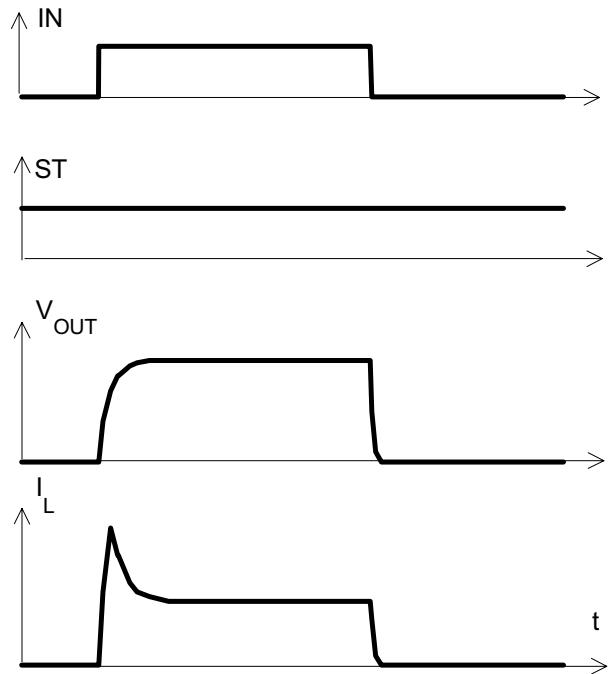
## Timing diagrams

All channels are symmetric and consequently the diagrams are valid for channel 1 to channel 4

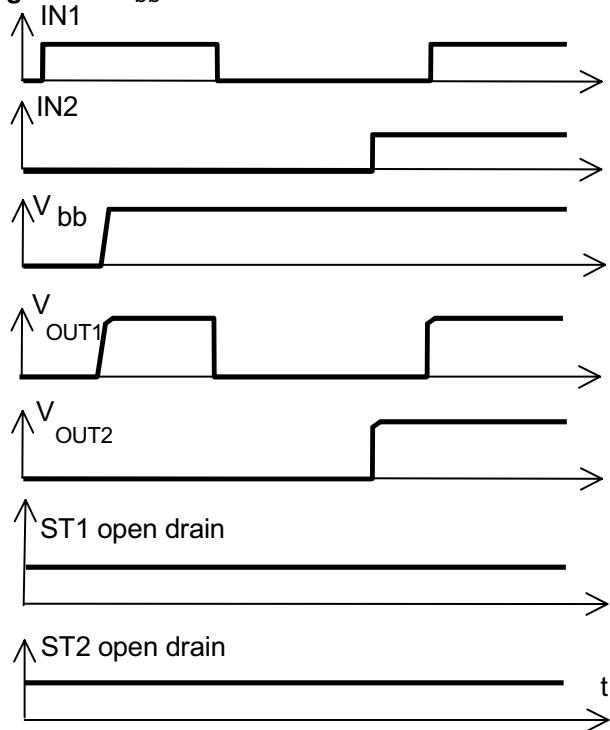
**Figure 1a:**  $V_{bb}$  turn on:




**Figure 2b:** Switching a lamp:




**Figure 2a:** Switching a resistive load, turn-on/off time and slew rate definition:

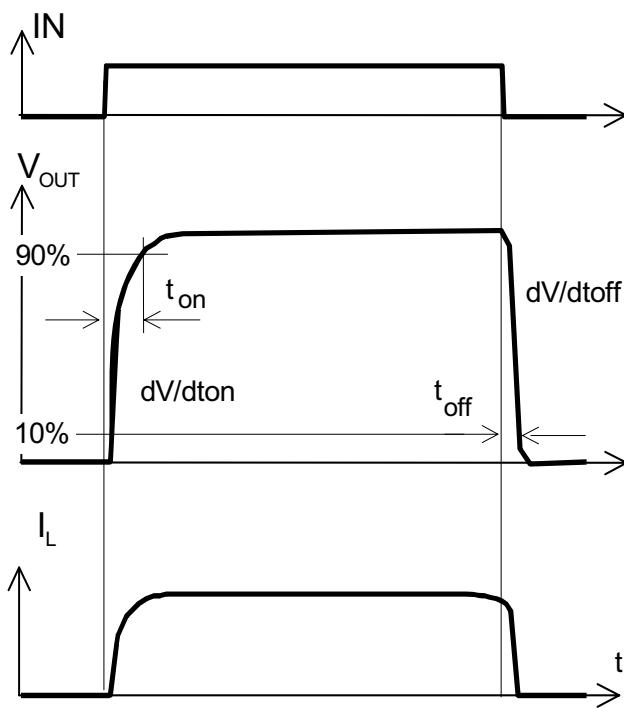

**Figure 3a:** Turn on into short circuit: shut down by overtemperature, restart by cooling

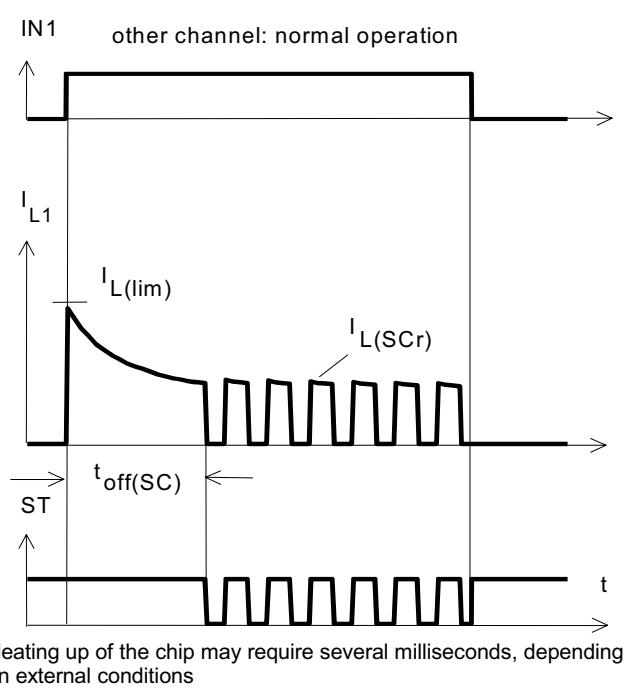


**Figure 3b:** Turn on into short circuit:  
shut down by overtemperature, restart by cooling  
(two parallel switched channels 1 and 2)

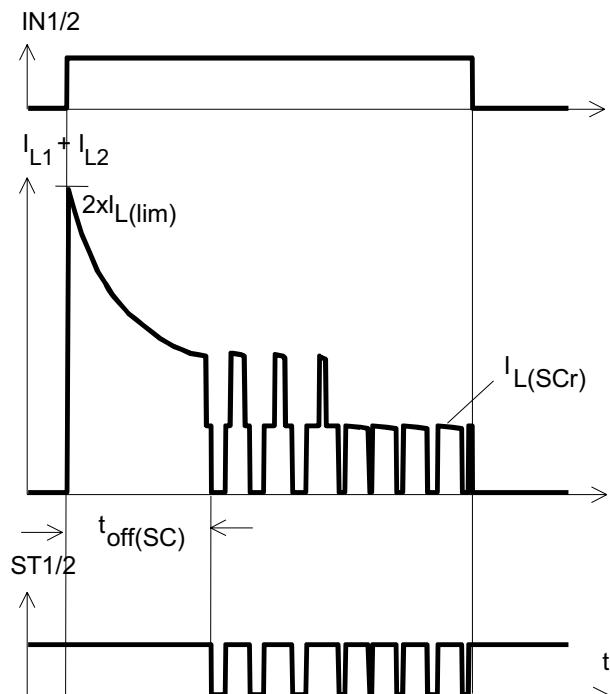


ST1 and ST2 have to be configured as a 'Wired OR' function  
ST1/2 with a single pull-up resistor.


**Figure 4a:** Overtemperature:  
Reset if  $T_j < T_{jt}$

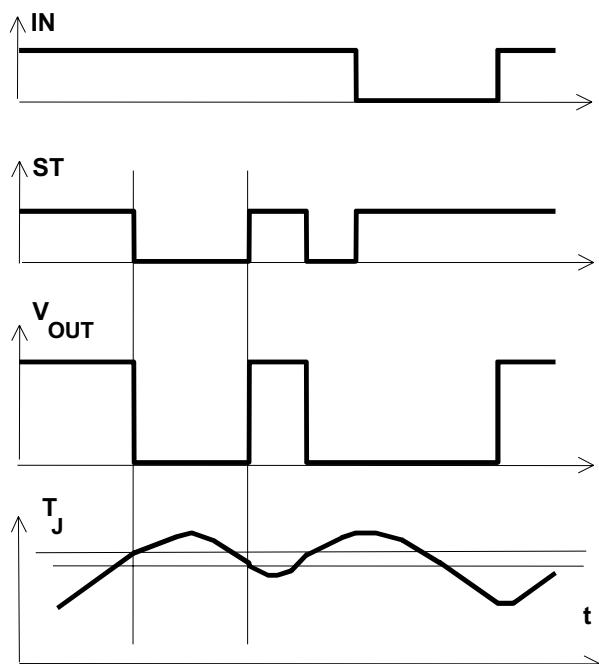


**Figure 5a:** Open load: detection in OFF-state, turn on/off to open load  
Open load of channel 1; other channels normal operation

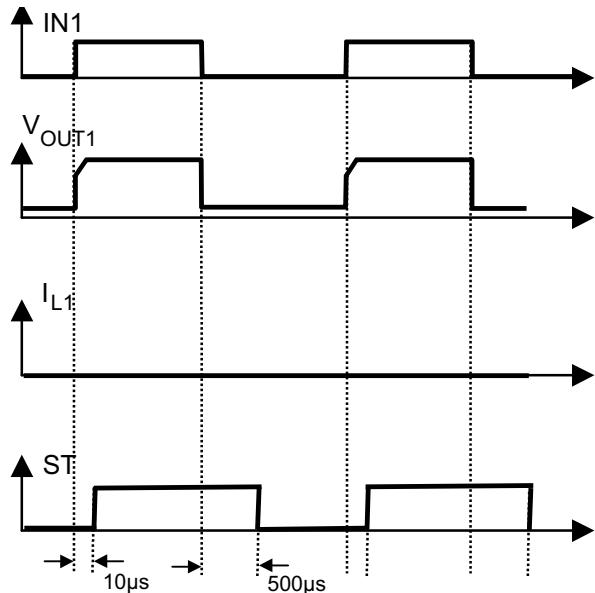

**Figure 6a:** Status change after, turn on/off to overtemperature  
Overtemperature of channel 1; other channels normal operation

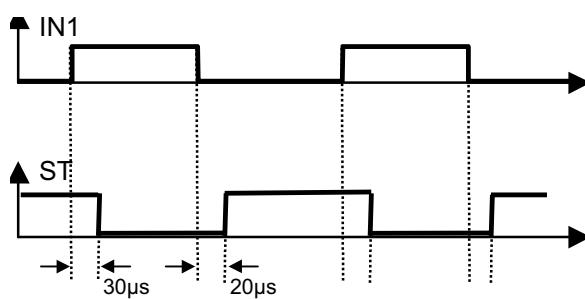

## 1 Package Outlines

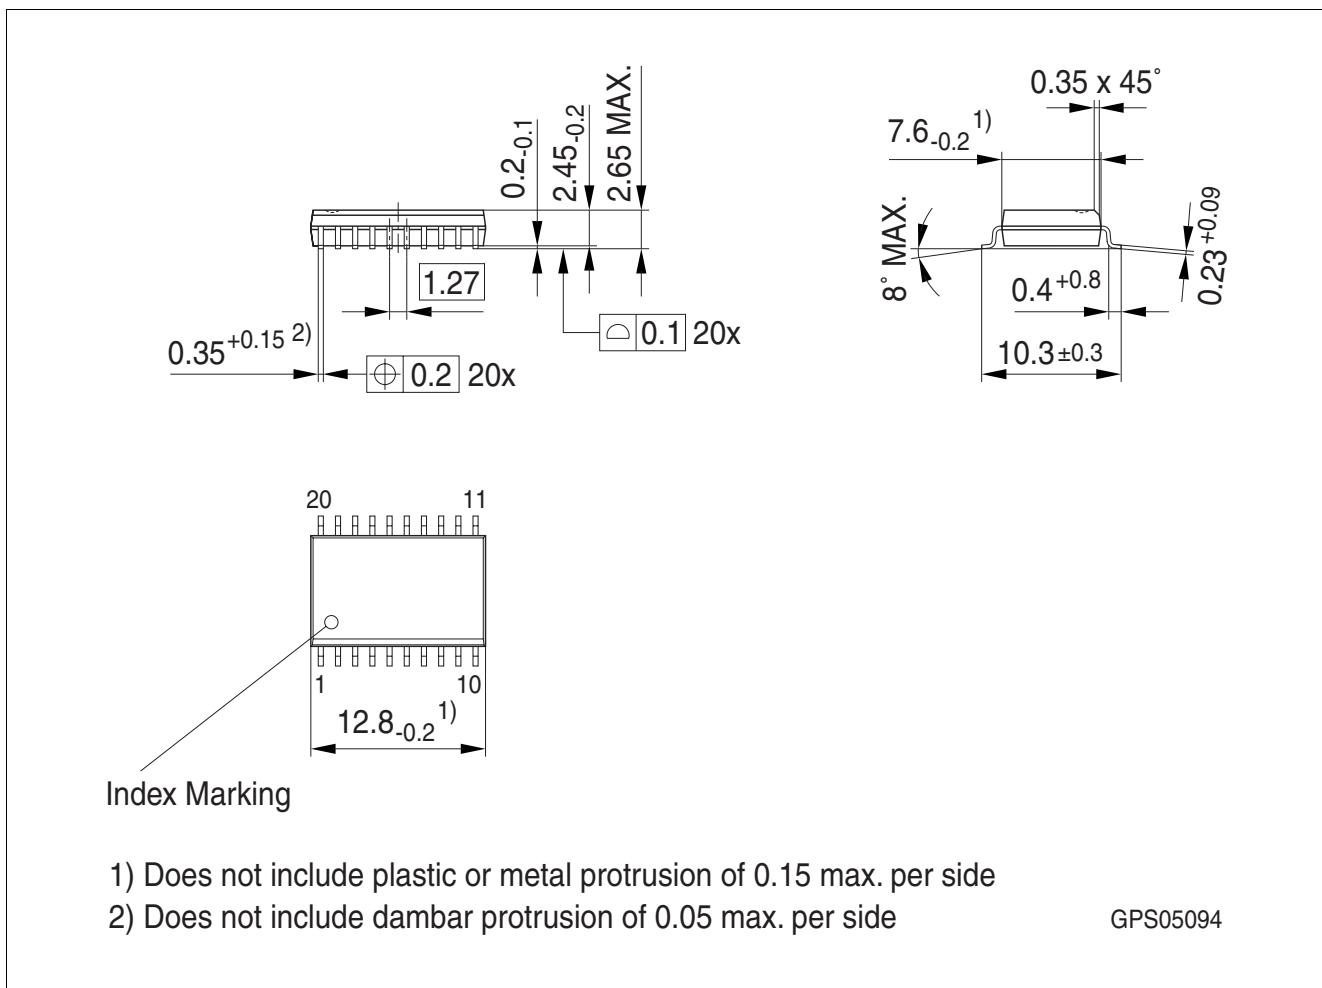

**Figure 1 PG-DSO-20-32**

### Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

For further information on alternative packages, please visit our website:  
<http://www.infineon.com/packages>.

Dimensions in mm

## 2 Revision History

Revision	Date	Changes
1.1	2008-10-02	<p>RoHS-compliant DSO package version of the ITS716G</p> <p>All pages: Infineon logo updated</p> <p>Page 1: Added “RoHS” logo, added “Green Product (RoHS compliant)” statement to feature list, package names changed to RoHS compliant versions.</p> <p>Page 14: Package names changed to RoHS compliant versions, added “Green Product” description</p> <p>page 15: added Revision History</p> <p>page 16: added Legal Disclaimer</p>

**Edition 2008-10-02**

**Published by**  
**Infineon Technologies AG**  
**81726 Munich, Germany**

**© 2008 Infineon Technologies AG**  
**All Rights Reserved.**

#### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

#### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[ITS716G](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.