

LT3494 and LT3494A

Micropower Low Noise Boost Converters
With Output Disconnect

DESCRIPTION

Demonstration circuits 1024A-A and 1024A-B are Micropower Low Noise Boost Converters With Output Disconnect featuring the LT3494 and LT3494A respectively. The demo circuits demonstrate small size and low component count in Boost configuration. Both demo versions are designed to convert a 3V-4.2V source to 15V. The only difference is in the load capability. The 1024A-A supplies 17mA at 3V_{IN} while the 1024A-B supplies 27mA, also at 3V_{IN}. The LT3494 features integrated Schottky diode, output disconnect function, dimming control, output sense resistor and non-audible switching frequency

over the entire load range. A 2-3% improvement in efficiency can be achieved by adding an external CMDSH-3 diode. A place holder is available on the back of the board. These circuits are intended for space-conscious applications such as OLED power, MP3 Players, and Low Noise Bias Supplies.

Design files for this circuit board are available. Call the LTC factory.

L, LTC, LTM, LT, Burst Mode, OPTI-LOOP, Over-The-Top and PolyPhase are registered trademarks of Linear Technology Corporation. Adaptive Power, C-Load, DirectSense, Easy Drive, FilterCAD, Hot Swap, LinearView, pModule, Micropower SwitcherCAD, Multimode Dimming, No Latency $\Delta\Sigma$, No Latency Delta-Sigma, No R_{DS(on)}, Operational Filter, PanelProtect, PowerPath, PowerSOT, SmartStart, SoftSpan, Stage Shedding, SwitcherCAD, ThinSOT, UltraFast and VLDO are trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

PERFORMANCE SUMMARY DC1024A-A Specifications are at TA = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		3		4.2	V
V _{OUT}	Output Voltage Range	V _{IN} = 3V, I _{LOAD} = 17mA	14.55	15	15.45	V
V _{OUT}	Output Voltage Range	V _{IN} = 3.6V, I _{LOAD} = 25mA	14.55	15	15.45	V
V _{OUT}	Output Voltage Range	V _{IN} = 4.2V, I _{LOAD} = 32mA	14.55	15	15.45	V
RIPPLE		V _{IN} = 3.6V, I _{LOAD} = 25mA		20		mV
EFFICIENCY	Load at V _{OUT}	V _{IN} = 3.6V, I _{LOAD} = 25mA		77		%
EFFICIENCY	Load at VCAP	V _{IN} = 3.6V, I _{LOAD} = 25mA		79		%

PERFORMANCE SUMMARY DC1024A-B Specifications are at TA = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		3		4.2	V
V _{OUT}	Output Voltage Range	V _{IN} = 3V, I _{LOAD} = 27mA	14.55	15	15.45	V
V _{OUT}	Output Voltage Range	V _{IN} = 3.6V, I _{LOAD} = 35mA	14.55	15	15.45	V
V _{OUT}	Output Voltage Range	V _{IN} = 4.2V, I _{LOAD} = 44mA	14.55	15	15.45	V
RIPPLE		V _{IN} = 3.6V, I _{LOAD} = 35mA		20		mV
EFFICIENCY	Load at V _{OUT}	V _{IN} = 3.6V, I _{LOAD} = 35mA		74		%
EFFICIENCY	Load at VCAP	V _{IN} = 3.6V, I _{LOAD} = 35mA		77		%

QUICK START PROCEDURE

Demonstration circuit 1024 is easy to set up to evaluate the performance of the LT3494 and LT3494A. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place jumpers in the following positions:

JP1 Run

2. With power off, connect the input power supply to Vin and GND.

3. Turn on the power at the input.

4. Check for the proper output voltages. $V_{out1} = 14.55V$ to $15.45V$.

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

5. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

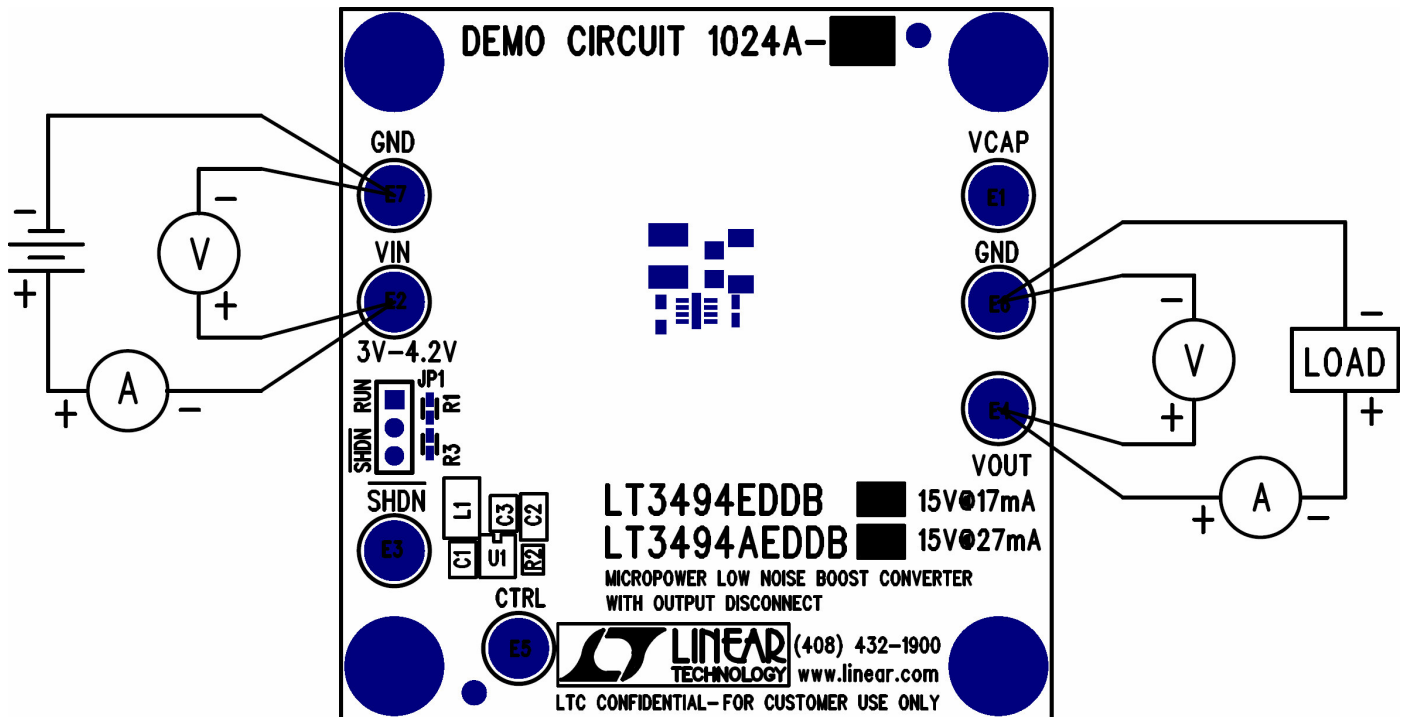


Figure 1. Proper Measurement Equipment Setup






Figure 2. Measuring Input or Output Ripple



Efficiency Comparison Between LT3494 and LT3494A

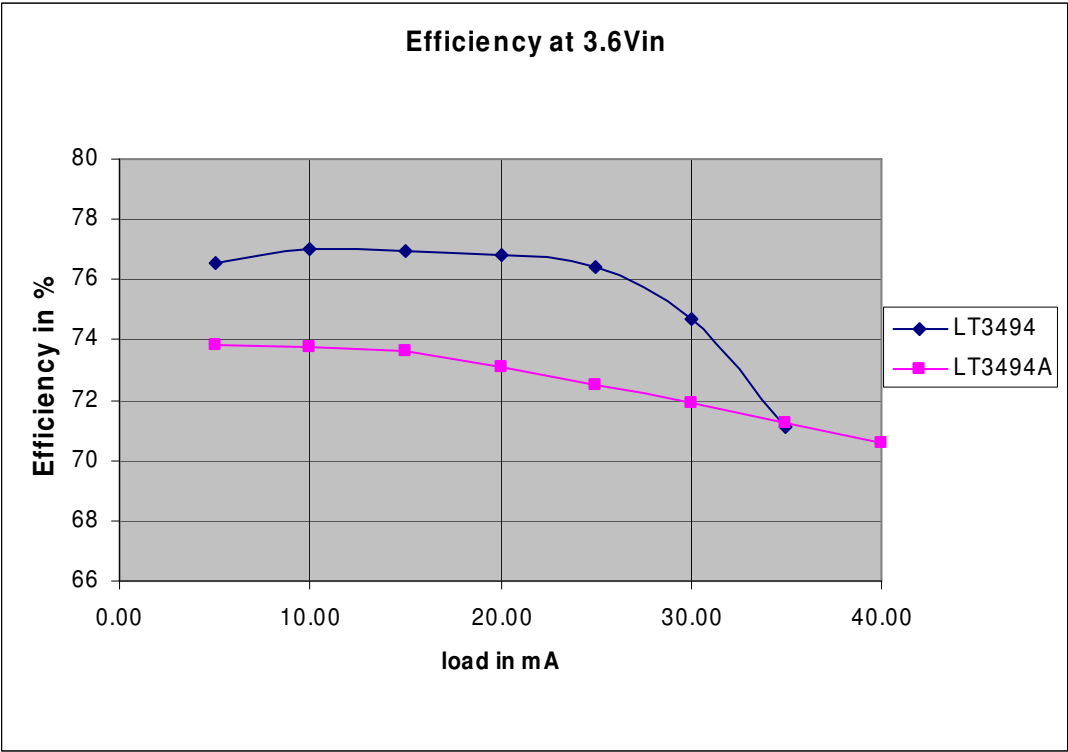

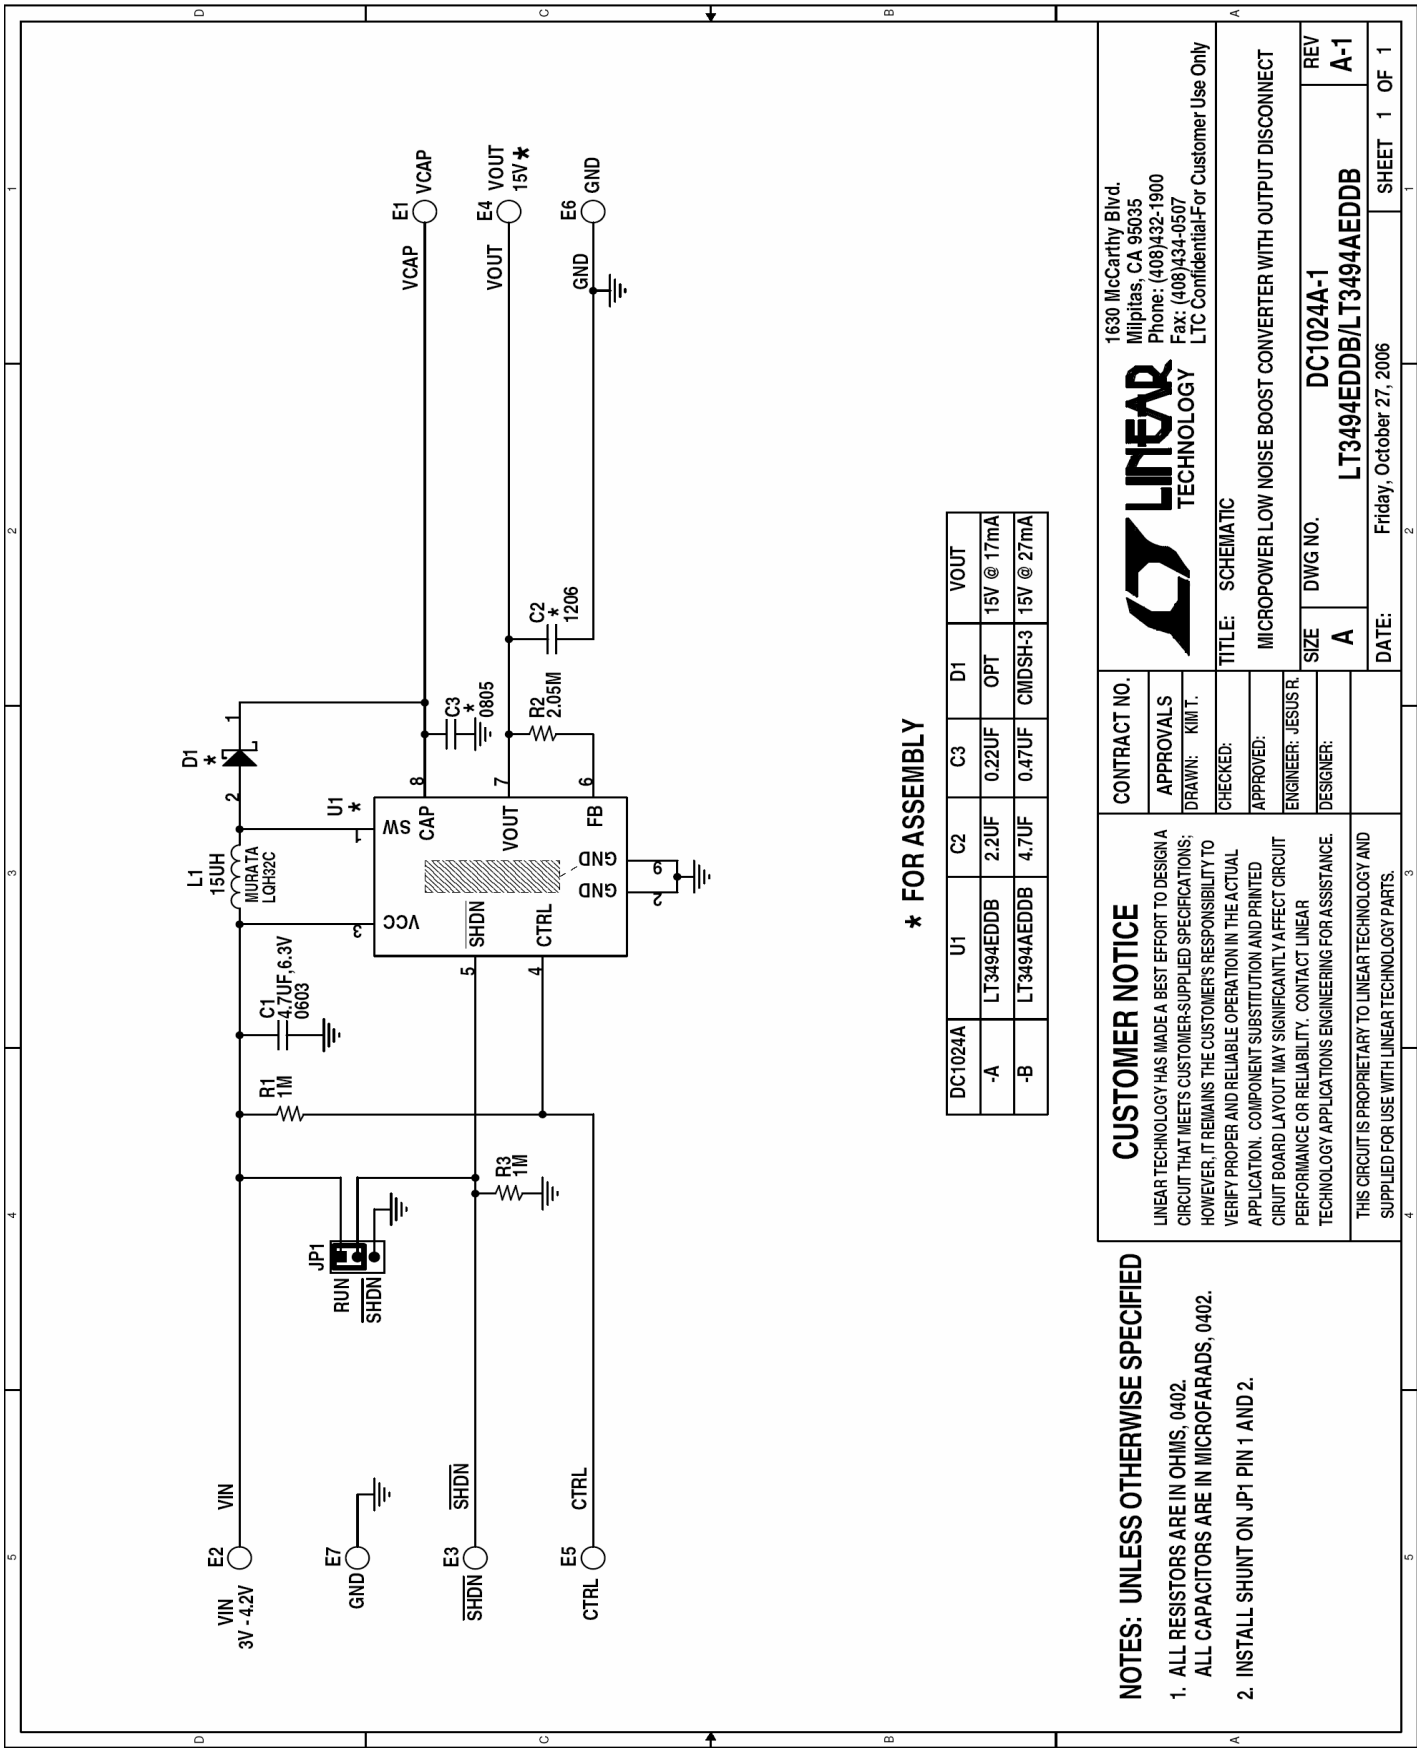

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.