

1. General description

DA9211 and DA9212 are PMUs optimised for the supply of CPUs, GPUs, and DDR memory rails in smartphones, tablets and other handheld applications. The fast transient response (10A/μs) and load regulation are optimised for the new generation of multi-core application processors.

DA9212 integrates two dual-phase buck converters, each phase using a small external 0.47 μH inductor. Each buck is capable of delivering up to 6 A output current at an output voltage in the range 0.3 - 1.57 V. The input voltage range of 2.8 – 5.5 V makes it suited for a wide variety of low voltage systems, including all Li-Ion battery-powered applications.

DA9211 operates as a single four-phase buck converter delivering up to 12 A output current. To guarantee the highest accuracy and to support multiple PCB routing scenarios without loss of performance, a remote sensing capability is implemented in both DA9211 and DA9212.

The power devices are fully integrated, so no external FETs or Schottky diodes are needed.

A programmable soft start-up can be enabled, which limits the inrush current from the input node and secures a slope-controlled activation of the rail.

The Dynamic Voltage Control (DVC) supports adaptive adjustment of the supply voltage depending on the processor load, either via direct register writes through the communication interface (I2C or SPI compatible) or via an input pin.

A voltage tracking functionality is implemented allowing the buck output voltage to be controlled by an analogue input signal. This feature, together with a digital clock input, allows complete control of the buck converter from external signals in the platform.

DA9211 and DA9212 feature integrated over-temperature and over-current protection for increased system reliability without the need for external sensing components. The safety feature set is completed by a V_{DDIO} under voltage lockout.

The configurable I2C address selection via GPI allows multiple instances of DA9211 and DA9212 or both to be placed in the application sharing the same communication interface with different addresses.

2. Key features

- 2.8 V to 5.5 V Input voltage
- 0.3 V to 1.57 V Output voltage
- 12 A Output Current (DA9211)
- 2x 6 A Output Current (DA9212)
- 3 MHz nominal Switching Frequency
- Max Inductor height 1.0 mm
- ±1 % Accuracy (static)
- ±3 % Accuracy (dynamic)
- Dynamic Voltage Control (DVC)
- Automatic Phase Shedding
- Integrated Power Switches
- Remote Sensing at Point of Load
- I2C/SPI compatible Interface
- Output Voltage Tracking Capability
- Adjustable Soft Start
- -40 to +85 °C Temperature Range
- Package 42 WL-CSP 0.4 mm pitch

3. Applications

- Smartphones, Mobile Phones and Ultra books
- Portable Navigation Devices, TV and Media players
- Tablet PCs, E-Book Readers and Car Infotainment

4. System diagrams

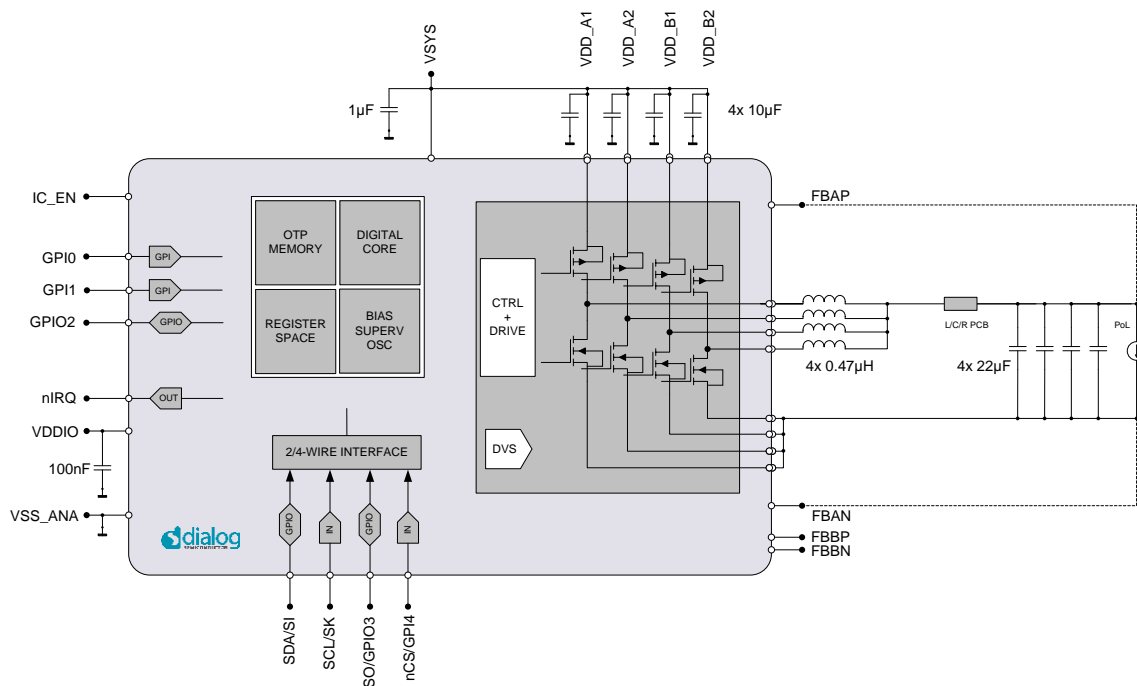


Figure 1: DA9211 System diagram

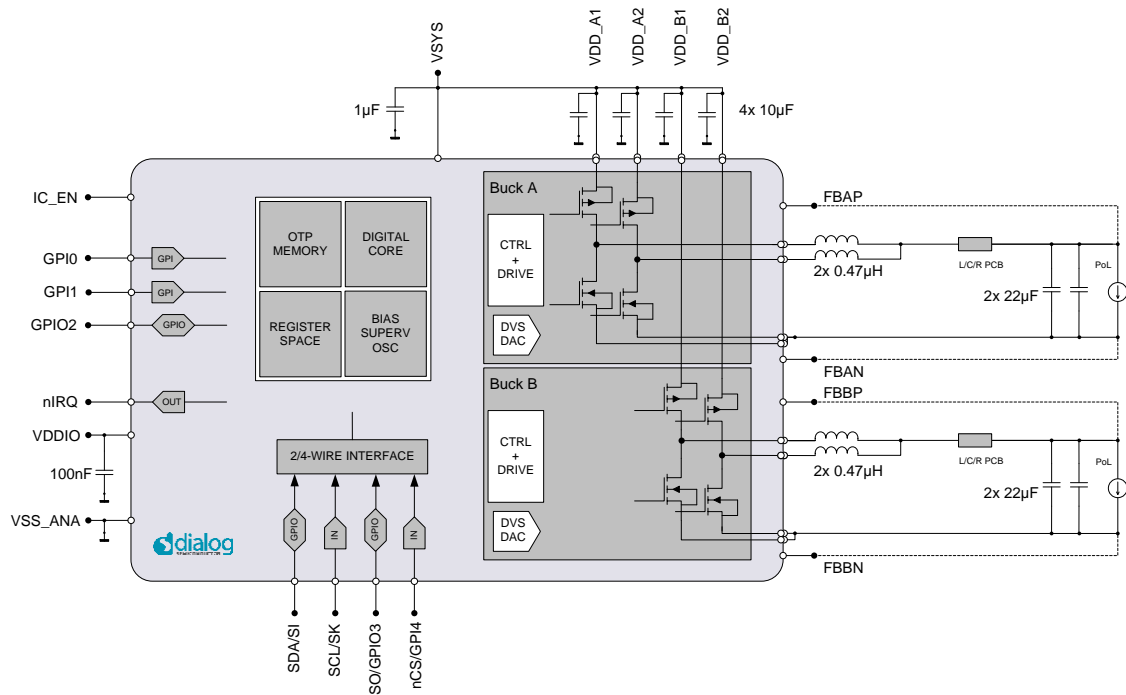


Figure 2: DA9212 System diagram

Contents

1. General description	1
2. Key features	1
3. Applications	2
4. System diagrams	2
5. Revision history	7
6. Terms and definitions	7
7. Ordering information	8
8. Pin information	8
9. Absolute maximum ratings	11
10. Recommended operating conditions	11
11. Electrical characteristics	12
12. Typical Characteristics	21
13. Functional description	28
13.1 DC-DC Buck Converter	32
13.1.1 Switching Frequency	32
13.1.2 Operation Modes and Phase Selection	33
13.1.3 Output Voltage Selection	33
13.1.4 Soft Start up	34
13.1.5 Current Limit	34
13.2 Ports Description	35
13.2.1 VDDIO	35
13.2.2 IC_EN	35
13.2.3 nIRQ	35
13.2.4 GPIO Extender	36
13.3 Operating Modes	38
13.3.1 ON Mode	38
13.3.2 OFF Mode	39
13.4 Control Interfaces	40
13.4.1 4-WIRE Communication	40
13.4.2 2-WIRE Communication	44
13.4.3 Details of the 2-WIRE control bus protocol	45
13.5 Internal Temperature Supervision	48
14. Register definitions	49
14.1 Register map	49
14.2 Register Definitions	50
14.2.1 Register Page Control	50
14.2.2 Register Page 0	50
14.2.3 Register Page 1	57

14.2.4 Register Page 2	64
15. Application Information	71
15.1 Capacitor Selection	71
15.2 Inductor Selection	71
16. Package information	73

Figures

Figure 1: DA9211 System diagram	2
Figure 2: DA9212 System diagram	3
Figure 4: Connection diagram	8
Figure 5: 2-WIRE Bus Timing.....	18
Figure 6: 4-WIRE Bus Timing.....	19
Figure 32: Interface of DA9211/12 with DA9063 and the host processor	28
Figure 33: Typical application of DA9211.....	29
Figure 34: Typical application of DA9212.....	31
Figure 35: Concept of control of the buck's output voltage	34
Figure 36: GPIO principle of operation (example paths)	38
Figure 37: Schematic of 4-WIRE and 2-WIRE Power Manager Bus	41
Figure 38: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '0', CPHA = '0')	42
Figure 39: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '0', CPHA = '1')	42
Figure 40: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '0')	43
Figure 41: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '1')	43
Figure 42: Timing of 2-WIRE START and STOP Condition	45
Figure 43: 2-WIRE Byte Write (SDA Line)	46
Figure 44: Examples of 2-WIRE Byte Read (SDA Line)	46
Figure 45: Examples of 2-WIRE Page Read (SDA Line)	46
Figure 46: 2-WIRE Page Write (SDA Line)	47
Figure 47: 2-WIRE Repeated Write (SDA Line)	47
Figure 49: DA9211/12 WL-CSP package outline drawing	73

Tables

Table 1: Ordering information.....	8
Table 2: Pin description	9
Table 3: Pin type definition	10
Table 4: Absolute maximum ratings (Note 1)	11
Table 5: Recommended operating conditions (Note 1).....	11
Table 6: Buck Converters Characteristics	12
Table 7: IC Performance and Supervision	15
Table 8: Digital I/O Characteristics	16
Table 9: 2-WIRE Control Bus Characteristics	17
Table 10: 4-WIRE Control Bus Characteristics	19
Table 11: Graphs of Typical Characteristics	20
Table 12: Selection of the buck current limit from the coil parameters	35
Table 13: 4-WIRE Clock Configurations.....	41
Table 14: 4-WIRE Interface Summary	44
Table 15: Over-temperature thresholds	48
Table 16: Register map	49
Table 17: Recommended capacitor types.....	71
Table 18: Recommended inductor types.....	72

5. Revision history

Version	Date	Description
2.0	Feb 2014	Initial Release
2.1	July 2014	Updated transient line Updated UVLO electrical characteristics Swapped GPIO0 and GPIO1 Updated IC_EN electrical characteristics Update OSC_TUNE register Updated quiescent current in PFM
2.2	November 2014	Updated GPIO-4, SCL, SDA V_{IH} and V_{IL} specification Updated IC_EN description and timing relation to VDD_IO Updated use case 2-phases Update IQ according to NEROII-34 Fixed block diagrams assignment to DA9211 and DA9212 Added limitation on use of power good Removed force PFM mode selection Added minimum on time Updated load and line transient performances Updated quiescent current in PWM
3.0	January 2015	Added performance plots (to be done) Updated IQ Added Typical Characteristics Updated Application Information Added power dissipation

6. Terms and definitions

AP	Application Processor
CPU	Central Processing Unit
DDR	Double Data Rate SDRAM (Synchronous Dynamic Random Access Memory)
DVC	Dynamic Voltage Control
GPU	Graphic Processing Unit
IC	Integrated Circuit
OTP	One Time Programmable memory
PCB	Printed Circuit Board
PMIC	Power Management Integrated Circuit
POL	Point Of Load

7. Ordering information

The order number consists of the part number followed by a suffix indicating the packing method. For details, please consult the [customer portal](#) on the Dialog web site or your local sales representative.

Table 1: Ordering information

Part number	Package	Package description	Package outline
DA9211-xxUU2	42 WL-CSP	T&R, 5000pcs	Figure 49
DA9211-xxUU6	42 WL-CSP	Waffle	
DA9212-xxUU2	42 WL-CSP	T&R, 5000pcs	
DA9212-xxUU6	42 WL-CSP	Waffle	

8. Pin information


	1	2	3	4	5	6	7			
A	VDD_A1	VDD_A1	SDA/ SI	SCL/ SK	GPIO/ TRK	VDD_B1	VDD_B1	A	DA9211/12 	
B	LX_A1	LX_A1	NC	GPIO2	GP11/ CLK_IN	LX_B1	LX_B1	B		
C	VSS_A1	VSS_A1	FBAP	SO/ GPIO3	FBBP/ NC	VSS_B1	VSS_B1	C	High Power Signals	
D	VSS_A2	VSS_A2	FBAN	nCS/ GPI4	FBBN/ NC	VSS_B2	VSS_B2	D	High Power Noisy Signals	
E	LX_A2	LX_A2	VSS	VSS_ANA	VDDIO	LX_B2	LX_B2	E	Power Signals	
F	VDD_A2	VDD_A2	nIRQ	VSYS	IC_EN	VDD_B2	VDD_B2	F	Noisy Digital Signals	
									Quasi Static Digital Signals	
									Sensitive Analog Signals	
	1	2	3	4	5	6	7		42 balls	

Figure 4: Connection diagram

Table 2: Pin description

Pin Name	Signal Name	Second function	Type (See Table 3)	Description
B1, B2	LX_A1		AO	Switching node for Buck A phase 1
E1, E2	LX_A2		AO	Switching node for Buck A phase 2
B6, B7	LX_B1		AO	Switching node for Buck B phase 1
E6, E7	LX_B2		AO	Switching node for Buck B phase 2
A1, A2	VDD_A1		PS	Supply voltage for Buck A phase 1 To be connected to VSYS
F1, F2	VDD_A2		PS	Supply voltage for Buck A phase 2 To be connected to VSYS
A6, A7	VDD_B1		PS	Supply voltage for Buck B phase 1 To be connected to VSYS
F6, F7	VDD_B2		PS	Supply voltage for Buck B phase 2 To be connected to VSYS
F5	IC_EN		DI	Integrated Circuit (IC) Enable Signal
F3	nIRQ		DO	Interrupt line towards the host
E5	VDDIO		PS	I/O Voltage Rail
C3	FBAP		AI	Positive sense node for the Buck A
D3	FBAN		AI	Negative sense node for the Buck A
C5	FBBP		AI	Positive sense node for the Buck B for DA9212
	N/C		AI	For DA9211
D5	FBBN		AI	Negative sense node for the Buck B for DA9212
	N/C		AI	For DA9211
A5	GPI0	TRK	DI/AI	General purpose input, input track
B5	GPI1	CLK_IN	DI	General purpose input, digital clock input
B4	GPIO2		DIO	General purpose input/output
A3	SDA	SI	DIO	2-WIRE data, 4-WIRE data input/output
A4	SCL	SK	DI	2-WIRE clock, 4-WIRE clock
D4	nCS	GPI4	DI	4-WIRE chip select, general purpose input
C4	SO	GPIO3	DIO	4-WIRE data output, general purpose input/output
B3	NC			Leave floating
F4	VSYS		PS	Supply for IC and input for voltage supervision
E3	VSS		VSS	
E4	VSS_ANA		VSS	

Pin Name	Signal Name	Second function	Type (See Table 3)	Description
C1, C2 D1, D2 C6, C7 D6, D7	VSS_A1, VSS_A2 VSS_B1 VSS_B2		VSS	Connect together

Table 3: Pin type definition

Pin type	Description	Pin type	Description
DI	Digital Input	AI	Analogue Input
DO	Digital Output	AO	Analogue Output
DIO	Digital Input/Output	AIO	Analogue Input/Output
PS	Power Supply		
VSS	Ground		

9. Absolute maximum ratings

Table 4: Absolute maximum ratings (Note 1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T _{STG}	Storage temperature		-65		+165	°C
T _{A_LIM}	Limiting ambient temperature		-40		+85	°C
V _{DD_LIM}	Limiting supply voltage		-0.3		5.5	V
V _{PIN}	Limiting voltage at all pins except above		-0.3		V _{DD} + 0.3 (max 5.5)	V
P _{TOT}	total power dissipation (Note 2)	derating factor above T _A = 70°C: 23 mW/°C	1265	1610		mW
V _{ESD_HBM}	Electrostatic discharge voltage	Human Body Model			2	kV

Note 1 Stresses beyond those listed under 'Absolute maximum ratings' may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note 2 Obtained from simulation on a 2S2P 4L JEDEC Board (EIA/JESD51-2). Influenced by PCB technology and layout

10. Recommended operating conditions

Table 5: Recommended operating conditions (Note 1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{DD}	Supply voltage		2.8		5.5	V
V _{DDIO}	Input/output supply voltage		1.2		3.6 (Note 2)	V

Note 1 Within the specified limits, a life time of 10 years is guaranteed

Note 2 V_{DDIO} is not allowed to be higher than V_{DD}

11. Electrical characteristics

Table 6: Buck Converters Characteristics

Unless otherwise noted, the following is valid for $T_A = -40$ to $+85$ °C, $V_{DD} = 2.8$ V to 5.5 V, $C_{OUT} = 22$ μ F /phase, local sensing

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{DD}	Supply voltage	$V_{DD_X} = V_{SYS}$	2.8		5.5	V
C_{OUT}	Output capacitance (per phase)	Including voltage and temperature coefficient	11	22	28.6	μ F
			23	47	61	μ F
ESR_{COUT}	Equivalent series resistance (per phase)	$f > 100$ kHz			10	m Ω
$L_{PHASE047}$	Inductance (per phase)	Including current and temperature dependence	0.23	0.47	0.62	μ H
$L_{PHASE022}$	Inductance (per phase)	Including current and temperature dependence	0.11	0.22	0.29	μ H
DCR_{LPHASE}	Inductor resistance			30	100	m Ω
V_{BUCK}	Buck output voltage (Note 1)	$I_O = 0$ to I_{O_MAX}	0.3		1.57	V
V_{OACC}	Output voltage accuracy PWM mode	Incl. static line/load reg and voltage ripple $V_{BUCK} \geq 1$ V	-2.0		+2.0	%
		Incl. static line/load reg and voltage ripple $V_{BUCK} < 1$ V		± 20		mV
		$V_{BUCK} = 1$ V $V_{DD} = 3.8$ V no load	-1.0		+1.0	%
		$V_{BUCK} = 1$ V $V_{DD} = 3.8$ V no load $T_A = 27$ °C	-0.5		+0.5	%
V_{TR_LOAD}	Load regulation transient voltage	$I_O = 0$ to 5 A, 10 A/ μ s 4-phase operation, PWM $V_{BUCK} \geq 1$ V 0.6 V $\leq V_{BUCK} < 1$ V	-3 -30 mV	Note 2	+3 +30 mV	%
		$I_O = 0$ to 5 A, 10 A/ μ s phase shedding, PWM $V_{DD} \leq 4.2$ V $V_{BUCK} \geq 1$ V 0.6 V $\leq V_{BUCK} < 1$ V	-3.5 -35 mV	Note 2	+3.5 +35 mV	%

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
		$I_O = 0$ to 5 A, 10 A/ μ s auto mode, ph shedding $C_{OUT} = 47 \mu F$ $V_{BUCK} \geq 1$ V 0.6 V $\leq V_{BUCK} < 1$ V	-3.5 -35 mV	Note 2	+3.5 +35 mV	%
V_{TR_LINE}	Line regulation transient voltage	$V_{DD} = 3$ to 3.6 V $dt = 10 \mu s$ $I_O = I_{O(MAX)}/2$		8		mV
R_{RS_MAX}	Maximum remote sensing resistance (Note 3)	To sense connection at point of load		10		m Ω
L_{RS_MAX}	Maximum remote sensing inductance (Note 3)	To sense connection at point of load		10		nH
I_{O_MAX}	Maximum output current	Per phase	3000			mA
I_{LIM_MIN}	Minimum current limit per phase (programmable)	$BUCKA_ILIM$ $BUCKB_ILIM = 0000$	-20%	2000	20%	mA
I_{LIM_MAX}	Maximum current limit per phase (programmable)	$BUCKA_ILIM$ $BUCKB_ILIM = 1111$	-20%	5000	20%	mA
I_{Q_PWM}	Quiescent current @ synchronous rectification mode	Per phase No load $V_{DD} = 3.7$ V		10		mA
f_{SW}	Switching frequency			3		MHz
t_{ON_MIN}	minimum on time			20		ns
t_{STUP}	Start up time	$BUCKA_UP_CTRL$ $BUCKB_UP_CTRL = 011$		50 (Note 4)		μs
R_{O_PD}	Output pull-down resistance	For each phase at the LX node @0.5 V, (see BUCKx_PD_DIS)		150	200	Ω
PFM Mode						
V_{BUCK_PFM}	Buck output voltage in PFM	$I_O = 0$ mA to I_{O_MAX}	0.3		1.57	V
$I_{Q_PFM_A2}$	DA9212 quiescent current Buck A enabled	No load $V_{DD} = 3.7$ V		56		μA
$I_{Q_PFM_A4}$	DA9211 quiescent current Buck enabled	No load $V_{DD} = 3.7$ V		70		μA

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$I_{Q_PFM_A2B2}$	DA9212 quiescent current Buck A enabled Buck B enabled	No load $V_{DD} = 3.7\text{ V}$		104		μA

Note 1 Programmable in 10 mV increments

Note 2 Additionally to the dc accuracy. The value is intended measured directly at $C_{OUT(EXT)}$. In case of remote sensing, parasitics of PCB and external components may affect this value.

Note 3 (ca 13 cm) trace routed over a ground plane (approx 1.2 nH/cm)

Note 4 Time from begin to end of the voltage ramp. Additional 10 μs typical delay, plus internal sync to the enable port

Table 7: IC Performance and Supervision $T_A = -40$ to $+85$ °C

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_{DD_OFF}	Off state supply current @V _{SYS} ,V _{DDx}	IC_EN = 0 $T_A = 27$ °C		0.1	1	µA
I_{DD_ON}	On state supply current @V _{SYS} ,V _{DDx}	IC_EN = 1 Buck A/B off $T_A = 27$ °C		12		µA
V _{TH_PG}	Power good threshold voltage	referred to V _{BUCK}		-50		mV
V _{HYS_PG}	Power good hysteresis voltage			50		mV
V _{TH_UVLO_VDD}	Under voltage lockout threshold @ V _{DD}			2.0		V
V _{TH_UVLO_IO}	Under voltage lockout threshold @ V _{DDIO}		1.35	1.45	1.55	V
V _{HYS_UVLO_IO}	Under voltage lockout hysteresis @ V _{DDIO}			70		mV
T _{TH_WARN}	Thermal warning threshold temperature		110	125	140	°C
T _{TH_CRIT}	Thermal critical threshold temperature		125	140	155	°C
T _{TH_POR}	Thermal power on reset threshold temperature		135	150	165	°C
f _{OSC}	Internal oscillator frequency		-7%	6.0	+7%	MHz

Table 8: Digital I/O Characteristics $T_A = -40$ to $+85$ °C

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{IH_EN}	HIGH level input voltage @ pin IC_EN		$0.7 \cdot V_{DDIO}$			V
V_{IL_EN}	LOW level input voltage @ pin IC_EN				$0.3 \cdot V_{DDIO}$	V
t_{EN}	Enable time	I/F operating		750		µs
$R_{O_PU_GPO}$	Pull up resistor @ GPO	$V_{DDIO} = 1.8$ V $V_{GPO} = 0$ V		100		kΩ
$R_{I_PD_GPI}$	Pull down resistor @ GPI	$V_{DDIO} = 1.8$ V $V_{GPI} = V_{DDIO}$		150		kΩ
V_{IH}	GPI0-4, SCL, SDA, (2-WIRE mode) HIGH level input voltage	$V_{LDOCORE}$ mode V_{DDIO} mode	1.75 $0.7 \cdot V_{DDIO}$			V
V_{IL}	GPI0-4, SCL, SDA, (2-WIRE mode) LOW level input voltage	$V_{LDOCORE}$ mode V_{DDIO} mode			0.75 $0.3 \cdot V_{DDIO}$	V
V_{IH_4WIRE}	SK, nCS, SI (4-WIRE Mode) HIGH level input voltage		$0.7 \cdot V_{DDIO}$			V
V_{IL_4WIRE}	SK, nCS, SI (4-WIRE Mode) LOW level input voltage				$0.3 \cdot V_{DDIO}$	V
V_{OH}	GPO2-3, SO (4-WIRE mode) HIGH level output voltage	push-pull mode @ 1mA $V_{DDIO} \geq 1.5$ V	$0.8 \cdot V_{DDIO}$			V
V_{OL1}	GPO2-3, SDA (2-WIRE mode) SO (4-WIRE mode) LOW level output voltage @ $I_{OL} = 1$ mA				0.3	V
V_{OL3}	SDA (2-WIRE Mode) LOW level output voltage @ $I_{OL} = 3$ mA				0.24	V
V_{OL20}	SDA (2-WIRE Mode) LOW level output voltage @ $I_{OL} = 20$ mA				0.4	V
C_{IN}	CLK, SDA (2-WIRE Mode) input capacitance			2.5	10	pF

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_{SP}	CLK, SDA (2-WIRE Mode) spike suppression pulse width	Fast/Fast+ mode High Speed mode	0 0		50 10	ns
t_{rDA}	Fall time of SDA signal (2-WIRE Mode)	Fast @ $C_b < 550\text{pF}$ HS @ $10 < C_b < 100\text{pF}$ HS @ $C_b < 400\text{pF}$	$20 + 0.1C_b$ 10 20		120 80 160	ns

Table 9: 2-WIRE Control Bus Characteristics

 $T_A = -40$ to $+85$ °C

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_{BUF}	Bus free time from STOP to START condition		0.5			μs
C_B	Bus line capacitive load				150	pF
Standard/Fast/Fast+ Mode						
f_{SCL}	Clock frequency @ pin SCL		0 (Note 1)		1000	kHz
t_{SU_STA}	START condition set-up time		0.26			μs
t_{H_STA}	START condition hold time		0.26			μs
t_{W_CL}	Clock LOW duration		0.5			μs
t_{W_CH}	Clock HIGH duration		0.26			μs
t_R	Rise time @ pin CLK and DATA	Input requirement			1000	ns
t_F	Fall time @ pin CLK and DATA	Input requirement			300	ns
t_{SU_D}	Data set-up time		50			ns
t_{H_D}	Data hold time		0			ns
High Speed Mode						
f_{SCL_HS}	Clock frequency @ pin SCL		0 (Note 1)		3400	kHz
$t_{SU_STA_HS}$	START condition set-up time		160			ns
$t_{H_STA_HS}$	START condition hold time		160			ns
$t_{W_CL_HS}$	Clock LOW duration		160			ns
$t_{W_CH_HS}$	Clock HIGH duration		60			ns
t_{R_HS}	Rise time @ pin CLK and DATA	Input requirement			160	ns

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_{F_HS}	Fall time @ pin CLK and DATA	Input requirement			160	ns
$t_{SU_D_HS}$	Data set-up time		10			ns
$t_{H_D_HS}$	Data hold time		0			ns
$t_{SU_STO_HS}$	STOP condition set-up time		160			ns

Note 1 Minimum clock frequency is 10 kHz if 2WIRE_TO is enabled

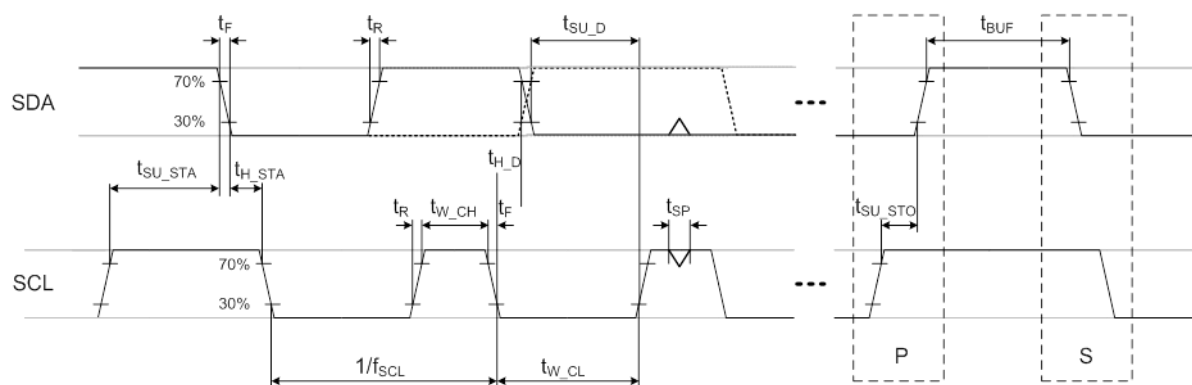


Figure 5: 2-WIRE Bus Timing

Table 10: 4-WIRE Control Bus Characteristics $T_A = -40$ to $+85$ °C

Symbol	Parameter	Label in plot	Min	Typ	Max	Unit
C_B	Bus line capacitive load				100	pF
t_C	Cycle time	1	70			ns
t_{SU_CS}	Chip select setup time	2, from CS active to first SK edge	20			ns
t_{H_CS}	Chip select hold time	3, from last SK edge to CS idle	20			ns
t_{W_CL}	Clock LOW duration	4	$0.4 \times t_C$			ns
t_{W_CH}	Clock HIGH duration	5	$0.4 \times t_C$			ns
t_{SU_SI}	Data input setup time	6	10			ns
t_{H_SI}	Data input hold time	7	10			ns
t_{V_SO}	Data output valid time	8			22	ns
t_{H_SO}	Data output hold time	9	6			ns
t_{W_CS}	Chip select HIGH duration	10	20			ns

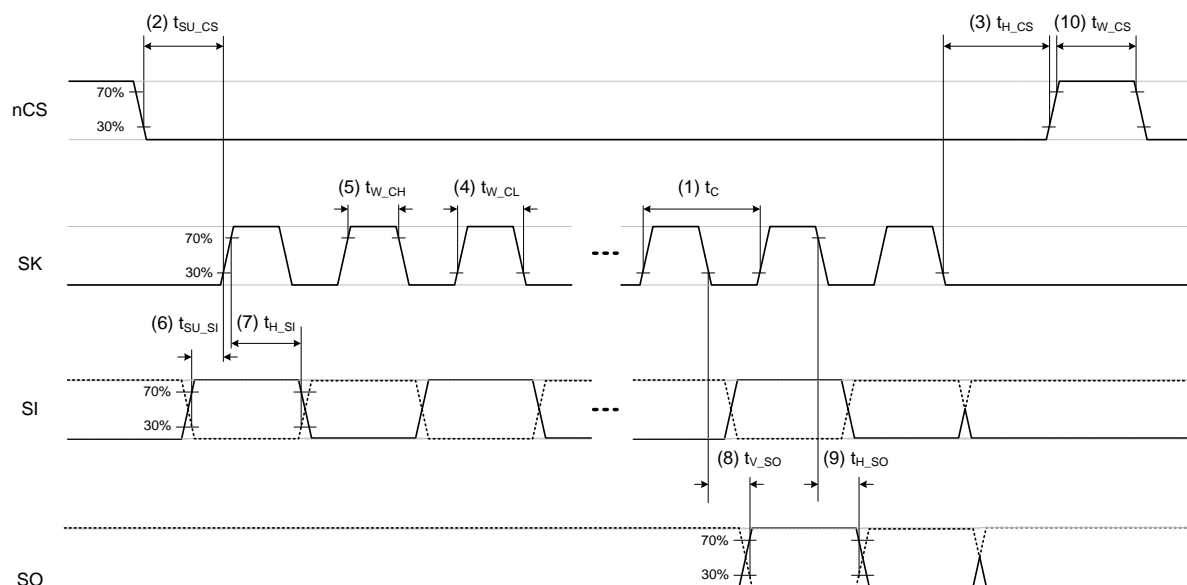
**Figure 6: 4-WIRE Bus Timing**

Table 11: Graphs of Typical Characteristics

Parameter	Test Conditions	Figure
Efficiency	Efficiency vs Output Current, $V_{OUT} = 1.0\text{ V}$, 4 phases	Figure 7
	Efficiency vs Output Current, $V_{OUT} = 1.2\text{ V}$, 4 phases	Figure 8
	Efficiency vs Output Current, $V_{OUT} = 0.9\text{ V}$, 4 phases	Figure 9
	Efficiency vs Output Current, $V_{OUT} = 1.0\text{ V}$, 2 phases	Figure 10
	Efficiency vs Output Current, $V_{OUT} = 1.2\text{ V}$, 2 phases	Figure 11
	Efficiency vs Output Current, $V_{OUT} = 0.9\text{ V}$, 2 phases	Figure 12
	Efficiency vs Input Voltage, $I_{OUT} = 100\text{ mA}$	Figure 13
	Efficiency vs Input Voltage, $I_{OUT} = 2\text{ A}$	Figure 14
	Efficiency vs Input Voltage, $I_{OUT} = 10\text{ A}$	Figure 15
Start-up	no load, STARTUP_CTRL=000 (slowest), $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 16
	no load, STARTUP_CTRL=100 (default), $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 17
	no load, STARTUP_CTRL=110 (fastest), $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 18
	1Ω load, STARTUP_CTRL=000 (slowest), $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 19
	1Ω load, STARTUP_CTRL=100 (default), $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 20
	1Ω load, STARTUP_CTRL=110 (fastest), $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 21
	Start up from IC_EN no load, STARTUP_CTRL=100 (default), $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 22
DVC	DVC no load, slowest speed $2.5\text{ mV}/\mu\text{s}$, $V_{DD}=3.7\text{ V}$, $V_{OUT} = 1.2\text{ V}/0.8\text{ V}$	Figure 23
	DVC no load, default speed $10\text{ mV}/\mu\text{s}$, $V_{DD}=3.7\text{ V}$, $V_{OUT} = 1.2\text{ V}/0.8\text{ V}$	Figure 24
	DVC no load, fastest speed $20\text{ mV}/\mu\text{s}$, $V_{DD}=3.7\text{ V}$, $V_{OUT} = 1.2\text{ V}/0.8\text{ V}$	Figure 25
Switching waveforms	PWM, no load, $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 26
	Voltage and current ripple, PWM, no load, $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 27
	PFM, no load, $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 28
Load Transient response	PWM, 4-phases, $0 \rightarrow 5\text{ A}$ in $10\text{ A}/\mu\text{s}$, $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 29
	PWM, 4-phases, $1 \rightarrow 5\text{ A}$ in $10\text{ A}/\mu\text{s}$, $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 30
	Auto, 4-phases, $10\text{ mA} \rightarrow 5\text{ A}$ in $10\text{ A}/\mu\text{s}$, $V_{DD}=3.7\text{ V}$, $V_{OUT}=1.0\text{ V}$	Figure 31

12. Typical Characteristics

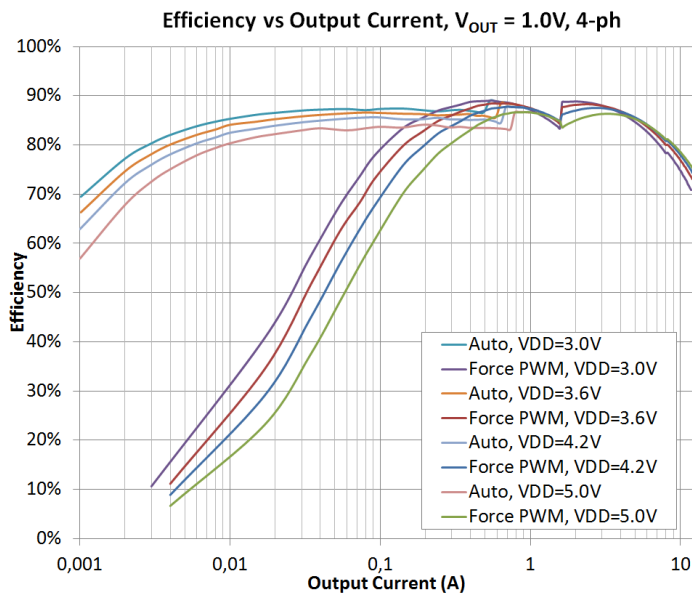


Figure 7

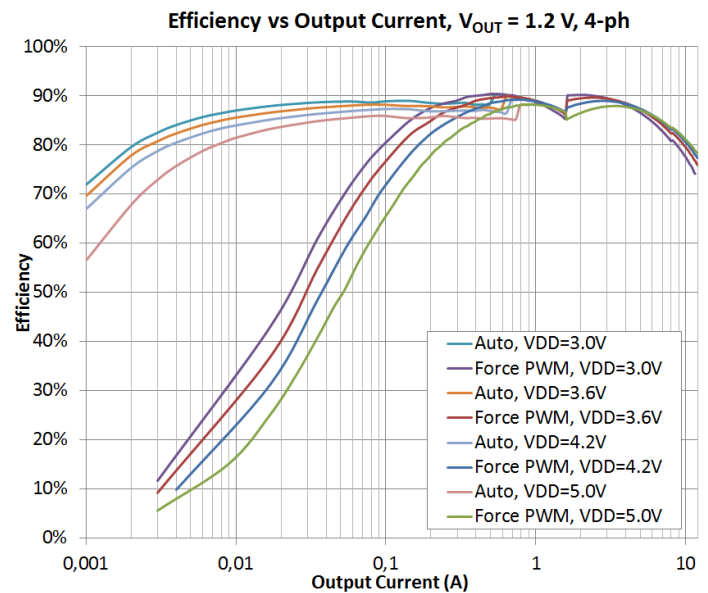


Figure 8

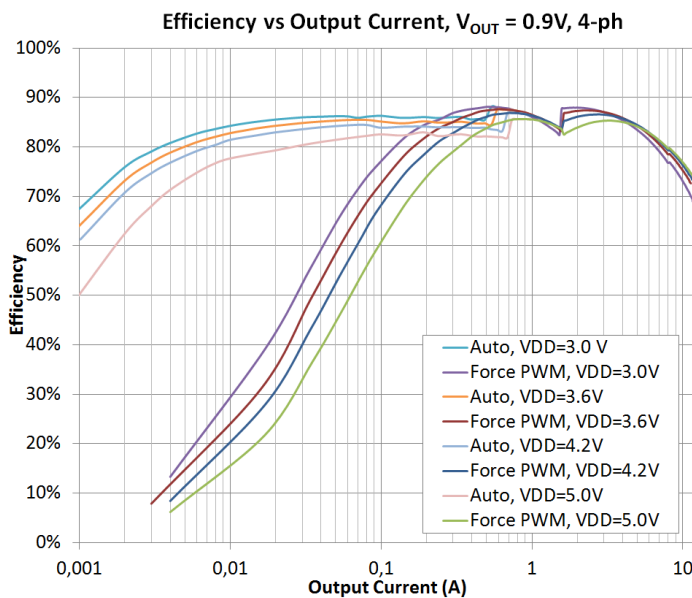


Figure 9

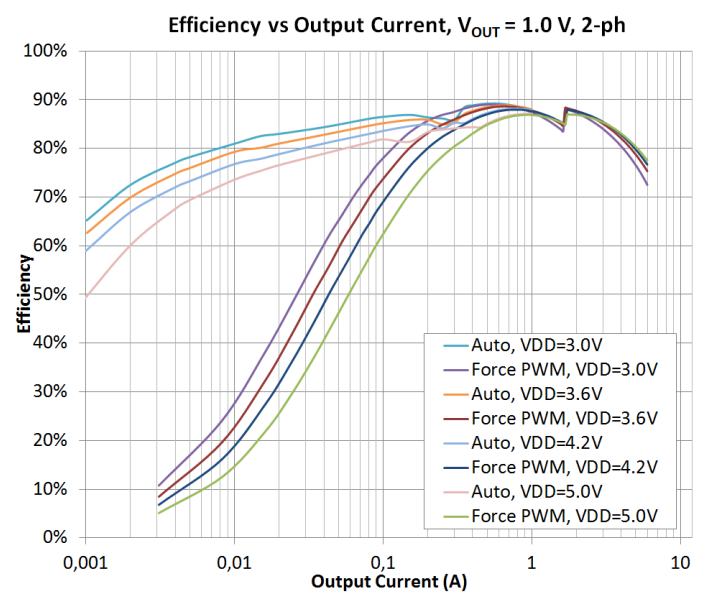


Figure 10

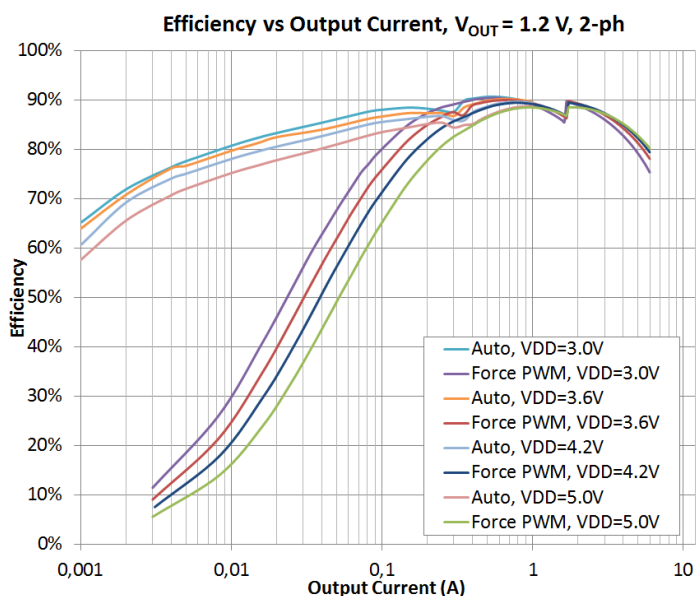


Figure 11

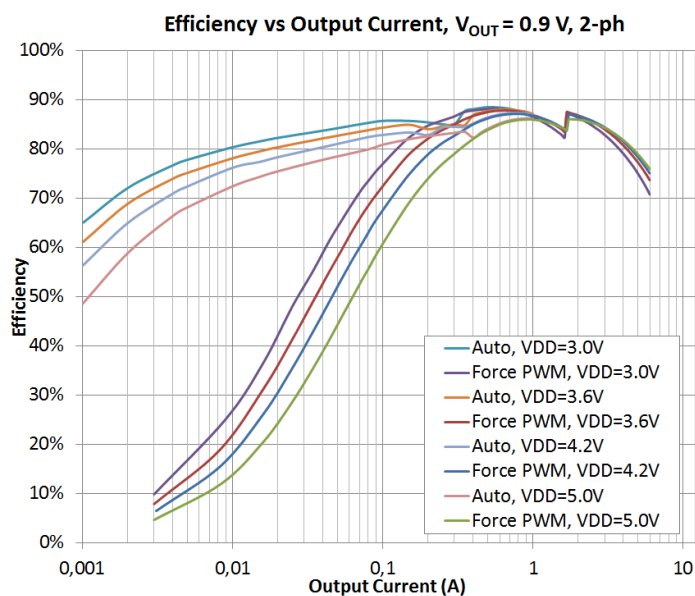


Figure 12

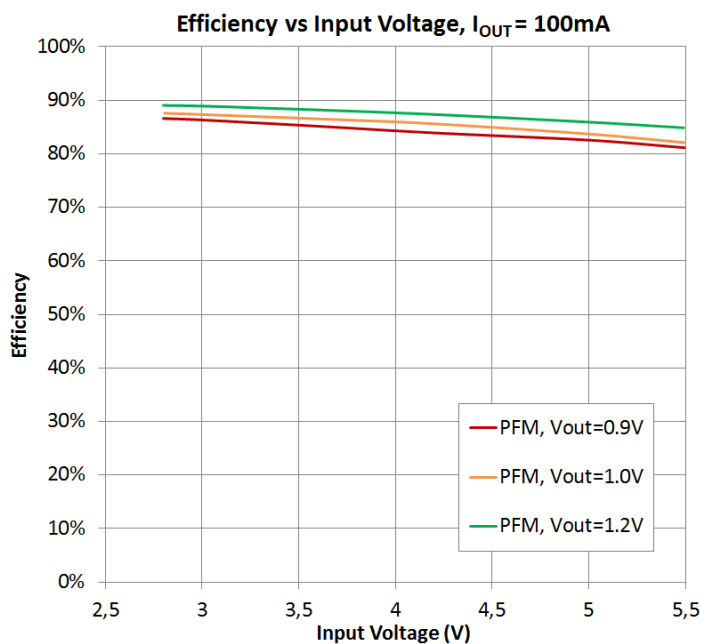


Figure 13

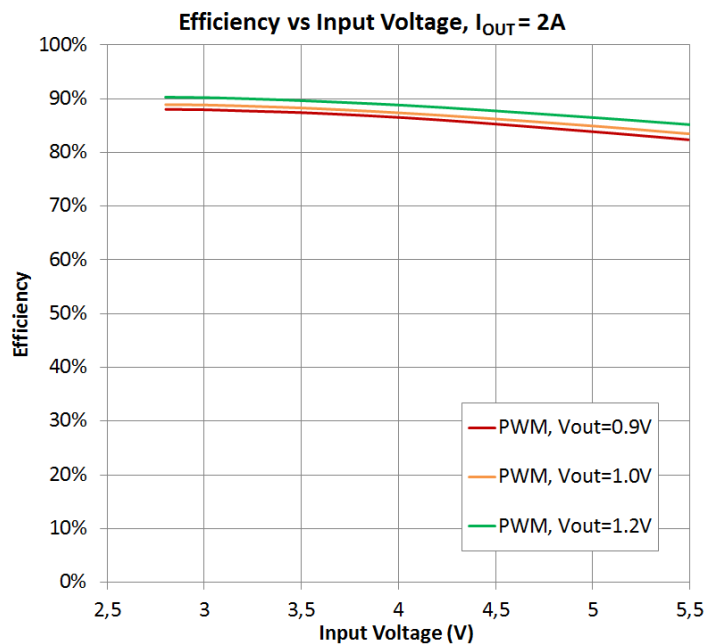


Figure 14

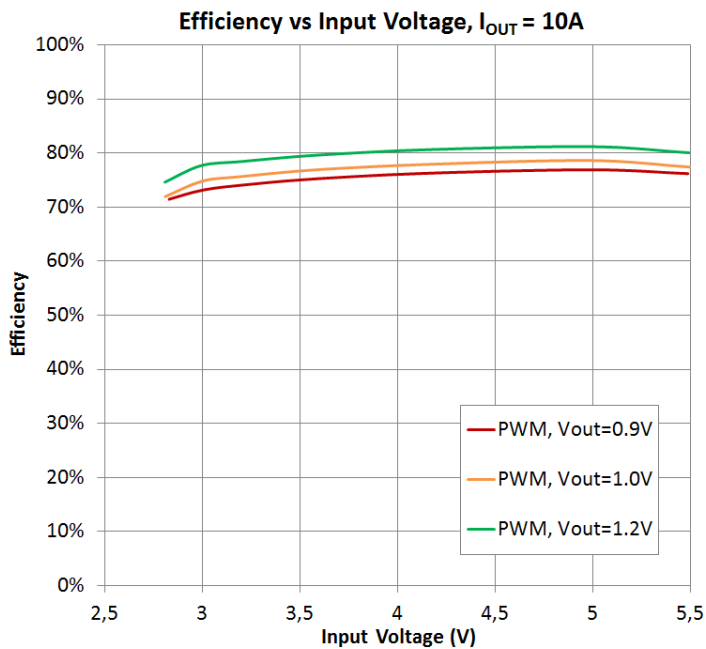


Figure 15

Start up no load,
STARTUP_CTRL=000 (slowest)
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

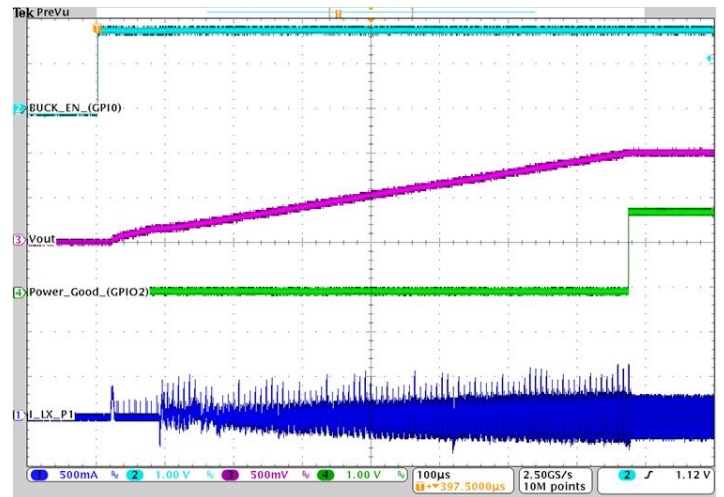


Figure 16

Start up no load,
STARTUP_CTRL=100 (default)
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

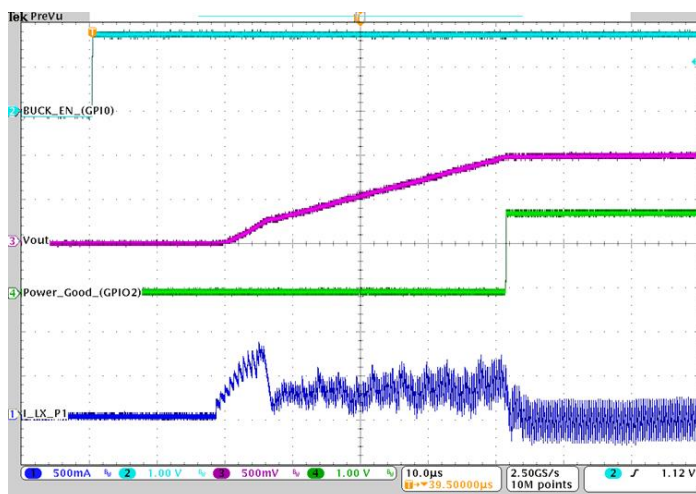


Figure 17

Start up no load,
STARTUP_CTRL=110 (fastest)
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

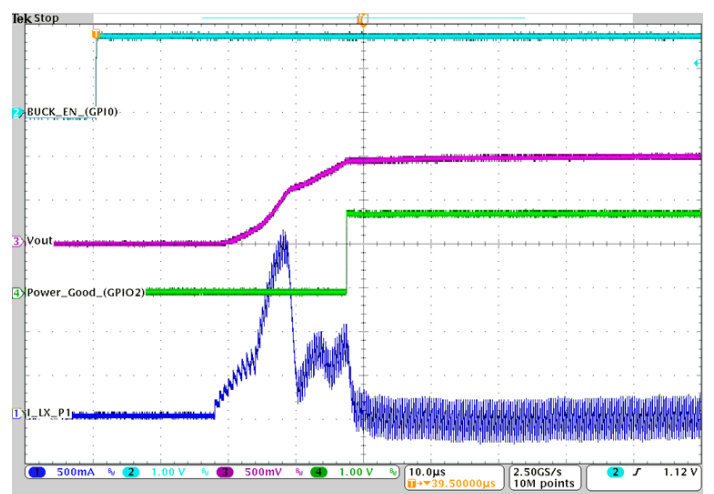


Figure 18

Start up 1Ω load,
STARTUP_CTRL=000 (slowest)
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

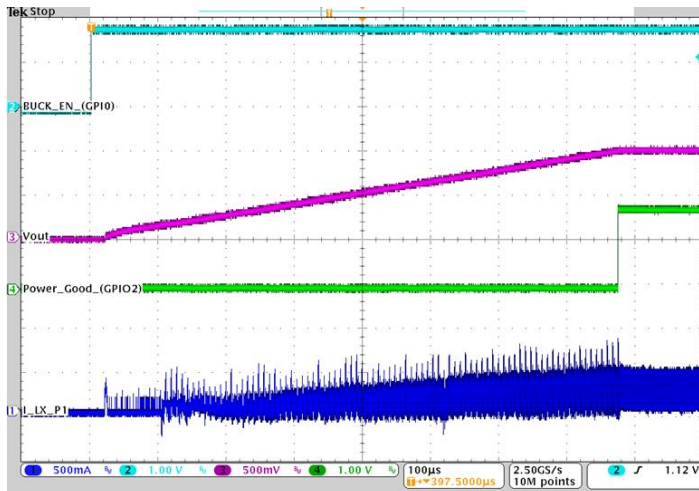


Figure 19

Start up 1Ω load,
STARTUP_CTRL=100 (default)
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

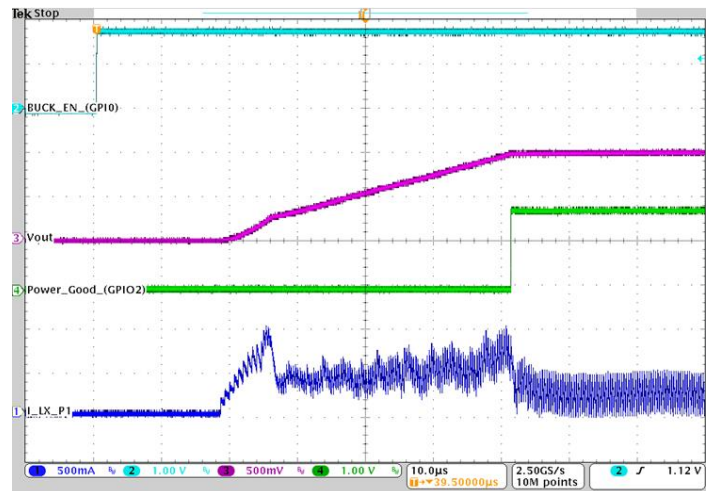


Figure 20

Start up 1Ω load,
STARTUP_CTRL=110 (fastest)
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

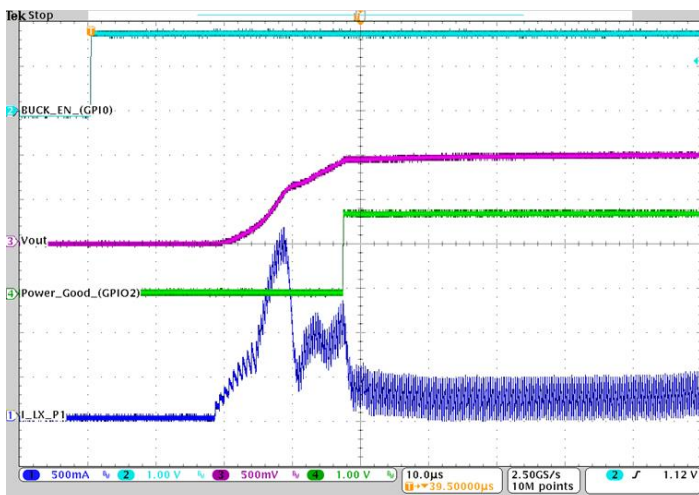


Figure 21

Start up from IC_EN no load,
STARTUP_CTRL=100 (default)
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$



Figure 22

DVC no load,
slowest speed 2.5mV/ μ s
 $V_{DD}=3.7V$, V_{OUT} 1.2V/0.8V

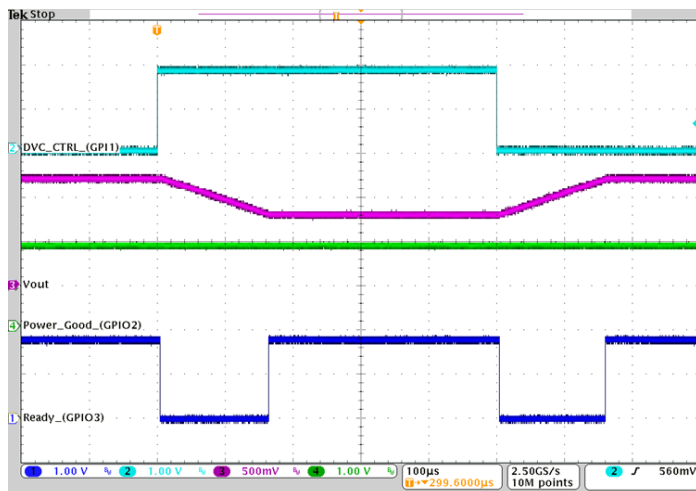


Figure 23

DVC no load,
default speed 10mV/ μ s
 $V_{DD}=3.7V$, V_{OUT} 1.2V/0.8V

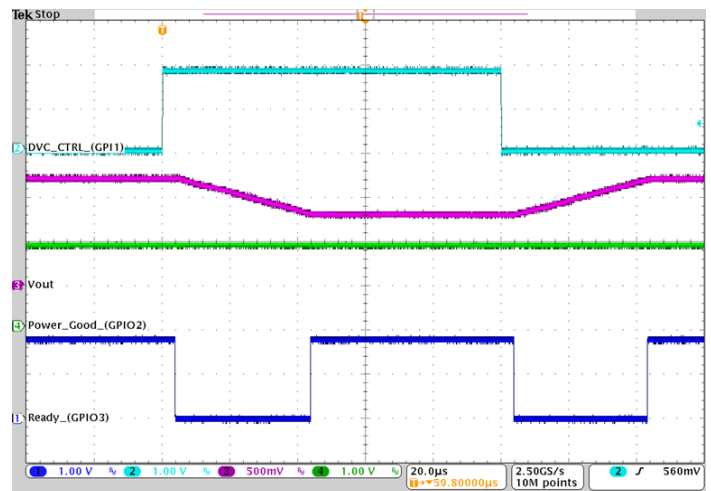


Figure 24

DVC no load,
fastest speed 20mV/ μ s
 $V_{DD}=3.7V$, V_{OUT} 1.2V/0.8V

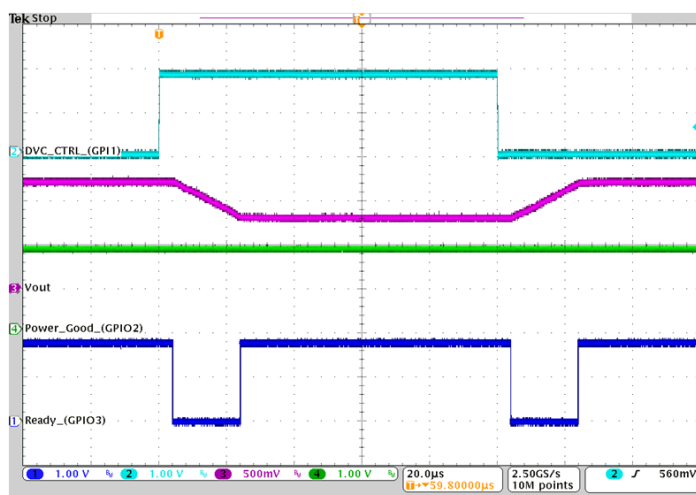


Figure 25

Switching waveforms,
PWM, no load
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

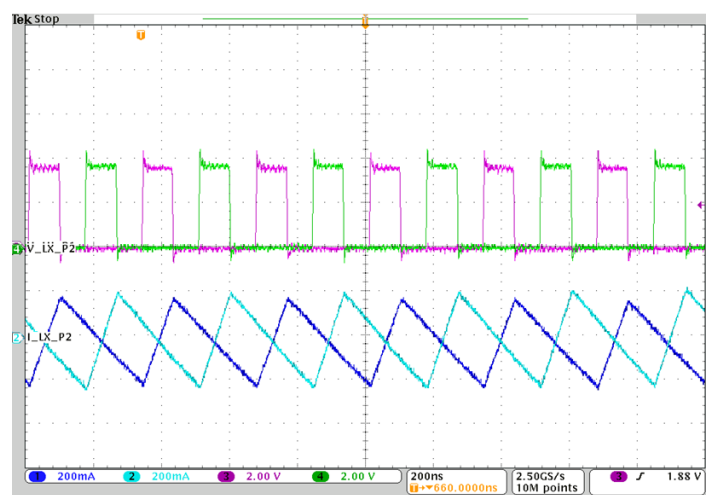


Figure 26

Voltage and current ripple,
PWM, no load
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

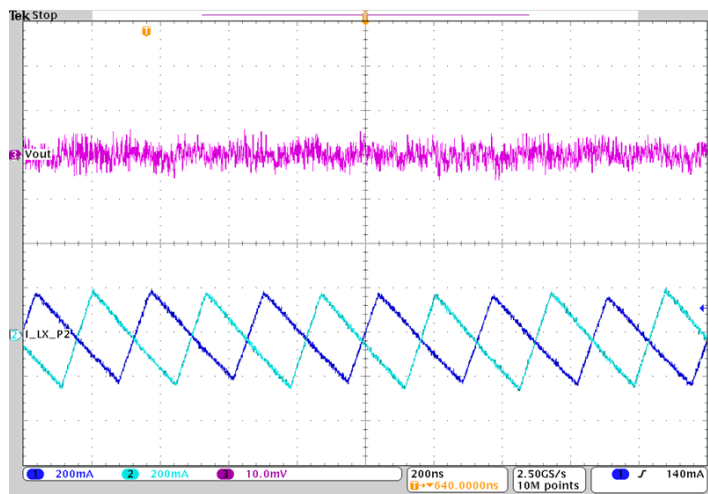


Figure 27

Switching waveforms,
PFM, no load
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

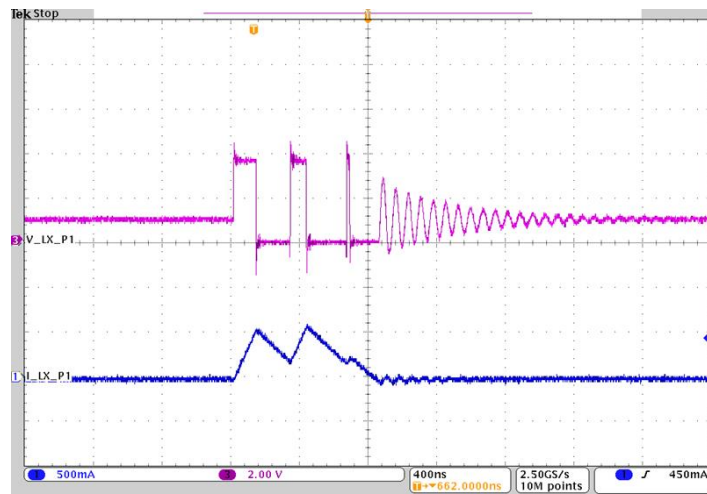


Figure 28

Transient Load , PWM, 4-phases
0→5A in 10A/μs,
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

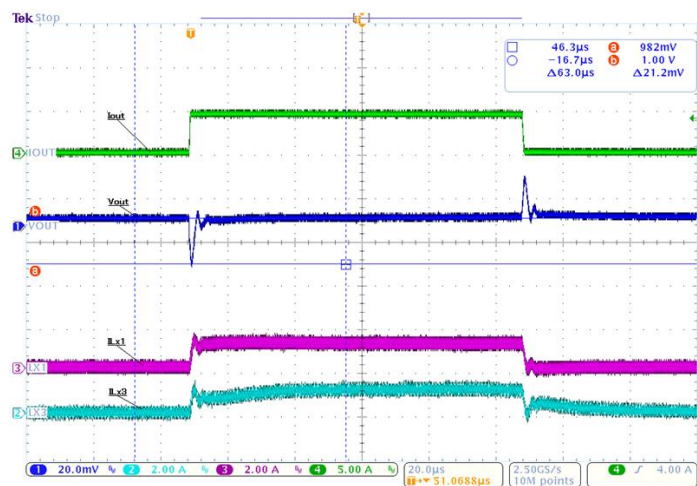


Figure 29

Transient Load , PWM, 4-phases
1→5A in 10A/μs,
 $V_{DD}=3.7V$, $V_{OUT}=1.0V$

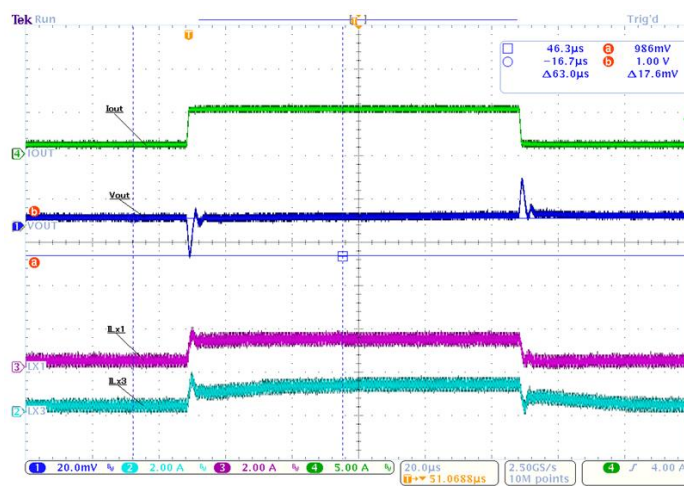


Figure 30

Transient Load , Auto, 4-phases

10mA→5A in 10A/μs,

V_{DD}=3.7 V, V_{OUT}=1.0 V

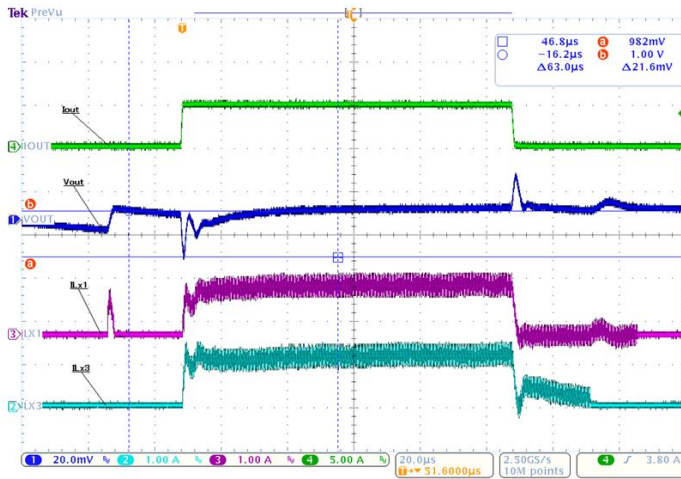


Figure 31

13. Functional description

Flexible configurability and the availability of different control schemes make both DA9211 and DA9212 the ideal single/dual buck companion ICs to expand the existing capabilities of a master PMIC.

Due to the advanced compatibility between both DA9211 and DA9212 and the DA9063, they offer several advantages when they are operated together. These advantages include:

- DA9211 and DA9212 can be enabled and controlled by DA9063 during the power up sequence, thanks to DA9063's dedicated output signals during power-up, and compatible input controls in both DA9211 and DA9212.
- DA9211 and DA9212 can be used in a completely transparent way for the host processor and can share the same Control Interface (same SPI chip select or I2C address), thanks to the compatible registers map. DA9211 and DA9212 has a dedicated register space for configuration and control which doesn't conflict with DA9063.
- DA9211 and DA9212 supports a Power-good configurable port for enhanced communication to the host processor and improved power-up sequencing.
- DA9211 and DA9212 can both share the same interrupt line with DA9063.

In addition, the 2-WIRE / 4-WIRE interfaces allow DA9211 and DA9212 to fit to many standard PMU parts and power applications.

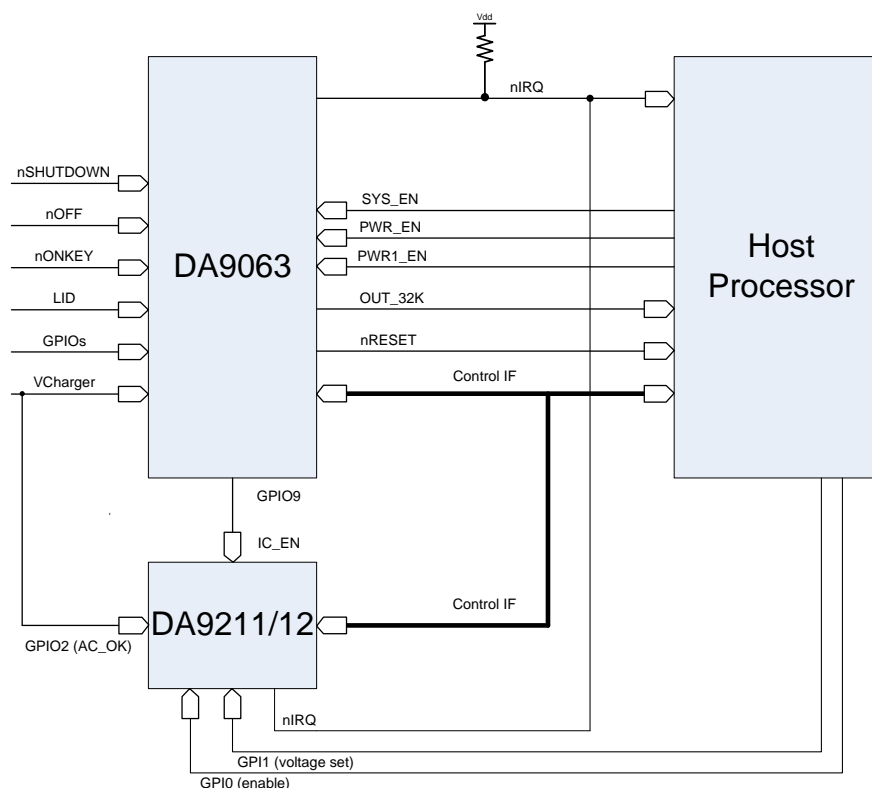


Figure 32: Interface of DA9211/12 with DA9063 and the host processor

As shown in Figure 32, a typical application case includes a host processor, a Main PMIC (for example, DA9063) and DA9211 or DA9212 used as companion IC for the high power core supply.

The easiest way of controlling DA9211 and DA9212 is through the Control Interface. The master initiating the communication must always be the host processor that reads and writes to the main PMIC, and to the DA9211 and DA9212 registers. To poll the status of DA9211 or DA9212, the host processor must access the dedicated register area through the Control Interface. DA9211 and DA9212 can be additionally controlled by means of hardware inputs.

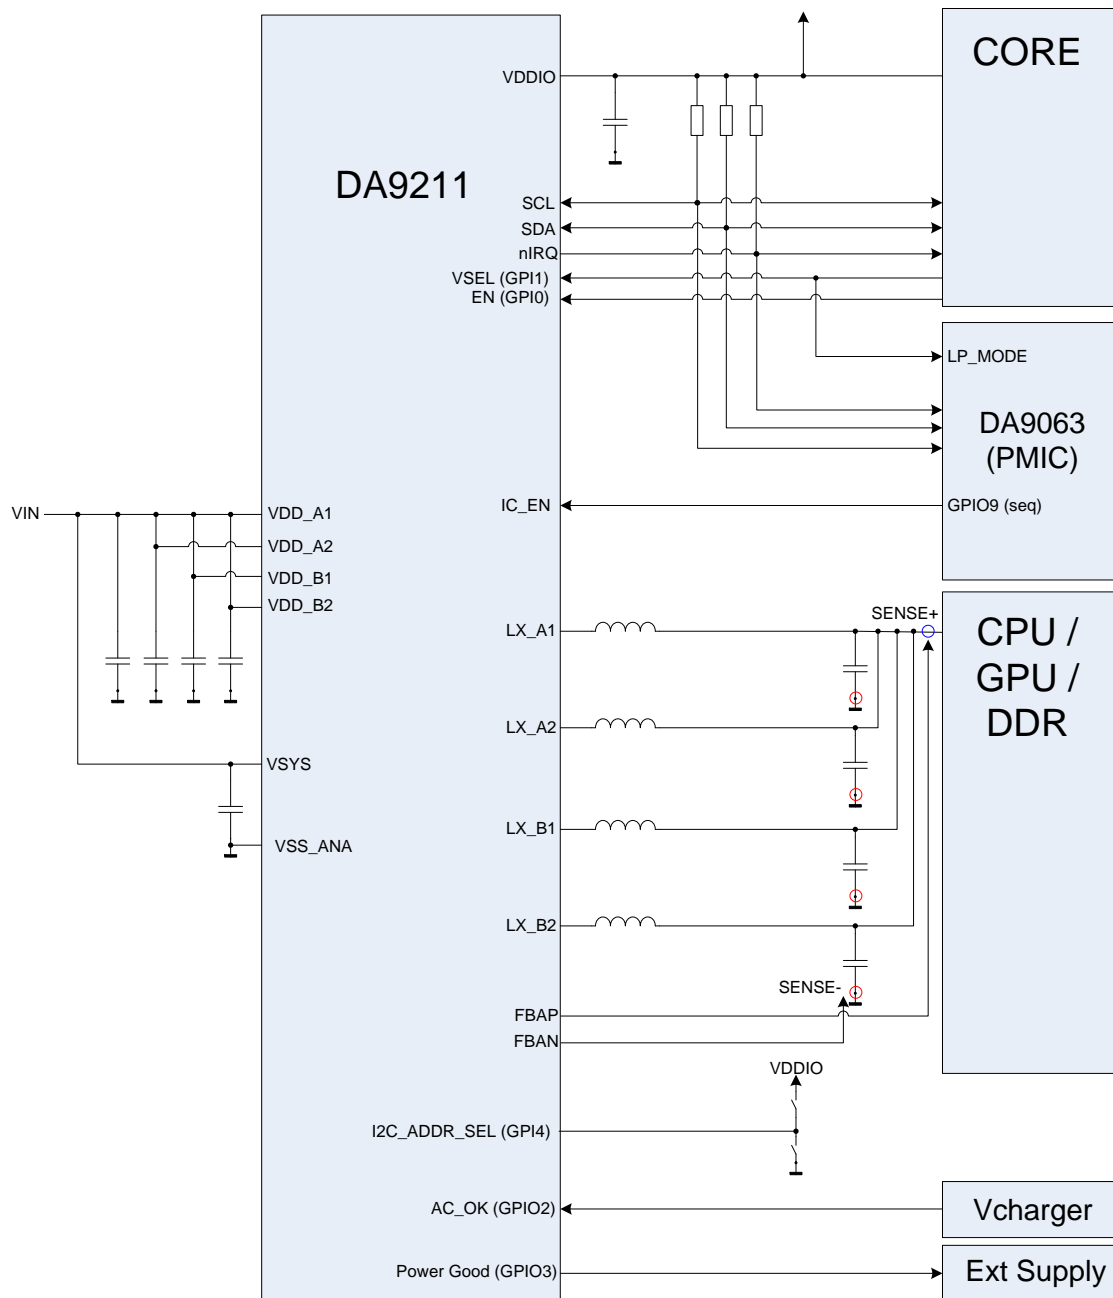


Figure 33: Typical application of DA9211

Figure 33 shows a typical use case of DA9211 for the supply of CPU, GPU, or DDR rails. The IC is enabled and disabled by the main PMIC via IC_EN port as part of its sequencer. Once the IC is enabled, the CORE application processor enables the buck converter with the EN1 signal and manages the output voltage selection with the VSEL signal.

The VSEL signal can be shared between the main PMIC and the DA9211. Three GPI/GPIOs embedded in DA9211 are used in this case:

- GPIO2 signals the insertion of an external charger in the application (through interrupt to the host processor)
- GPIO3 indicates a power-good-condition, either to proceed with the power up sequence or to enable an external supply connected to the port
- GPI4 is used for the I2C interface address hardware selection

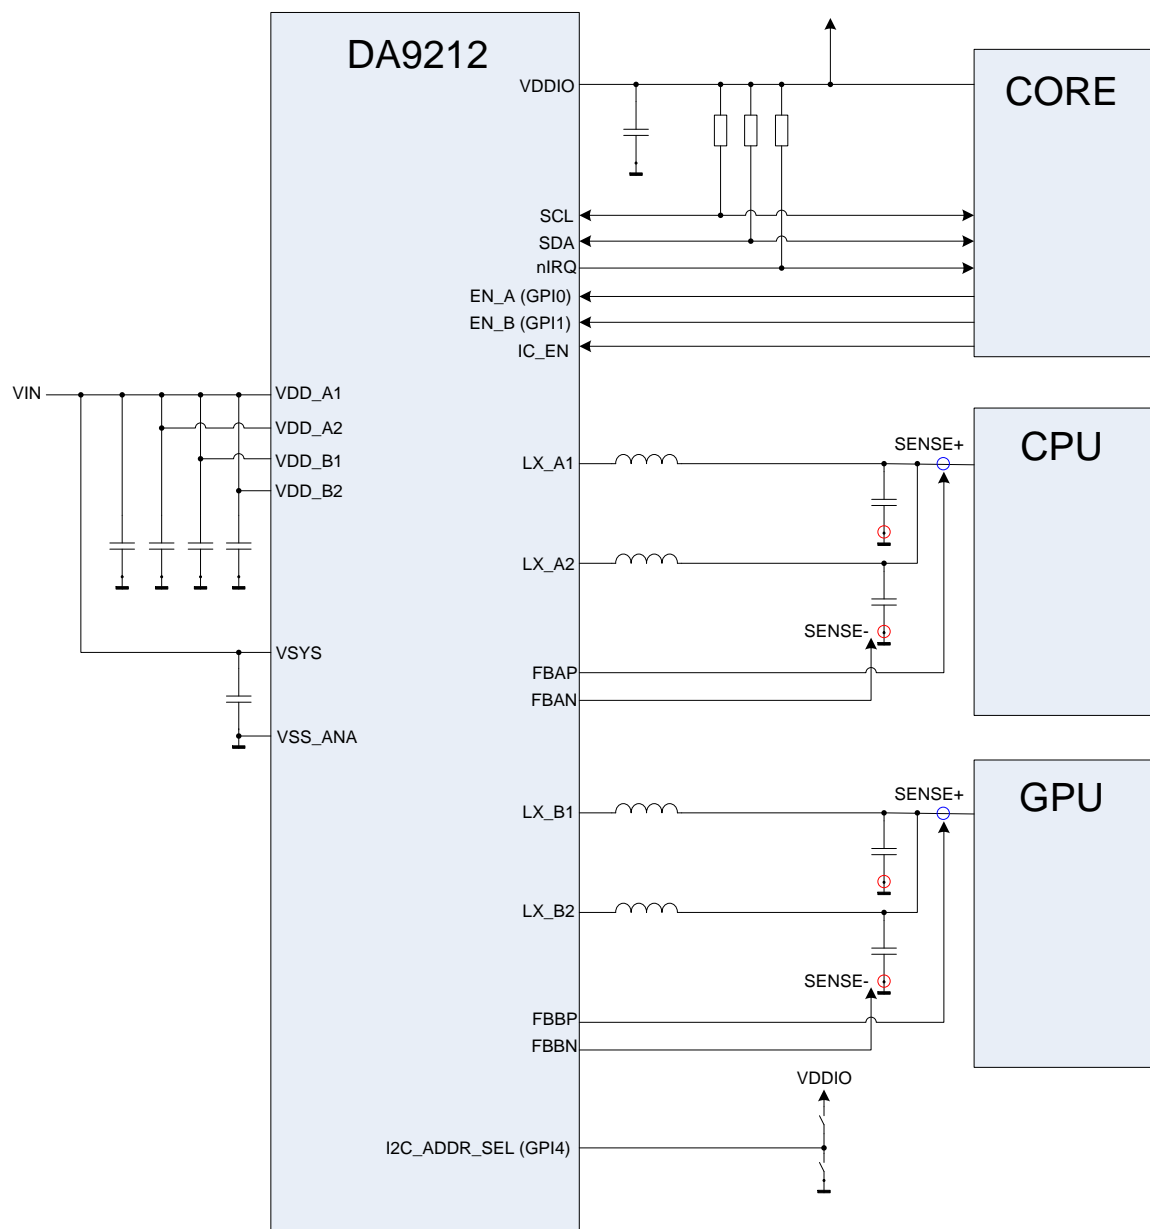


Figure 34: Typical application of DA9212

Figure 34 shows a typical use case of DA9212 for the simultaneous supply of a CPU and a GPU rail. The CORE application processor enables and disables the IC, the CPU and the GPU individually via dedicated ports on DA9212.

13.1 DC-DC Buck Converter

DA9211 is a four-phase 12 A high efficiency synchronous step-down DVC regulator, operating at a high frequency of typically 3 MHz. It supplies an output voltage of typically 1.0 V for a CPU rail, configurable in the range 0.3 – 1.57 V, with high accuracy in steps of 10 mV.

DA9212 contains two buck converters, Buck A and Buck B, each capable of delivering 6 A

To improve the accuracy of the delivered voltage, each buck converter is able to support a differential sensing of the configured voltage directly at the point of load via dedicated positive and negative sense pins.

Both Buck A and Buck B have two voltage registers each. One defines the normal output voltage, while the other offers an alternative retention voltage. In this way different application power modes can easily be supported. The voltage selection can be operated either via GPI or via control interface to guarantee the maximum flexibility according to the specific host processor status in the application.

When a buck is enabled, its output voltage is monitored and a power-good signal indicates that the buck output voltage has reached a level higher than the $V_{TH(PG)}$ threshold. The power-good is lost when the voltage drops below $V_{TH(PG)} - V_{HYS(PG)}$, which is the level at which the signal is de-asserted. The power good signalling should not be used in conjunction with fast start up rates, configured in BUCKx_UP_CTRL register fields and can be individually masked during DVC transitions using the [PGA_DVC_MASK](#) and [PGB_DVC_MASK](#) bits. For each of the buck converters the status of the power-good indicator can be read back via I2C from the [PWRGOOD_A](#) and [PWRGOOD_B](#) status bits. It can be also individually assigned to either GPIO2 or GPIO3 using [BUCKA_PG_SEL](#) and [BUCKB_PG_SEL](#). For correct functionality, the GPIO ports need to be configured as output. An I2C write in GPIOx_MODE can overwrite the internal configuration so that a new update will be automatically done only when the internal power-good indicator changes status.

The buck converters are capable of supporting DVC transitions that occur:

- When the active and selected A-voltage or B-voltage is updated to a new target value.
- When the voltage selection is changed from the A-voltage to the B-voltage (or B-voltage to the A-voltage) using [VBUCKA_SEL](#) and [VBUCKB_SEL](#).

The DVC controller operates in Pulse Width Modulation (PWM) mode with synchronous rectification. When the host processor changes the output voltage, the voltage transition of each buck converter can be individually signalled with a READY signal routed to either GPIO2 or GPIO3. The port has to be configured as GPO and selected for the functionality via [READYA_CONF](#) or [READYB_CONF](#). In contrast to the power-good signal, the READY only informs the host processor about the completion of the digital DVC ramp without confirming that the target voltage has actually been reached.

The slew rate of the DVC transition is individually programmed for each buck converter at 10mV per (4, 2, 1 or 0.5 μ s) via control bit [SLEW_RATE_A](#) and [SLEW_RATE_B](#).

The typical supply current is in the order of 8 mA per phase (quiescent current and charge/discharge current) and drops to <1 μ A when the buck is turned off.

When the buck is disabled, a pull-down resistor (typically 150 Ω) for each phase is activated depending of the value stored in register bits [BUCKA_PD_DIS](#) and [BUCKB_PD_DIS](#). Phases disabled using [PHASE_SEL_A](#) and [PHASE_SEL_B](#) will not have any pull-down. The pull-down resistor is always disabled at all phases when DA9211 and DA9212 are OFF.

13.1.1 Switching Frequency

The switching frequency is chosen to be high enough to allow the use of a small 0.47 μ H inductor (see a complete list of coils in the Application Information section (see section 15). The buck

switching frequency can be tuned using register bit [OSC_TUNE](#). The internal 6 MHz oscillator frequency is tuned in steps of 180 kHz. This impacts the buck converter frequency in steps of 90 kHz and helps to mitigate possible disturbances to other HF systems in the application.

13.1.2 Operation Modes and Phase Selection

The buck converters can operate in synchronous PWM mode and PFM mode. The operating mode is selected using register bits [BUCKA_MODE](#) and [BUCKB_MODE](#).

An automatic phase shedding can be enabled for each buck converter in PWM mode via [PH_SH_EN_A](#), [PH_SH_EN_B](#), thereby automatically reducing or increasing the number of active phases depending on the output load current. For DA9212 the phase shedding will automatically change between 1-phase and 2-phase operation at a typical current of 1.3 A. For DA9211 the phase shedding will automatically change between 1-phase and 4-phase operation at a typical current of 1.6 A. The [PHASE_SEL_A](#) and [PHASE_SEL_B](#) register fields limit the maximum number of active phases under any conditions.

If the automatic operation mode is selected on [BUCKA_MODE](#) or [BUCKB_MODE](#), the buck converters will automatically change between synchronous PWM mode and PFM depending on the load current. This improves the efficiency of the converters across the whole range of output load currents.

13.1.3 Output Voltage Selection

The switching converter can be configured using either a 2-WIRE or a 4-WIRE interface. For security reasons, the re-programming of registers that can cause damage when wrongly programmed (for example, the voltage settings) can be disabled by asserting the control [V_LOCK](#). When [V_LOCK](#) is asserted, reprogramming the registers 0xD0 to 0x14F from control interfaces is disabled.

For each buck converter two output voltages can be pre-configured inside registers [VBUCKA_A](#) and [VBUCKB_A](#), and registers [VBUCKA_B](#) and [VBUCKB_B](#). The output voltage can be selected by either toggling register bits [VBUCKA_SEL](#) and [VBUCKB_SEL](#) or by re-programming the selected voltage control register. Both changes will result into ramped voltage transitions, during which the READY signal is asserted. After being enabled, the buck converter will by default use the register settings in [VBUCKA_A](#) and [VBUCKB_A](#) unless the output voltage selection is configured via the GPI port.

If "00" has been selected in [BUCKA_MODE](#) or [BUCKB_MODE](#), A-/B- voltage selection registers [VBUCKx_x](#) control the operation of the PWM and PFM modes.

Regardless of the values programmed in the [VBUCKx_A](#) and [VBUCKx_B](#) registers, the registers [VBUCKA_MAX](#), [VBUCKB_MAX](#) will individually limit the output voltage that can be set for each of the buck converters.

The buck converter provides an optional hardware enable/disable via selectable GPI, and configured via control register bits [BUCKA_GPI](#) and [BUCKB_GPI](#). A change of the output voltage from the state of a GPI is enabled via control register bits [VBUCKA_GPI](#) and [VBUCKB_GPI](#). After detecting a rising or falling edge at the related GPIs, DA9211 and DA9212 will configure the buck converters according to their status.

In addition to selecting between the A/B voltages, a track mode can be activated for Buck A to set the output voltage. In the DA9211, the track mode is applied to the 4-phase buck converter. This feature can be enabled on GPIO via [GPIO_PIN](#). The output voltage will be configured to follow the value applied at a selected GPI pin. The voltage applied at GPIO must be in the same range as the nominal output voltage selectable for the buck rail (see [VBUCKA_A](#) and [VBUCKA_B](#) registers). In Track Mode, only single ended remote sensing is possible.

In Track Mode, the content of the [VBUCKA_SEL](#) bit is ignored, as well as [VBUCKA_A](#) and [VBUCKA_B](#) bits. They will become active again once the voltage track mode is disabled. The GPIO does not generate any event in this case.

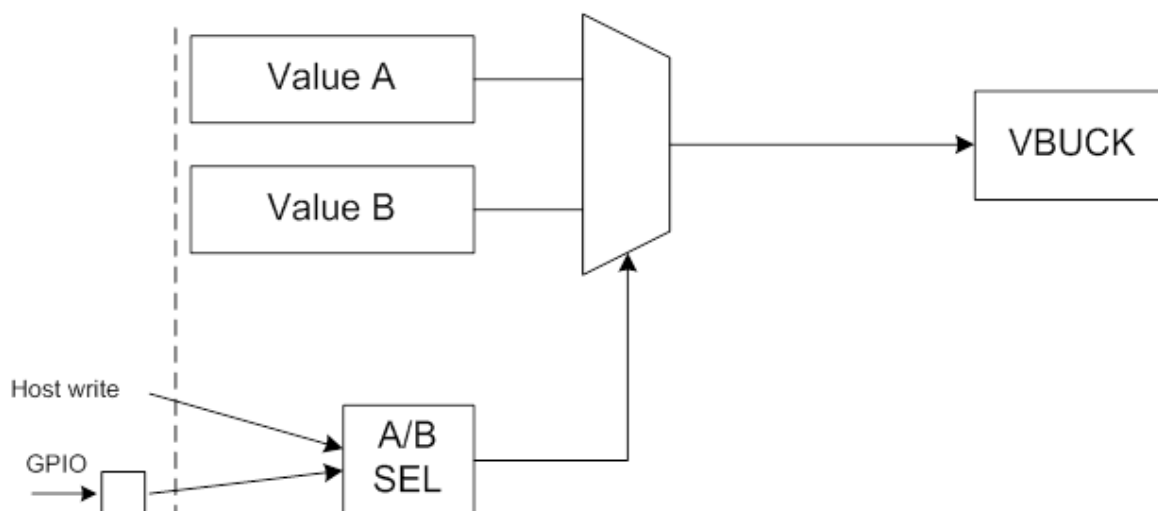


Figure 35: Concept of control of the buck's output voltage

13.1.4 Soft Start up

To limit in-rush current from VSYS, the buck converters can perform a soft-start after being enabled. The start-up behaviour is a compromise between acceptable inrush current from the battery and turn-on time. In DA9211 and DA9212, different ramp times can be individually configured for each buck converter on register [BUCKA_UP_CTRL](#) and [BUCKB_UP_CTRL](#). Rates higher than 20 mV/μs may produce overshoot during the start-up phase, so they should be considered carefully.

A ramped power-down can be selected on register bits [BUCKA_DOWN_CTRL](#) and [BUCKB_DOWN_CTRL](#). When no ramp is selected, the output node will be discharged only by the pull-down resistor, if enabled via [BUCKA_PD_DIS](#) and [BUCKB_PD_DIS](#).

13.1.5 Current Limit

The integrated current limit is meant to protect DA9211 and DA9212's power stages and the external coil from excessive current. The bucks' current limit should be configured to be at least 40% higher than the required maximum continuous output current (see table below).

When reaching the current limit, each buck converter generates an event and an interrupt to the host processor unless the interrupt has been masked using the [OCx_MASK](#) controls. These [OCA_MASK](#) and [OCB_MASK](#) control bits can be used to mask the generation of over-current events during DVC transitions. An extra masking time as defined in [OCx_MASK](#) will be automatically added to the DVC interval after the DVC has finished in order to ensure that the possible high current levels needed for DVC do not influence the event generation.

Table 12: Selection of the buck current limit from the coil parameters

Min ISAT (mA)	Frequency (MHz)	Buck current limit (mA)	Average current (mA)
5060	3	4600	3300
4180	3	3800	2700
3080	3	2800	2000
1760	3	1600	1100

13.2 Ports Description

This section describes the functionality of each input / output port.

13.2.1 VDDIO

VDDIO is an independent IO supply rail input to DA9211 and DA9212 that can be assigned to the power manager interface and to the GPIOs (see control [PM_IF_V](#) and [GPI_V](#)). The rail assignment determines the IO voltage levels and logical thresholds (see also the Digital I/O Characteristics in [Table 8](#)).

An integrated under voltage lockout circuit for the VDDIO prevents internal errors by disabling the I2C communication when the voltage drops below V_{ULO_IO} . In that case the buck converters are also disabled and can not be re-enabled (even via input port) until the VDDIO under-voltage condition has been resolved. At the exit of the VDDIO under voltage condition an event [E_UVLO_IO](#) is generated and the nIRQ line is driven active if the event is not masked.

The VDDIO under-voltage circuit monitors voltages relative to a nominal voltage of 1.8V. If a different rail voltage is being used, the under-voltage circuit can be disabled via [UVLO_IO_DIS](#).

Note that the maximum speed at 4-WIRE interface is only available if the selected supply rail is greater than 1.6 V.

13.2.2 IC_EN

IC_EN is a general enable signal for DA9211 and DA9212, turning on and off the internal circuitry (for example, the reference, the digital core, etc). Correct control of this port has a direct impact on the quiescent current of the whole application. A low level of IC_EN allows the device to reach the minimum quiescent current. The voltage at this pin is continuously sensed by a dedicated analogue circuit.

The host processor will be allowed to start the communication with DA9211 and DA9212 through the Control Interface and, for example to turn on the buck converters, a delay time of t_{EN} after assertion of the IC_EN pin. If the bucks are enabled via OTP (see [BUCKA_EN](#) and [BUCKB_EN](#) controls), they will start up automatically after assertion of IC_EN.

The IC_EN signal shall be asserted and deasserted only when the VDD_IO supply is available and its level is above the undervoltage threshold level $V_{TH_UVLO_IO}$.

13.2.3 nIRQ

The nIRQ port indicates that an interrupt-causing event has occurred and that the event/status information is available in the related registers. The nIRQ is an output signal that can either be

push-pull or open drain (selected via [IRQ_TYPE](#)). If an active high IRQ signal is required, it can be achieved by asserting control [IRQ_LEVEL](#) (recommended for push-pull mode).

Examples of this type of information can be critical temperature and voltage, fault conditions, status changes at GPI ports, and so forth. The event registers hold information about the events that have occurred. Events are triggered by a status change at the monitored signals. When an event bit is set, the nIRQ signal is asserted unless this interrupt is masked by a bit in the IRQ mask register. The nIRQ will not be released until all event registers with asserted bits have been read and cleared. New events that occur during reading an event register are held until the event register has been cleared, ensuring that the host processor does not miss them.

13.2.4 GPIO Extender

DA9211 and DA9212 includes a GPIO extender that offers up to five 5 V-tolerant general purpose input/output ports. Each port is controlled via registers from the host processor.

The GPIO3 and GPI4 ports are pin-shared with the 4-WIRE Control Interface. For instance, if [GPIO3_PIN](#) = 01, [GPI4_PIN](#) = 01 (Interface selected), the GPIO3 and GPI4 ports will be exclusively dedicated to output and chip-select signaling for 4-WIRE purposes. If the alternative function is selected, all GPIOs configuration as per registers 0x58 to 0x5A and 0x145 will be ignored.

GPIs are supplied from the internal rail VDDCORE or VDDIO (selected via [GPI_V](#)) and can be configured to be active high or active low (selected via [GPIOx_TYPE](#)). The input signals can be debounced or directly change the state of the assigned status register GPIx to high or low, according to the setting of [GPIOx_MODE](#). The debouncing time is configurable via control [DEBOUNCE](#) (10 ms default).

When ever the status has changed to its configured active state (edge sensitive), the assigned event register is set and the nIRQ signal is asserted (unless this nIRQ is masked, see also [Figure 36](#)).

Whenever DA9211 and DA9212 is enabled and enters ON mode (also when enabled changing the setting of [GPIOx_PIN](#)) the GPI status bits are initiated towards their configured passive state. This ensures that already active signals are detected, and that they create an event immediately after the GPI comparators are enabled.

The buck enable signal (BUCKx_EN) can be controlled directly via a GPI, if so configured in the [BUCKA_GPI](#) and [BUCKB_GPI](#) registers. If it is required that GPI ports do not generate an event when configured for the HW control of the switching regulator, the relative mask bit should be set.

GPIs can alternatively be selected to toggle the [VBUCKA_SEL](#) and [VBUCKB_SEL](#) from rising and falling edges at this inputs. Apart from changing the regulator output voltage this also provides hardware control of the regulator mode (normal/low power mode) from the settings of [Error! Reference source not found.](#), [Error! Reference source not found.](#), [Error! Reference source not found.](#), and [Error! Reference source not found.](#) (enabled if [BUCKA_MODE](#) or [BUCKB_MODE](#) = '00').

All GPI ports have the additional option of activating a 100 kΩ pull-down resistor via [GPIOx_PUPD](#), which ensures a well defined level in case the input is not actively driven.

If enabled via [ADDR_SEL_CONF](#), the I2C address selection can be assigned to a specific GPI. An active voltage level at the selected GPI configures the slave address of DA9211 and DA9212 to [IF_BASE_ADDR1](#) while a passive voltage level configures the slave address to [IF_BASE_ADDR2](#). If no GPI is selected then the [IF_BASE_ADDR1](#) is automatically used.

If defined as an output, GPIOs can be configured to be open-drain or push-pull. If configured as push-pull, the supply rail is VDDIO. By disabling the internal 120 kΩ pull-up resistor in open-drain mode, the GPO can also be supplied from an external rail. The output state will be assigned as configured by the GPIO register bit [GPIOx_MODE](#).

A specific power-good port for each of the buck converters can be configured via [BUCKA_PG_SEL](#) and [BUCKB_PG_SEL](#). The respective port must be configured as GPO for correct operation. If assigned to the same GPO, it is necessary that the power-good indicators for Buck A and Buck B are both active (supply voltages in range) to assert the overall power-good. The signal will be released as soon as one of the single power-good signals is not active (that is, at least one supply is out of range).

The power good signalling should not be used in conjunction with fast start up rates, configured in BUCKx_UP_CTRL register fields.

Whenever the GPIO unit is off (POR or OFF Mode) all ports are configured as open drain active high (pass device switched off, high impedance state). When leaving POR the pull-up or pull-down resistors will be configured from register GPIOx_PUPD.

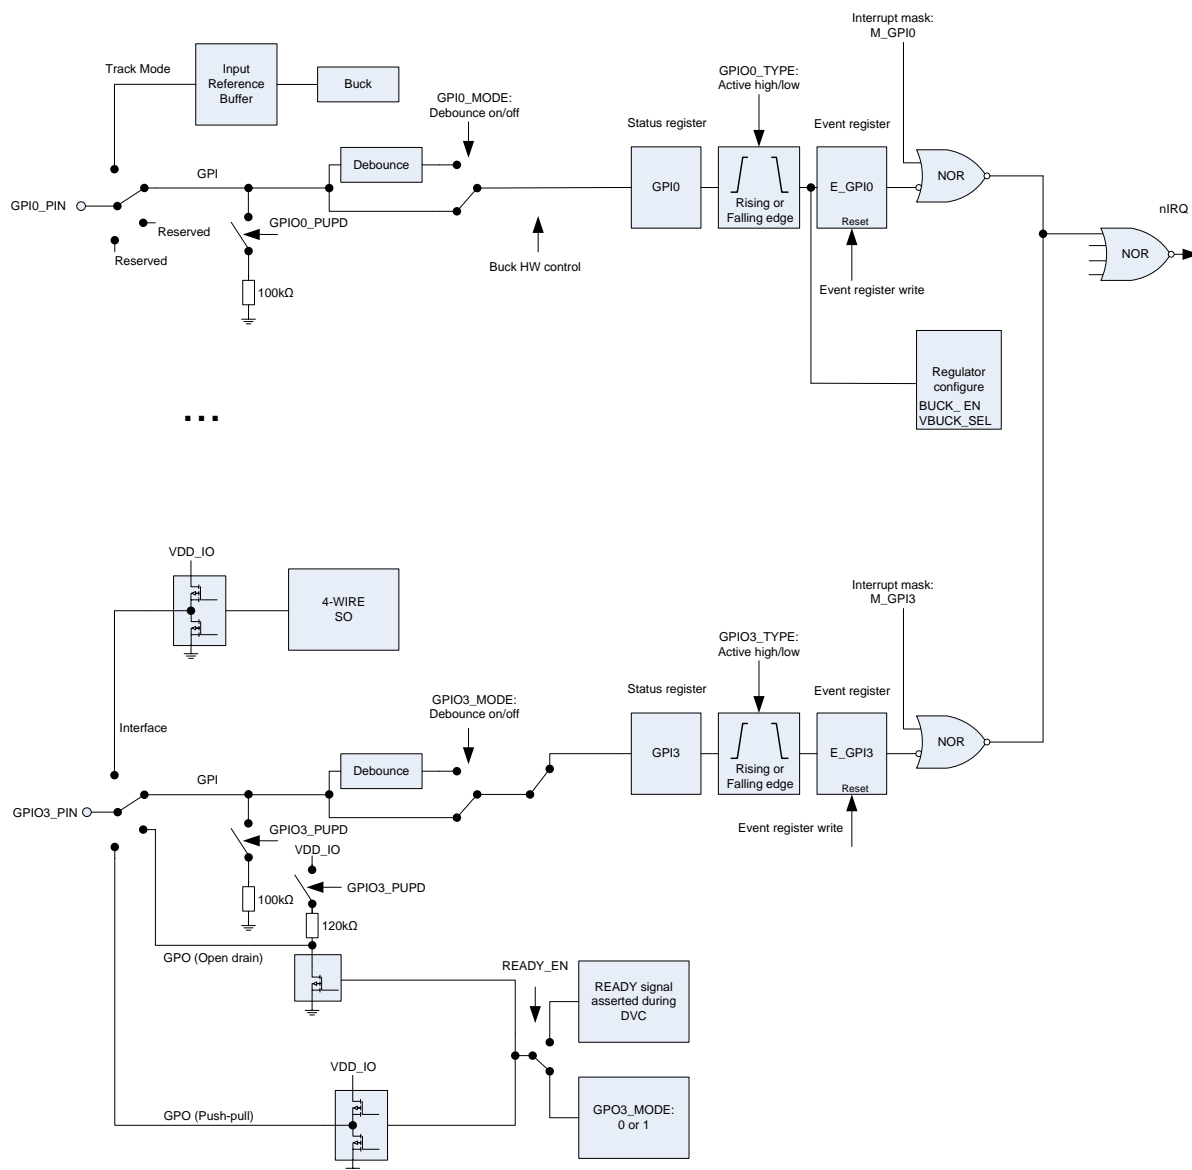


Figure 36: GPIO principle of operation (example paths)

13.3 Operating Modes

13.3.1 ON Mode

DA9211 and DA9212 is in ON Mode when the IC_EN port is higher than EN_ON and the supply voltage is higher than $V_{TH(UVLO)}(V_{DD})$. Once enabled, the host processor can start the communication with DA9211 and DA9212 via Control Interface after the t_{EN} delay needed for internal circuit start up.

If **BUCKA_EN** or **BUCKB_EN** is asserted when DA9211 and DA9212 is in ON Mode the power up of the related buck converter is initiated. If the bucks are controlled via GPI, the level of the controlling ports is checked when entering ON mode, so that an active level will immediately have effect on the

buck. If BUCKA_EN or BUCKB_EN are not asserted and all controlling GPI ports are inactive, the buck converter will stay off with the output pull-down resistor enabled/disabled according to the setting of [BUCKA_PD_DIS](#) and [BUCKB_PD_DIS](#).

13.3.2 OFF Mode

DA9211 and DA9212 is in OFF Mode when the IC_EN port is lower than EN_OFF. In OFF Mode, the bucks are always disabled and the output pull-down resistors are disabled independently of [BUCKA_PD_DIS](#) and [BUCKB_PD_DIS](#). All I/O ports of DA9211 and DA9212 are configured as high impedance.

13.4 Control Interfaces

All the features of DA9211 and DA9212 can be controlled by SW through a serial control interfaces. The communication is selectable to be either a 2-WIRE (I2C compliant) or a 4-WIRE connection (SPI compliant) via control [IF_TYPE](#), which will be selected during the initial OTP read. If 4-WIRE is selected, the GPIO3 and GPIO4 are automatically configured as interface pins. Data is shifted into or out of DA9211 and DA9212 under the control of the host processor, which also provides the serial clock. In a normal application case the interface is only configured once from OTP values, which are loaded during the initial start-up of DA9211 and DA9212.

DA9211 and DA9212 reacts only on read/write commands where the transmitted register address (using the actual page bits as a MSB address range extensions) is within 0x50 to 0x67, 0xD0 to DF, 0x140 to 0x14F and (read only) 0x200 to 0x27F. Host access to registers outside these ranges will be ignored. This means there will be no acknowledge after receiving the register address in 2-WIRE Mode, and SO stays HI-Z in 4-WIRE Mode. During debug and production modes write access is available to page 4 (0x200 to 0x27F). DA9211 and DA9212 will react only on write commands where the transmitted register address is 0x00, 0x80, 0x100 to 0x106. The host processor must read the content of those registers before writing, thereby changing only the bit fields that are not marked as reserved (the content of the read back comes from the compatible PMIC, for example DA9063).

If the [STAND_ALONE](#) bit is asserted (OTP bit), DA9211 and DA9212 will also react to read commands.

13.4.1 4-WIRE Communication

In 4-WIRE Mode the interface uses a chip-select line (nCS/nSS), a clock line (SK), data input (SI) and data output line (SO).

The DA9211 and DA9212 register map is split into four pages that each contain up to 128 registers. The register at address zero on each page is used as a page control register. The default active page after turn-on includes registers 0x50 to 0x6F. Writing to the page control register changes the active page for all subsequent read/write operations unless an automatic return to page 0 was selected by asserting bit [REVERT](#). Unless the [REVERT](#) bit was asserted after modifying the active page, it is recommended to read back the page control register to ensure that future data exchange is accessing the intended registers.

All registers outside the DA9211 and DA9212 range are write only, that is, the DA9211 and DA9212 will not answer to a read command and the data bus is tri-state (they are implicitly directed to DA9063). In particular the information contained in registers 0x105 and 0x106 is used by DA9211 and DA9212 to configure the control interface. They must be the same as the main PMIC (DA9063), so that a write to those registers configures both the main PMIC and DA9211 and DA9212 at the same time. The default OTP settings also need to be identical for a correct operation of the system.

The 4-WIRE interface features a half-duplex operation, that is, data can be transmitted and received within a single 16-bit frame at enhanced clock speed (up to 14 MHz). It operates at the clock frequencies provided by the host.

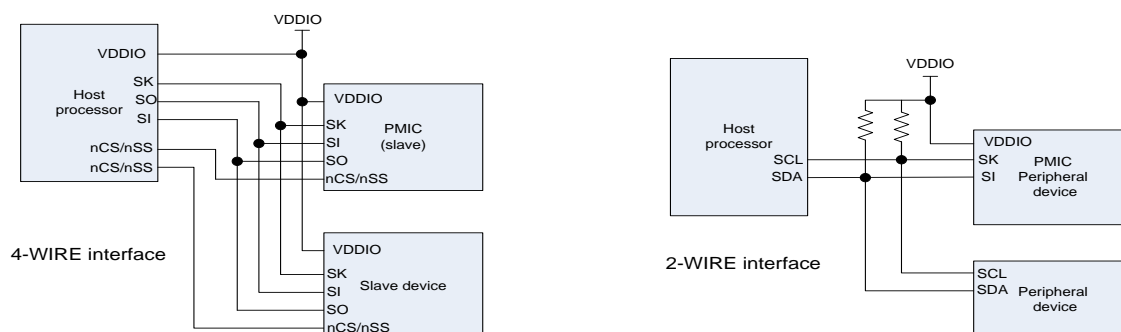


Figure 37: Schematic of 4-WIRE and 2-WIRE Power Manager Bus

A transmission begins when initiated by the host. Reading and writing is accomplished by the use of an 8-bit command, which is sent by the host prior to the exchanged 8-bit data. The byte from the host begins shifting in on the SI pin under the control of the serial clock SK provided from the host. The first seven bits specify the register address (0x01 to 0x07) that will be written or read by the host. The register address is automatically decoded after receiving the seventh address bit. The command word ends with an R/W bit, which together with the control bit **R/W_POL** specifies the direction of the following data exchange. During register writing the host continues sending out data during the following eight SK clocks. For reading, the host stops transmitting and the 8-bit register is clocked out of DA9211 and DA9212 during the consecutive eight SK clocks of the frame. Address and data are transmitted with MSB first. The polarity (active state) of nCS is defined by control bit **nCS_POL**. nCS resets the interface when inactive and it has to be released between successive cycles.

The SO output from DA9211 and DA9212 is normally in high-impedance state and active only during the second half of read cycles. A pull-up or pull-down resistor may be needed at the SO line if a floating logic signal can cause unintended current consumption inside other circuits.

Table 13: 4-WIRE Clock Configurations

Configurations			
CPHA clock polarity	CPOL clock phase	Output data is updated at SK edge	Input data is registered at SK edge
0 (idle low)	0	Falling	Rising
0 (idle low)	1	Rising	Falling
1 (idle high)	0	Rising	Falling
1 (idle high)	1	Falling	Rising

DA9211 and DA9212's 4-WIRE interface offers two further configuration bits. Clock polarity (**CPOL**) and clock phase (**CPHA**) define when the interface will latch the serial data bits. **CPOL** determines whether SK idles high (**CPOL** = 1) or low (**CPOL** = 0). **CPHA** determines on which SK edge data is shifted in and out. With **CPOL** = 0 and **CPHA** = 0, DA9211 and DA9212 latch data on the SK rising edge. If the **CPHA** is set to 1 the data is latched on the SK falling edge. **CPOL** and **CPHA** states allow four different combinations of clock polarity and phase. Each setting is incompatible with the other three. The host and DA9211 and DA9212 must be set to the same **CPOL** and **CPHA** states to communicate with each other.

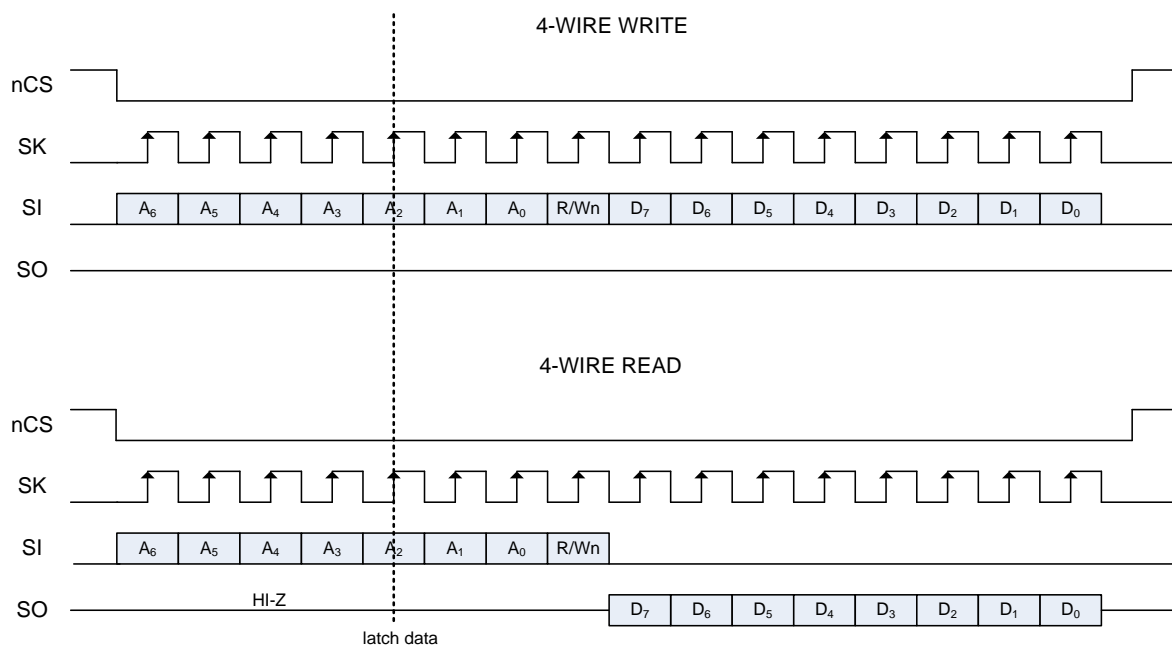


Figure 38: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '0', CPHA = '0')

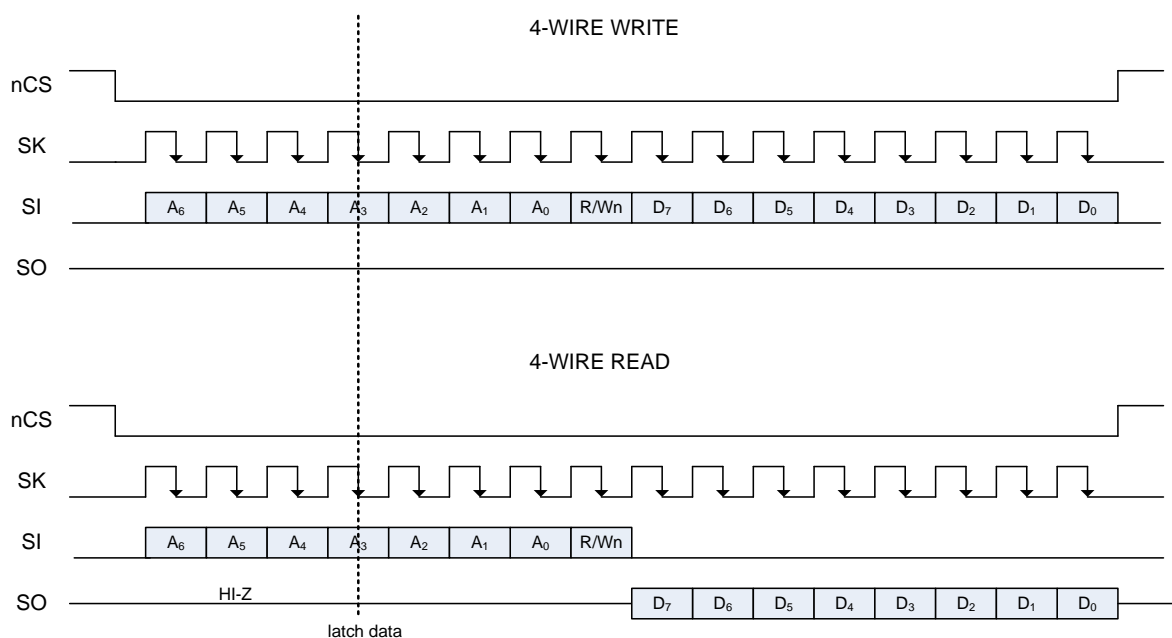


Figure 39: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '0', CPHA = '1')

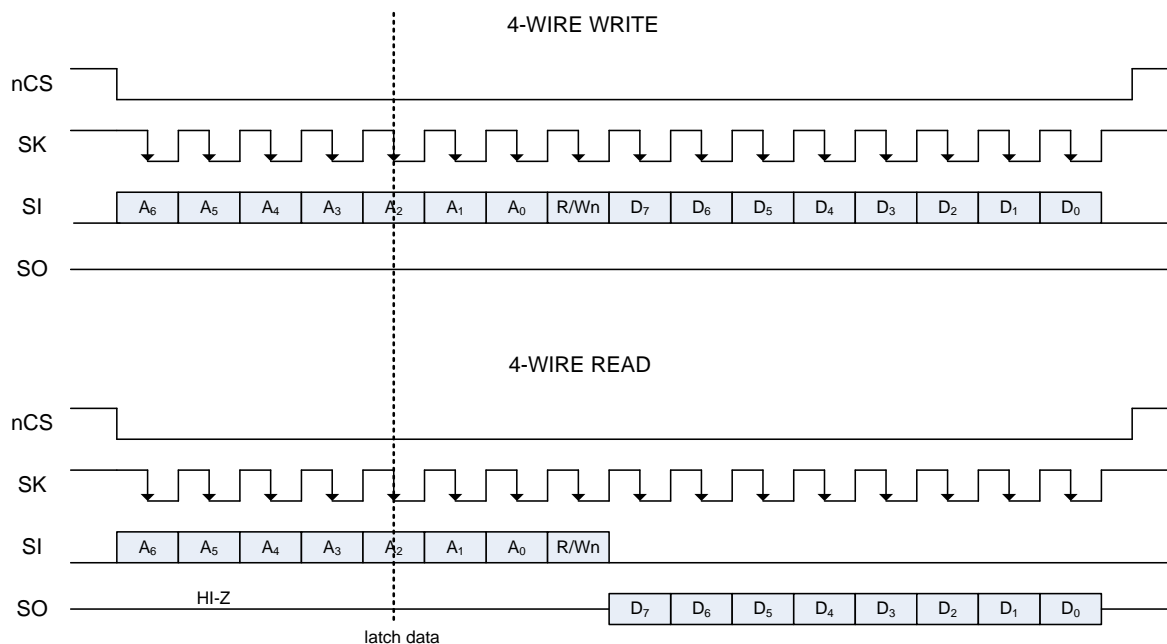


Figure 40: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '0')

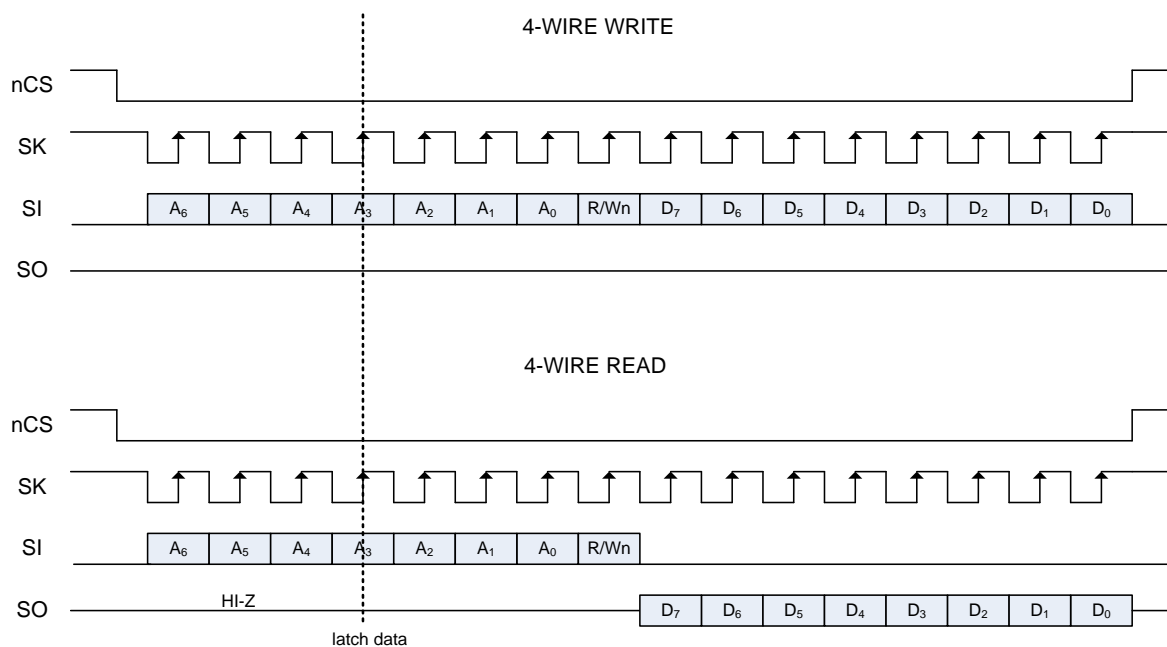


Figure 41: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '1')

Table 14: 4-WIRE Interface Summary

Parameters		
Signal Lines	nCS	Chip select
	SI Serial input data	Master out Slave in
	SO Serial output data	Master in Slave out
	SK	Transmission clock
Interface	Push-pull with tristate	
Supply voltage	Selected from VDDIO	1.6 V to 3.3 V
Data rate	Effective read/write data	Up to 7 Mbps
Transmission	Half-duplex	MSB first
	16 bit cycles	7-bit address, 1 bit read/write, 8-bit data
Configuration	CPOL	Clock polarity
	CPHA	Clock phase
	nCS_POL	nCS is active low/high

Note that reading the same register at high clock rates directly after writing it does not guarantee a correct value. It is recommended to keep a delay of one frame until re-accessing a register that has just been written (for example, by writing/reading another register address in between).

13.4.2 2-WIRE Communication

The [IF_TYPE](#) bit in the INTERFACE2 register can be used to configure the DA9211 and DA9212 control interface as a 2-WIRE serial data interface. In this case the GPIO3 and GPI4 are free for regular input/output functions. DA9211 and DA9212 has a configurable device write address (default: 0xD0) and a configurable device read address (default: 0xD1). See control [IF_BASE_ADDR1](#) for details of configurable addresses. The [ADDR_SEL_CONF](#) bit is used to configure the device address as [IF_BASE_ADDR1](#) or [IF_BASE_ADDR2](#) depending on the voltage level applied at a configurable GPI port (see [GPIO Extender](#)).

The SK port functions as the 2-WIRE clock and the SI port carries all the power manager bi-directional 2-WIRE data. The 2-WIRE interface is open-drain supporting multiple devices on a single line. The bus lines have to be pulled HIGH by external pull-up resistors (in the 2 kΩ to 20 kΩ range). The attached devices only drive the bus lines LOW by connecting them to ground. As a result two devices cannot conflict if they drive the bus simultaneously. In standard/fast mode the highest frequency of the bus is 400 kHz. The exact frequency can be determined by the application and does not have any relation to the DA9211 and DA9212 internal clock signals. DA9211 and DA9212 will follow the host clock speed within the described limitations, and does not initiate any clock arbitration or slow down. An automatic interface reset can be triggered using control [2WIRE_TO](#) if the clock signal stops to toggle for more than 35 ms.

The interface supports operation compatible to Standard, Fast, Fast-Plus and High Speed mode of the I2C-bus specification Rev 4. Operation in high speed mode at 3.4 MHz requires mode changing in order to set spike suppression and slope control characteristics to be compatible with the I2C-bus specification. The high speed mode can be enabled on a transfer by transfer basis by sending the master code (0000 1XXX) at the begin of the transfer. DA9211 and DA9212 do not make use of clock stretching, and deliver read data without additional delay up to 3.4 MHz.

Alternatively, [PM_IF_HSM](#) configures the interface to use high speed mode continuously. In this case, the master code is not required at the beginning of every transfer. This reduces the communication overhead on the bus but limits the slaves attachable to the bus to compatible devices.

The communication on the 2-WIRE bus always takes place between two devices, one acting as the master and the other as the slave. The DA9211 and DA9212 will only operate as a SLAVE.

In contrast to the 4-WIRE mode, the 2-WIRE interface has direct access to two pages of the register map (up to 256 addresses). The register at address zero on each page is used as a page control register (with the 2-WIRE bus ignoring the LSB of control [REG_PAGE](#)). Writing to the page control register changes the active page for all subsequent read/write operations unless an automatic return to page 0 was selected by asserting control REVERT. Unless [REVERT](#) was asserted after modifying the active page, it is recommended to read back the page control register to ensure that future data exchange is accessing the intended registers.

In 2-WIRE operation DA9211 and DA9212 offer an alternative way to access register page 2 and page 3. It removes the need for preceeding page selection writes by incrementing the device write/read address by one (default 0xD2/0xD3) for any direct access of page 2 and page 3 (page 0 and 1 access requires the basic write/read device address with the MSB of [REG_PAGE](#) to be '0').

13.4.3 Details of the 2-WIRE control bus protocol

All data is transmitted across the 2-WIRE bus in groups of eight bits. To send a bit the SDA line is driven towards the intended state while the SCL is LOW (a low on SDA indicates a zero bit). Once the SDA has settled, the SCL line is brought HIGH and then LOW. This pulse on SCL clocks the SDA bit into the receiver's shift register.

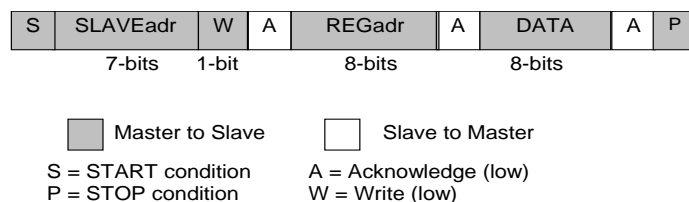
A two-byte serial protocol is used containing one byte for address and one byte data. Data and address transfer are transmitted MSB first for both read and write operations. All transmissions begin with the START condition from the master while the bus is in IDLE state (the bus is free). It is initiated by a high to low transition on the SDA line while the SCL is in the high state (a STOP condition is indicated by a low to high transition on the SDA line while the SCL is in the high state).




Figure 42: Timing of 2-WIRE START and STOP Condition

The 2-WIRE bus is monitored by DA9211 and DA9212 for a valid SLAVE address whenever the interface is enabled. It responds immediately when it receives its own slave address. The acknowledge is done by pulling the SDA line low during the following clock cycle (white blocks marked with 'A' in [Figure 43](#) to [Figure 47](#)).


The protocol for a register write from master to slave consists of a start condition, a slave address with read/write bit and the 8-bit register address followed by eight bits of data terminated by a STOP condition. DA9211 and DA9212 respond to all bytes with Acknowledge. This is illustrated in [Figure 43](#).

**Figure 43: 2-WIRE Byte Write (SDA Line)**

When the host reads data from a register it first has to write to DA9211 and DA9212 with the target register address and then read from DA9211 and DA9212 with a Repeated START or alternatively a second START condition. After receiving the data, the host sends No Acknowledge and terminates the transmission with a STOP condition. This is illustrated in [Figure 44](#).

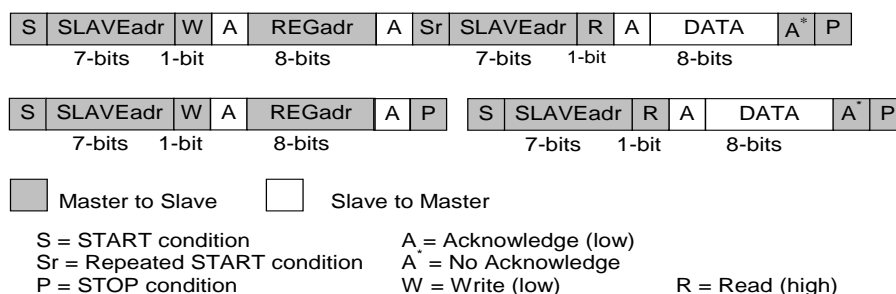**Figure 44: Examples of 2-WIRE Byte Read (SDA Line)**

Consecutive (page) read out mode is initiated from the master by sending an Acknowledge instead of Not acknowledge after receipt of the data word. The 2-WIRE control block then increments the address pointer to the next 2-WIRE address and sends the data to the master. This enables an unlimited read of data bytes until the master sends a Not acknowledge directly after the receipt of data, followed by a subsequent STOP condition. If a non-existent 2-WIRE address is read out, the DA9211 and DA9212 will return code zero. This is illustrated in [Figure 45](#).

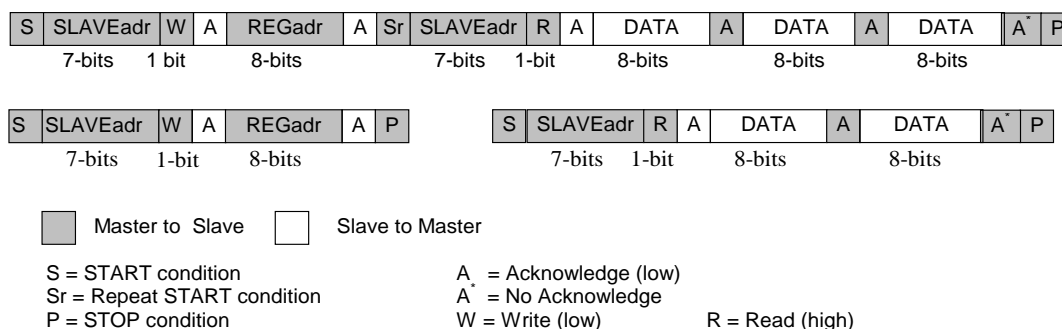**Figure 45: Examples of 2-WIRE Page Read (SDA Line)**

Note that the slave address after the Repeated START condition must be the same as the previous slave address.

Consecutive (page) write mode is supported if the Master sends several data bytes following a slave register address. The 2-WIRE control block then increments the address pointer to the next 2-WIRE address, stores the received data and sends an Acknowledge until the master sends the STOP condition. This is illustrated in [Figure 46](#).

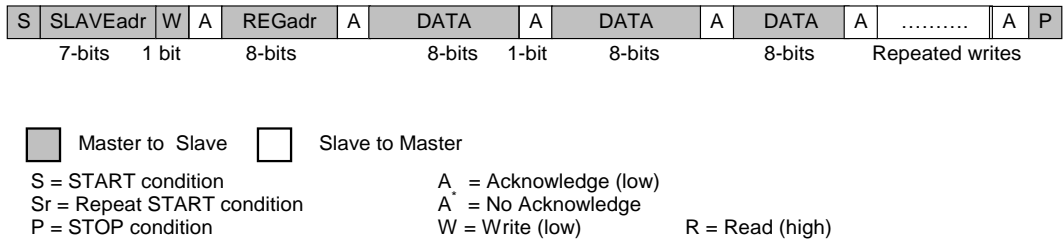


Figure 46: 2-WIRE Page Write (SDA Line)

Via control [WRITE_MODE](#) an alternate write mode can be configured. Register addresses and data are sent in alternation like in [Figure 47](#) to support host repeated write operations that access several non consecutive registers. Data will be stored at the previously received register address.

An update of [WRITE_MODE](#) can not be done without interruption within a transmission frame. Thus, if not previously selected or not set as OTP default, the activation of Repeated Write must be done with a regular write on [WRITE_MODE](#) followed by a stop condition. The next frame after a start condition can be written in Repeated Write.

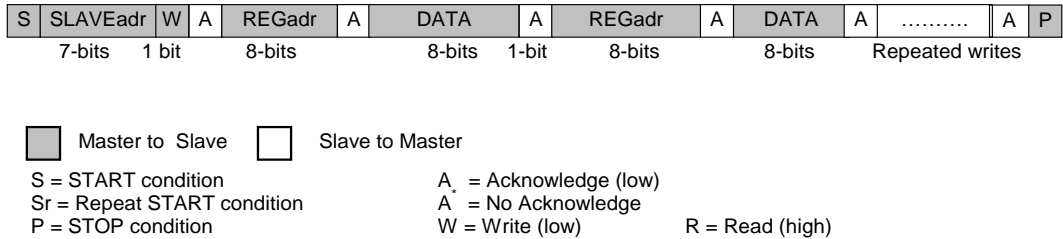


Figure 47: 2-WIRE Repeated Write (SDA Line)

If a new START or STOP condition occurs within a message, the bus will return to IDLE-mode.

13.5 Internal Temperature Supervision

To protect DA9211 and DA9212 from damage due to excessive power dissipation, the internal temperature is continuously monitored. There are three temperature thresholds,

Table 15: Over-temperature thresholds

Temperature threshold	Typical temperature setting	Interrupt event	Status bit	Masking bit
TEMP_WARN	125 °C	E_TEMP_WARN	TEMP_WARN	M_TEMP_WARN
TEMP_CRIT	140 °C	E_TEMP_CRIT	TEMP_CRIT	M_TEMP_CRIT
TEMP_POR	150 °C			

When the junction temperature reaches the TEMP_WARN threshold, DA9211 and DA9212 will assert the bit TEMP_WARN and will generate the event E_TEMP_WARN. If not masked using bit M_TEMP_WARN, the output port nIRQ will be asserted. The status bit TEMP_WARN will remain asserted as long as the junction temperature remains higher than TEMP_WARN.

When the junction temperature increases further to TEMP_CRIT, DA9211 and DA9212 will immediately disable the buck converter, assert the bit TEMP_CRIT, and will generate the event E_TEMP_CRIT. If not masked via bit M_TEMP_CRIT, the output port nIRQ will be asserted. The status bit TEMP_CRIT will remain asserted as long as the junction temperature remains higher than TEMP_CRIT. The buck converter will be kept disabled as long as the junction temperature is above TEMP_CRIT. It will not be automatically re-enabled even after the temperature drops below the valid threshold (even if the controlling GPI is asserted). A direct write into [BUCKA_EN](#) or [BUCKB_EN](#), or a toggling of the controlling GPI, is needed to enable the buck converter.

Whenever the junction temperature exceeds TEMP_POR, a power on reset to the digital core is immediately asserted, which will stop all functionalities of DA9211 and DA9212. This is needed to prevent possible permanent damage in the case of a rapid temperature increase.

14. Register definitions

14.1 Register map

Table 16: Register map

All bits loaded from OTP are marked in **bold**

Addr	Function	7	6	5	4	3	2	1	0
Register Page 0									
0x00	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	REG_PAGE			
0x50	STATUS_A	Reserved	Reserved	Reserved	GP4	GP3	GP2	GP1	GP0
0x51	STATUS_B	Reserved	Reserved	OV_CURR_B	OV_CURR_A	TEMP_CRIT	TEMP_WARN	PWRGOOD_B	PWRGOOD_A
0x52	EVENT_A	Reserved	E_UVLO_IO	Reserved	E_GP4	E_GP3	E_GP2	E_GP1	E_GP0
0x53	EVENT_B	Reserved	E_OV_CURR_B	E_OV_CURR_A	E_TEMP_CRIT	E_TEMP_WARN	E_PWRGOODB	E_PWRGOODA	E_PWRGOOD_A
0x54	MASK_A	Reserved	M_UVLO_IO	Reserved	M_GP4	M_GP3	M_GP2	M_GP1	M_GP0
0x55	MASK_B	Reserved	Reserved	M_OV_CURR_B	M_OV_CURR_A	M_TEMP_CRIT	M_TEMP_WARN	M_PWRGOOD_B	M_PWRGOOD_A
0x56	CONTROL_A	V_LOCK	SLEW_RATE_B		SLEW_RATE_A		DEBOUNCING		
0x57	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x58	GPIO0-1	GPIO1_MODE	GPIO1_TYPE	GPIO1_PIN		GPIO0_MODE	GPIO0_TYPE	GPIO0_PIN	
0x59	GPIO2-3	GPIO3_MODE	GPIO3_TYPE	GPIO3_PIN		GPIO2_MODE	GPIO2_TYPE	GPIO2_PIN	
0x5A	GPIO4	Reserved	Reserved	Reserved		GPIO4_MODE	GPIO4_TYPE	GPIO4_PIN	
0x5B	Reserved	Reserved	Reserved	Reserved		Reserved	Reserved	Reserved	Reserved
0x5C	Reserved	Reserved	Reserved	Reserved		Reserved	Reserved	Reserved	Reserved
0x5D	BUCKA_CONT	Reserved	VBUCKA_GPI		VBUCKA_SEL	BUCKA_PD_DIS	BUCKA_GPI	BUCKA_EN	
0x5E	BUCKB_CONT	Reserved	VBUCKB_GPI		VBUCKB_SEL	BUCKB_PD_DIS	BUCKB_GPI	BUCKB_EN	
Register Page 1									
0x60	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	Reserved	REG_PAGE		
0x60	BUCK_ILIM	BUCKB_ILIM				BUCKA_ILIM			
0x61	BUCKA_CONF	BUCKA_DOWN_CTRL				BUCKA_UP_CTRL		BUCKA_MODE	
0x62	BUCKB_CONF	BUCKB_DOWN_CTRL				BUCKB_UP_CTRL		BUCKB_MODE	
0x63	BUCK_CONF	Reserved	Reserved	Reserved	PH_SH_EN_B	PH_SH_EN_A	PHASE_SEL_B	PHASE_SEL_A	
0x64	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x65	VBUCKA_MAX	Reserved				VBUCKA_MAX			
0x66	VBUCKB_MAX	Reserved				VBUCKB_MAX			
0x67	VBUCKA_A	Reserved				VBUCKA_A			
0x68	VBUCKB_B	Reserved				VBUCKB_B			
0x69	VBUCKB_A	Reserved				VBUCKB_A			
0x6A	VBUCKB_B	Reserved				VBUCKB_B			
Register Page 2									
0x70	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	Reserved	REG_PAGE		
0x71	OTP_CONT	Reserved	Reserved	Reserved	Reserved	PC_DONE	OTP_APPS_RD	Reserved	OTP_TM
0x72	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x73	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x74	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x75	INTERFACE	IF_BASE_ADDR1				R/W_POL	CPHA	CPOL	nCS_POL
0x76	INTERFACE2	IF_TYPE	PM_IF_HSM	PM_IF_FMP	PM_IF_V	Reserved	Reserved	Reserved	Reserved
0x77	OTP_CONF2	OTP_CONF_LOCK	OTP_APPS_LOCK	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x78	OTP_ADDR	OTP_ADDR							
0x79	OTP_DATA	OTP_DATA							
0x7A	CONFIG_A	Reserved	Reserved	Reserved	2WIRE_TO	GP1_V	Reserved	IRQ_TYPE	IRQ_LEVEL
0x7B	CONFIG_B	UVLO_IO_DIS	PGB_DVC_MASK	PGA_DVC_MASK	OCB_MASK	OCB_MASK	OCA_MASK	Reserved	
0x7C	CONFIG_C	Reserved	Reserved	Reserved	GP4_PUPD	GPIO3_PUPD	GPIO2_PUPD	GPIO1_PUPD	GPIO0_PUPD
0x7D	CONFIG_D	BUCKB_PG_SEL			BUCKA_PG_SEL		READYB_CONF		READYA_CONF
0x7E	CONFIG_E	STAND_ALONE	SLAVE_SEL	Reserved	Reserved	Reserved	Reserved	OSC_TUNE	
0x7F	CONFIG_F	IF_BASE_ADDR2				Reserved	Reserved	ADDR_SEL_CONF	

14.2 Register Definitions

14.2.1 Register Page Control

Register	Bit	Type	Label	Def	Description
0x00 PAGE_CON	7	R/W	REVERT	0	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	0	2-WIRE multiple write mode (Note 1) 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	000	
	3:0	R/W	REG_PAGE	000	000: Selects Register 0x01 to 0x3F 001: Selects Register 0x81 to 0xCF 010: Selects Register 0x101 to 0x1CF >010: Reserved for production and test

Note 1 Not used for 4-WIRE-IF

14.2.2 Register Page 0

14.2.2.1 System Control and Event

The STATUS registers report the current value of the various signals at the time that it is read out.

Register	Bit	Type	Label	Def	Description
0x50 STATUS_A	7:5	R	(reserved)	000	
	4	R	GPI4	0	GPI4 level
	3	R	GPI3	0	GPI3 level
	2	R	GPI2	0	GPI2 level
	1	R	GPI1	0	GPI1 level
	0	R	GPI0	0	GPI0 level

Register	Bit	Type	Label	Def	Description
0x51 STATUS_B	7:6	R	(reserved)	00	
	5	R	OV_CURR_B	0	Asserted as long as the current limit for Buck B is hit
	4	R	OV_CURR_A	0	Asserted as long as the current limit for Buck A is hit
	3	R	TEMP_CRIT	0	Asserted as long as the thermal shutdown threshold is reached
	2	R	TEMP_WARN	0	Asserted as long as the thermal warning threshold is reached
	1	R	PWRGOOD_B	0	Asserted as long as the Buck B output voltage is in range

Register	Bit	Type	Label	Def	Description
	0	R	PWRGOOD_A	0	Asserted as long as the Buck A output voltage is in range

The EVENT registers hold information about events that have occurred in DA9211 and DA9212. Events are triggered by a change in the status register which contains the status of monitored signals. When an EVENT bit is set in the event register, the IRQ signal is asserted unless the event is masked by a bit in the mask register. **The IRQ triggering event register will be cleared from the host by writing back its read value.** New events occurring during clearing will be delayed before they are passed to the event register, ensuring that the host controller does not miss them.

Register	Bit	Type	Label	Def	Description
0x52 EVENT_A	7	R	(reserved)	0	
	6	R	E_UVLO_IO	0	UVLO_IO caused the event
	5	R	(reserved)	0	
	4	R	E_GPI4	0	GPI4 event according to active state setting
	3	R	E_GPI3	0	GPI3 event according to active state setting
	2	R	E_GPI2	0	GPI2 event according to active state setting
	1	R	E_GPI1	0	GPI1 event according to active state setting
	0	R	E_GPI0	0	GPI0 event according to active state setting

Register	Bit	Type	Label	Def	Description
0x53 EVENT_B	7:6	R	(reserved)	00	
	5	R	E_OV_CURR_B	0	OV_CURR Buck B caused event
	4	R	E_OV_CURR_A	0	OV_CURR Buck A caused event
	3	R	E_TEMP_CRIT	0	TEMP_CRIT caused event
	2	R	E_TEMP_WARN	0	TEMP_WARN caused event
	1	R	E_PWRGOOD_B	0	PWRGOOD loss at Buck B caused event
	0	R	E_PWRGOOD_A	0	PWRGOOD loss at Buck A caused event

Register	Bit	Type	Label	Def	Description
0x54 MASK_A	7	R/W	(reserved)	0	
	6	R/W	M_UVLO_IO	0	Mask UVLO_IO caused nIRQ
	5	R/W	(reserved)	0	
	4	R/W	M_GPI4	0	Masks nIRQ interrupt at GPI4
	3	R/W	M_GPI3	0	Masks nIRQ interrupt at GPI3
	2	R/W	M_GPI2	0	Masks nIRQ interrupt at GPI2
	1	R/W	M_GPI1	0	Masks nIRQ interrupt at GPI1
	0	R/W	M_GPI0	0	Masks nIRQ interrupt at GPI0

Register	Bit	Type	Label	Def	Description
0x55 MASK_B	7:6	R/W	(reserved)	00	
	5	R/W	M_OV_CURR_B	0	OV_CURR Buck B caused event
	4	R/W	M_OV_CURR_A	0	OV_CURR Buck A caused event
	3	R/W	M_TEMP_CRIT	0	TEMP_CRIT caused event
	2	R/W	M_TEMP_WARN	0	TEMP_WARN caused event
	1	R/W	M_PWRGOOD_B	0	PWRGOOD Buck B caused event
	0	R/W	M_PWRGOOD_A	0	PWRGOOD Buck A caused event

Register	Bit	Type	Label	Def	Description
0x56 CONTROL_A	7	R/W	V_LOCK	0	0: Allows host writes into registers 0xD0 to 0x14F 1: Disables register 0xD0 to 0x14F re-programming from control interfaces
	6:5	R/W	SLEW_RATE_B	10	Buck B DVC slewing is executed at 00: 10mV every 4.0 μ s 01: 10mV every 2.0 μ s 10: 10mV every 1.0 μs 11: 10mV every 0.5 μ s
	4:3	R/W	SLEW_RATE_A	10	Buck A DVC slewing is executed at 00: 10mV every 4.0 μ s 01: 10mV every 2.0 μ s 10: 10mV every 1.0 μs 11: 10mV every 0.5 μ s
	0:2	R/W	DEBOUNCE	011	Input signals debounce time: 000: no debounce time 001: 0.1 ms 010: 1.0 ms 011: 10 ms 100: 50 ms 101: 250 ms 110: 500 ms 111: 1000 ms

14.2.2.2 GPIO Control

Register	Bit	Type	Label	Def	Description
0x58 GPIO-1	7	R/W	GPI1_MODE	0	0: GPI: debouncing off 1: GPI: debouncing on
	6	R/W	GPI1_TYPE	1	0: GPI: active low 1: GPI: active high
	5:4	R/W	GPI1_PIN	00	PIN assigned to: 00: GPI >00: Reserved
	3	R/W	GPIO_MODE	0	0: GPI: debouncing off 1: GPI: debouncing on
	2	R/W	GPIO_TYPE	1	0: GPI: active low 1: GPI: active high
	1:0	R/W	GPIO_PIN	00	PIN assigned to: 00: GPI 01: Track enable 1x: Reserved

Register	Bit	Type	Label	Def	Description
0x59 GPIO2-3	7	R/W	GPIO3_MODE	0	0: GPI: debouncing off GPO: Sets output to passive level 1: GPI: debouncing on GPO: Sets output to active level
	6	R/W	GPIO3_TYPE	1	0: GPI/GPO: active low 1: GPI/GPO: active high
	5:4	R/W	GPIO3_PIN	00	PIN assigned to: 00: GPI 01: Reserved 10: GPO (Open drain) 11: GPO (Push-pull)
	3	R/W	GPIO2_MODE	0	0: GPI: debouncing off GPO: Sets output to passive level 1: GPI: debouncing on GPO: Sets output to active level
	2	R/W	GPIO2_TYPE	1	0: GPI/GPO: active low 1: GPI/GPO: active high
	1:0	R/W	GPIO2_PIN	00	PIN assigned to: 00: GPI 01: Reserved 10: GPO (Open drain) 11: GPO (Push-pull)

Register	Bit	Type	Label	Def	Description
0x5A GPI4	7:4	R/W	(reserved)	0000	
	3	R/W	GPI4_MODE	0	0: GPI: debouncing off 1: GPI: debouncing on
	2	R/W	GPI4_TYPE	1	0: GPI: active low 1: GPI: active high
	1:0	R/W	GPI4_PIN	00	PIN assigned to: 00: GPI 01: Reserved 1x: Reserved

14.2.2.3 Regulators Control

Register	Bit	Type	Label	Def	Description
0x5D BUCKA_CON T	7	R/W	(reserved)	0	
	6:5	R/W	VBUCKA_GPI	00	<p>Selects the GPI that specifies the target voltage of VBUCKA. This is VBUCKA_A on active to passive transition, VBUCKA_B on passive to active transition.</p> <p>Active high/low is controlled by GPIx_TYPE.</p> <p>00: Not controlled by GPIO</p> <p>01: GPIO1 controlled</p> <p>10: GPIO2 controlled</p> <p>11: GPIO4 controlled</p>
	4	R/W	VBUCKA_SEL	0	<p>Buck A voltage is selected from (ramping):</p> <p>0: VBUCKA_A</p> <p>1: VBUCKA_B</p>
	3	R/W	BUCKA_PD_DIS	0	<p>0: Enable pull-down resistor of Buck A when the buck is disabled</p> <p>1: Disable pull-down resistor of Buck A when the buck is disabled</p>
	2:1	R/W	BUCKA_GPI	00	<p>GPIO enables the Buck A on passive to active state transition, disables the Buck A on active to passive state transition</p> <p>00: Not controlled by GPIO</p> <p>01: GPIO0 controlled</p> <p>10: GPIO1 controlled</p> <p>11: GPIO3 controlled</p>
	0	R/W	BUCKA_EN	0	<p>0: Buck A disabled</p> <p>1: Buck A enabled</p>

Register	Bit	Type	Label	Def	Description
0x5E BUCKB_CON T	7	R/W	(reserved)	0	
	6:5	R/W	VBUCKB_GPI	00	<p>Selects the GPI that specifies the target voltage of VBUCKB. This is VBUCKB_A on active to passive transition, VBUCKB_B on passive to active transition.</p> <p>Active high/low is controlled by GPIx_TYPE.</p> <p>00: Not controlled by GPIO</p> <p>01: GPIO1 controlled</p> <p>10: GPIO2 controlled</p> <p>11: GPIO4 controlled</p>
	4	R/W	VBUCKB_SEL	0	<p>Buck A voltage is selected from (ramping):</p> <p>0: VBUCKB_A</p> <p>1: VBUCKB_B</p>

Register	Bit	Type	Label	Def	Description
	3	R/W	BUCKB_PD_DIS	0	0: Enable pull-down resistor of Buck B when the buck is disabled 1: Disable pull-down resistor of Buck B when the buck is disabled
	2:1	R/W	BUCKB_GPI	00	GPIO enables the Buck B on passive to active state transition, disables the Buck B on active to passive state transition 00: Not controlled by GPIO 01: GPIO0 controlled 10: GPIO1 controlled 11: GPIO3 controlled
	0	R/W	BUCKB_EN	0	0: Buck B disabled 1: Buck B enabled

14.2.3 Register Page 1

Register	Bit	Type	Label	Def	Description
0x80 PAGE_CON	7	R/W	REVERT	0	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	0	2-WIRE multiple write mode 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	000	
	3:0	R/W	REG_PAGE	000	000: Selects Register 0x01 to 0x3F 001: Selects Register 0x81 to 0xCF 010: Selects Register 0x101 to 0x1CF >010: Reserved for production and test

14.2.3.1 Regulators Settings

Register	Bit	Type	Label	Def	Description
0xD0 BUCK_ILIM	7:4	R/W	BUCKB_ILIM	1001	Current limit per phase: 0000: 2000 mA 0001: 2200 mA 0010: 2400 mA continuing through... 1001: 3800 mA to... 1110: 4800 mA 1111: 5000 mA
	3:0	R/W	BUCKA_ILIM	1001	Current limit per phase: 0000: 2000 mA 0001: 2200 mA 0010: 2400 mA continuing through... 1001: 3800 mA to... 1110: 4800 mA 1111: 5000 mA

Register	Bit	Type	Label	Def	Description
0xD1 BUCKA_CONF	7:5	R/W	BUCKA_DOWN_CTRL	111	Buck A voltage ramping during power down 000: 1.25 mV/μs 001: 2.5 mV/μs 010: 5 mV/μs 011: 10 mV/μs 100: 20 mV/μs 101: 30 mV/μs 110: 40 mV/μs 111: no ramped power down
	4:2	R/W	BUCKA_UP_CTRL	100	Buck A voltage ramping during start up 000: 1.25 mV/μs 001: 2.5 mV/μs 010: 5 mV/μs 011: 10 mV/μs 100: 20 mV/μs (Note 1) 101: 30 mV/μs 110: 40 mV/μs 111: target voltage applied immediately (no soft start)
	1:0	R/W	BUCKA_MODE	10	00: Reserved 01: Reserved 10: Buck A always operates in PWM mode 11: Automatic mode

Note 1 Settings higher than 20 mV/μs may cause significant overshoot

Register	Bit	Type	Label	Def	Description
0xD2 BUCKB_CONF	7:5	R/W	BUCKB_DOWN_CTRL	111	Buck B voltage ramping during power down 000: 1.25 mV/μs 001: 2.5 mV/μs 010: 5 mV/μs 011: 10 mV/μs 100: 20 mV/μs 101: 30 mV/μs 110: 40 mV/μs 111: no ramped power down
	4:2	R/W	BUCKB_UP_CTRL	100	Buck B voltage ramping during start up 000: 1.25 mV/μs 001: 2.5 mV/μs 010: 5 mV/μs 011: 10 mV/μs 100: 20 mV/μs (Note 1) 101: 30 mV/μs 110: 40 mV/μs 111: target voltage applied immediately (no soft start)
	1:0	R/W	BUCKB_MODE	10	00: Reserved 01: Reserved 10: Buck B always operates in PWM mode 11: Automatic mode

Note 1 Settings higher than 20mV/μs may cause significant overshoot

Register	Bit	Type	Label	Def	Description
0xD3 BUCK_CONF	7:5	R/W	(reserved)	000	
	4	R/W	PH_SH_EN_B	1	Enable current dependant phase shedding in PWM for Buck B
	3	R/W	PH_SH_EN_A	1	Enable current dependant phase shedding in PWM for Buck A
	2	R/W	PHASE_SEL_B	1	Phase selection for Buck B in PWM 0: 1 phase is selected 1: 2 phases are selected
	1:0	R/W	PHASE_SEL_A	11	Phase selection for Buck A in PWM mode. Settings >01 apply only for DA9211 otherwise the number of phases is limited to max 2 00: 1 phase is selected 01: 2 phases are selected 10: 3 phases are selected (uneven 0/90/180 phase shift) 11: 4 phases are selected

Register	Bit	Type	Label	Def	Description
0xD5 VBUCKA_MAX	7	R/W	(reserved)	0	
	6:0	R	VBUCKA_MAX	0x7F	Sets the maximum voltage allowed for Buck A (OTP programmed, access only in test mode) 0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Def	Description
0xD6 VBUCKB_MAX	7	R/W	(reserved)	0	
	6:0	R	VBUCKB_MAX	0x7F	Sets the maximum voltage allowed for Buck B (OTP programmed, access only in test mode) 0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Def	Description
0xD7 VBUCKA_A	7	R/W	(reserved)	0	
	6:0	R/W	VBUCKA_A	0x46	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Def	Description
0xD8 VBUCKA_B	7	R/W	(reserved)	0	
	6:0	R/W	VBUCKA_B	0x46	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Def	Description
0xD9 VBUCKB_A	7	R/W	(reserved)	0	
	6:0	R/W	VBUCKB_A	0x46	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Def	Description
0xDA VBUCKB_B	7	R/W	(reserved)	0	
	6:0	R/W	VBUCKB_B	0x46	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

14.2.4 Register Page 2

Register	Bit	Type	Label	Def	Description
0x100 PAGE_CON	7	R/W	REVERT	0	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	0	2-WIRE multiple write mode 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	000	
	3:0	R/W	REG_PAGE	000	000: Selects Register 0x01 to 0x3F 001: Selects Register 0x81 to 0xCF 010: Selects Register 0x101 to 0x1CF >010: Reserved for production and test

14.2.4.1 Interface and OTP Settings (shared with DA9063)

Register	Bit	Type	Label	Def	Description
0x101 OTP_CONT	7:4	R/W	(reserved)	0000	
	3	R/W	PC_DONE	0	Asserted from Power Commander software after the emulated OTP read has finished, automatically cleared when leaving emulated OTP read
	2	R/W	OTP_APPS_RD	0	Reads on assertion application specific registers 0x105, 0x106, 0x143 to 0x149 and OTP_APPS_LOCK) from OTP
	1	R/W	(reserved)	0	
	0	R/W	OTP_TIM	0	OTP read timing: 0: normal read 1: marginal read (for OTP fuse verification)

Register	Bit	Type	Label	Def	Description
0x105 INTERFACE	7:4	R/W	IF_BASE_ADDR1	1101	4 MSB of 2-WIRE control interfaces base address XXXX0000 11010000 = 0xD0 write address of PM 2-WIRE interface (page 0 and 1) 11010001 = 0xD1 read address of PM 2-WIRE interface (page 0 and 1) 11010010 = 0xD2 write address of PM-2-WIRE interface (page 2 and 3) 11010011 = 0xD3 read address of PM-2-WIRE interface (page 2 and 3) Code '0000' is reserved for unprogrammed OTP (triggers start-up with hardware default interface address)
	3	R/W	R/W_POL	1	4-WIRE: Read/Write bit polarity 0: Host indicates reading access via R/W bit = '0' 1: Host indicates reading access via R/W bit = '1'
	2	R/W	CPHA	0	4-WIRE interface clock phase (see Table 13)
	1	R/W	CPOL	0	4-WIRE interface clock polarity 0: SK is low during idle 1: SK is high during idle
	0	R/W	nCS_POL	1	4-WIRE chip select polarity 0: nCS is low active 1: nCS is high active

Register	Bit	Type	Label	Def	Description
0x106 INTERFACE2	7	R/W Error! Bookmark not defined.	IF_TYPE	1	0: Power manager interface is 4-WIRE. Automatically configures GPIO3 and GPI4 as interface signals. The GPIO configuration is overruled. 1: Power manager interface is 2-WIRE
	6	R/W	PM_IF_HSM	0	Enables continuous high speed mode on 2-WIRE interface if asserted (no master code required)
	5	R/W	PM_IF_FMP	0	Enables 2-WIRE interface operating with fast mode+ timings if asserted
	4	R/W	PM_IF_V	0	0: Power manager interface in 2-WIRE mode is supplied from VDDCORE (4-WIRE always from VDDIO) 1: Power manager interface in 2-WIRE mode is supplied from VDDIO (4-WIRE always from VDDIO)
	0:3	R/W	(reserved)	0000	

14.2.4.2 OTP Fusing Registers

Register	Bit	Type	Label	Def	Description
0x140 OTP_CONT2	7	R/W	OTP_CONF_LOCK	0	0: Registers 0x54 to 0x5E and 0xD0 to 0xDA are not locked for OTP programming (should be selected for unmarked evaluation samples) 1: Registers 0x54 to 0x5E and 0xD0 to 0xDA are locked in OTP (no further fusing possible)
	6	R/W	OTP_APPS_LOCK	0	0: Registers 0x105, 0x106, 0x143 to 0x149 are not locked for OTP programming (should be selected for unmarked evaluation samples) 1: Registers 0x105, 0x106, 0x143 to 0x149 are locked in OTP (no further fusing possible)
	5:0	R/W	(reserved)	0000 00	

Register	Bit	Type	Label	Def	Description
0x141 OTP_ADDR	7:0	R/W	OTP_ADDR	0x00	OTP Array address

Register	Bit	Type	Label	Def	Description
0x142 OTP_DATA	7:0	R/W	OTP_DATA	0x00	OTP read/write data OTP_DATA written to OTP_ADDR selects the IC and accepts unlock sequence (1 + 3 bytes)

14.2.4.3 Application Configuration Settings

Register	Bit	Type	Label	Def	Description
0x143 CONFIG_A	7:5	R/W	(reserved)	000	
	4	R/W	2WIRE_TO	1	Enables automatic reset of 2-WIRE interface if the clock stays low for >35 ms 0: Disabled 1: Enabled
	3	R/W	GPI_V	0	GPIs are supplied from: 0: VDDCORE 1: VDDIO
	2	R/W	(reserved)	0	
	1	R/W	IRQ_TYPE	1	nIRQ output port is: 0: Push-pull 1: Open drain (requires external pull-up resistor)
	0	R/W	IRQ_LEVEL	0	nIRQ output port is: 0: Active low 1: Active high

Register	Bit	Type	Label	Def	Description
0x144 CONFIG_B	7	R/W	UVLO_IO_DIS	0	Disable the UVLO for the VDDIO rail and its comparator (suggested for rail voltages different to 1.8 V and to save quiescent current)
	6	R/W	PGB_DVC_MASK	0	Power-good configuration for Buck B 0: Power-good signal not masked during DVC transitions 1: Power-good signal masked during DVC transitions (keep previous status)
	5	R/W	PGA_DVC_MASK	0	Power-good configuration for Buck A 0: Power-good signal not masked during DVC transitions 1: Power-good signal masked during DVC transitions (keep previous status)
	4:3	R/W	OCB_MASK	00	Over Current configuration for Buck B 00: Event generation due to over current hit is always active during DVC transitions of the Buck converter 01: Event generation due to over current hit is masked during DVC transitions of the buck converter + 2 μ s extra masking at the end 10: Event generation due to over current hit is masked during DVC transitions of the buck converter + 10 μ s extra masking at the end 11: Event generation due to over current hit is masked during DVC transitions of the buck converter + 50 μ s extra masking at the end
	2:1	R/W	OCA_MASK	00	Over Current configuration for Buck A 00: Event generation due to over current hit is always active during DVC transitions of the buck converter 01: Event generation due to over current hit is masked during DVC transitions of the buck converter + 2 μ s extra masking at the end 10: Event generation due to over current hit is masked during DVC transitions of the buck converter + 10 μ s extra masking at the end 11: Event generation due to over current hit is masked during DVC transitions of the buck converter + 50 μ s extra masking at the end
	0	R/W	(reserved)	0	

Register	Bit	Type	Label	Def	Description
0x145 CONFIG_C	7:5	R/W	(reserved)	000	
	4	R/W	GPI4_PUPD	0	0: GPI: pull-down resistor disabled 1: GPI: pull-down resistor enabled
	3	R/W	GPIO3_PUPD	0	0: GPI: pull-down resistor disabled GPO (open drain): pull up resistor disabled (external pull-up resistor) 1: GPI: pull-down resistor enabled GPO (open drain): pull up resistor
	2	R/W	GPIO2_PUPD	0	0: GPI: pull-down resistor disabled GPO (open drain): pull up resistor disabled (external pull-up resistor) 1: GPI: pull-down resistor enabled GPO (open drain): pull up resistor enabled
	1	R/W	GPI1_PUPD	0	0: GPI: pull-down resistor disabled 1: GPI: pull-down resistor enabled
	0	R/W	GPI0_PUPD	0	0: GPI: pull-down resistor disabled 1: GPI: pull-down resistor enabled

Register	Bit	Type	Label	Def	Description
0x146 CONFIG_D	7:6	R/W	BUCKB_PG_SEL	00	Selection of the PG signal for Buck B 00: none 01: GPO2 10: GPO3 11: reserved
	5:4	R/W	BUCKA_PG_SEL	00	Selection of the PG signal for Buck A 00: none 01: GPO2 10: GPO3 11: reserved
	3:2	R/W	READYB_CONF	00	Selection of the READY signal for Buck B 00: none 01: GPO2 10: GPO3 11: reserved
	1:0	R/W	READYA_CONF	00	Selection of the READY signal for Buck A 00: none 01: GPO2 10: GPO3 11: reserved

Register	Bit	Type	Label	Def	Description
0x147 CONFIG_E	7	R/W	STAND_ALONE	0	0: DA9211 and DA9212 is used as companion IC to DA9063 or DA9063-compliant 1: DA9211 and DA9212 is stand alone or as companion IC with another PMU not DA9063-compliant
	6	R/W	(reserved)	0	
	5:3	R/W	(reserved)	000	
	2:0	R/W	OSC_TUNE	000	Tune the main 6 MHz oscillator frequency: 000: no tune 001: +180 kHz 010: +360 kHz 011: +540 kHz 100: +720 kHz 101: 900 kHz 110: 1080 kHz 111: 1260 kHz

Register	Bit	Type	Label	Def	Description
0x148 CONFIG_F	7:4	R/W	IF_BASE_ADDR2	1101	If a second I2C address is to be selected on ADR_SEL_CONF, this field configures the second address. 4 MSB of 2-WIRE control interfaces base address XXXX0000 11010000 = 0xD0 write address of PM 2-WIRE interface (page 0 and 1) 11010001 = 0xD1 read address of PM 2-WIRE interface (page 0 and 1) 11010010 = 0xD2 write address of PM-2-WIRE interface (page 2 and 3) 11010011 = 0xD3 read address of PM-2-WIRE interface (page 2 and 3) Code '0000' is reserved for unprogrammed OTP (triggers start-up with hardware default interface address)
	3:2	R	(reserved)	00	
	1	R/W	ADDR_SEL_CONF	00	Selects the GPI for the alternative I2C address selection: 00: none 01: GPI0 10: GPI1 11: GPI4

15. Application Information

The following recommended components are examples selected from requirements of a typical application.

15.1 Capacitor Selection

Ceramic capacitors are used as bypass capacitors at all VDD and output rails. When selecting a capacitor, especially for types with high capacitance at smallest physical dimension, the DC bias characteristic has to be taken into account.

Table 17: Recommended capacitor types

Application	Value	Size	Temp Char	Tol	V-Rate	Type
VOUT output bypass	4x 22 μ F	0402	X5R +/-15%	+/-20%	4 V	Semco CL05A226MR5NZNC
	4x 10 μ F	0402	X5R +/-15%	+/-20%	10 V	Semco CL05A106MP5NUNC
VDDx bypass	4x 10 μ F	0603	X5R +/-15%	+/-20%	6.3 V	Murata GRM188R60J106ME84
VSYS bypass	1x 1 μ F	0402	X5R +/-15%	+/-10%	10 V	Murata GRM155R61A105KE15#
VDDIO bypass	1x 100 nF	01005	X5R +/-15%	\pm 10%	6.3 V	Semco CL02A104KQ2NNN

15.2 Inductor Selection

Inductors should be selected based upon the following parameters:

- Rated max. current: usually a coil provides two current limits: The Isat specifies the maximum current at which the inductance drops by 30% of the nominal value. The Imax is defined by the maximum power dissipation and is applied to the effective current.
- DC resistance: critical for the converter efficiency and should therefore be minimised.
- Inductance: given by converter electrical characteristics; 0.47 μ H for each DA9211 and DA9212 phase.

Table 18: Recommended inductor types

Application	Value	Size	I _{max} (dc)	I _{sat}	Tol	DC res	Type
BUCK	4x 0.47 µH	2.0x1.6x 1.0 mm	3.6 A	4.1 A	+/-20%	32 mΩ	TOKO DFE201610P-H-R47M
	4x 0.47 µH	2.0x1.6x 1.2 mm	3.8 A	4.2 A	+/-30%	40 mΩ	TOKO DFE201612C1286AS-H-R47M
	4x 0.47 µH	2.5x2.0x 1.0 mm	3.6 A	3.9 A	+/-20%	35 mΩ	TOKO DFE252010C1269AS-H-R47M
	4x 0.47 µH	2.5x2.0x 1.2 mm	4.4 A	4.7 A	+/-20%	29 mΩ	TOKO DFE252012C1239AS-H-R47M
	4x 0.47 µH	2.0x1.6x 1.0 mm	2.7 A	3.5 A	+/-20%	38 mΩ	TDK TFM201610A R47M
	4x 0.47 µH	2.5x2.0x 1.0 mm	2.8 A	4.5 A	+/-20%	34 mΩ	TDK TFM252010A R47M
	4x 0.47 µH	2.0x1.6x 1.0mm	2.7 A	3.56 A	+/-20%	38 mΩ	Cyntec PIFE20161T
	4x 0.47 µH	2.5x2.0x 1.0mm	3.5 A	4.5 A	+/-20%	34 mΩ	Cyntec PIFE25201T
	4x 0.47 µH	2.5x2.0x 1.2mm	4.5 A	5.0 A	+/-20%	23 mΩ	Cyntec PIFE25201B
	4x 0.47 µH	2.5x2.0x 1.2mm	3.7 A	3.9 A	+/-20%	25 mΩ	Cyntec PST25201B
	4x 0.47 µH	2.0x2.0x 1.2mm	2.8 A	4.2 A	+/-30%	30 mΩ	Taiyo Yuden MDMK2020T R47M
	4x 0.47 µH	2.5x2.0x 1.2mm	3.9 A	4.8 A	+/-20%	30 mΩ	Taiyo Yuden MAMK2520T R47M
	4x 0.47 µH	2.0x1.6x 1.0mm	3.2 A	3.6 A	+/-20%	32 mΩ	Murata LQM2MPNR47MGH
	4x 0.47 µH	4x4x1.2 mm	8.7 A	6.7 A	+/-20%	14 mΩ	Coilcraft XFL4012-471ME

16. Package information

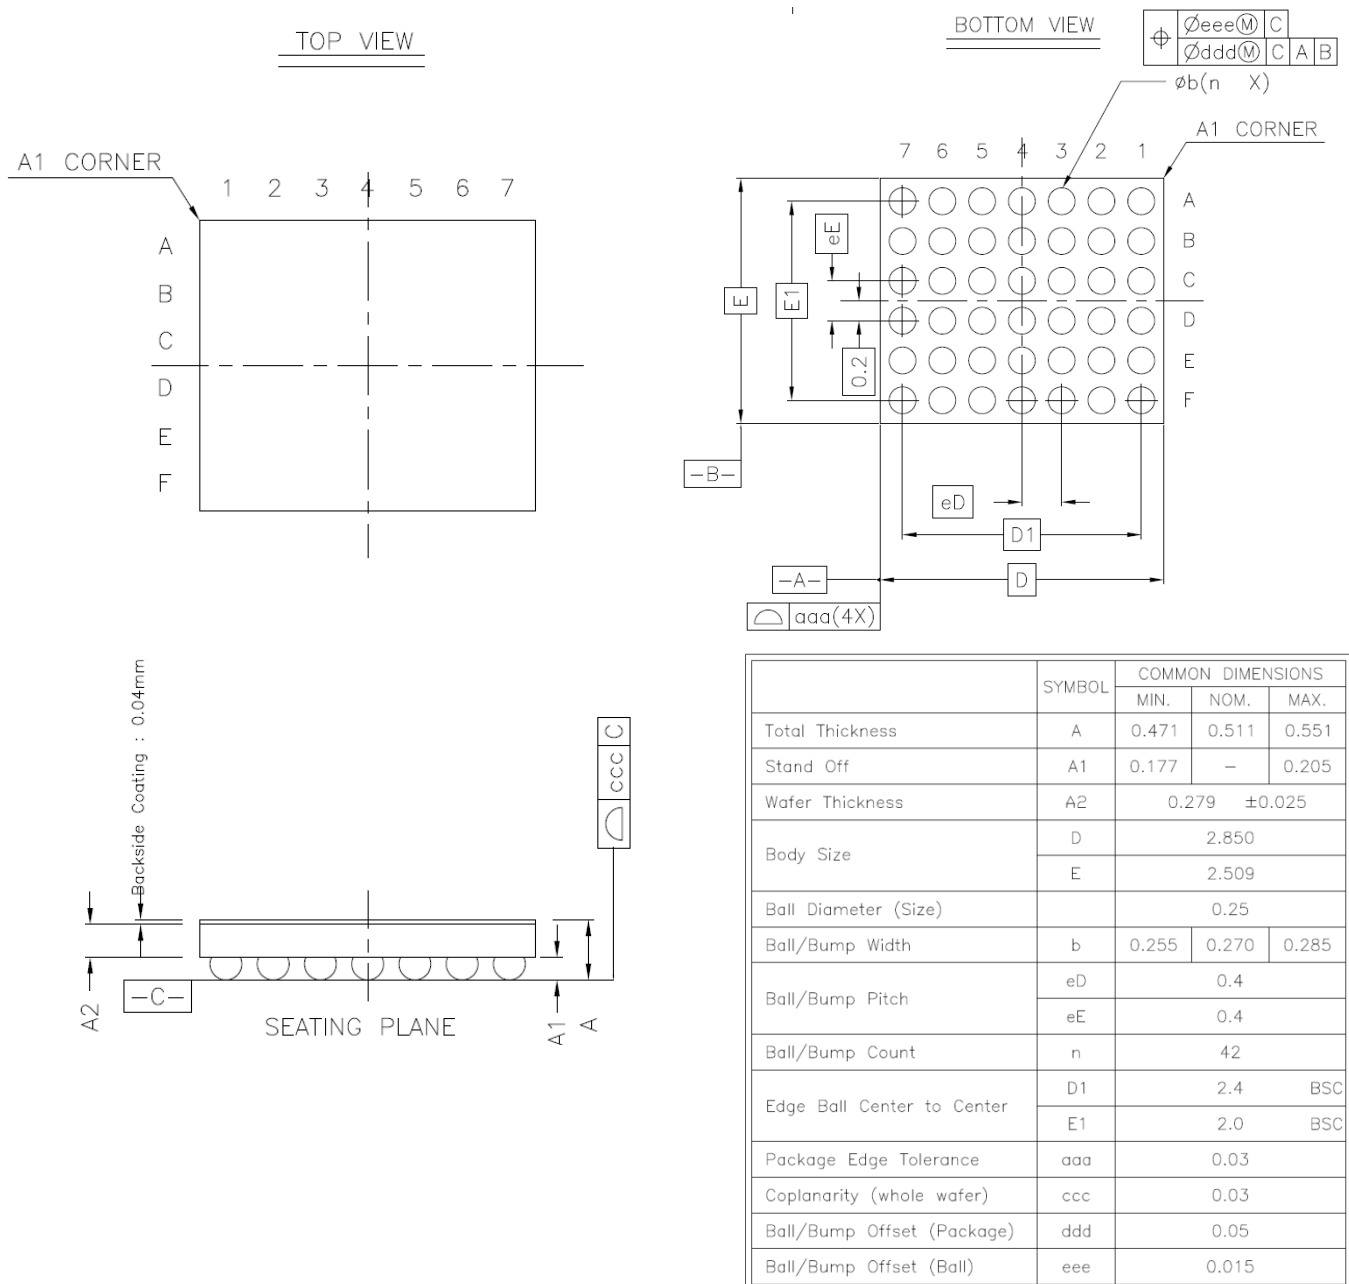


Figure 49: DA9211/12 WL-CSP package outline drawing

Disclaimer

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including without limitation the specification and the design of the related semiconductor products, software and applications.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Customer notes that nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document are subject to Dialog Semiconductor's [Standard Terms and Conditions of Sale](#), unless otherwise stated.

© Dialog Semiconductor GmbH. All rights reserved.

RoHS compliance

Dialog Semiconductor complies to Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 concerning Restriction of Hazardous Substances (RoHS). Dialog Semiconductor's statement on RoHS can be found on the customer portal <https://support.diasemi.com/>. RoHS certificates from our suppliers are available on request.

Contacting Dialog Semiconductor

Germany Headquarters

Dialog Semiconductor GmbH
Phone: +49 7021 805-0

United Kingdom

Dialog Semiconductor (UK) Ltd
Phone: +44 1793 757700

The Netherlands

Dialog Semiconductor B.V.
Phone: +31 73 640 88 22

Email:

enquiry@diasemi.com

North America

Dialog Semiconductor Inc.
Phone: +1 408 727 3200

Japan

Dialog Semiconductor K. K.
Phone: +81 3 5425 4567

Taiwan

Dialog Semiconductor Taiwan
Phone: +886 226 580 388

Web site:

www.dialog-semiconductor.com

Singapore

Dialog Semiconductor Singapore
Phone: +65 64845419

China

Dialog Semiconductor China
Phone: +852 2607 4271

Korea

Dialog Semiconductor Korea
Phone: +82 2 569 2301



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.