

## Low Voltage Video Amplifier with Y/C MIX and Filter

### ■ GENERAL DESCRIPTION

NJM2567 is a low voltage operating video amplifier included LPF,BPF In Y and C system.

Output with 75ohm driver optimize the TV monitor system.

The NJM2567 includes power saving circuit, suitable for portable video Application, camcorder and others.

### ■ PACKAGE OUTLINE




NJM2567V

### ■ FEATURES


- Operating Voltage 2.8 to 5.5V
- Internal 6dB Amp. and 75ohm Driver
- Internal LPF(Y),BPF(C)
- Bipolar technology
- Package Outline SSOP14

### ■ PIN CONFIGURATION



- |               |          |
|---------------|----------|
| 1. V+1        | 8. Cout  |
| 2. NC         | 9. GND2  |
| 3. Yin        | 10. Vsag |
| 4. Vref       | 11. Vout |
| 5. Cin        | 12. V+2  |
| 6. GND1       | 13. Ysag |
| 7. Power Save | 14. Yout |

### ■ BLOCK DIAGLAM

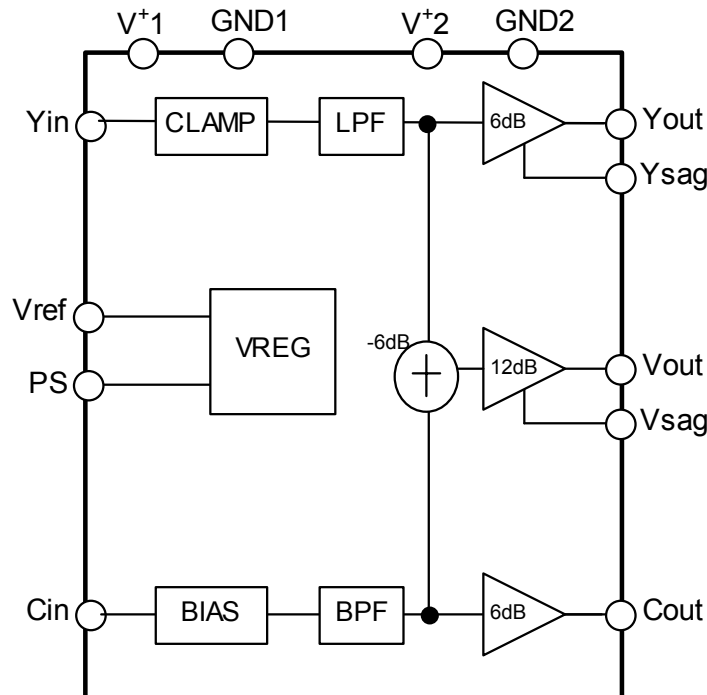

# NJM2567

---

## ■ ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	7.0	V
Power Dissipation	P <sub>D</sub>	300	mW
Operating Temperature Range	T <sub>opr</sub>	-40 to +85	°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +125	°C

## ■ RECOMMENDED OPEARATING CONDITION(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	MIN.	TYP.	MAX.	UNIT
Operating Voltage 1	Vopr1	V <sup>+</sup> 1	2.8	-	5.5	V
Operating Voltage 2	Vopr2	V <sup>+</sup> 2	2.8	-	5.5	V

**■ ELECTRICAL CHARACTERISTICS** ( $V^+1=V^+2=3V$ , Powersave=3V,  $R_L=150\Omega$ ,  $T_a=25^\circ C$  at non-designation)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Circuit 1	$I_{CC1}$	$V^+1=5.0V$ , No signal	-	12.0	16.0	mA
Operating Circuit 2	$I_{CC2}$	$V^+2=5.0V$ , No signal	-	10.0	15.0	mA
Operating Circuit 1 at Power Save	$I_{save1}$	$V^+1=5.0V$ , Power Save Mode	-	40	80	$\mu A$
Operating Circuit 2 at Power Save	$I_{save2}$	$V^+2=5.0V$ , Power Save Mode	-	0	5	$\mu A$
Voltage Gain (Y Signal)	$G_{vy}$	$Y_{in}=100kHz$ , 1.0Vpp Input Sin Signal	6.1	6.5	6.9	dB
Voltage Gain (C Signal)	$G_{vc}$	$Y_{in}=4.43MHz$ , 0.3Vpp Input Sin Signal	6.1	6.5	6.9	dB
Voltage Gain (V Signal)	$G_{vv}$	$Y_{in}=100kHz$ , 1.0Vpp Input Sin Signal	6.1	6.5	6.9	dB
Frequency Characteristics	$G_{fy1}$	$Y_{in}=6MHz/100kHz$ , 1.0Vpp Input Sin Signal	-0.5	0	+0.5	dB
	$G_{fy2}$	$Y_{in}=20MHz/100kHz$ , 1.0Vpp Input Sin Signal	-	-25	-	
	$G_{fc1}$	$C_{in}=\pm 1MHz/4.43MHz$ , 0.3Vpp Input Sin Signal	-0.5	0	+0.5	
	$G_{fc2}$	$C_{in}=20MHz/4.43MHz$ 0.3Vpp Input Sin Signal	-	-25	-	
Group Delay Characteristic (Y Signal)	$T_{dY}$	$Y_{in}=4.43MHz$ , Sin Signal	-	60	-	ns
Group Delay Characteristic (C Signal)	$T_{dC}$	$C_{in}=4.43MHz$ , Sin Signal	-	60	-	ns
Maximum Output Voltage Swing (Y Signal)	$V_{oym}$	$Y_{in}=100kHz$ , Sin Signal, THD=1%, $R_L=75\Omega$	1.1	1.2	-	Vp-p
Maximum Output Voltage Swing (C Signal)	$V_{ocm}$	$C_{in}=4.43MHz$ , Sin Signal, THD=1%, $R_L=75\Omega$	0.7	1.1	-	Vp-p
Maximum Output Voltage Swing (V Signal)	$V_{ovm}$	$Y_{in}=100kHz$ , Sin Signal, THD=1%, $R_L=75\Omega$	1.1	1.2	-	Vp-p
Differential Gain(Y Signal)	$DG_Y$	$Y_{in}=1.0V_{pp}$ , 10Step video signal, measure the $Y_{out}$ .	-	0.3	-	%
Differential Phase(Y Signal)	$DP_Y$	$Y_{in}=1.0V_{pp}$ , 10Step video signal, measure the $Y_{out}$ .	-	0.3	-	deg
Differential Gain(V Signal)	$DG_V$	$Y_{in}=1.0V_{pp}$ , $C_{in}=0.3V_{pp}$ , 10Step video signal, measure the $V_{out}$ .	-	0.3	-	%
Differential Phase(V Signal)	$DP_V$	$Y_{in}=1.0V_{pp}$ , $C_{in}=0.3V_{pp}$ 10Step video signal, measure the $V_{out}$ .	-	0.3	-	deg
SW Change Voltage High Level for Power Save	$V_{CH}$	Active	1.4	-	$V^+$	V
SW Change Voltage Low Level for Power Save	$V_{CL}$	Non-active	0	-	0.6	V

# NJM2567


## ■ ELECTRICAL CHARACTERISTICS (V<sup>+</sup>1= V<sup>+</sup>2=3V, Powersave=3V, R<sub>L</sub>=150Ω, Ta=25°C at non-designation)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Crosstalk 1(Yin to Cout)	CTyc	Yin to Cout=20log(Cout/Yout) Yin=4.43MHz, 1.0Vpp Sin Signal, Cin=AC GND	-	-50	-	dB
Crosstalk 2(Cin to Yout)	CTcy	Cin to Yout=20log(Yout/Cout) Cin=4.43MHz, 0.3Vpp Sin Signal, Yin=AC GND	-	-50	-	dB
S/N1(Y Signal)	SNy	Yin=100% White Video Signal, R <sub>L</sub> =75Ω at Yout Bandwidth 100kHz to 6MHz	-	60	-	dB
S/N2(C Signal)	SNc1	Cin=100% Red Field Video Signal, R <sub>L</sub> =75Ω at Cout, AM Noise Bandwidth 100kHz to 500kHz	-	60	-	dB
S/N3(C Signal)	SNc2	Cin=100% Red Field Video Signal, R <sub>L</sub> =75Ω at Cout, PM Noise Bandwidth 100kHz to 500kHz	-	60	-	dB
S/N4 (V Signal)	SNv	Yin=100% White Video Signal, R <sub>L</sub> =75Ω at Vout Bandwidth 100kHz to 6MHz	-	60	-	dB
2nd. Distortion 1 (Y Signal)	Hy	Yin=1MHz, 1.0Vpp Input Sin Signal	-	-50	-	dB
2nd. Distortion 2 (C Signal)	Hc	Cin=4.43MHz, 0.3Vpp Input Sin Signal	-	-50	-	dB
2nd. Distortion 3 (V Signal)	Hv	Yin=1MHz, 1.0Vpp Input Sin Signal	-	-50	-	dB

## ■ CONTROL TERMINAL

PARAMETER	CONTROL	NOTES
Power Save	H	Power Save: OFF
	L	Power Save: ON
	OPEN	Power Save: ON


■ TEST CIRCUIT

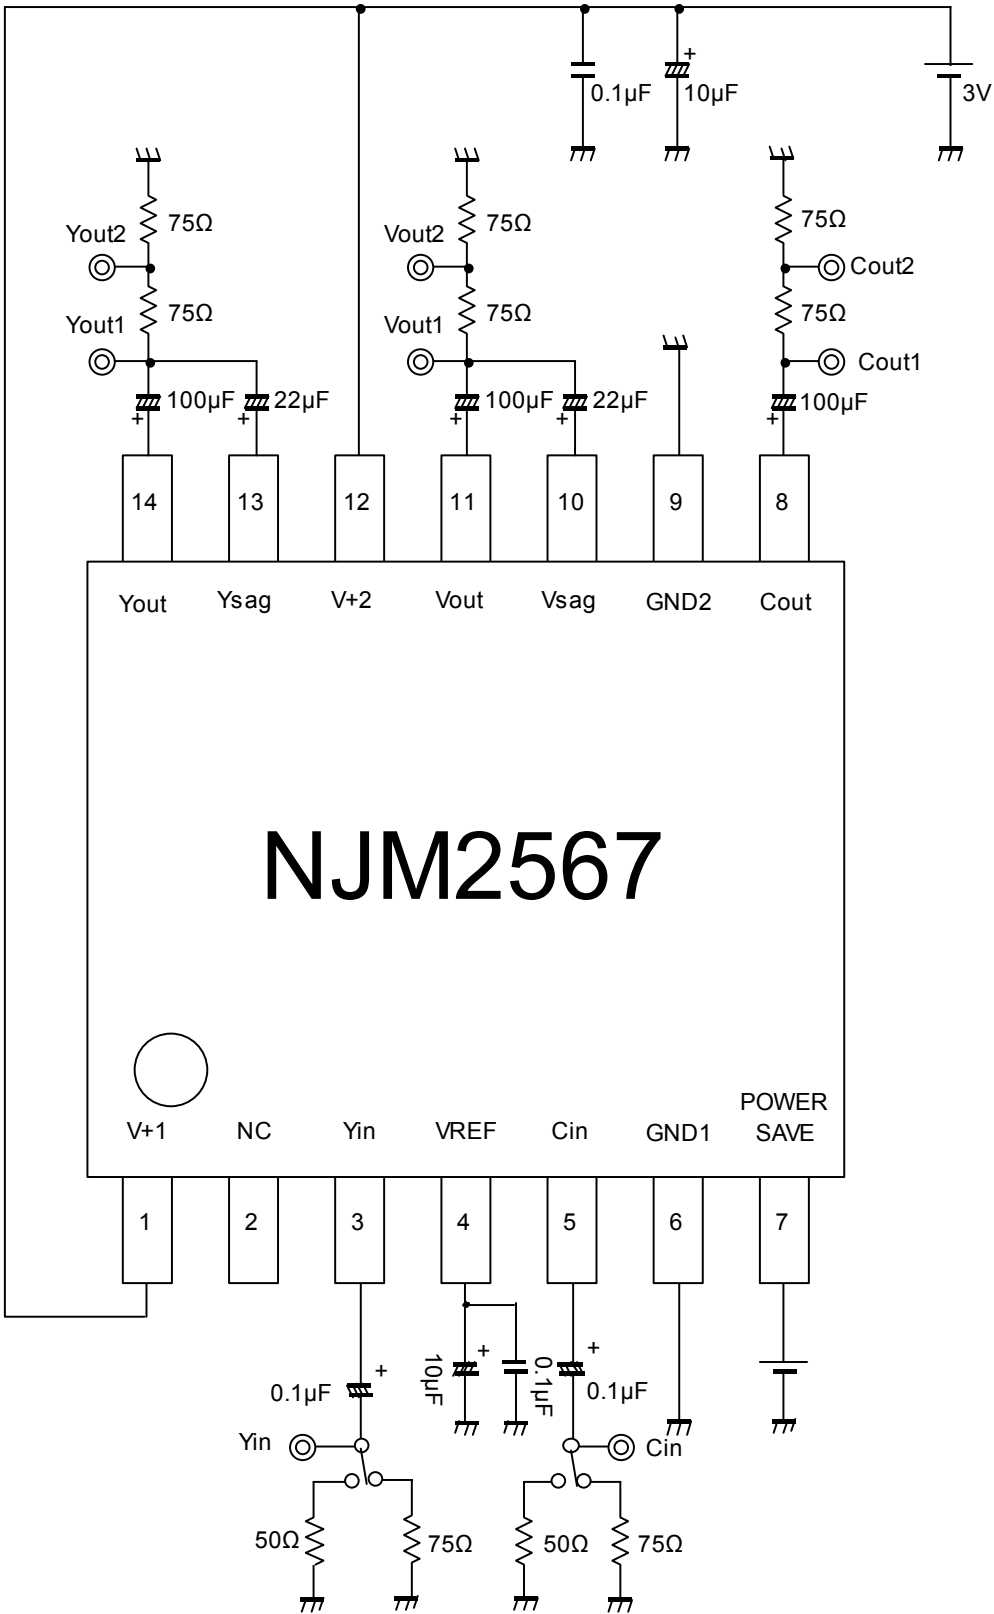


# NJM2567

## APPLICATION CIRCUIT

### (1) Standard circuit

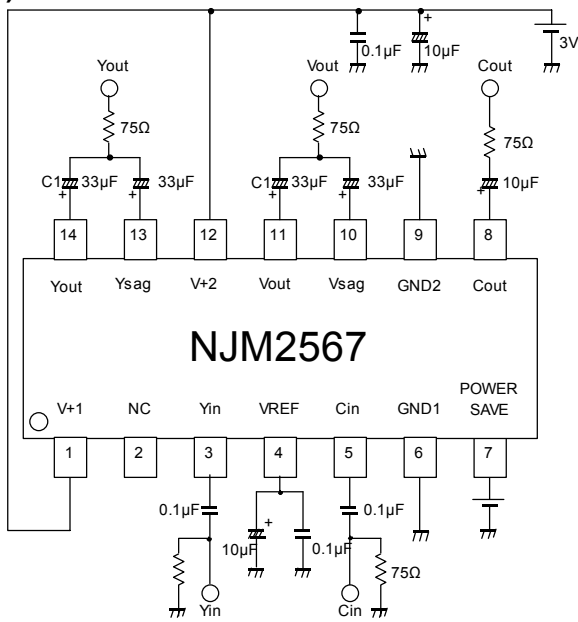

### (2) SAG correction unused circuit

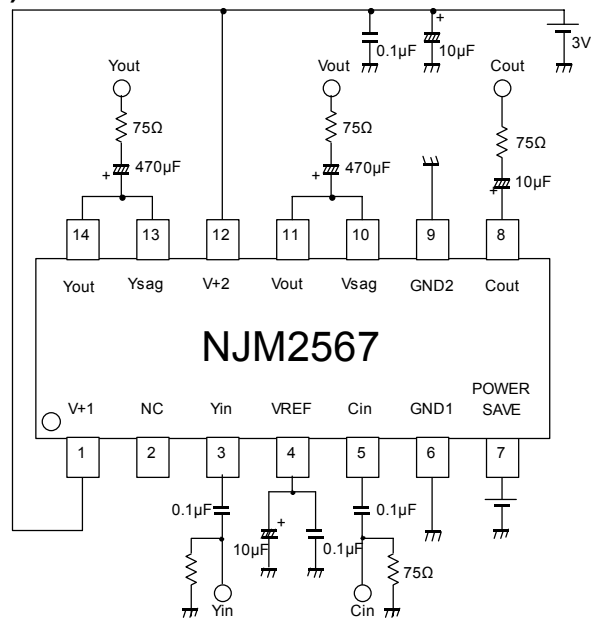

### (1) Standard circuit

The SAG correction reduces output coupling capacitor values.

The capacitor of C1 (33µF) is recommended for the portable application.

However, the 33µF capacitor may deteriorate SAG, and lose synchronization by luminance fluctuation.

Adjust the C1 value, checking the waveform containing a lot of low frequency components like a bounce waveform (In case of worst condition). Change the capacitor of C1 into a large value to improve SAG.

### (2) SAG correction unused circuit

Cancel the SAG correction to improve lost synchronization.

Connect the coupling capacitor after connecting the Vout pin and Vsag pin. The recommended value is 470µF or more.

## ■ TERMINAL DESCRIPTION

Pin No.	SYMBOL	EQUIVALENT CIRCUIT
3	Yin	
4	Vref	
5	Cin	
7	Power save	
8	Cin	
10 11 13 14	Vsag Vout Ysag Yout	


## APPLICATION

### ◆ SAG correction circuit


SAG correction circuit is a circuit to correct for low-frequency attenuation by high-pass filter consisting of the output coupling capacitance and load resistance. Low-frequency attenuation raises the sag in the vertical period of the video signal.

Capacitor for  $V_{sag}$  ( $C_{sag}$ ) is connected to the negative feedback of the amplifier. This  $C_{sag}$  increase the low frequency gain to correct for the attenuation of low frequency gain.





Example SAG collection circuit

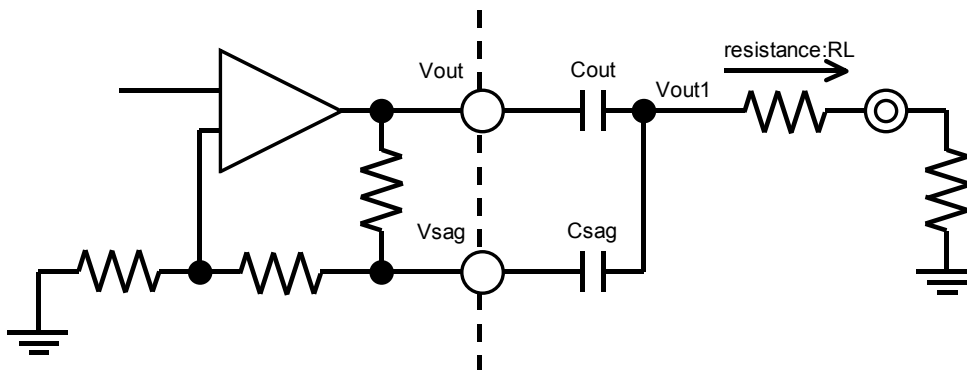

Example of not using sag compensation circuit

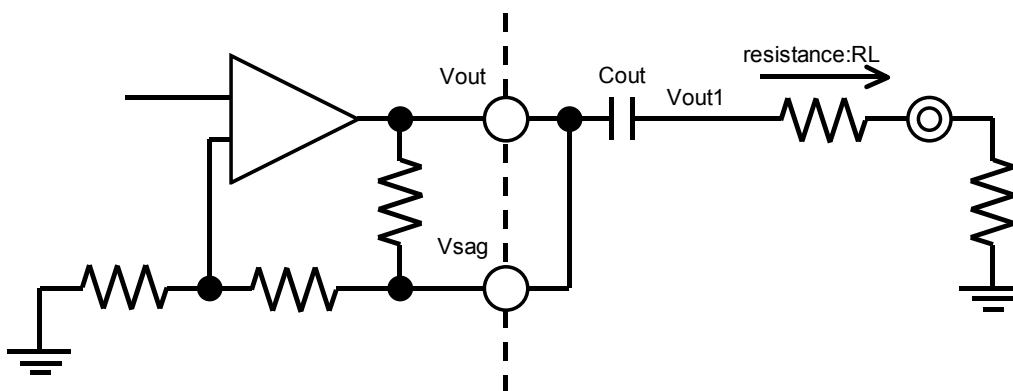


Waveform of Vout terminal and Vout1 terminal

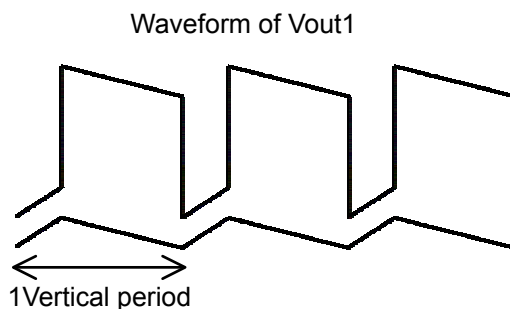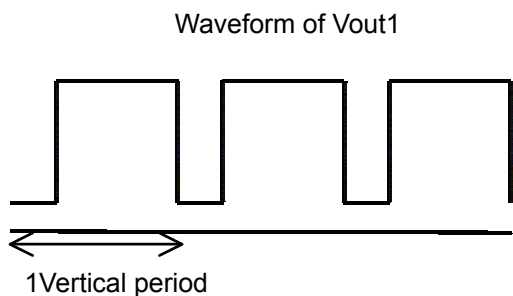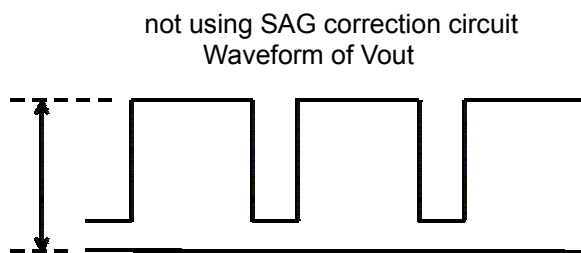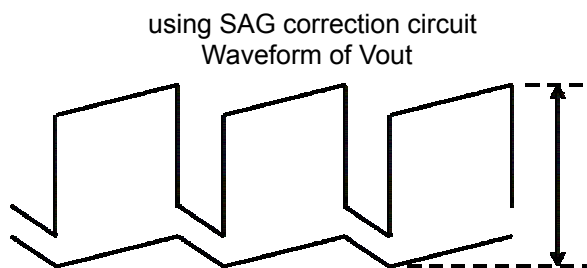



SAG correction circuit generates a low frequency component signal amplified to Vout terminal. Changes of the luminance signal will be low-frequency components, if you want to output a large signal luminance changes. Therefore, generate correction signal of change of a luminance signal to Vout pin. At this time, signal is over the dynamic range of Vout pin. This may cause a lack of sync signal, and waveform distortion.

Please see diagram below (green waveform), if you want to output large changes of a signal luminance, such as 100% white video signal and black signal. Thus, output signal exceed dynamic range of Vout pin and may be the signal lack.

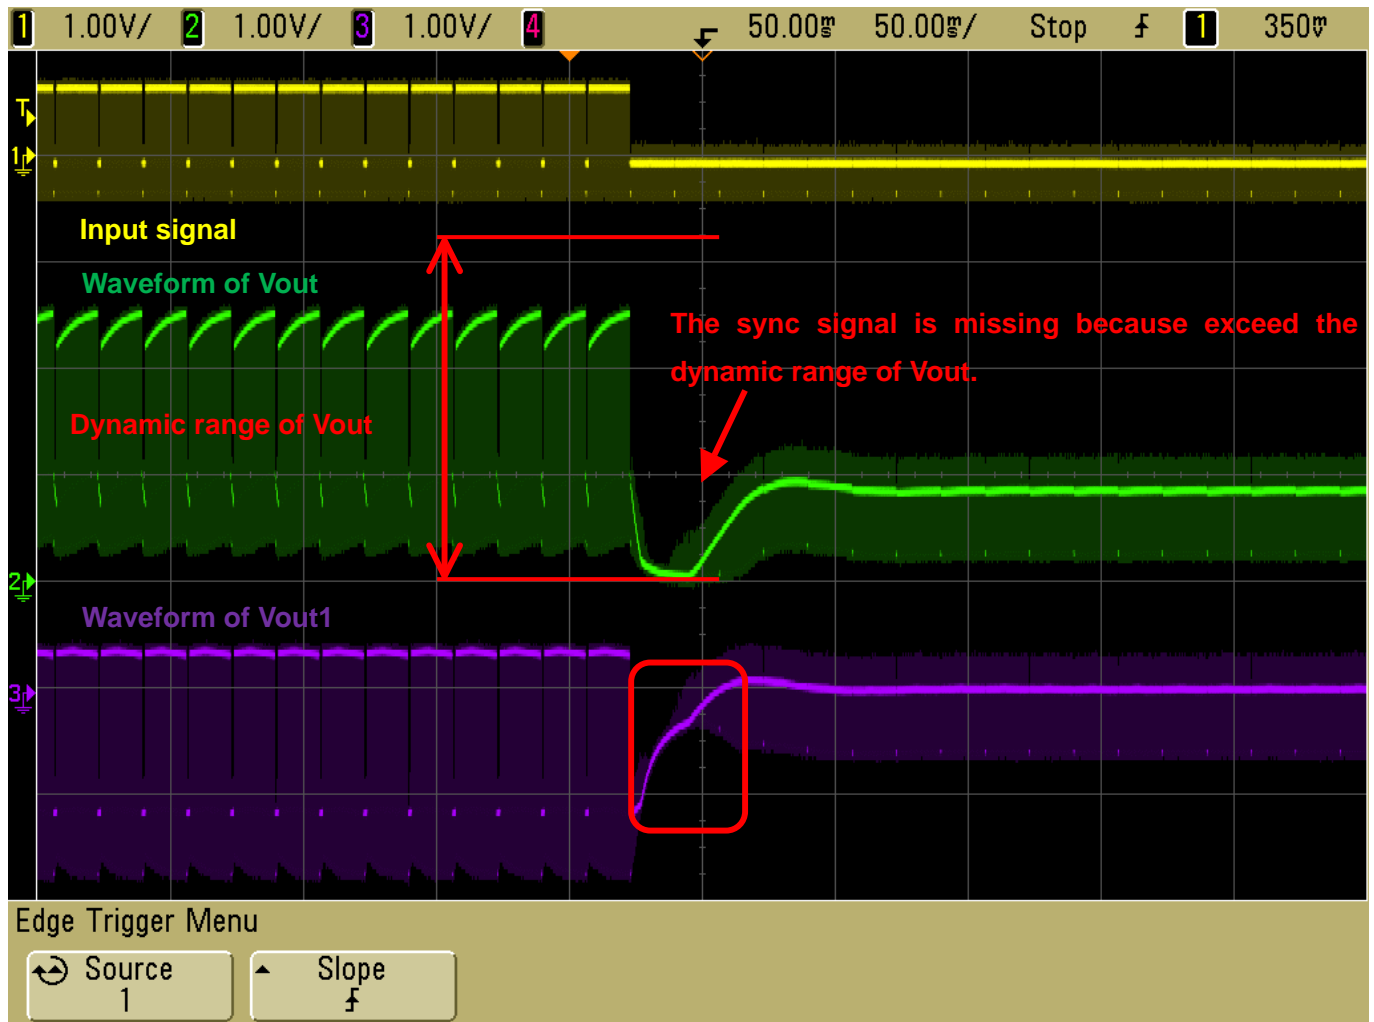

### < Countermeasure for waveform distortion >

1. Please using small value the Sag compensation capacitor (VSAG).

It can ensure the dynamic range by using small value the capacitor (VSAG). It because of low-frequency variation of Vout pin is smaller. However, the output (VOUT) must be use large capacitor for this reason sag characteristics become exacerbated.

2. Please do not use the sag correction circuit.


Signal can output within dynamic range for reason it does not change the DC level of the output terminal.

However, the output (VOUT) must be use large capacitor for this reason sag characteristics become exacerbated.

< Dual drive at using SAG correction circuit >

Using sag correction circuit at dual drive circuit is below. Dual drives are less load resistance. Thus, the cut-off frequency of HPF that is composed of the output capacitor and load resistance will be small. Therefore, the sag characteristics deteriorate.

Please size up to the output capacitor (Vout) for not to deteriorate the sag characteristics.

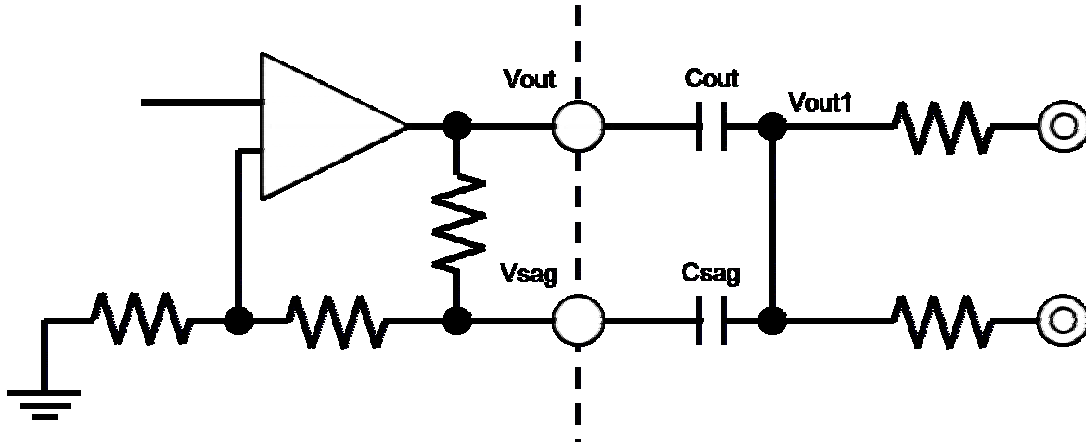


< Dual drive at not using SAG correction circuit >

We recommended two-example dual drive circuit with not use sag correction circuit. Please change the configuration to be used according to the situation. Please configure to meet the following conditions. Then you can adjust the characteristics of each configuration.


$$C_{out} = C_{out1} + C_{out2}$$

$$C_{out1} = C_{out2}$$

(A) In case of using one output capacitor

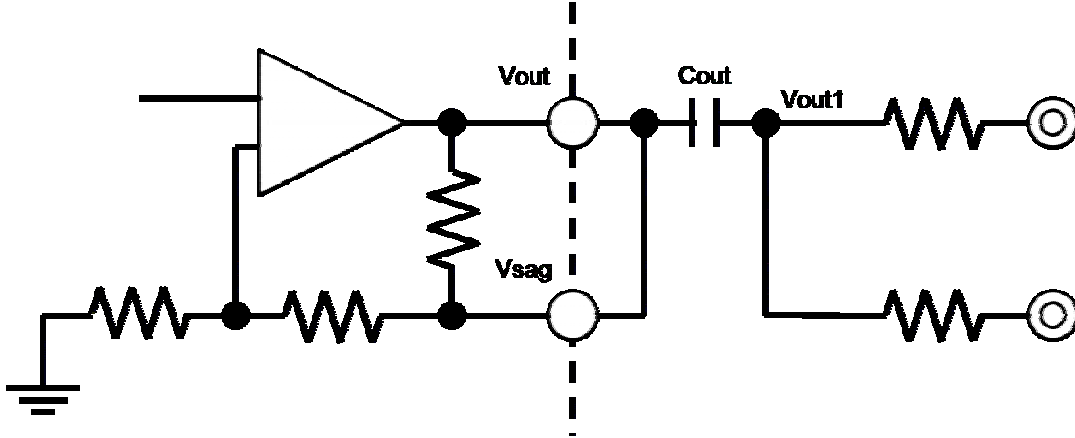


(B) In case of using two output capacitors

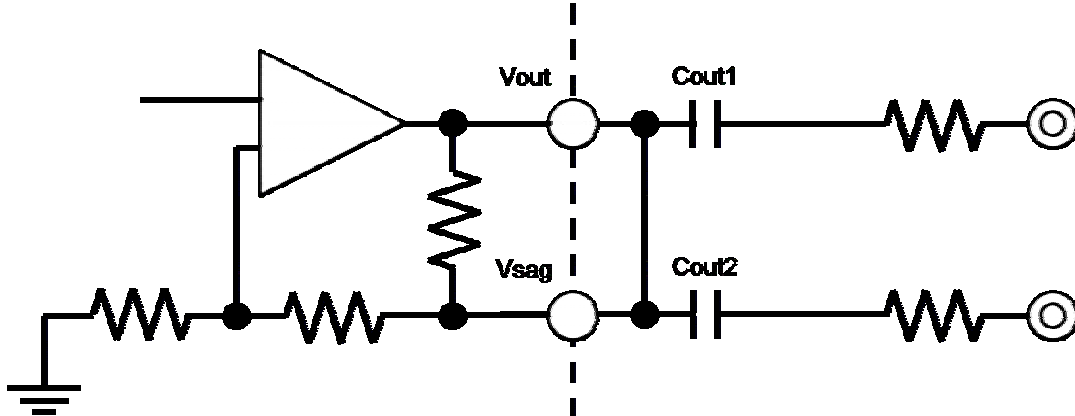

< Using SAG correction circuit >


Input signal: bounce signal (IRE0%, IRE100%, 30Hz), resistance=150Ω

Waveform: yellow: input signal, green: Vout signal, purple: Vout1signal

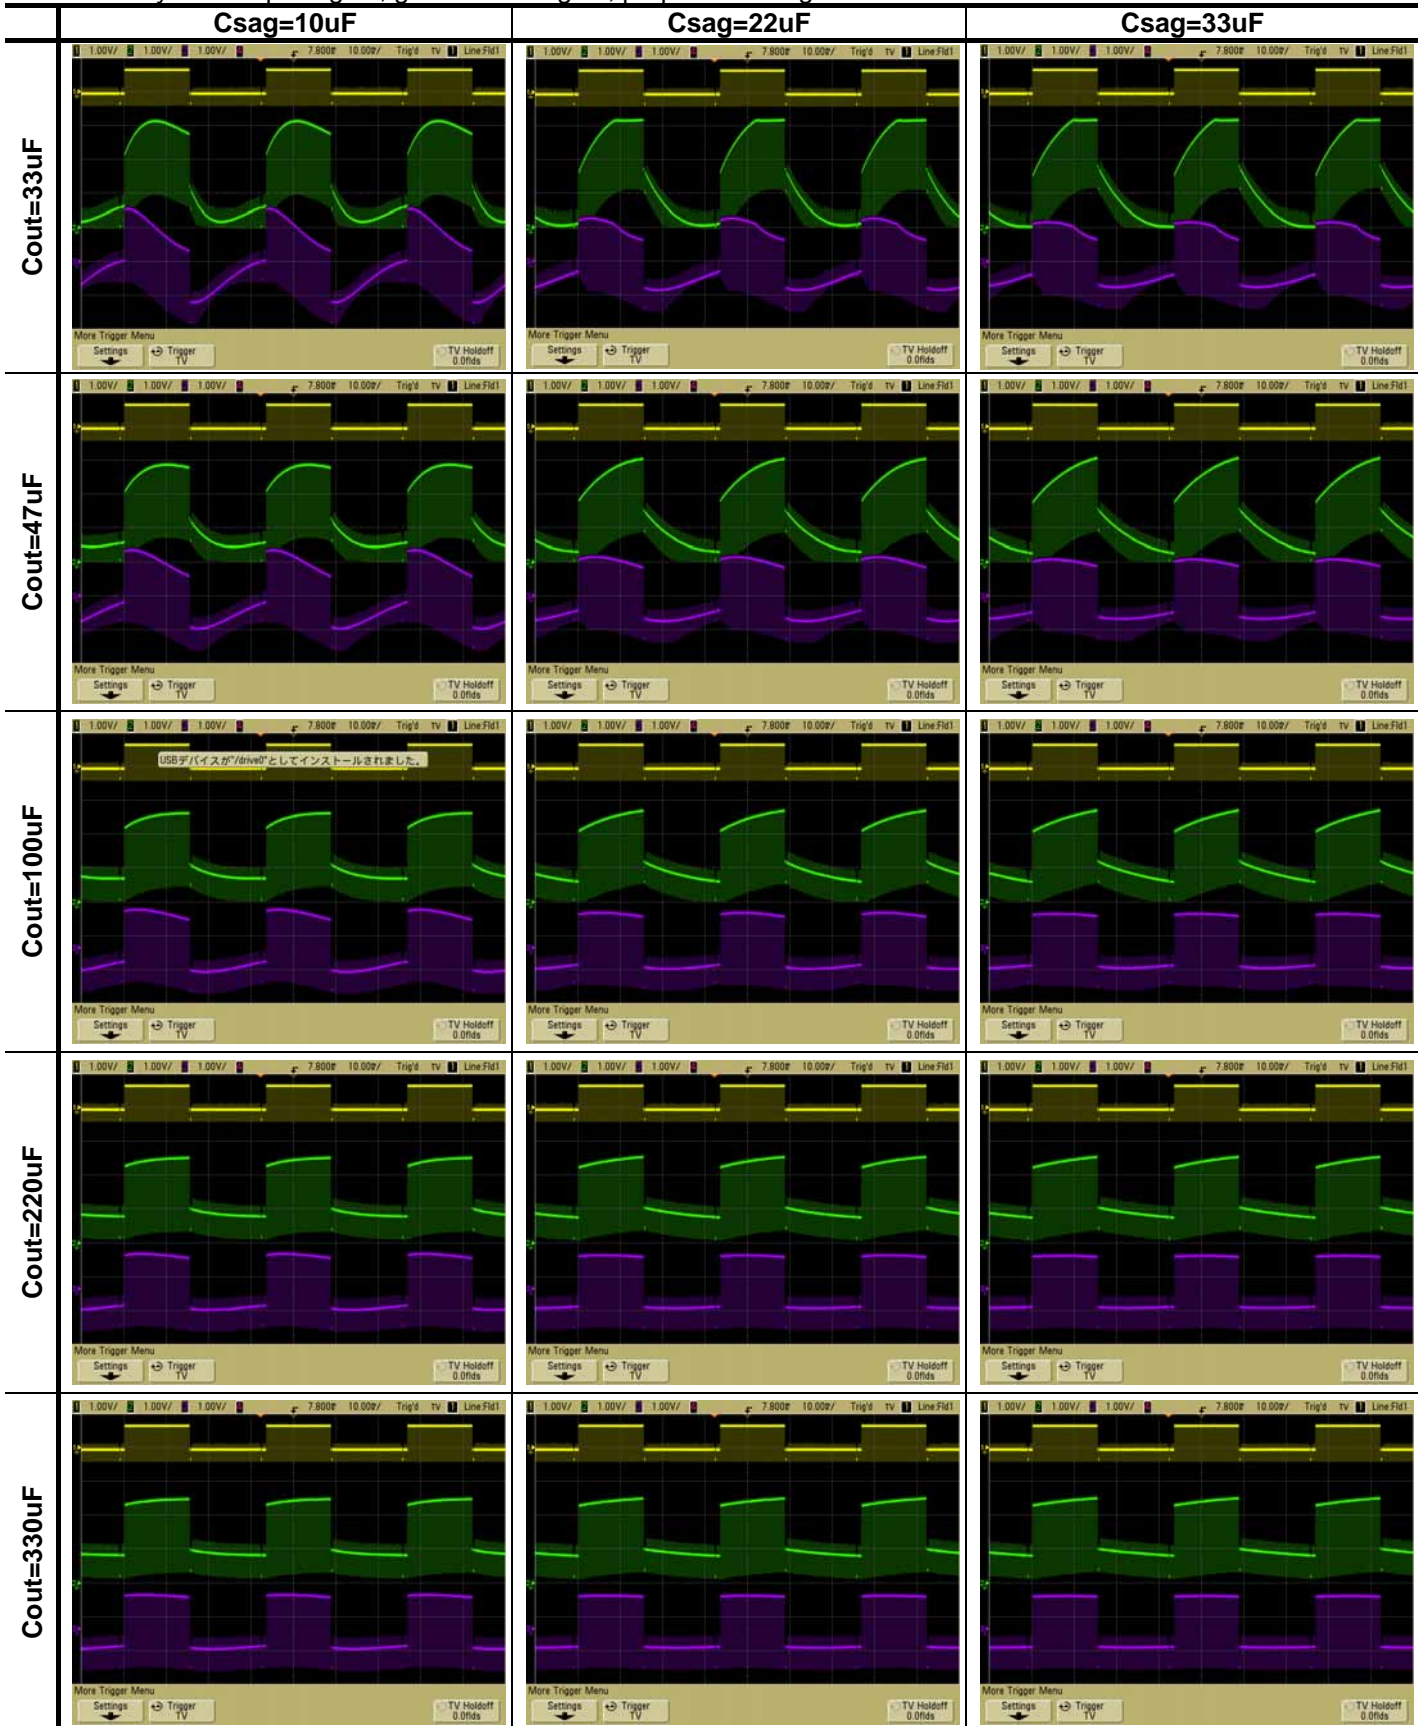

# NJM2567


Input signal: bounce signal (IRE0%, IRE100%, 30Hz), resistance=150Ω  
 Waveform: yellow: input signal, green: Vout signal, purple: Vout1signal

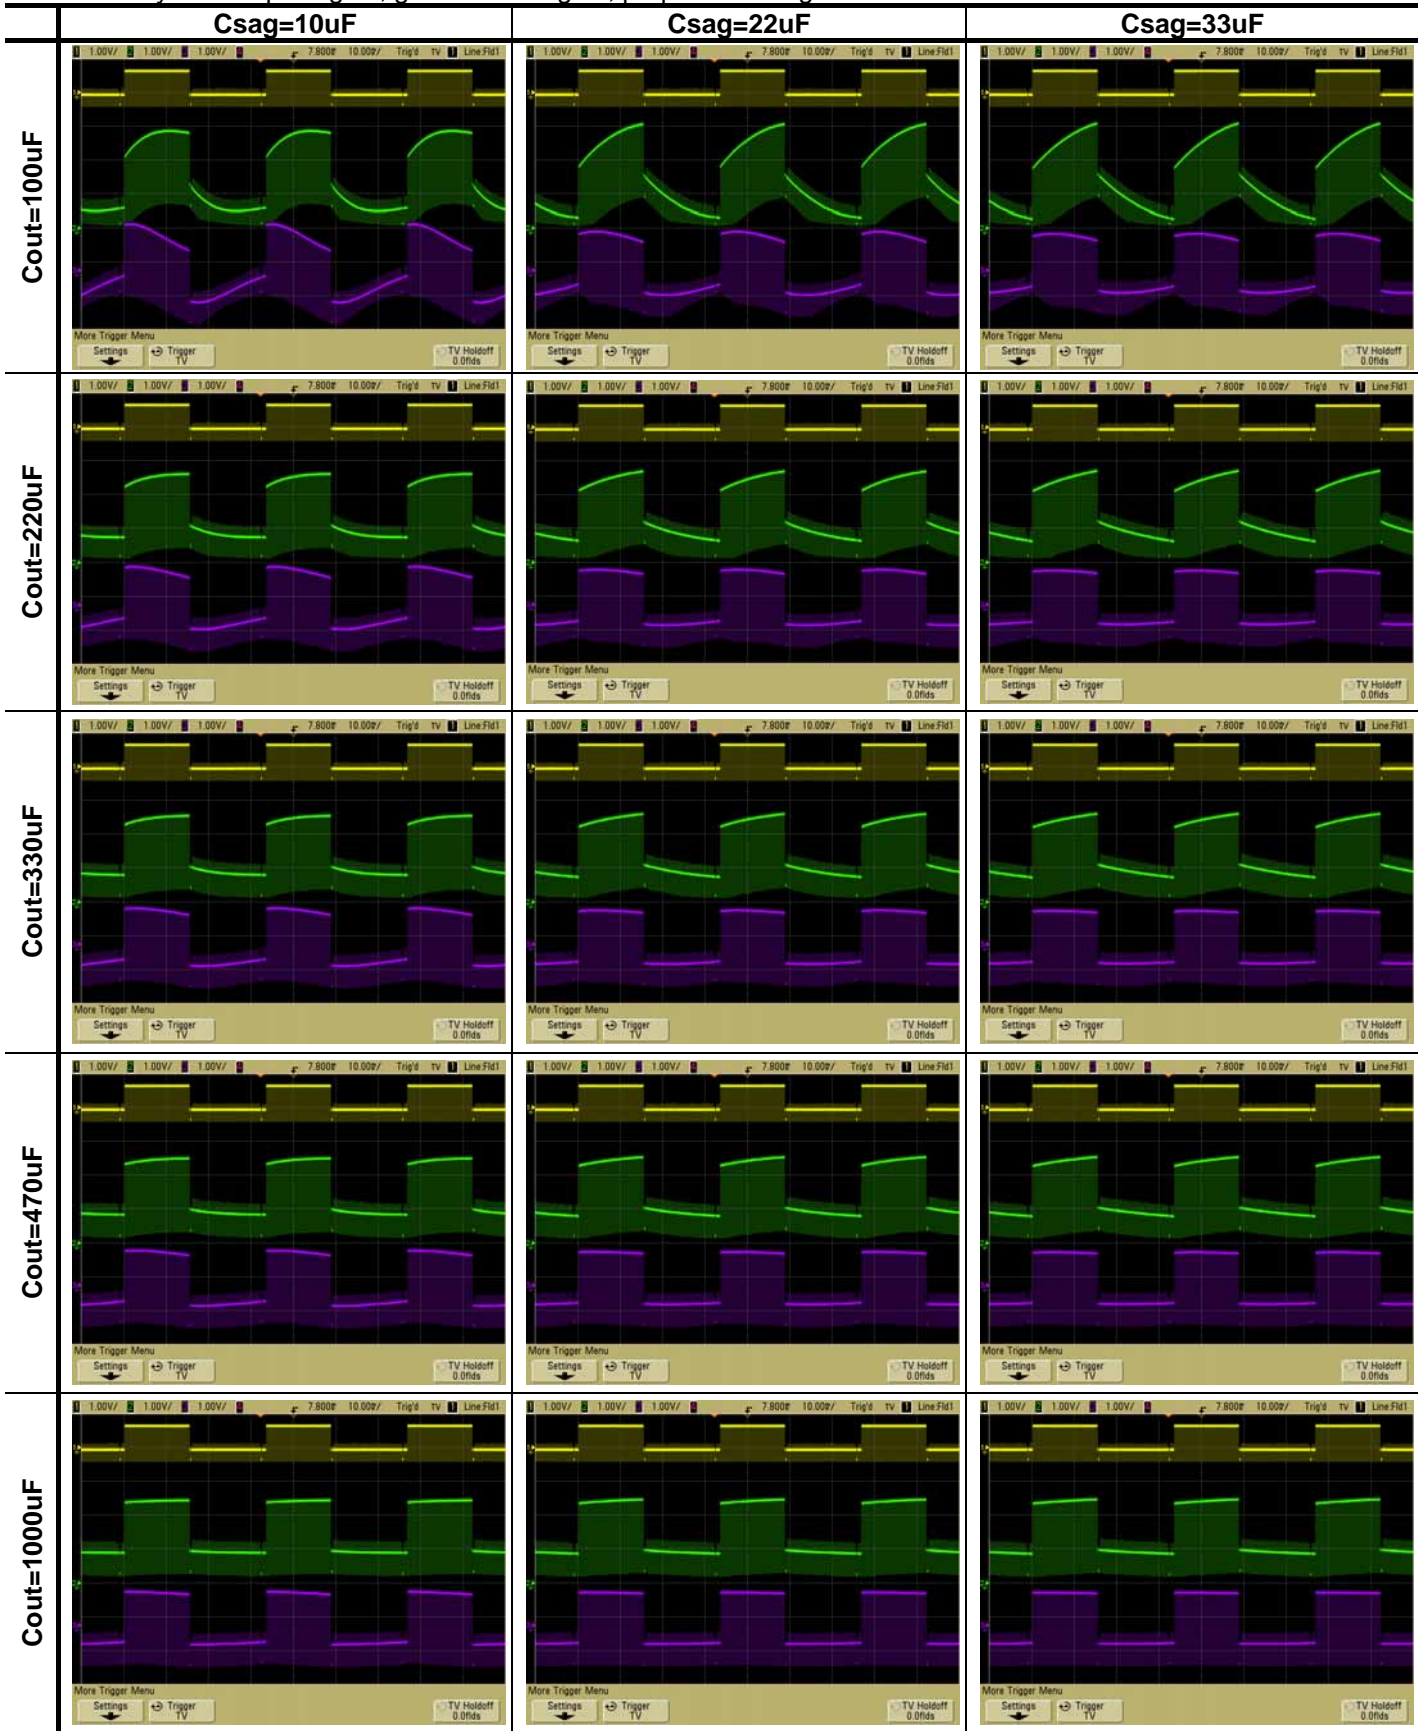

< Not using SAG correction circuit >

Input signal: bounce signal (IRE0%, IRE100%, 30Hz), resistance=150Ω

Waveform: yellow: input signal, green: Vout signal, purple: Vout1signal

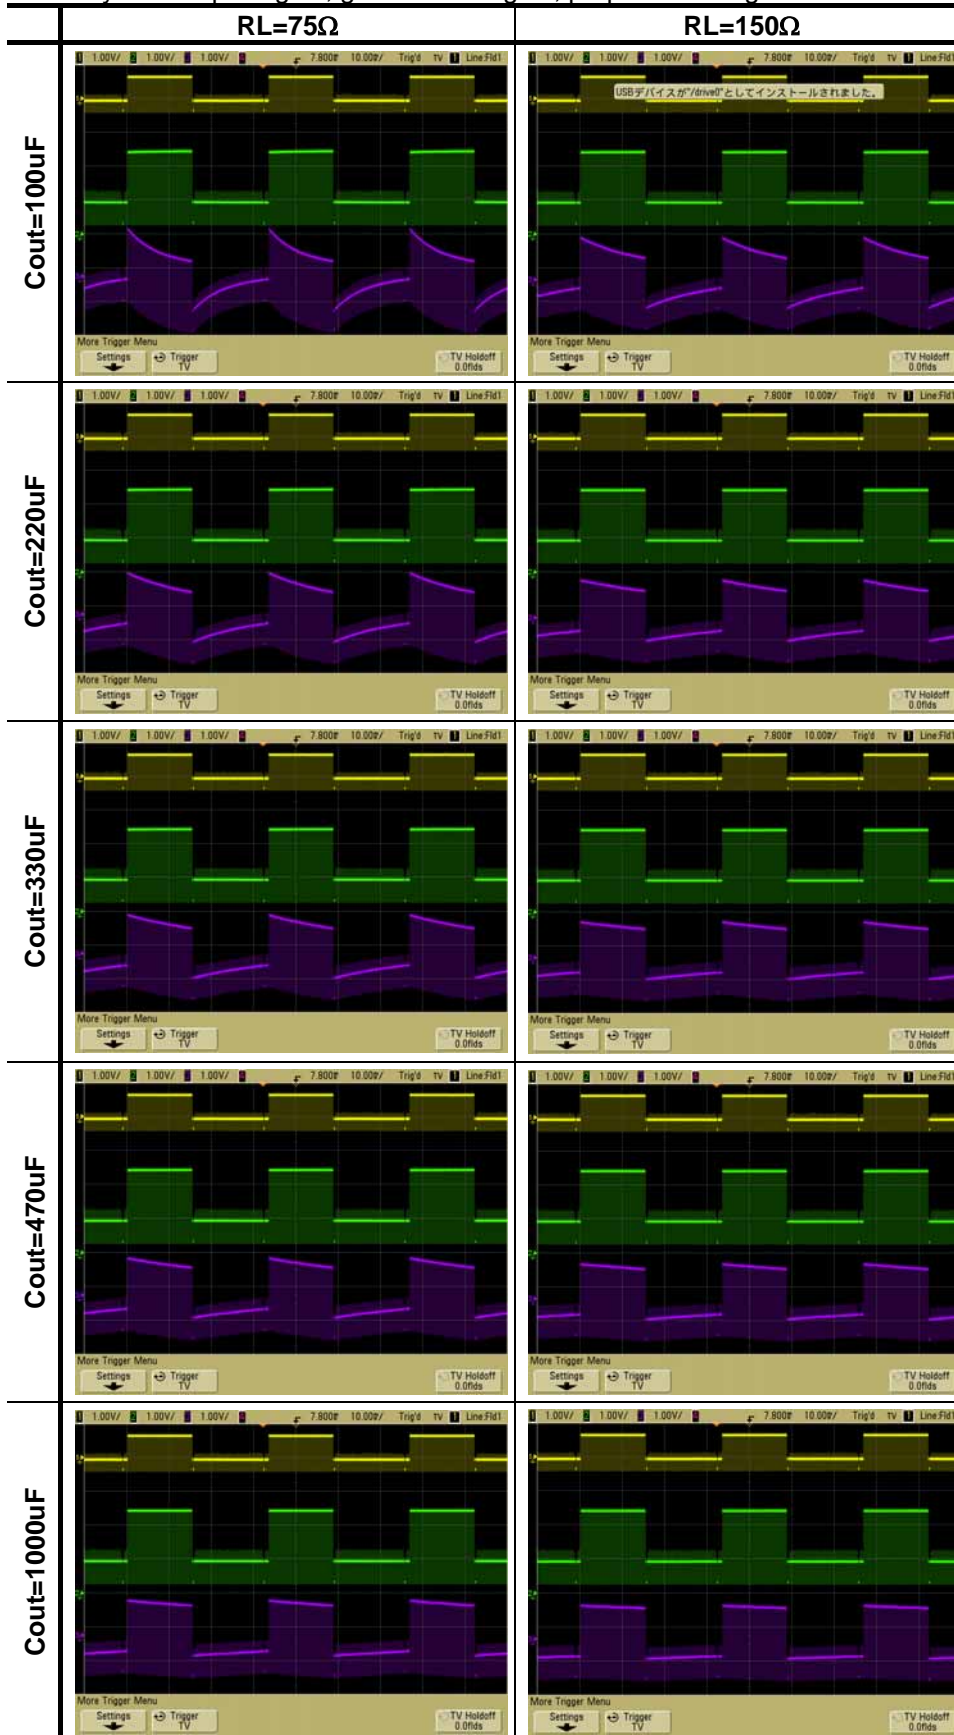


# NJM2567

< Using SAG correction circuit >


Input signal: Black to White 100%, resistance 150Ω

Waveform: yellow: input signal, green: Vout signal, purple: Vout1 signal

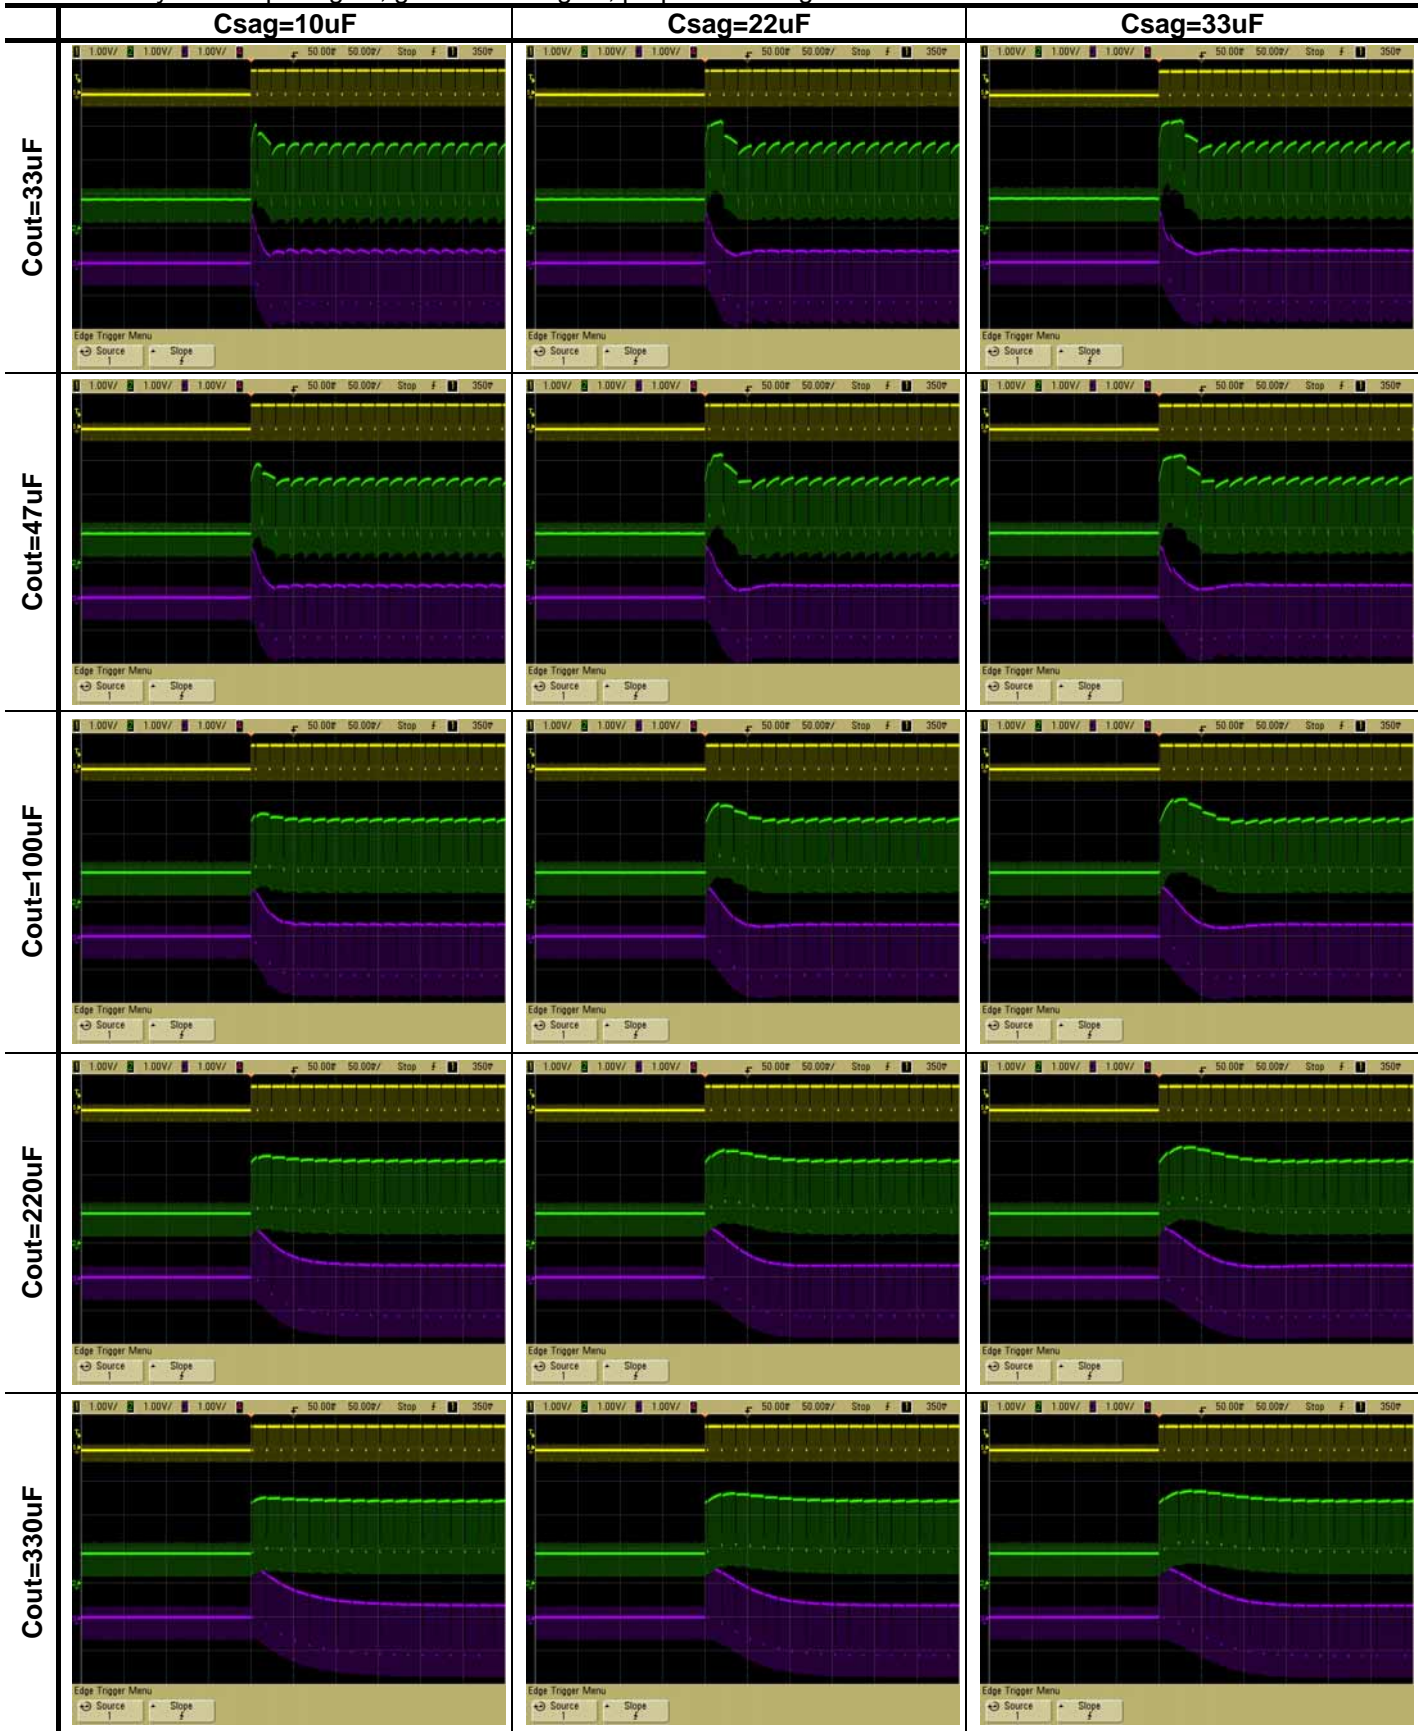

Input signal: White100% to Black, resistance150Ω

Waveform: yellow: input signal, green: Vout signal, purple: Vout1signal

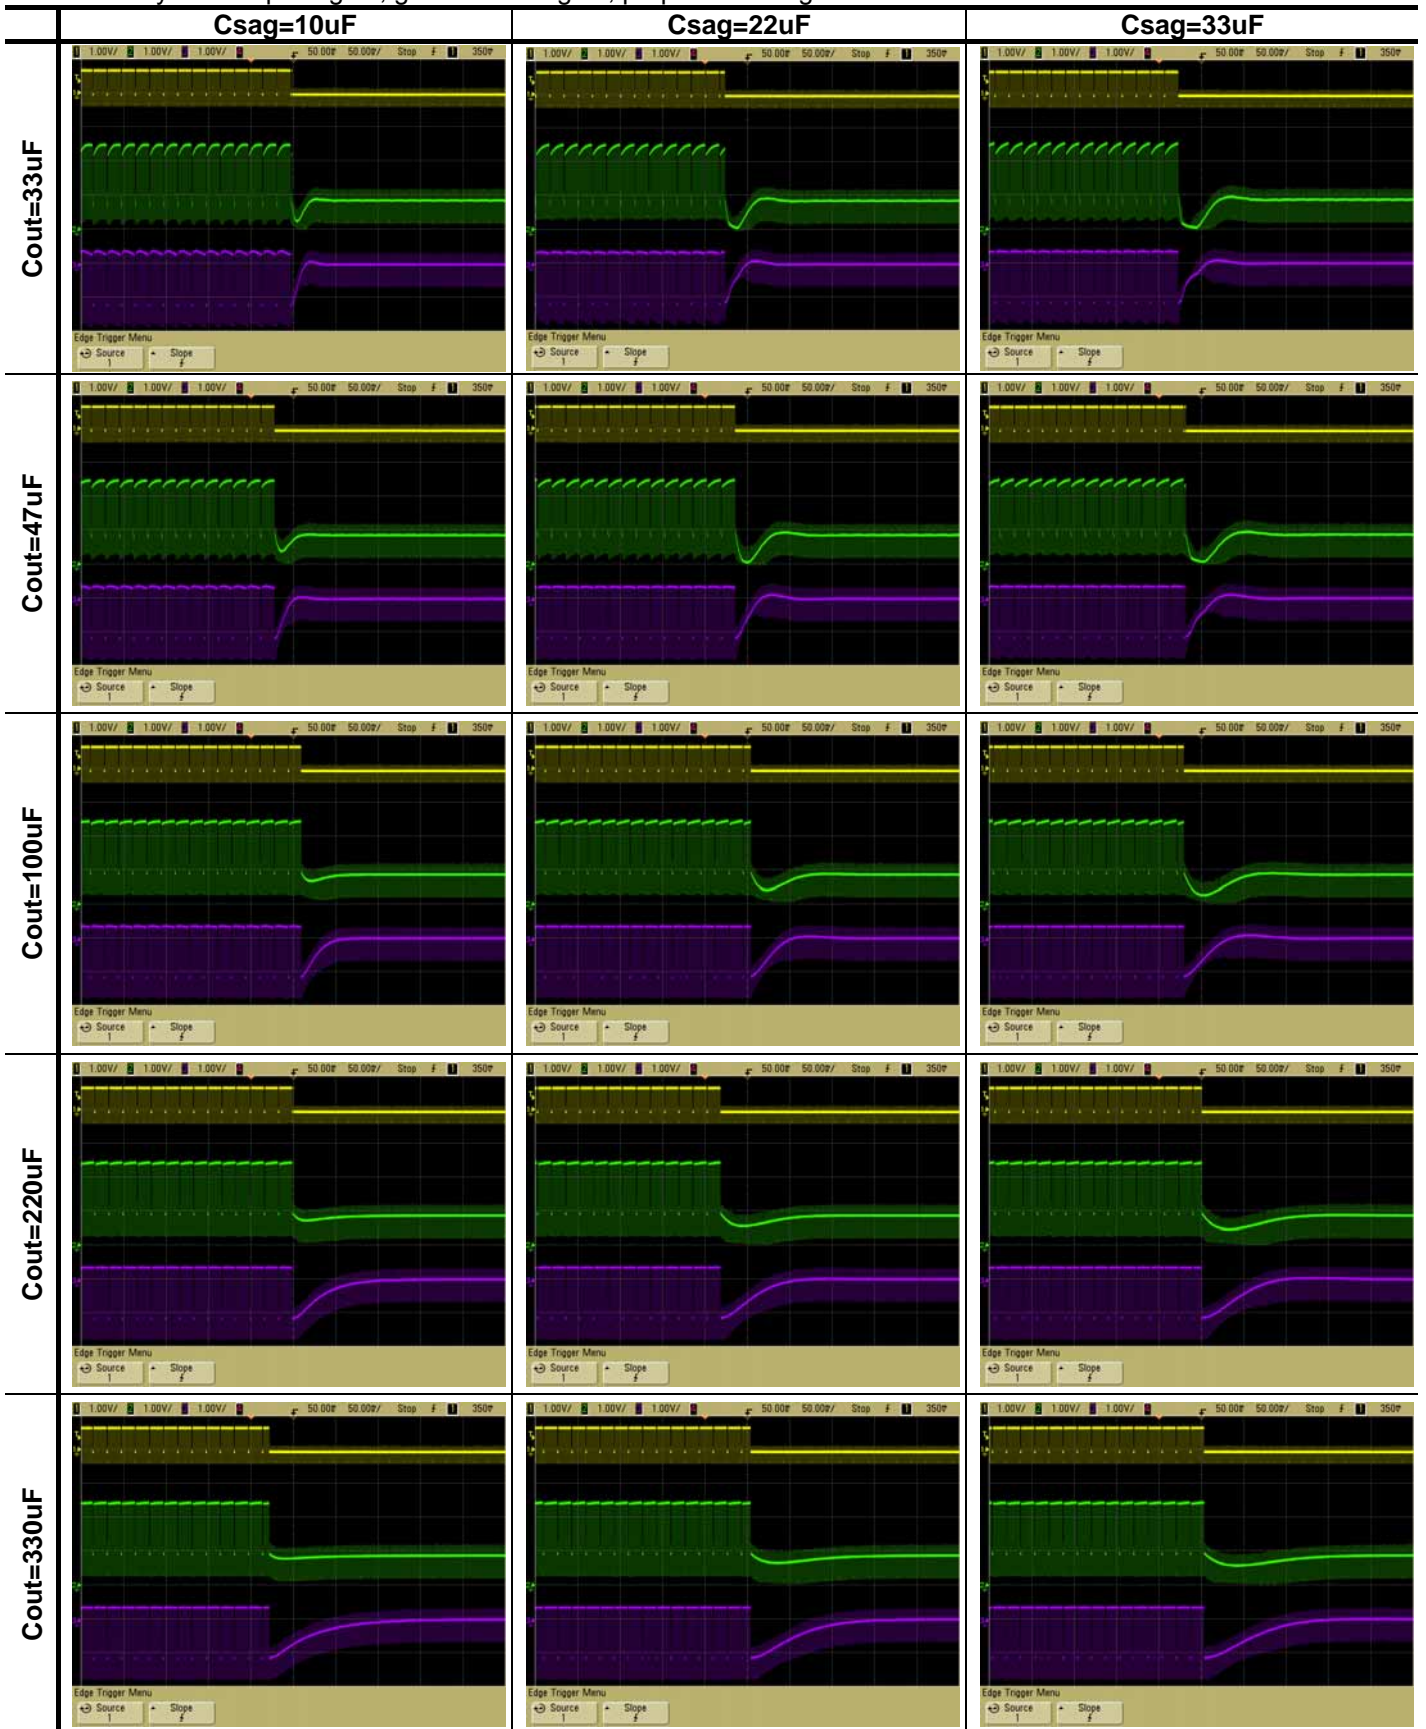


# NJM2567

< Using SAG correction circuit >

Input signal: Black to White 100%, resistance=75Ω


Waveform: yellow: input signal, green: Vout signal, purple: Vout1signal

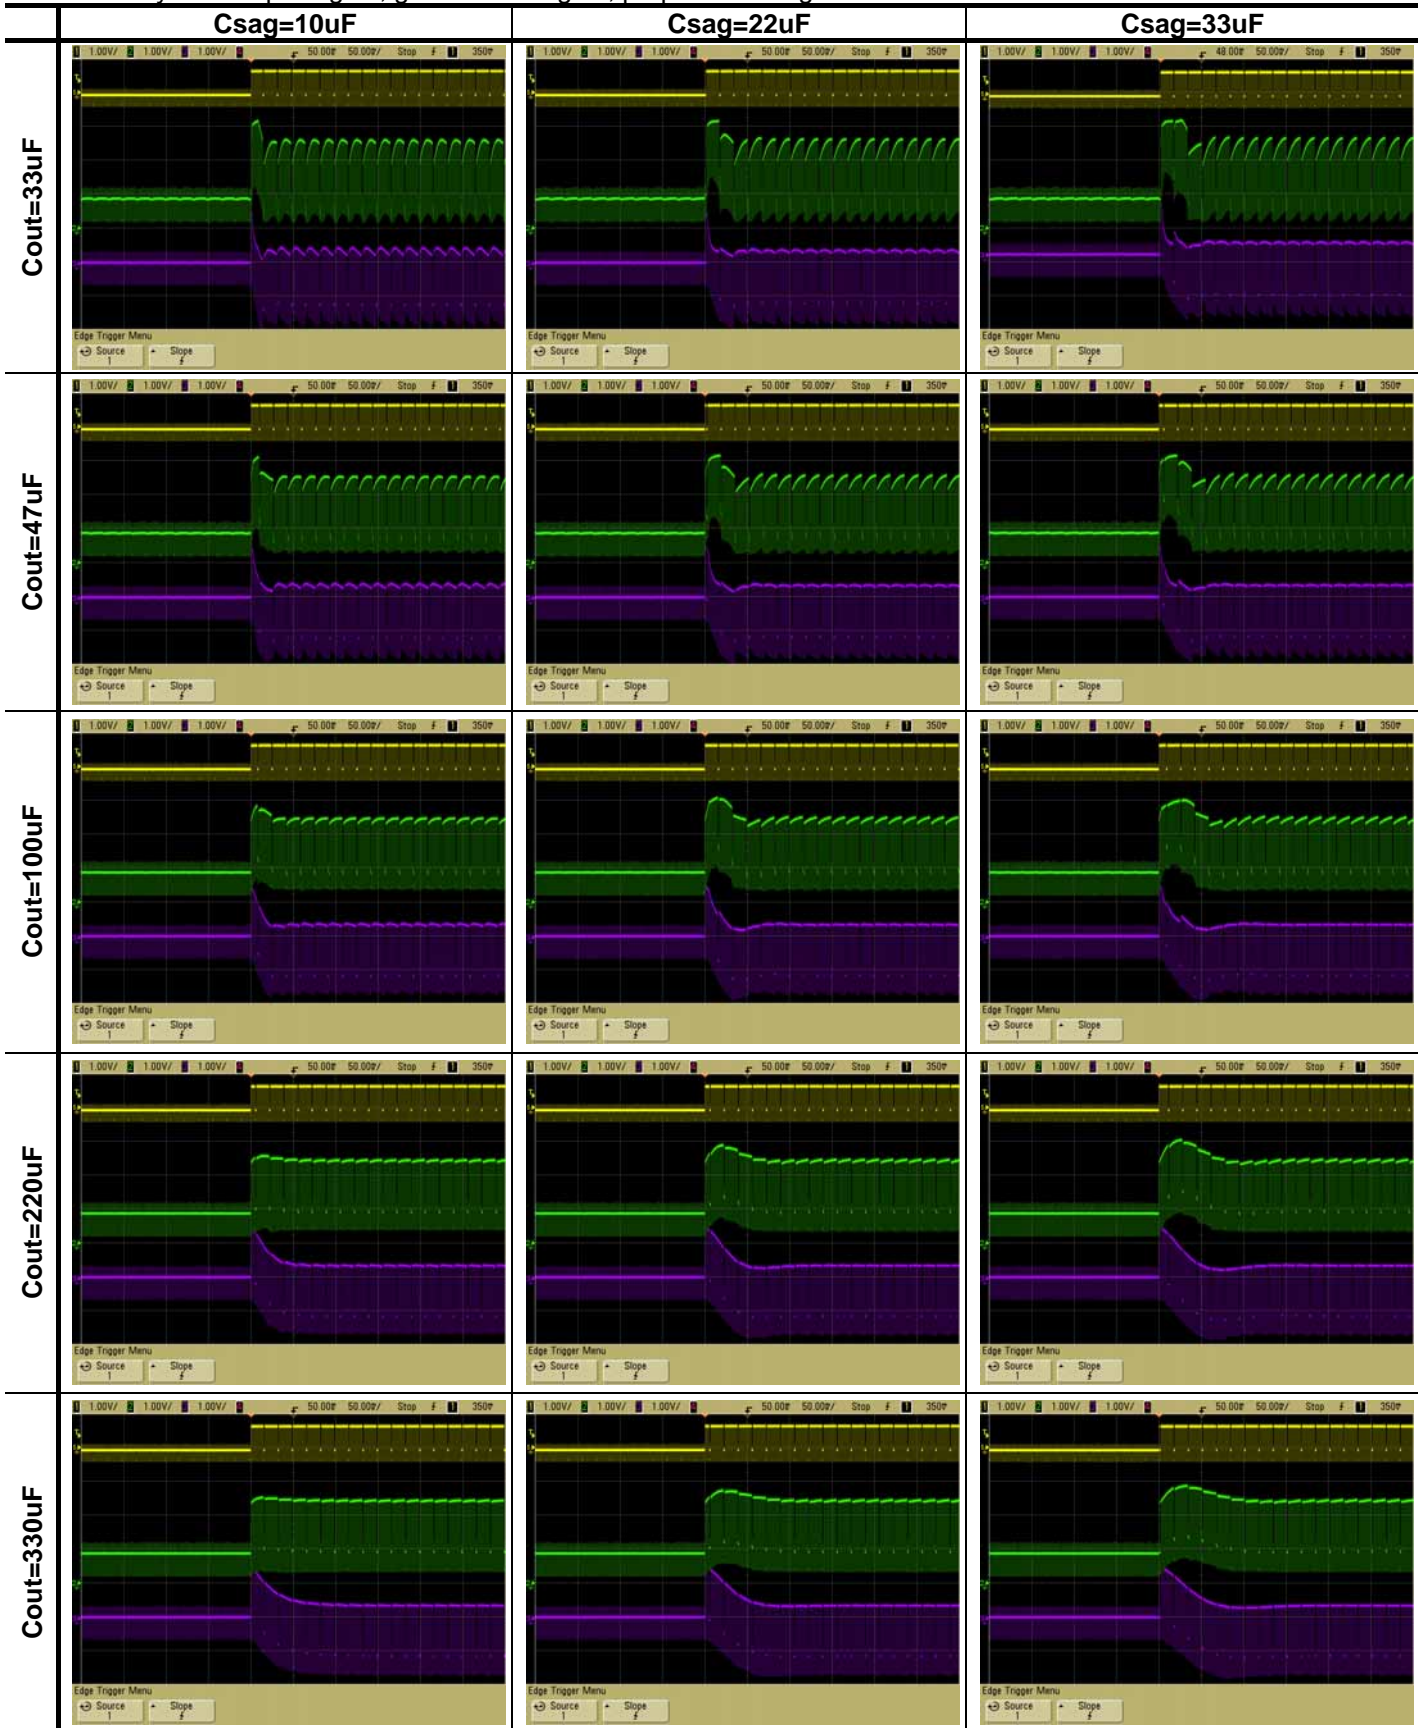



Input signal: White100% to Black, resistance=75Ω

Waveform: yellow: input signal, green: Vout signal, purple: Vout1signal

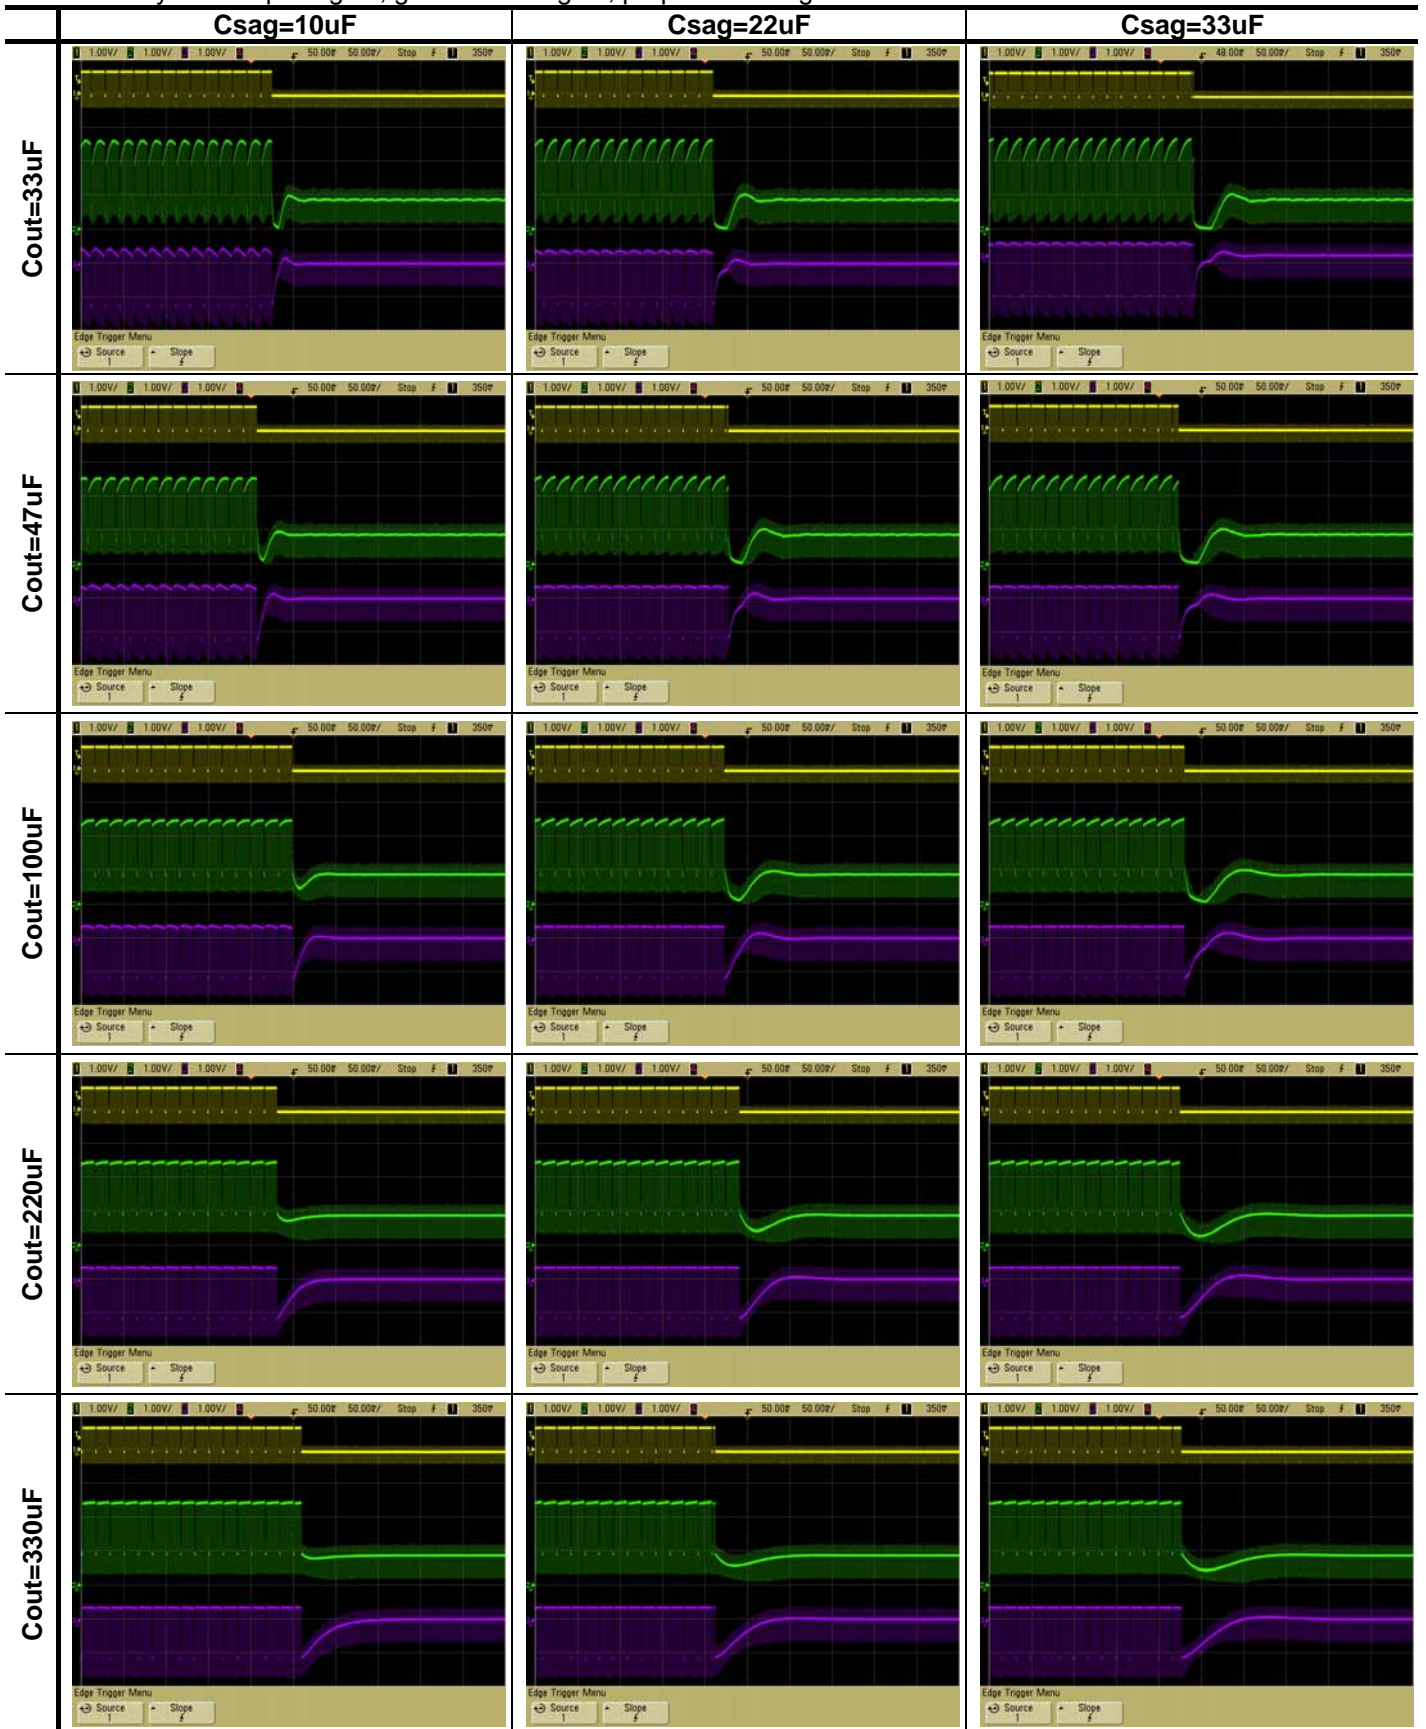

## ◆Clamp circuit

### 1. Operation of Sync-tip-clamp


Input circuit will be explained. Sync-tip clamp circuit (below the clamp circuit) operates to keep a sync tip of the minimum potential of the video signal. Clamp circuit is a circuit of the capacitor charging and discharging of the external input  $C_{in}$ . It is charged to the capacitor to the external input  $C_{in}$  at sync tip of the video signal. Therefore, the potential of the sync tip is fixed.

And it is discharged charge by capacitor  $C_{in}$  at period other than the video signal sync tip. This is due to a small discharge current to the IC.

In this way, this clamp circuit is fixed sync tip of video signal to a constant potential from charging of  $C_{in}$  and discharging of  $C_{in}$  at every one horizontal period of the video signal.


The minute current be discharged an electrical charge from the input capacitor at the period other than the sync tip of video signals. Decrease of voltage on discharge is dependent on the size of the input capacitor  $C_{in}$ .

If you decrease the value of the input capacitor, will cause distortion, called the H sag. Therefore, the input capacitor recommend on more than 0.1 $\mu$ F.

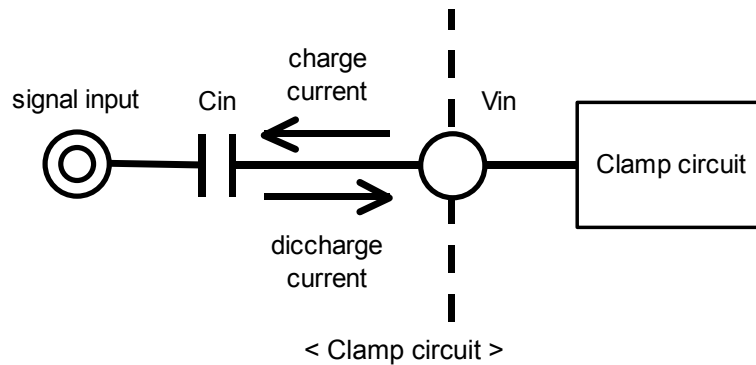

A.  $C_{in}$  is large

B.  $C_{in}$  is small (H sag experience)

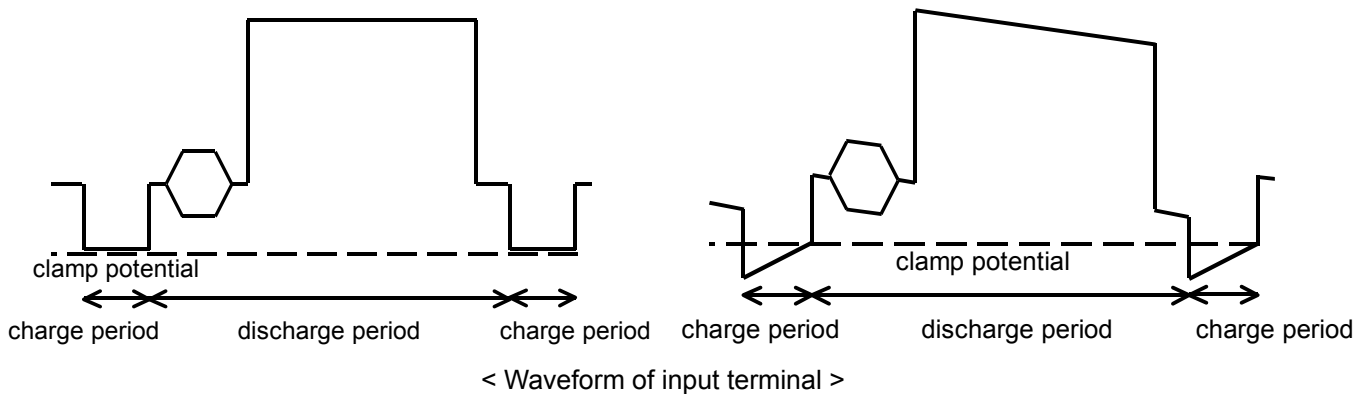

### 2. Input impedance

The input impedance of the clamp circuit is different at the capacitor discharge period and the charge period.

The input impedance of the charging period is a few  $k\Omega$ . On the other hand, the input impedance of the discharge period is several  $M\Omega$ . Because is a small discharge-current through to the IC.


Thus the input impedance will vary depending on the operating state of the clamp circuit.

### 3. Impedance of signal source


Source impedance to the input terminal, please lower than 200 $\Omega$ . A high source impedance, the signal may be distorted. If so, please to connect a buffer for impedance conversion.

## TYPICAL CHARACTERISTICS


Voltage Gain vs. Frequency  
( $Y_{in} \rightarrow Y_{out}, V_{cc}=3V, T_a=25^\circ C$ )

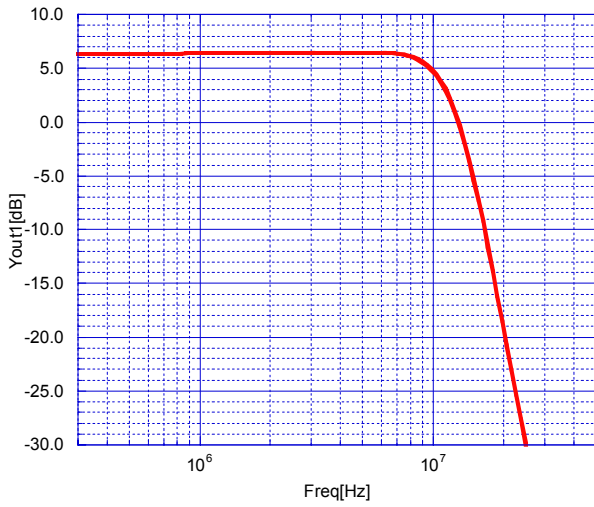


Voltage Gain vs. Frequency  
( $Y_{in} \rightarrow V_{out}, V_{cc}=3V, T_a=25^\circ C$ )

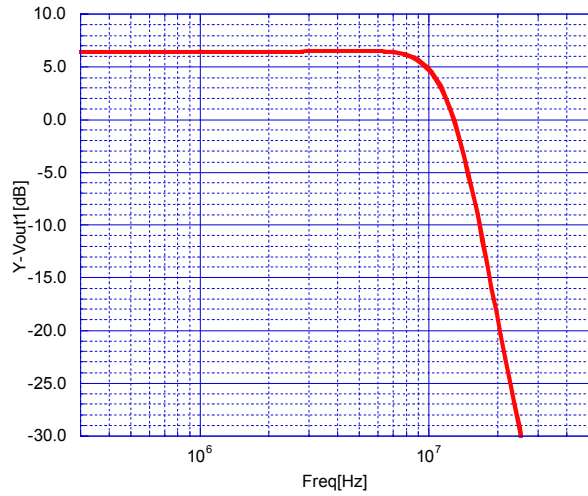


Voltage Gain vs. Frequency  
( $C_{in} \rightarrow C_{out}, V_{cc}=3V, T_a=25^\circ C$ )

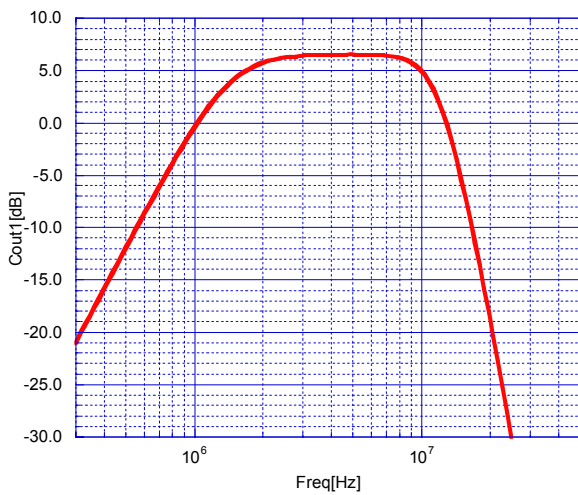


Voltage Gain vs. Frequency  
( $C_{in} \rightarrow V_{out}, V_{cc}=3V, T_a=25^\circ C$ )

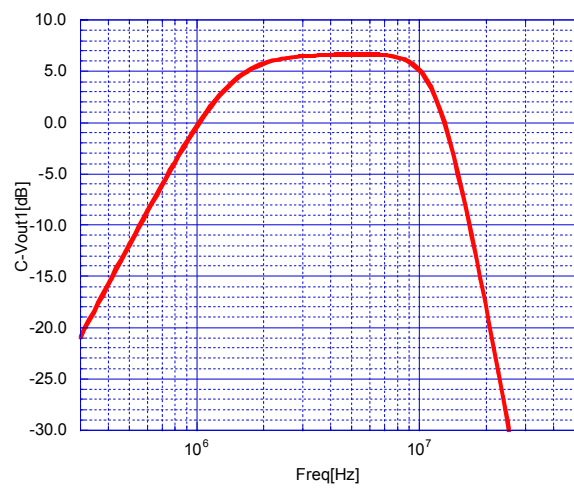

Operating Current1 vs. Operating Voltage  
( $T_a=25^\circ C$ )

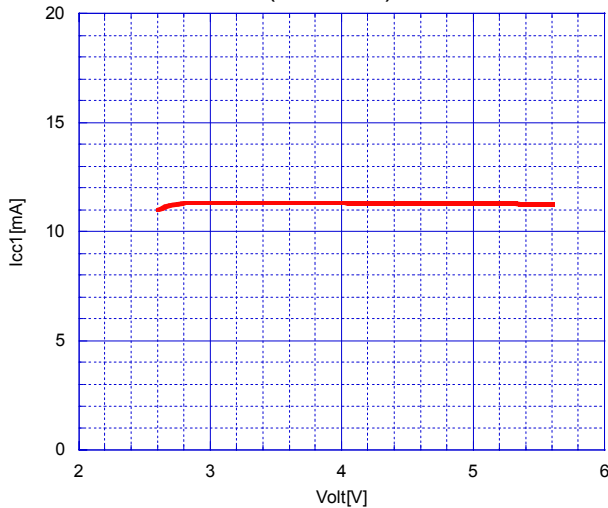


Operating Current2 vs. Operating Voltage  
( $T_a=25^\circ C$ )

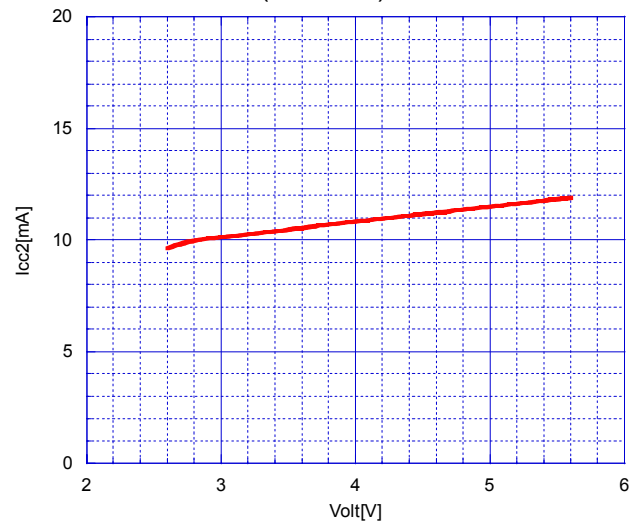


## TYPICAL CHARACTERISTICS


Operating Current at Power Save Mode1.  
vs. Operating Voltage (Ta=25°C)

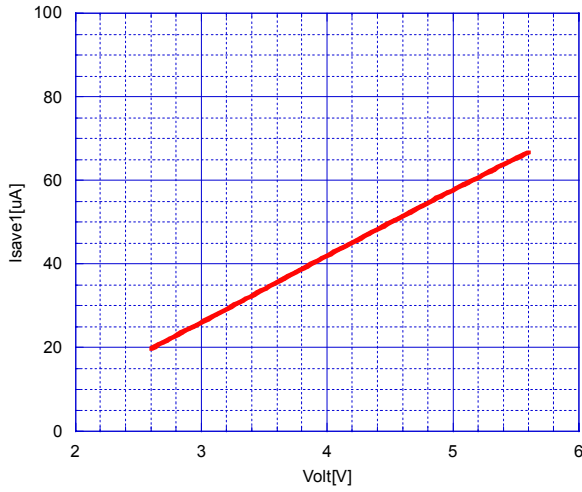


Operating Current at Power Save Mode2  
vs. Operating Voltage (Ta=25°C)

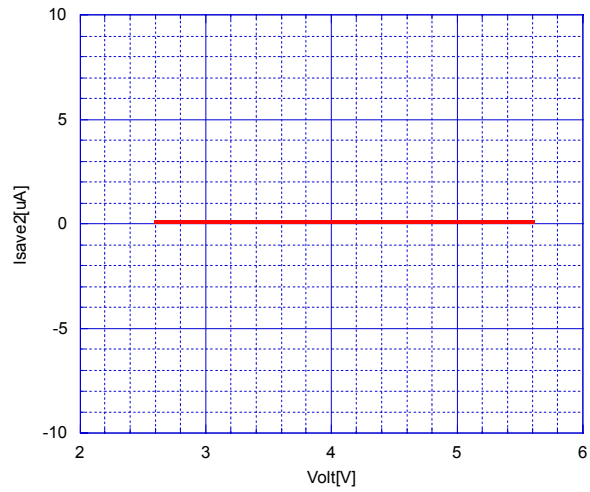


Voltage Gain(Y mode) vs. Operating Voltage  
(Ta=25°C)

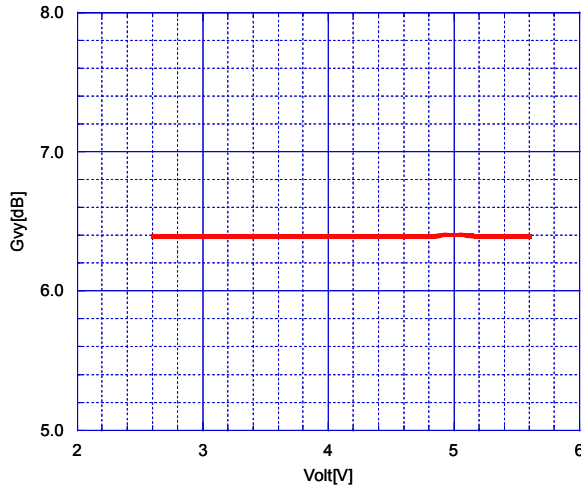


Voltage Gain(C mode) vs. Operating Voltage  
(Ta=25°C)

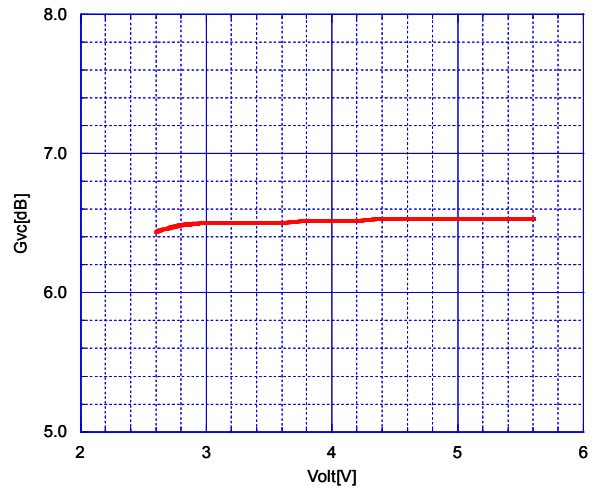

Voltage Gain(V mode) vs. Operating Voltage  
(Ta=25°C)

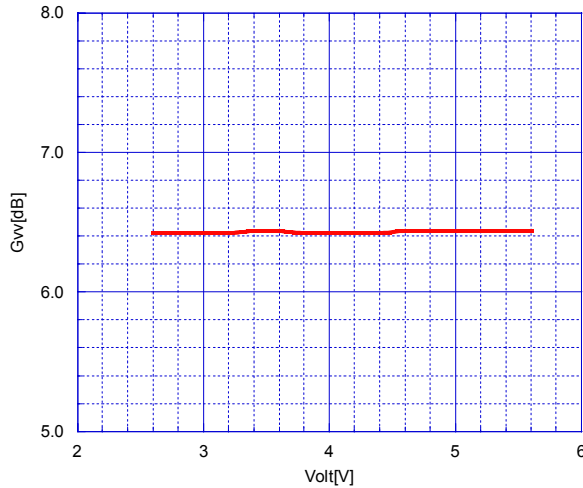


Frequency vs. Operating Voltage  
(Yin=6MHz/100kHz, 1Vpp, Ta=25°C)

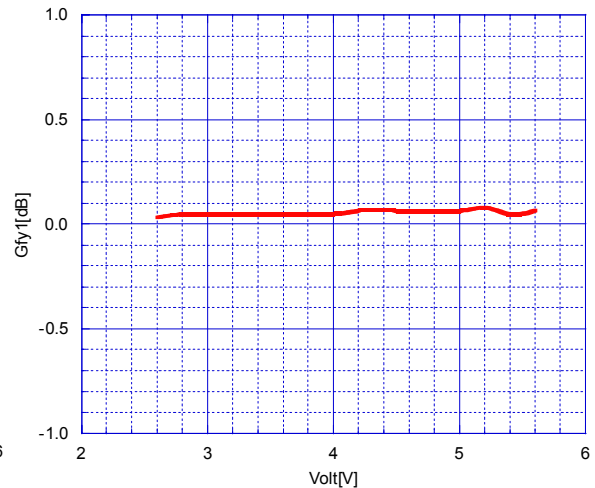


## TYPICAL CHARACTERISTICS


Frequency vs. Operating Voltage  
( $Y_{in}=20\text{MHz}/100\text{kHz}, 1\text{Vpp}, T_a=25^\circ\text{C}$ )

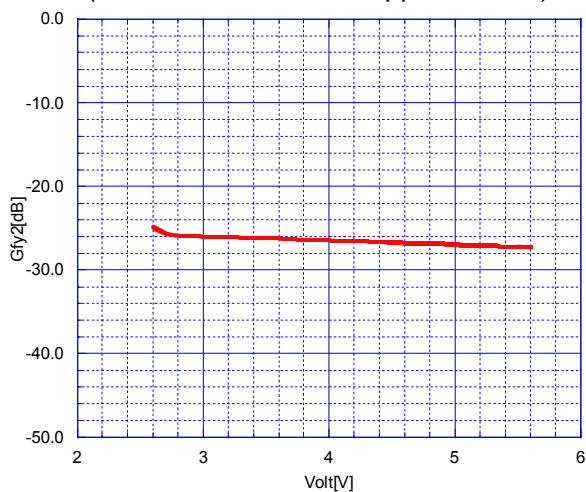


Frequency vs. Operating Voltage  
( $C_{in}=3.43\text{MHz}/4.43\text{MHz}, 0.3\text{Vpp}, T_a=25^\circ\text{C}$ )

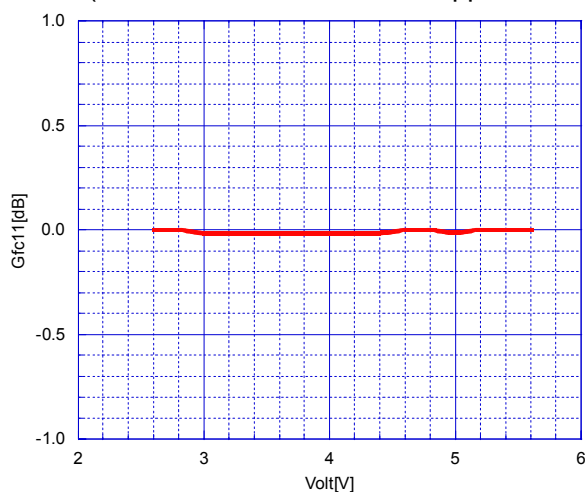


Frequency vs. Operating Voltage  
( $C_{in}=5.43\text{MHz}/4.43\text{MHz}, 0.3\text{Vpp}, T_a=25^\circ\text{C}$ )

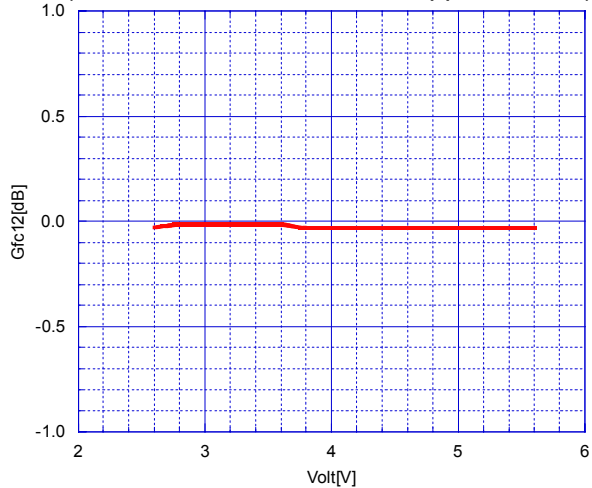


Frequency vs. Operating Voltage  
( $C_{in}=20\text{MHz}/4.43\text{MHz}, 0.3\text{Vpp}, T_a=25^\circ\text{C}$ )

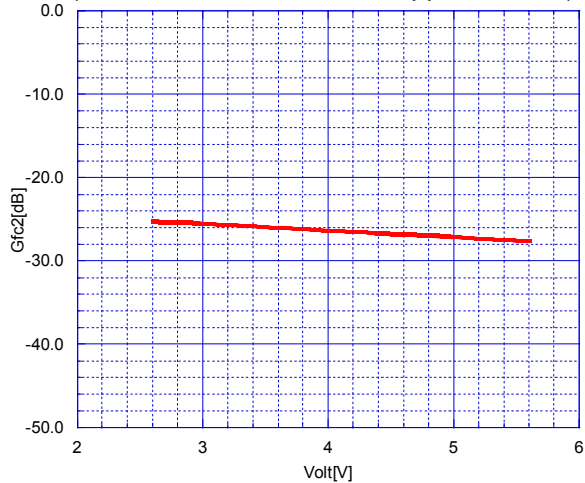

Group Delay(Y mode) vs. Operating Voltage  
( $T_a=25^\circ\text{C}$ )

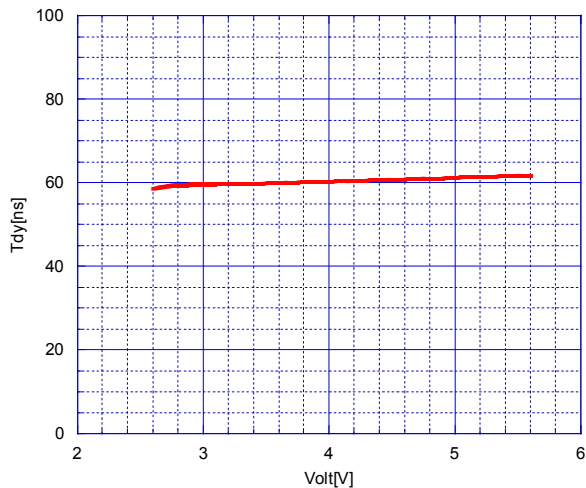


Group Delay(C mode) vs. Operating Voltage  
( $T_a=25^\circ\text{C}$ )

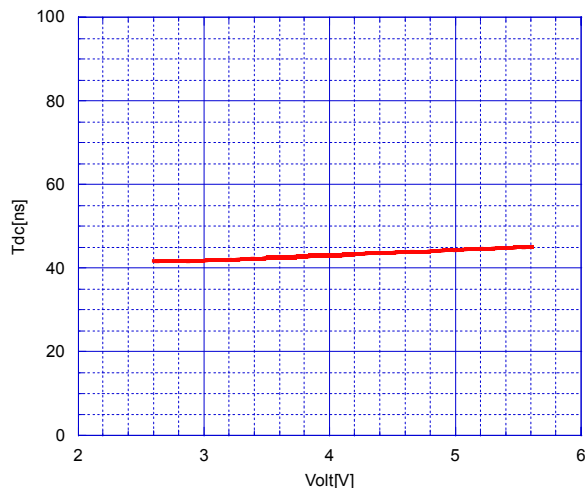


## TYPICAL CHARACTERISTICS


Maximum Output Voltage vs. Operating Voltage  
(Yin→Yout, Ta=25°C)

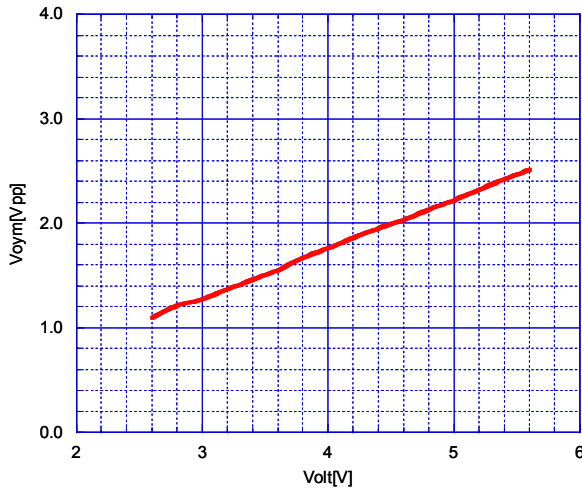


Maximum Output Voltage vs. Operating Voltage  
(Cin→Cout, Ta=25°C)

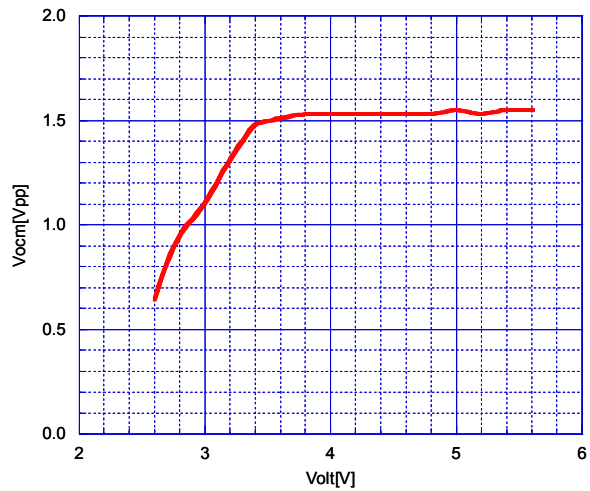


Maximum Output Voltage vs. Operating Voltage  
(Yin→Vout, Ta=25°C)

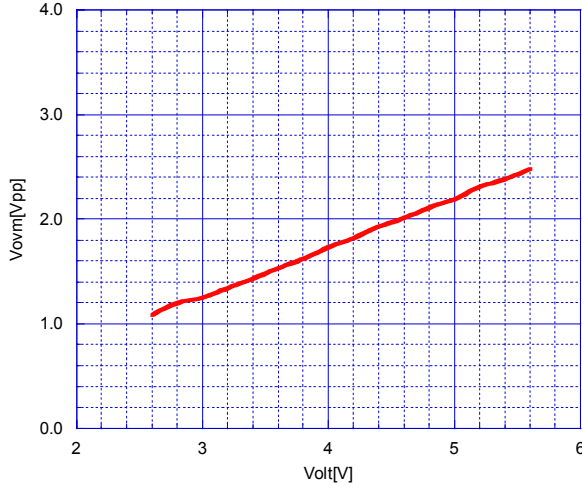


Differential Gain vs. Operating Voltage  
(Yin→Yout, Ta=25°C)

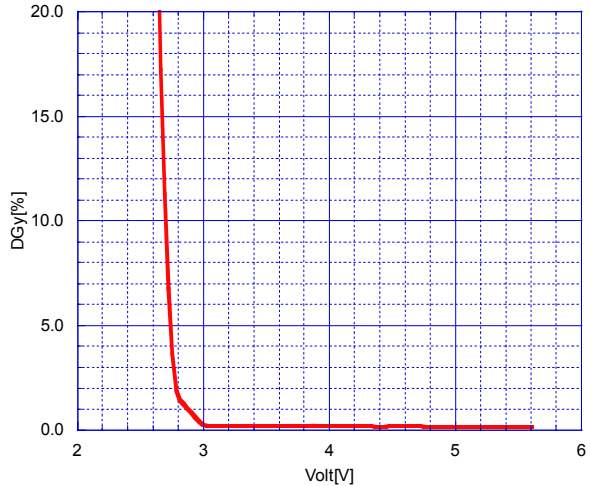

Differential Phase vs. Operating Voltage  
(Yin→Yout, Ta=25°C)

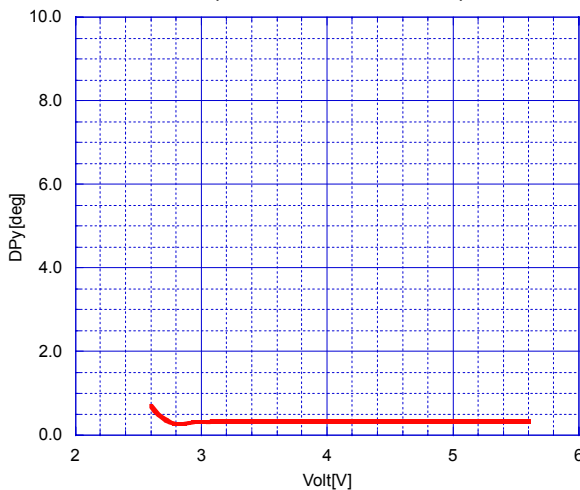


Differential Gain vs. Operating Voltage  
(Yin→Vout, Ta=25°C)

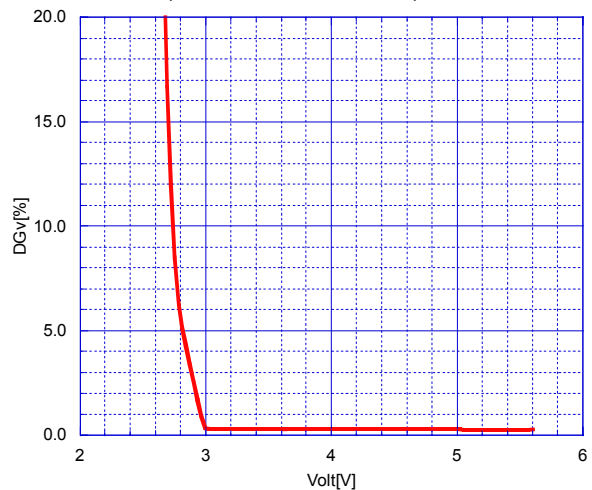


## TYPICAL CHARACTERISTICS


Differential Phase vs. Operating Voltage  
(Yin→Vout Ta=25°C)

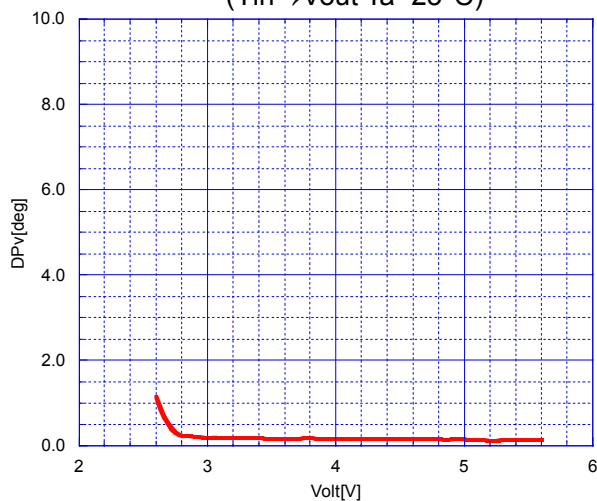


SW Threshold Voltage(High) vs. Operating Voltage  
(Ta=25°C)

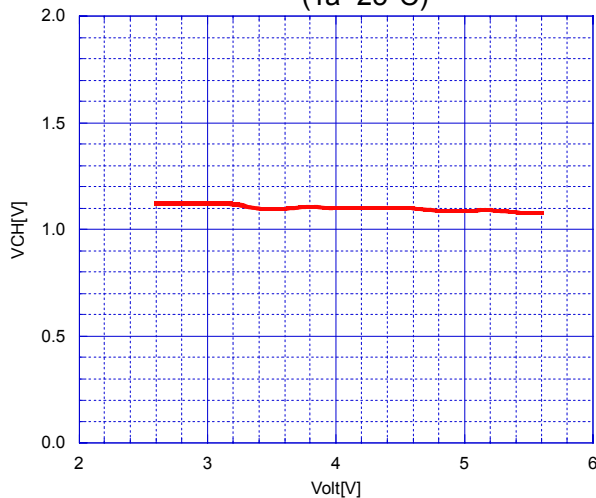


SW Threshold Voltage(Low) vs. Operating Voltage  
(Ta=25°C)

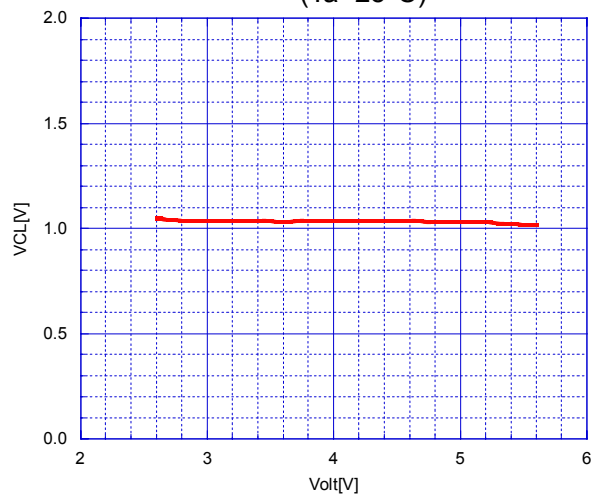


Crosstalk vs. Operating Voltage  
(Yin→Cout, Ta=25°C)

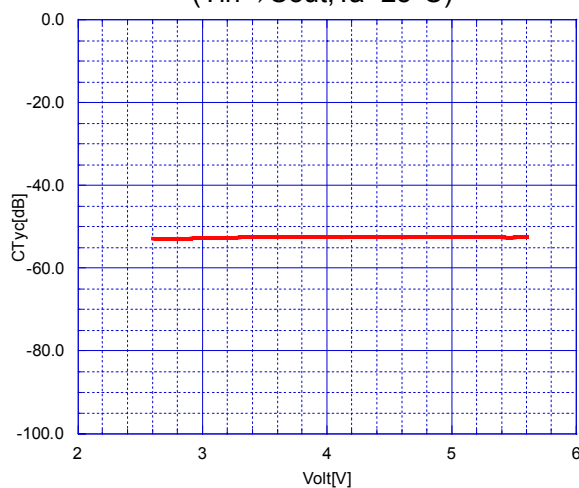







Crosstalk vs. Operating Voltage  
(Cin→Yout Ta=25°C)

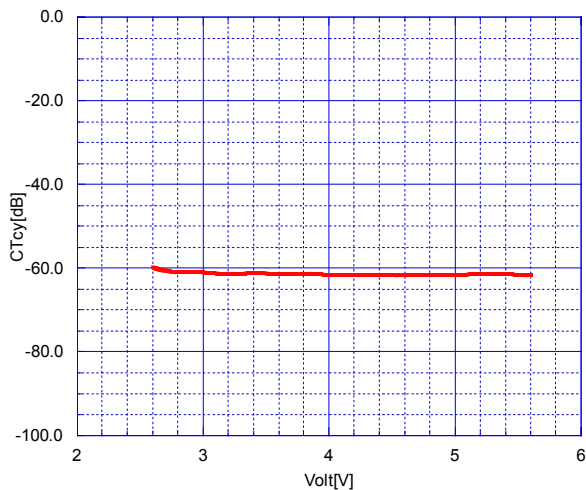

S/N Ratio vs. Operating Voltage  
(Ysignal, Ta=25°C)

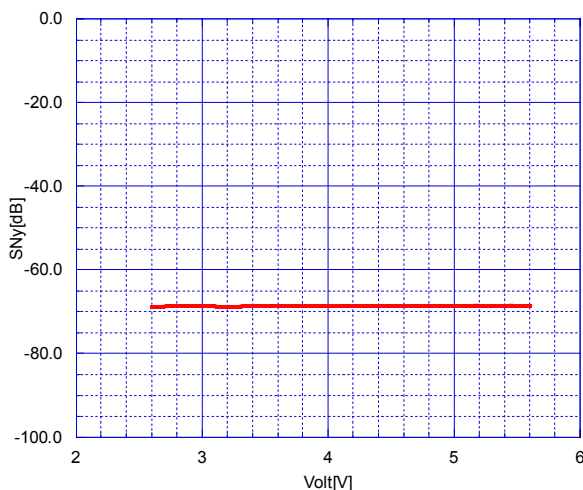


## TYPICAL CHARACTERISTICS

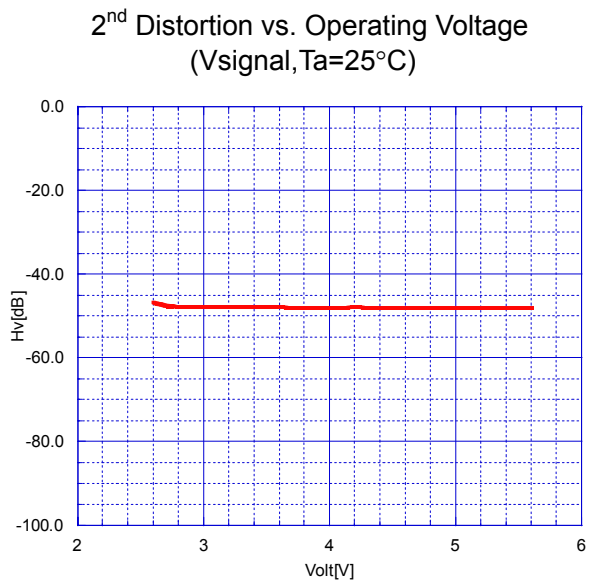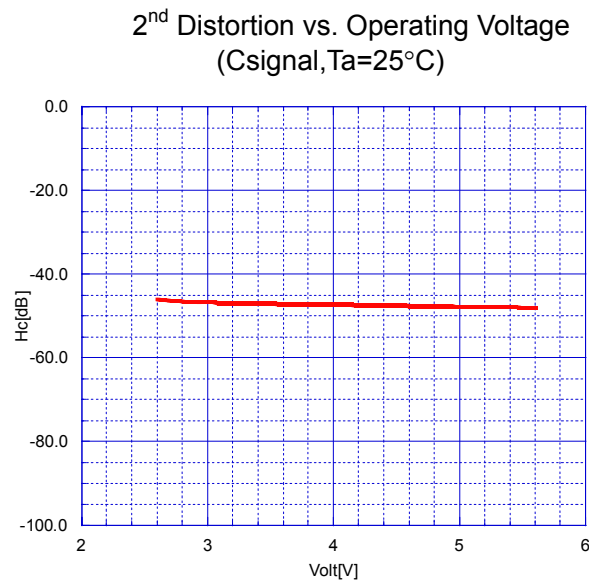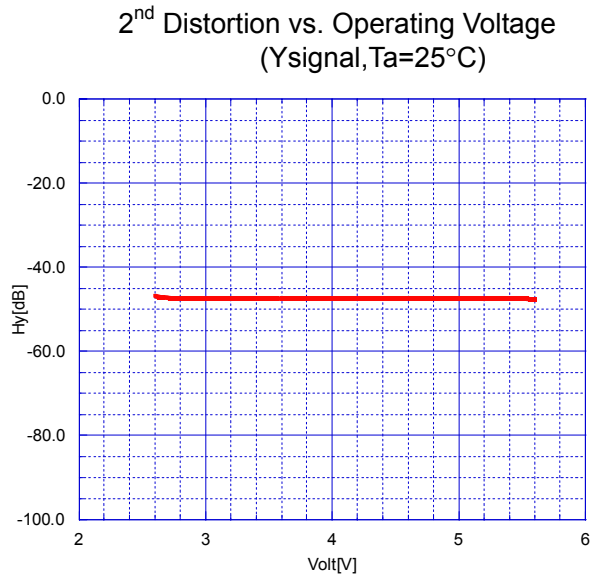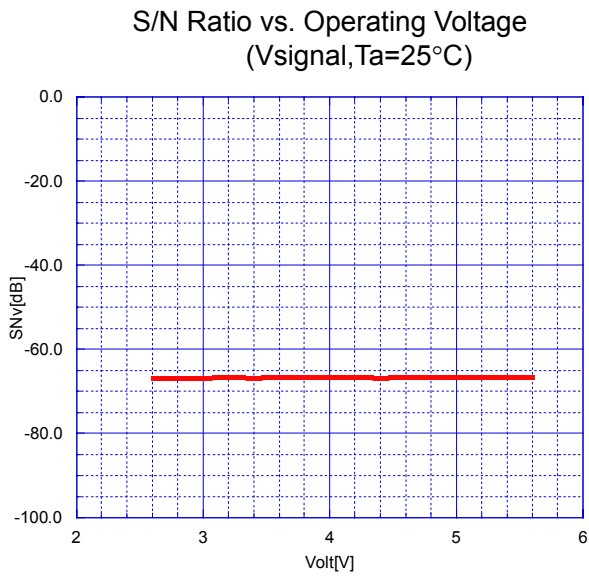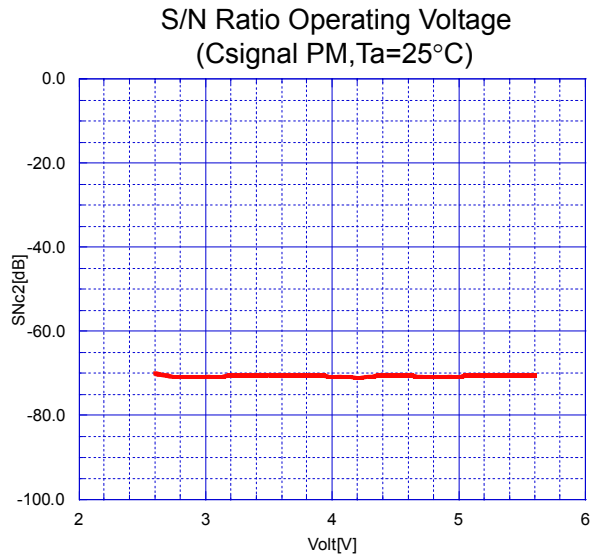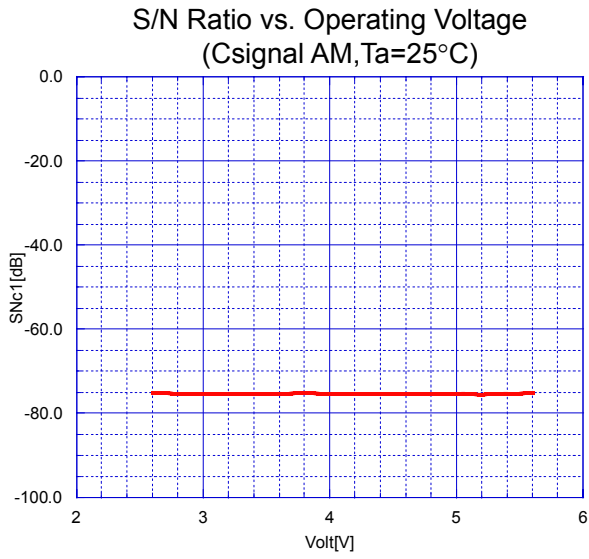




## TYPICAL CHARACTERISTICS


Operating Current1 vs. Temperature  
(Vcc=3V)

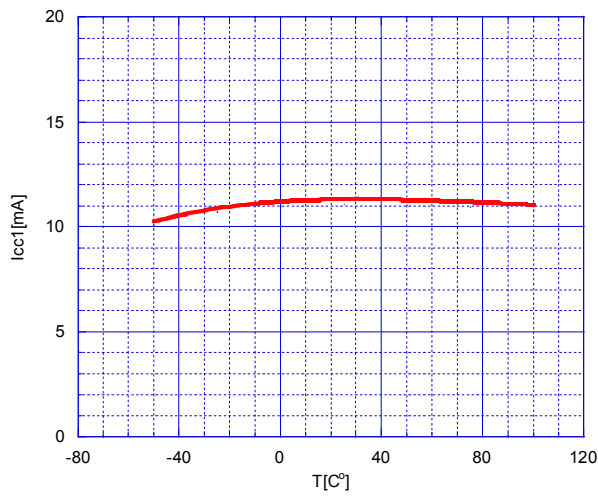


Operating Current2 vs. Temperature  
(Vcc=3V)

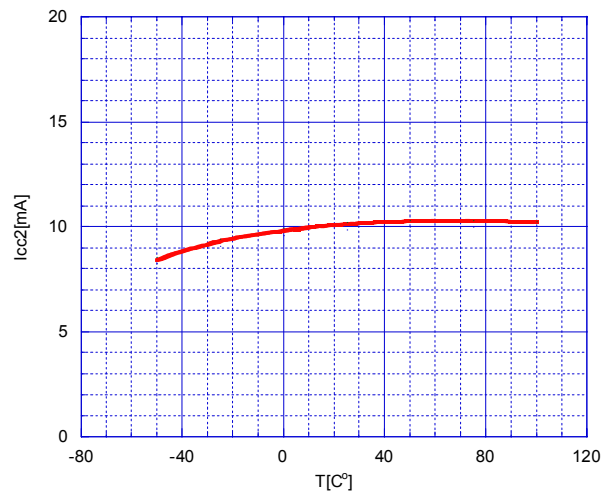


Operating Current1 at Power Save mode vs. Temperature  
(Vcc=3V)

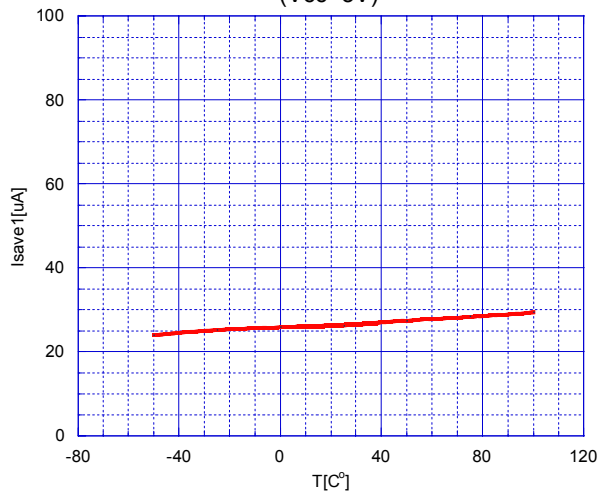


Operating Current2 at Power Save Mode vs. Temperature  
(Vcc=3V)

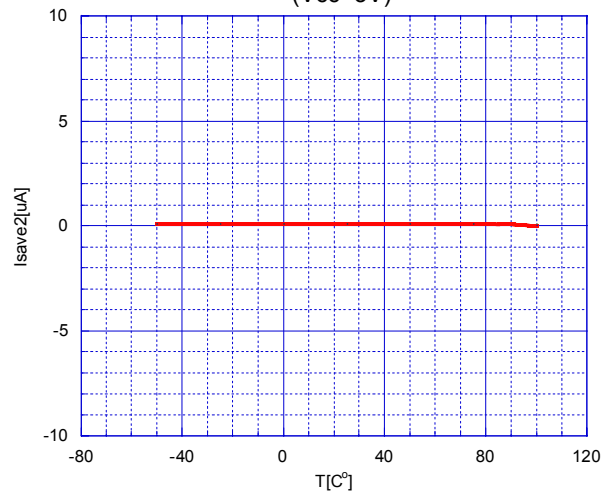







Voltage Gain(Y mode) vs. Temperature  
(Vcc=3V)

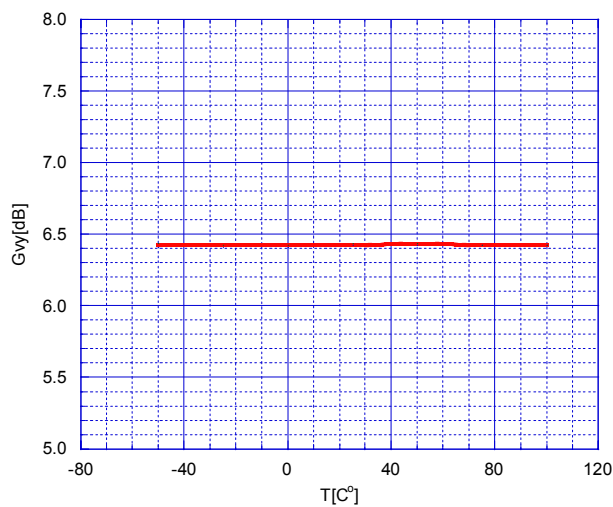

Voltage Gain(C mode) vs. Temperature  
(Vcc=3V)

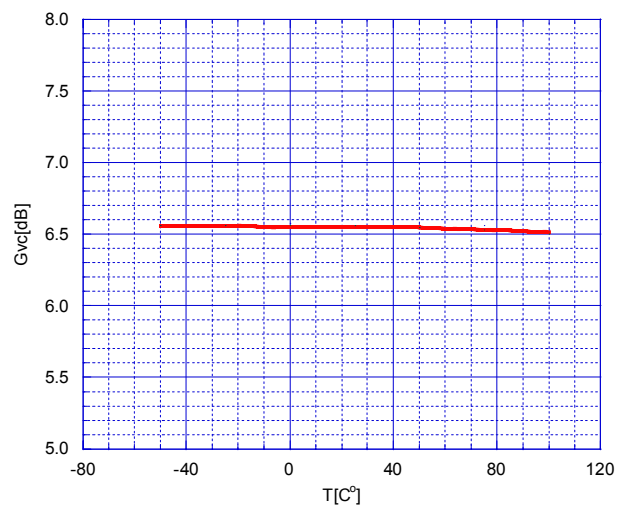


## TYPICAL CHARACTERISTICS

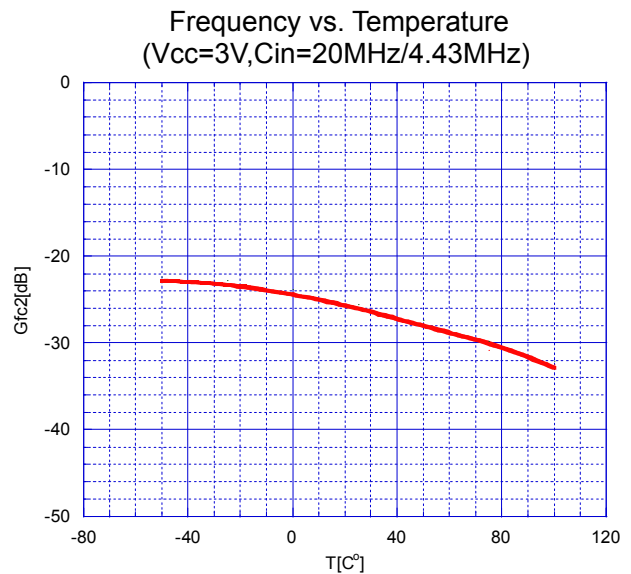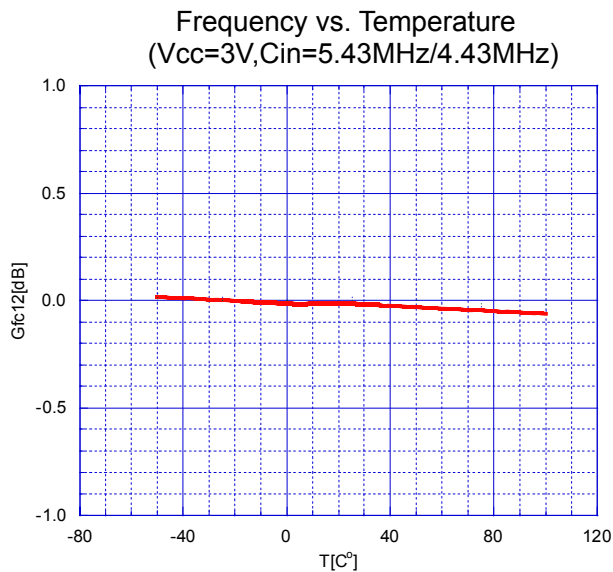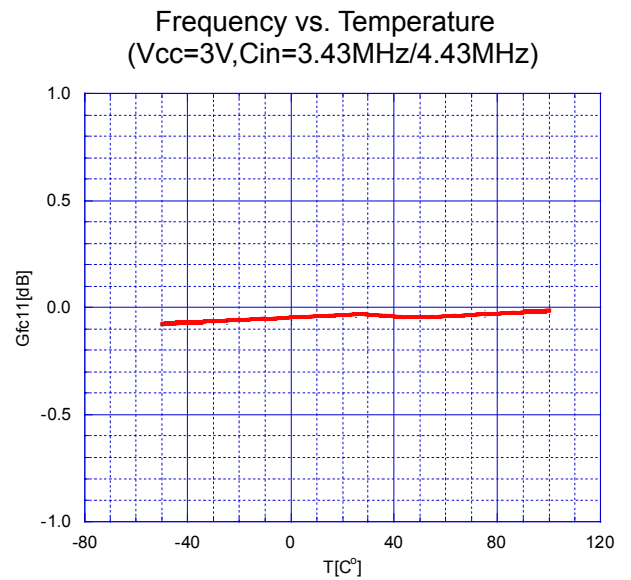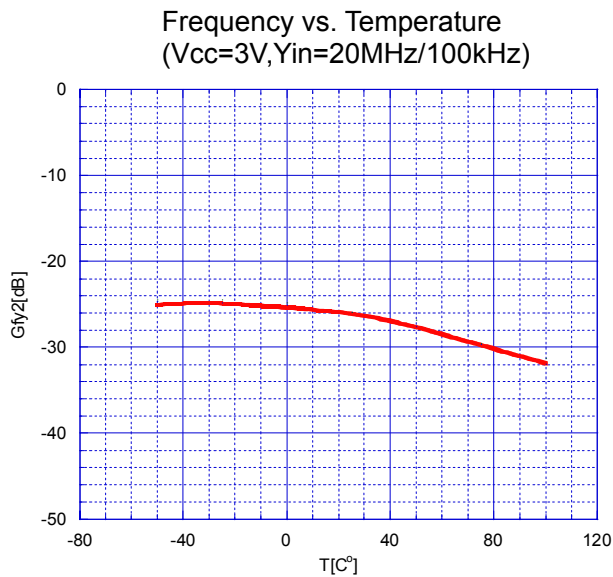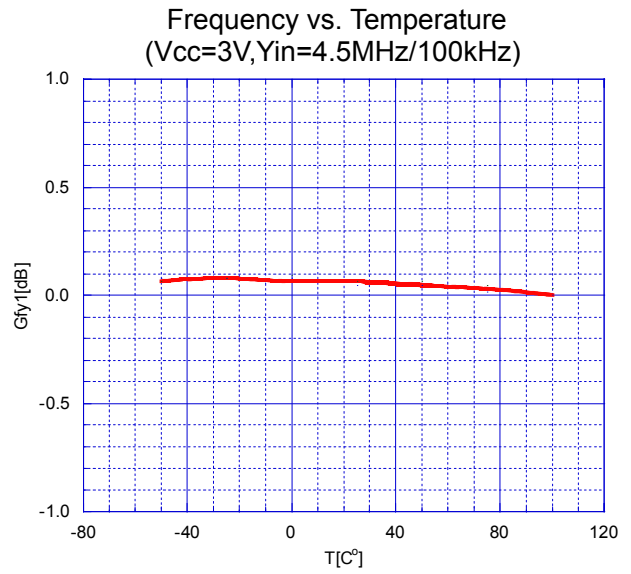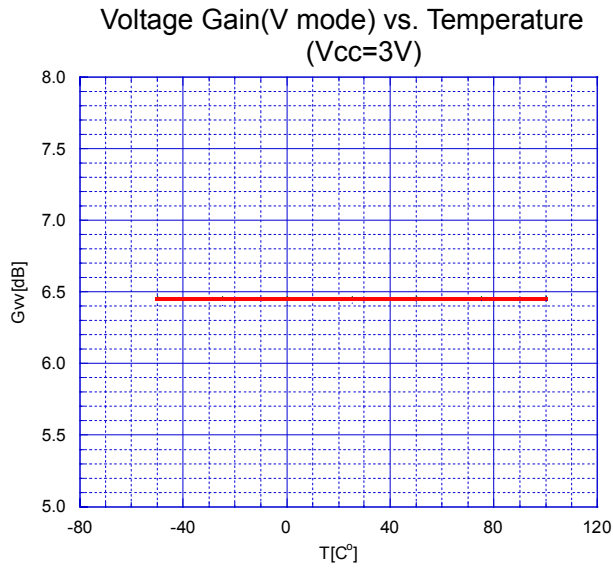


## TYPICAL CHARACTERISTICS


Group Delay (Y mode) vs. Temperature  
(Vcc=3V)

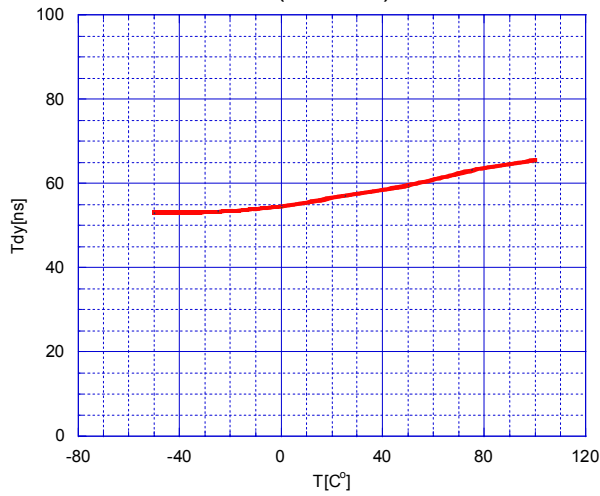


Group Delay(C mode) vs. Temperature  
(Vcc=3V)

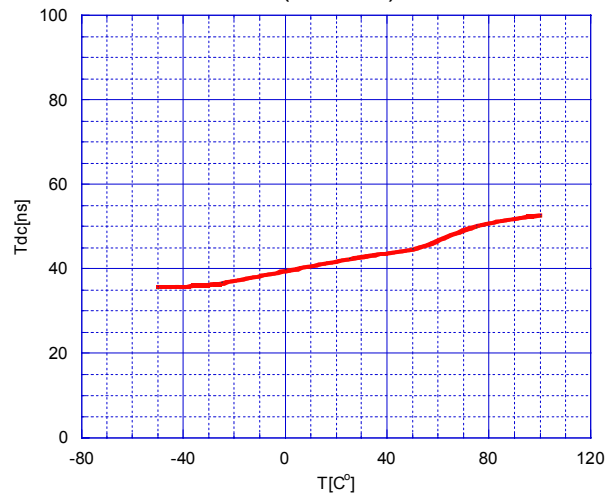


Maximum Output Voltage(Y mode) vs. Temperature  
(Vcc=3V)

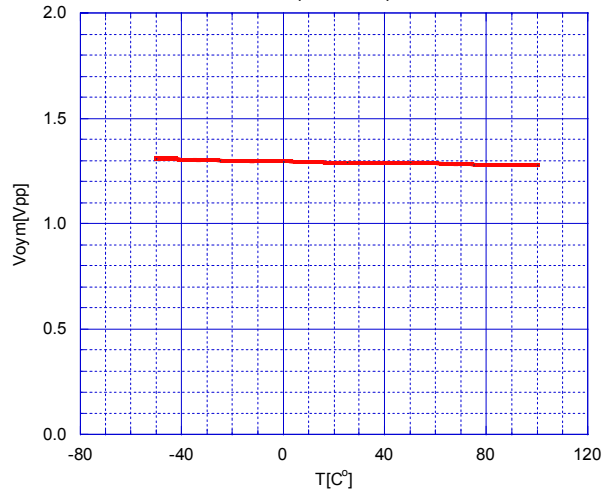


Maximum Output Voltage(Y mode) vs. Temperature  
(Vcc=3V)

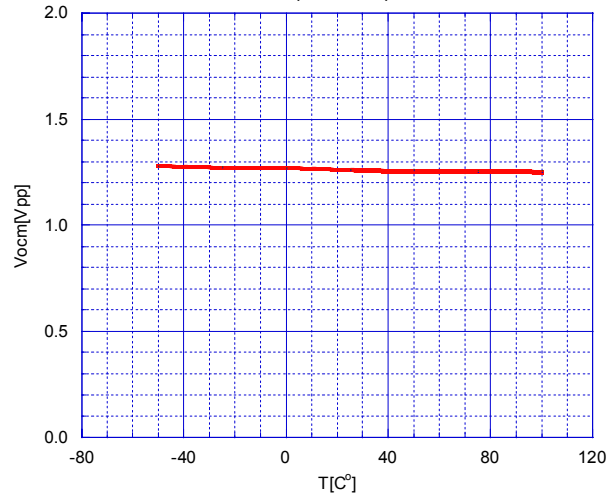


Maximum Output Voltage(V mode) vs. Temperature  
(Vcc=3V)

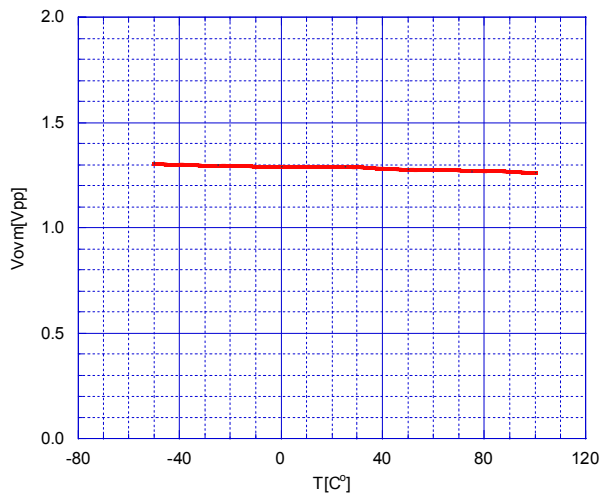

Differential Gain(Y mode) vs. Temperature  
(Vcc=3V)

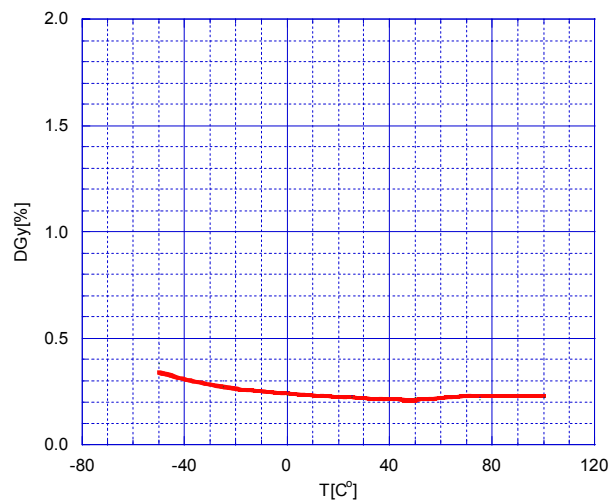


## TYPICAL CHARACTERISTICS

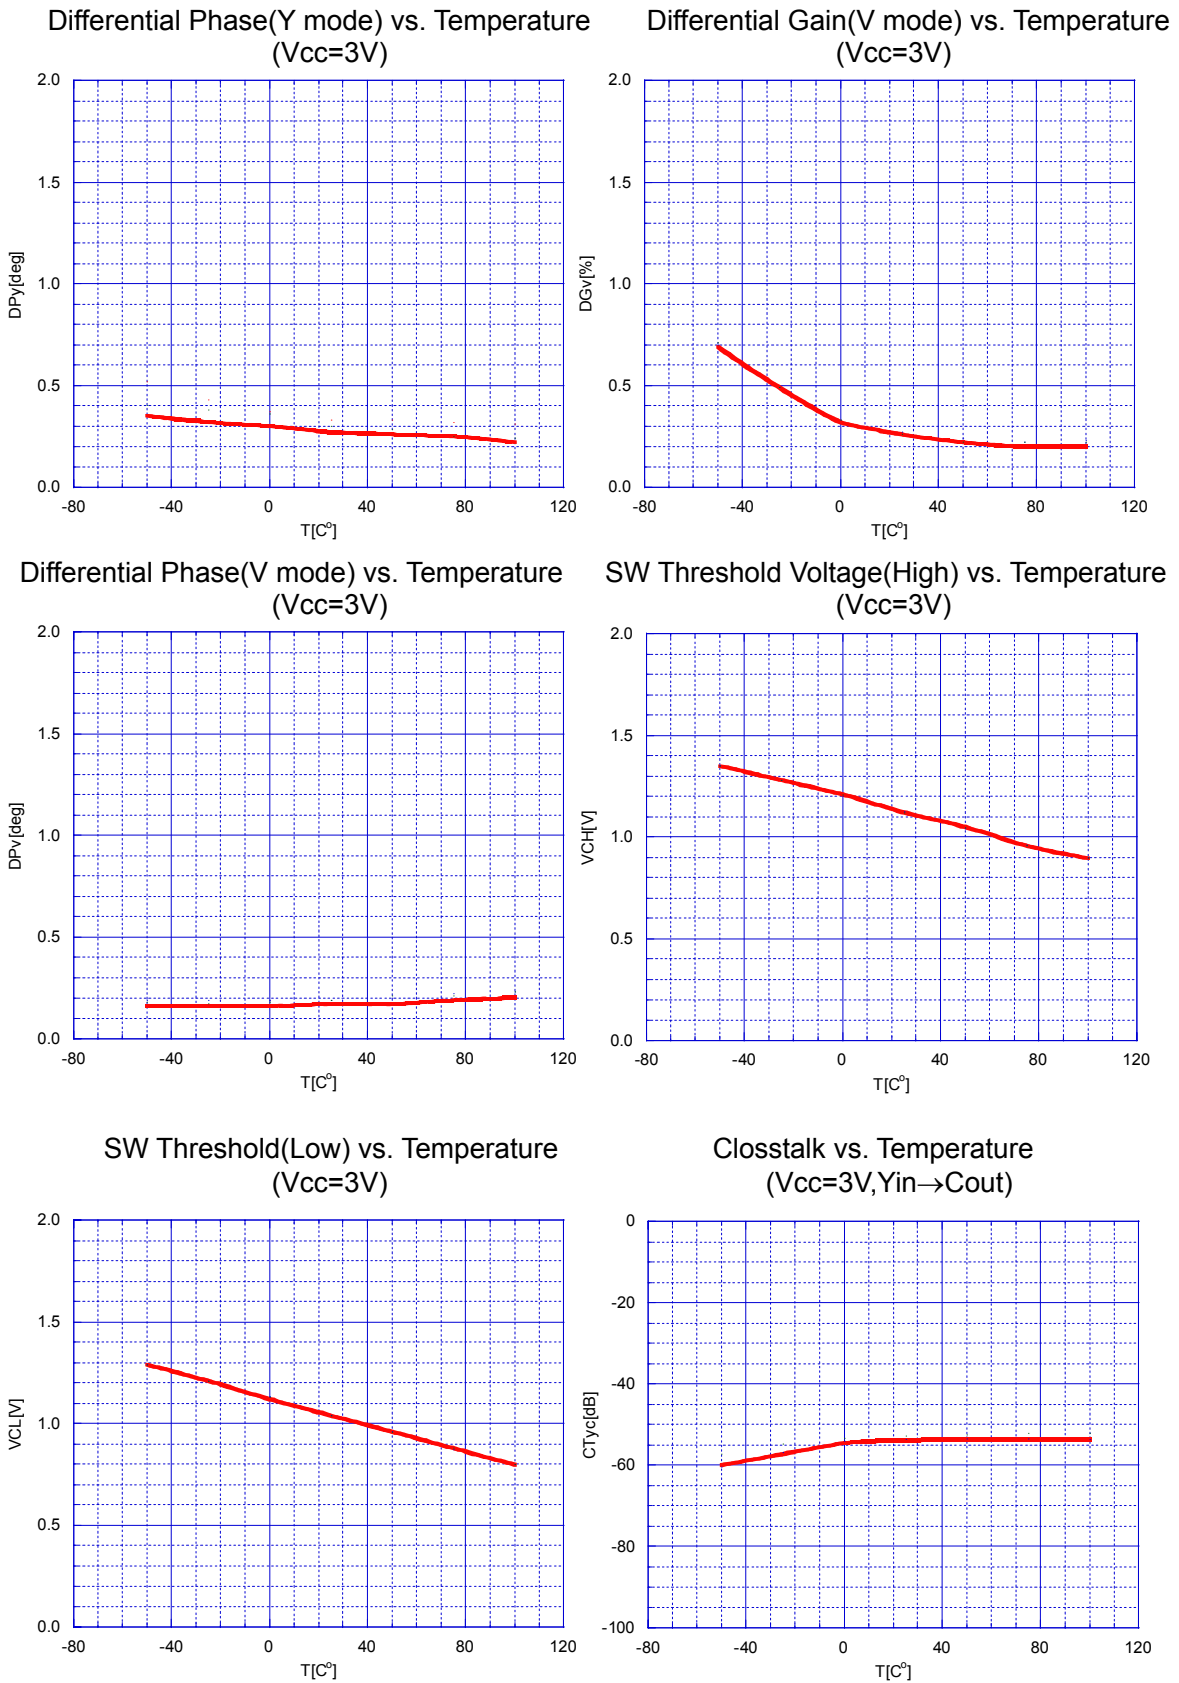


## TYPICAL CHARACTERISTICS


Crosstalk vs. Temperature  
(Vcc=3V, Cin→Yout)

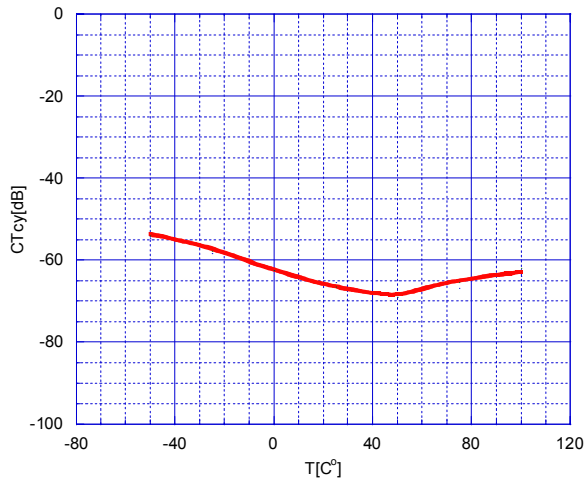


S/N Ratio vs. Temperature  
(Vcc=3V, Ysignal)

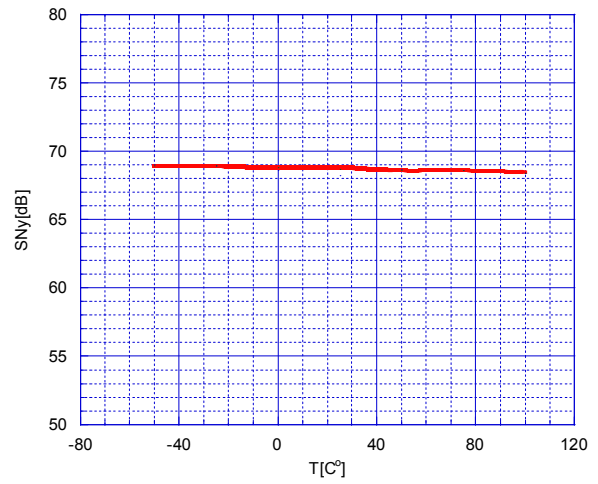


S/N Ratio vs. Temperature  
(Vcc=3V, Csignal AM)

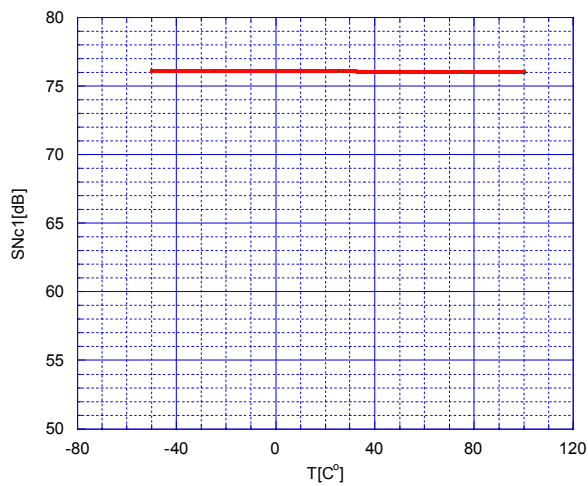


S/N Ratio vs. Temperature  
(Vcc=3V, Csignal PM)

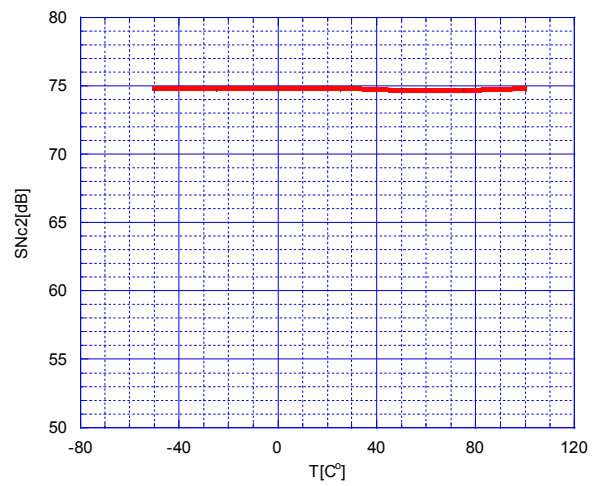

S/N Ratio vs. Temperature  
(Vcc=3V, Vsignal)

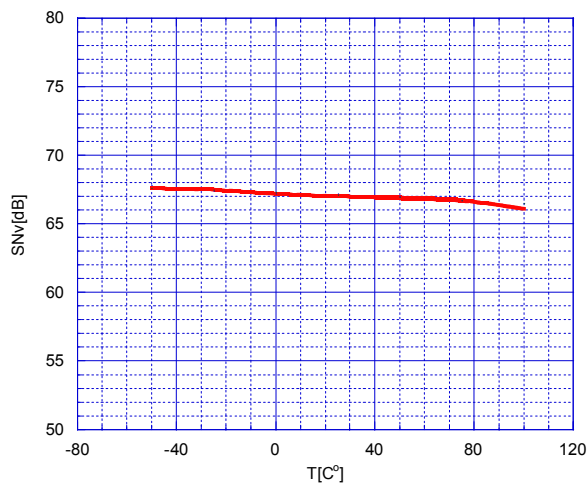


2<sup>nd</sup> Distortion vs. Temperature  
(Vcc=3V, Ysignal)

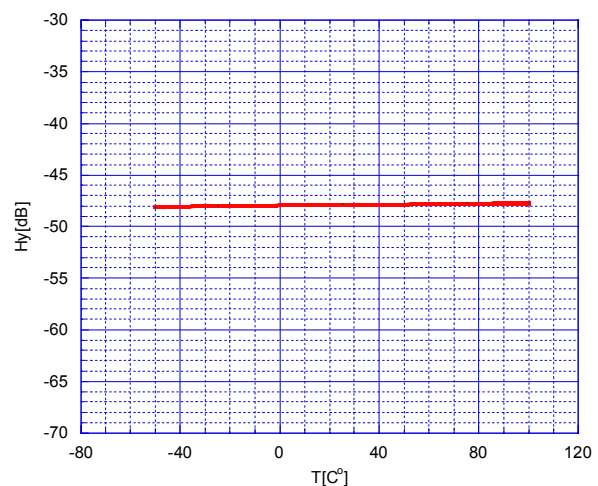


## TYPICAL CHARACTERISTICS

2<sup>nd</sup> Distortion vs. Temperature  
(V<sub>cc</sub>=3V, C<sub>signal</sub>)

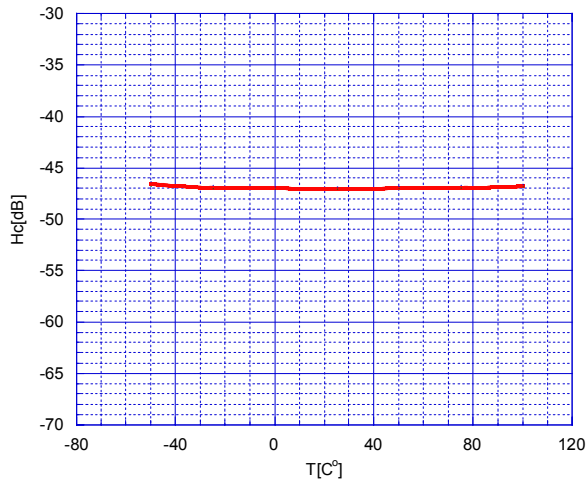

2<sup>nd</sup> Distortion vs. Temperature  
(V<sub>cc</sub>=3V, V<sub>signal</sub>)

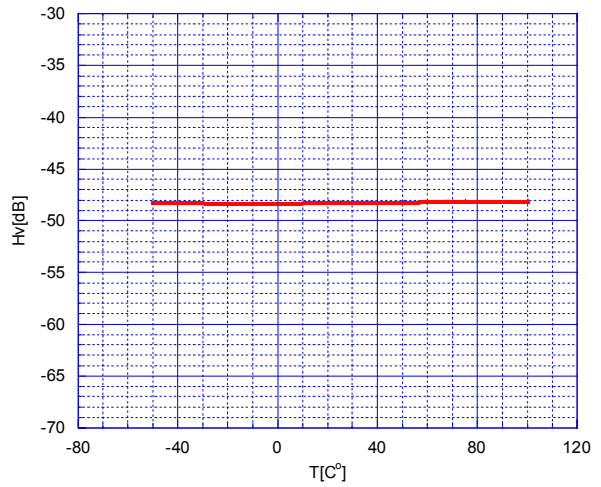

[CAUTION]  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2567V-TE2](#) [NJM2567V-TE1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.