

LT8708/LT8708-1 80V V_{IN} and V_{OUT} Synchronous 4-Switch Buck-Boost DC/DC Controller with Flexible Bidirectional Capability

DESCRIPTION

Demonstration circuit 2719A is a high performance bidirectional buck-boost converter featuring the LT®8708/LT8708-1 that can operate from input voltages above, below or equal to the output voltage. The demo board input range is 10.5V to 14.5V (25V_{MAX}). The output voltage is set at 14.5V and the output current limit at 40A. The board can operate in both forward and reverse mode.

The controller has integrated input voltage and output voltage regulators and two sets of input and output current regulators that control current flow in forward or reverse direction. Features are included that simplify bidirectional power conversion in battery/capacitor backup systems and other applications that may need regulation of V_{IN}, V_{OUT}, I_{IN} and/or I_{OUT}.

While the current mode control limits the inductor current both in normal and in reverse direction these current limits have some variation as input/output voltage changes. The forward and reverse input and output current regulators offer four accurate current limits that can be set individually.

The input voltage regulator is often used in applications with high impedance power sources and will reduce the forward current if the input voltage drops below the set point. When operating with reverse current flow, the input voltage regulator regulates the voltage at the input side.

The operating mode of the controller is determined through the MODE pin (jumper JP9 Pins 5 to 12) and can be set to discontinuous mode, hybrid discontinuous mode, forced continuous mode and Burst Mode® operation.

The LT8708 is capable of bidirectional operation when operating in the continuous conduction mode (CCM). DCM, HCM and Burst Mode operation only allow power to flow in one direction. Additional circuitry may be needed depending on the application.

Design files for this circuit board are available.

All registered trademarks and trademarks are the property of their respective owners.

PERFORMANCE SUMMARY

Specifications are at T_A = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		10.5	14.5	25	V
V _{OUT}	Output Voltage			14.5		V
I _{IN}	Input Current Limit			46.5		A
I _{OUT}	Output Current Limit			40		A
F _{sw}	Switching Frequency			120		kHz
EFF	Efficiency at DC Input	V _{IN} = 11V, V _{OUT} = 14.5V, I _{OUT} = 35A V _{IN} = 12V, V _{OUT} = 14.5V, I _{OUT} = 35A V _{IN} = 14.5V, V _{OUT} = 14.5V, I _{OUT} = 35A		96.7		%
				97.2		%
				97.6		%

DEMO MANUAL DC2719A

QUICK START PROCEDURE

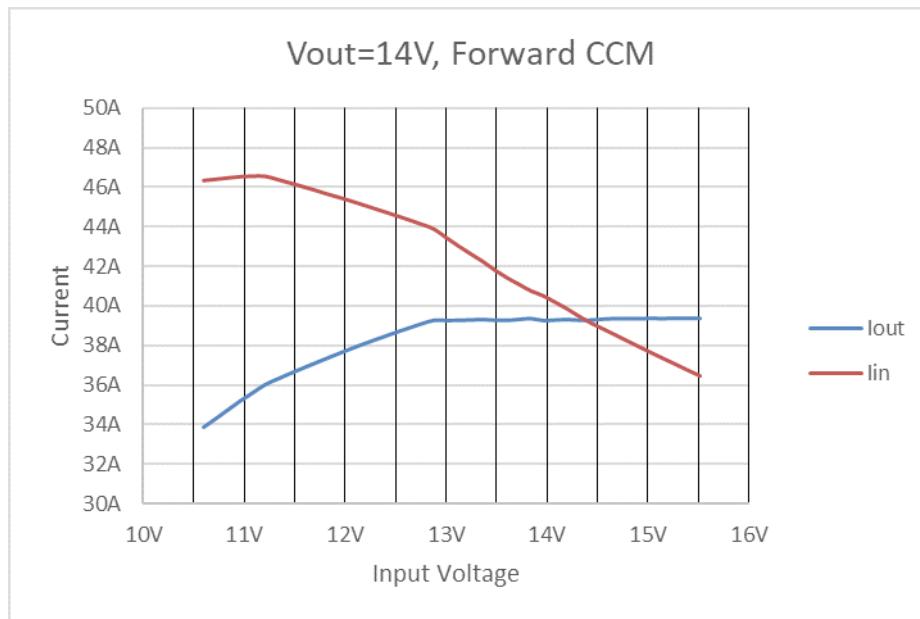


Figure 1. Input and Output Currents as Function of Input Voltage, with a Constant Voltage Load Set at 14.0V Connected to V_{OUT} . Forward CCM Mode. Output Current is Lower than Set Point when V_{IN} is Below 13V Because the Input Current Limit is Activated

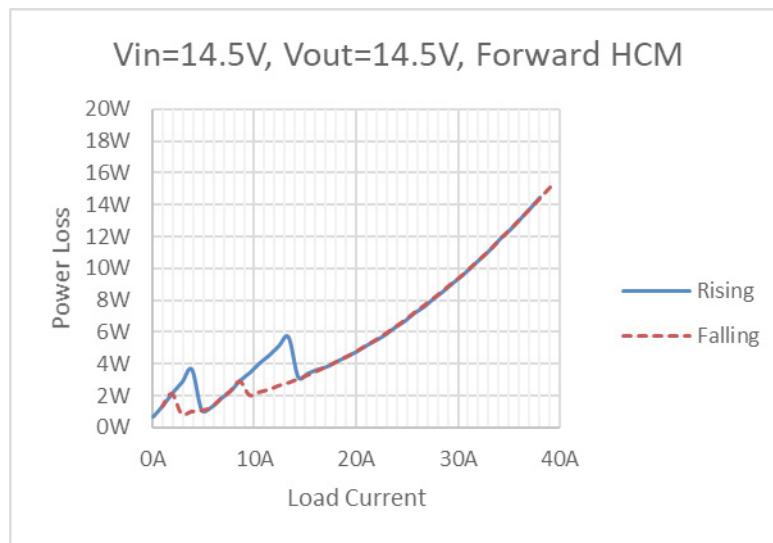


Figure 2. Power Loss in Forward HCM Buck-Boost Mode as Function of Load Current. $V_{IN} = V_{OUT} = 14.5V$. Constant Current Load Connected to V_{OUT} . The Measurement is Done by Increasing Load Current (Blue Line) Until Current Limit, then Decreasing the Current to Zero (Red Line)

QUICK START PROCEDURE

1. Demonstration circuit 2719A is easy to set up to evaluate the performance of the LT8708. Refer to Figure 3 for proper measurement equipment setup and follow the procedure below.
2. With power off, connect the input power supply to V_{IN} (J1) and GND (J2). Attach the load to V_{OUT} (J3) and GND (J4). Use short and thick cables because the current level is high. If batteries are used when testing the demo board, always use suitable circuit breakers for safety.
3. Set the power supply at 12V. The power source must have the current limit set at 50A or higher if you want to evaluate the board with full load over the input range. Monitor circuit board temperature when running with full power for extended time, and if necessary add some airflow for cooling.
4. Once the proper output voltage is established, adjust the load and the input voltage within the operating range and observe the output voltage regulation, ripple voltage and efficiency and other parameters as needed. For reverse power flow testing, see data sheet. When measuring input/output voltages, measure at the input/output terminals of the board to avoid measurement error caused by voltage drops in cables.

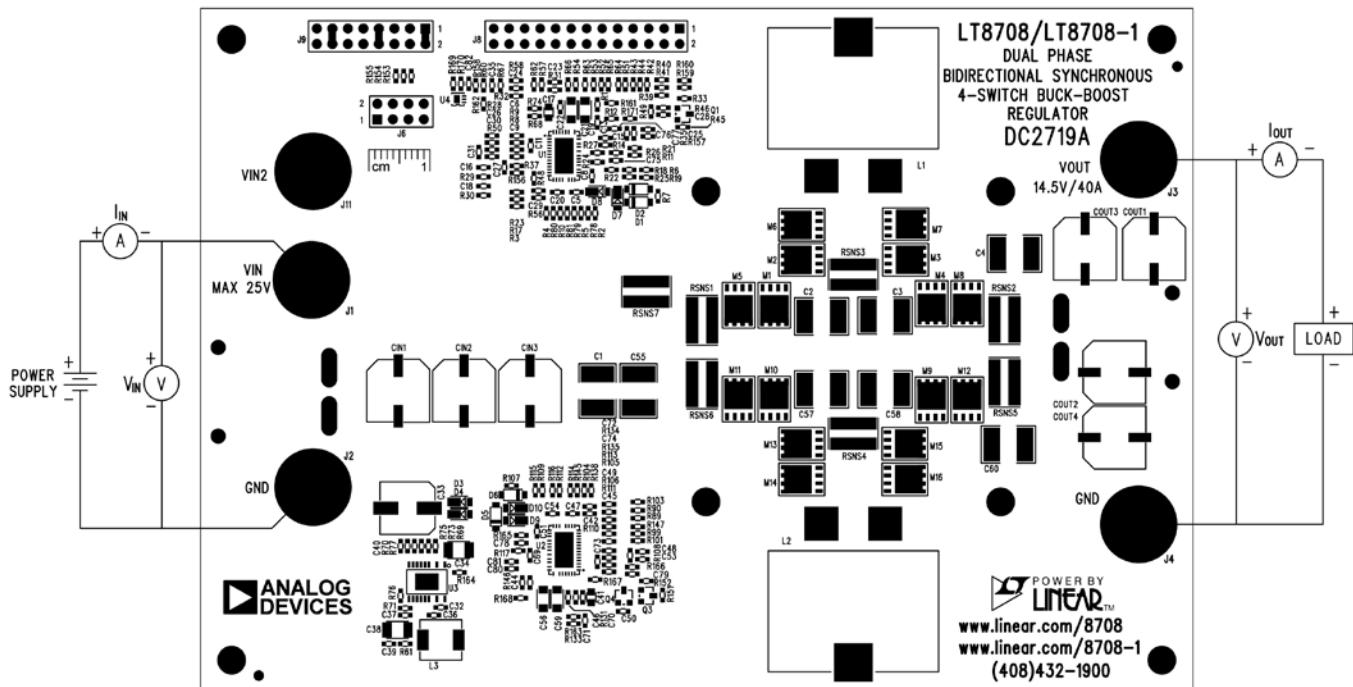


Figure 3. Test Setup

DEMO MANUAL DC2719A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	7	COUT1, CIN1, COUT2, CIN2, COUT3, CIN3, COUT4	CAP, EP-CAP, 270µF, 25V, 20% 10×10.5	SUN ELEC. 25Hvh270M
2	8	C1, C2, C3, C4, C55, C57, C58, C60	CAP, 10µF, X7S, 100V, 10%, 2220	TDK, CKG57KX7S2A106M335JH
3	4	C5, C8, C51, C54	CAP, 0.22µF, X7R, 16V, 10%, 0603	MURATA, GRM188R71C224KA01D
4	4	C6, C9, C45, C49	CAP, 1000pF, X7R, 25V, 10%, 0603	MURATA, GRM188R71E102KA01D
5	2	C11, C73	CAP, 3.3nF, X7R, 25V, 10%, 0603	MURATA, GRM188R71E332KA01D
6	2	C25, C27	CAP, 4.7nF, X7R, 25V, 10%, 0603	MURATA, GRM188R71E472KA01D
7	4	C13, C15, C44, C69	CAP, 47nF, X7R, 25V, 10%, 0603	MURATA, GRM188R71E473KA01D
8	8	C16, C18, C23, C24, C53, C70, C71, C74	CAP, 10nF, X7R, 25V, 10%, 0603	MURATA, GRM188R71E103KA01D
9	2	C17, C41	CAP, 4.7µF, X7R, 16V, 10%, 0805	MURATA, GRM21BR71C475KA73L
10	4	C19, C21, C56, C59	CAP, 4.7µF, X7S, 100V, 10%, 1206	AVX, 12061Z475KAT2A
11	4	C20, C22, C46, C47	CAP, 4.7µF, X5R, 10V, 10%, 0603	MURATA, GRM188R61A475KE15D
12	2	C26, C50	CAP, 1µF, X7R, 10V, 10%, 0603	MURATA, GRM188R71A105KA61D
13	3	C29, C42, C75	CAP, 100pF, COG, 25V, 5%, 0603	WURTH ELEKTRONIK, 885012006038
14	2	C30, C48	CAP, 470pF, COG, 25V, 5%, 0603	WURTH ELEKTRONIK, 885012006042
15	1	C31	CAP, 18nF, X7R, 25V, 10%, 0603	MURATA, GRM188R71E183JA01D
16	4	C76, C77, C80, C81	CAP, 0.1µF, X7R, 25V, 10%, 0603	MURATA, GRM188R71E104KA01D
17	2	C78, C79	CAP, 2.2nF, X7R, 25V, 10%, 0603	MURATA, GRM188R71E222KA01D
18	4	D1, D2, D5, D6	DIODE, 200V, 1A, SOD123F	CENTRAL SEMI., CMMR1U-02
19	2	D3, D4	DIODE, DFLS1100, POWERDI123	DIODES., DFLS1100-7
20	2	L1, L2	IND., PWR., 3.3µH, ±10%	COILCRAFT, SER2915L-332KL
21	8	M1, M2, M3, M4, M9, M10, M13, M15	N-CH., 25V, PG-TDS0N-8	INFINEON, BSC009NE2LS5
22	2	Q3, Q4	N-CH., 30V, SOT23	NEXDERIA, PMV40UN2
23	6	RSNS1, RSNS2, RSNS3, RSNS4, RSNS5, RSNS6	RES, CHIP, SENSE, 0.002Ω, 3W, 1%, WIDE 2512	SUSUMU, KRL6432E-M-R002-F-T1
24	8	R2, R4, R5, R10, R104, R115, R112, R114	RES, CHIP, 1Ω, 1/10W, 0603	VISHAY, CRCW06031R00FKEA
25	2	R7, R107	RES, CHIP, 3.3Ω, 1/10W, 1%, 0603	VISHAY, CRCW06033R30FKEA
26	9	R8, R9, R12, R14, R89, R106, R111, R117, R146	RES, CHIP, 10Ω, 1/10W, 1%, 0603	VISHAY, CRCW060310R0FKEA
27	1	R11	RES, CHIP, 261k, 1/10W, 1%, 0603	VISHAY, CRCW0603261KFKEA
28	2	R17, R18	RES, CHIP, 93.1k, 1/10W, 1%, 0603	VISHAY, CRCW060393K1FKEA
29	1	R19	RES, CHIP, 133k, 1/10W, 1%, 0603	VISHAY, CRCW0603133KFKEA
30	3	R23, R25, R28	RES, CHIP, 12.1k, 1/10W, 1%, 0603	VISHAY, CRCW060312K1FKEA
31	1	R24	RES, CHIP, 178k, 1/10W, 1%, 0603	VISHAY, CRCW0603178KFKEA
32	1	R26	RES, CHIP, 21.5k, 1/10W, 1%, 0603	VISHAY, CRCW060321K5FKEA
33	1	R27	RES, CHIP, 68.1k, 1/10W, 1%, 0603	VISHAY, CRCW060368K1FKEA
34	7	R29, R32, R35, R37, R131, R133, R135	RES, CHIP, 17.4k, 1/10W, 1%, 0603	VISHAY, CRCW060317K4FKEA
35	3	R30, R31, R108	RES, CHIP, 20.0k, 1/10W, 1%, 0603	VISHAY, CRCW060320K0FKEA
36	1	R33	RES, CHIP, 665k, 1/10W, 1%, 0603	VISHAY, CRCW0603665KFKEA
37	7	R39, R41, R45, R56, R110, R152, R162	RES, CHIP, 100k, 1/10W, 1%, 0603	VISHAY, CRCW0603100KFKEA
38	2	R48, R103	RES, CHIP, 365k, 1/10W, 1%, 0603	VISHAY, CRCW0603365KFKEA

DEMO MANUAL DC2719A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
39	3	R50, R154, R155	RES, CHIP, 10k, 1/10W, 1%, 0603	VISHAY, CRCW060310K0FKEA
40	1	R151	RES, CHIP, 27.4k, 1/10W, 1%, 0603	VISHAY, CRCW060327K4FKEA
41	1	R153	RES, CHIP, 14.7k, 1/10W, 1%, 0603	VISHAY, CRCW060314K7FKEA
42	1	R163	RES, CHIP, 200, 1/10W, 1%, 0603	VISHAY, CRCW0603200RFKEA
43	1	U1	IC., BUCK-BOOST DC/DC CONTROLLER. 40L-5x8-UHG	ANALOG DEVICES, LT8708EUHG#PBF
44	1	U2	IC., BUCK-BOOST DC/DC CONTROLLER. 40L-5x8-UHG	ANALOG DEVICES, LT8708-1EUHG#PBF

Additional Demo Board Circuit Components


45	0	COUT5, CIN4, CIN5 (OPT)	CAP., OPTION	
46	0	C28, C32, C35, C36, C37, C39, C40, C72, C82 (OPT)	CAP., OPTION 0603	
47	0	C33 (OPT)	CAP., ALUM, 8x10.2, OPTION	
48	0	C34, C38 (OPT)	CAP., OPTION, 1210	MURATA, GRM32ER72A105KA01L
49	0	D7, D8, D9, D10 (OPT)	DIODE, OPTION, POWERDI123	DIODES., DFLS1100-7
50	0	L3 (OPT)	IND., OPTION, IHLP-2525CZ-11	
51	0	M5, M6, M7, M8, M11, M12, M14, M16 (OPT)	N-CH., OPTION PG-TDS0N-8	
52	0	Q1 (OPT)	TRANSISTOR, OPTION, SOT23	
53	0	RSNS7 (OPT)	RES, CHIP, WIDE 2512 OPTION	
54	0	RT1 (OPT)	THERMISTOR, OPTION 0603	
55	0	R1, R21, R22, R40, R42, R43, R44, R46, R49, R51, R52, R53, R54, R57, R58, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R73, R74, R75, R76, R77, R90, R99, R101, R113, R159, R160, R158, R78, R79, R80, R81, R109, R116, R138, R145, R161, R169, R170, R171	RES., OPTION, 0603	
56	12	R3, R6, R105, R134, R147, R156, R157, R164, R165, R166, R167, R168	RES, CHIP, 0Ω, 1/10W, 1%, 0603	VISHAY, CRCW06030000Z0EA
57	0	U3 (OPT)	I.C. LT8631EFE, 20-TSSOP	
58	0	U4 (OPT)	IC., LT6703-3 DC PACKAGE	

Hardware for Demo Board Only


59	5	J1, J2, J3, J4, J11	STUD, TEST PIN	PEM, KFH-032-10ET
60	5	J1, J2, J3, J4, J11	NUT, BRASS NUTS # 10-32	ANY #10-32M/S BR PL
61	5	J1, J2, J3, J4, J11	RING, LUG RING # 10	KEYSTONE RING #10 8205
62	5	J1, J2, J3, J4, J11	WASHER, TIN PLATED BRASS	ANY #10 EXT BZ TN
63	0	J5, J10 (OPT)	CON., 2-PIN, POWERPOLE	
64	1	J6	HEADER 4-PIN 0.1 DOUBLE ROW	WURTH ELEKTRONIK, 61300821121
65	1	J8	HEADER 13-PIN 0.1 DOUBLE ROW	WURTH ELEKTRONIK, 61302621121
66	1	J9	HEADER 8-PIN 0.1 DOUBLE ROW	WURTH ELEKTRONIK, 61301621121
67	3	XJ9 (1-2), XJ9 (7-8), XJ9 (13-14)	SHUNT, 0.1 CENTER	WURTH ELEKTRONIK, 60900213421
68	4	MH1-MH4	STAND-OFF, NYLON 0.375"	WURTH ELEKTRONIK, 702933000
69	1		PRINTED CIRCUIT BOARD	DEMO CIRCUIT 2719A
70	1		STENCIL	STENCIL DC2719A

DEMO MANUAL DC2719A

SCHEMATIC DIAGRAM

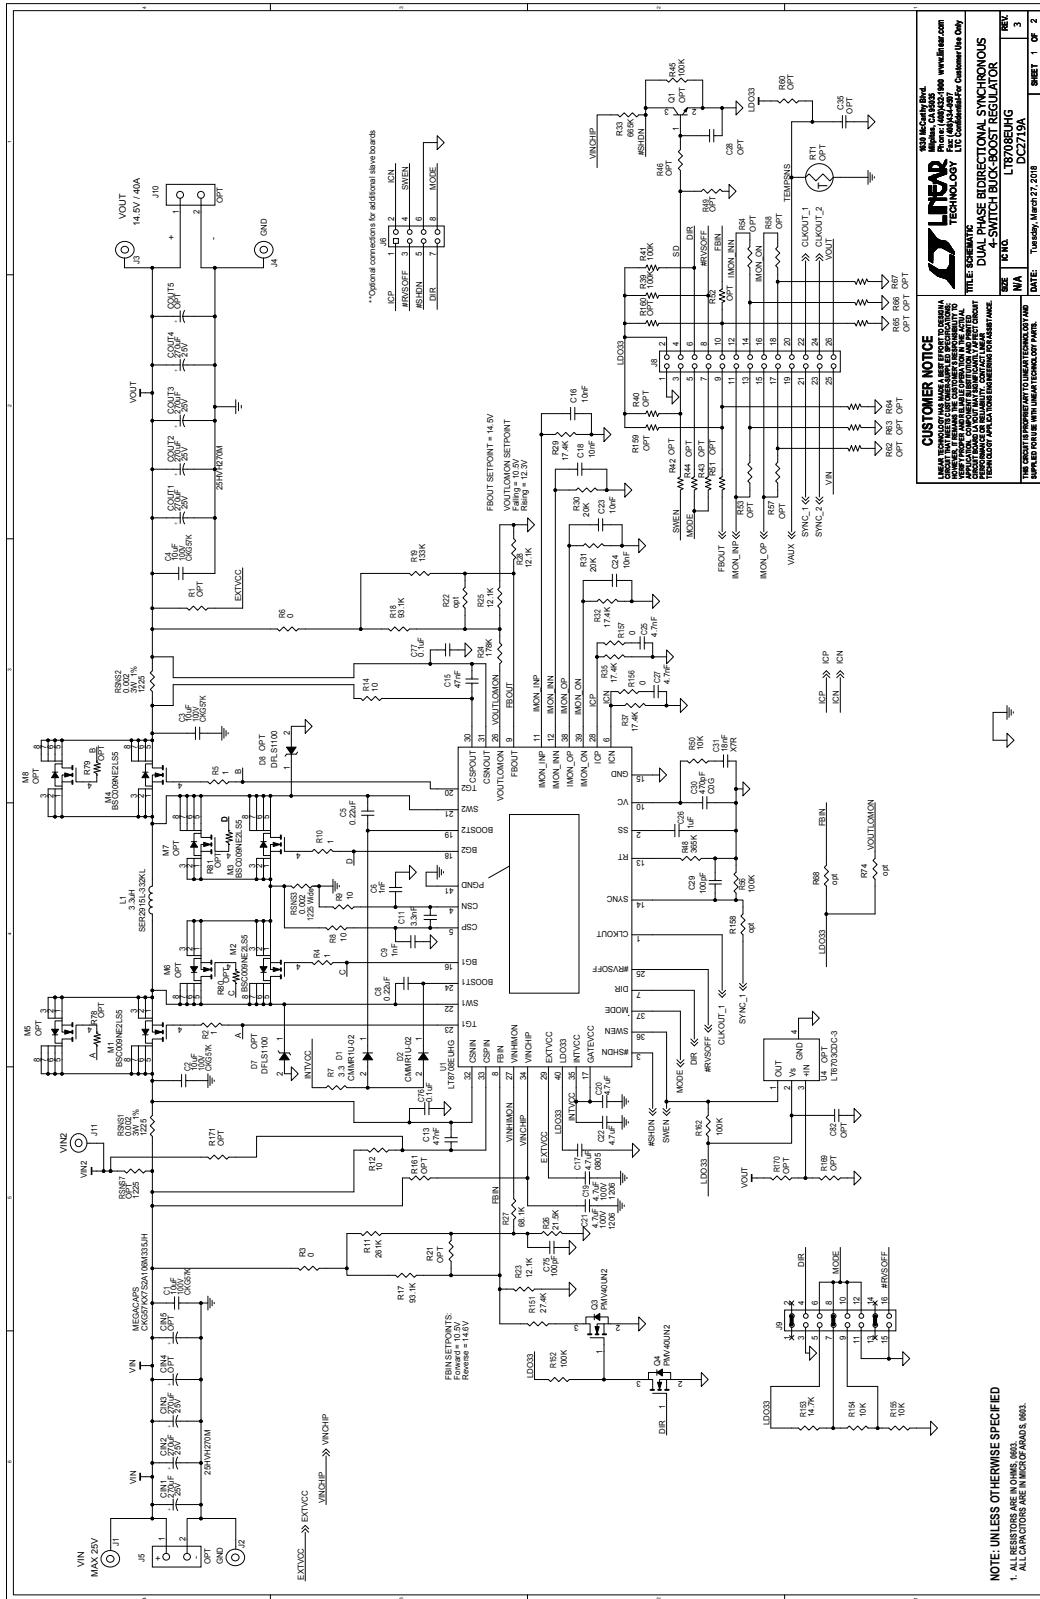

SCHEMATIC DIAGRAM

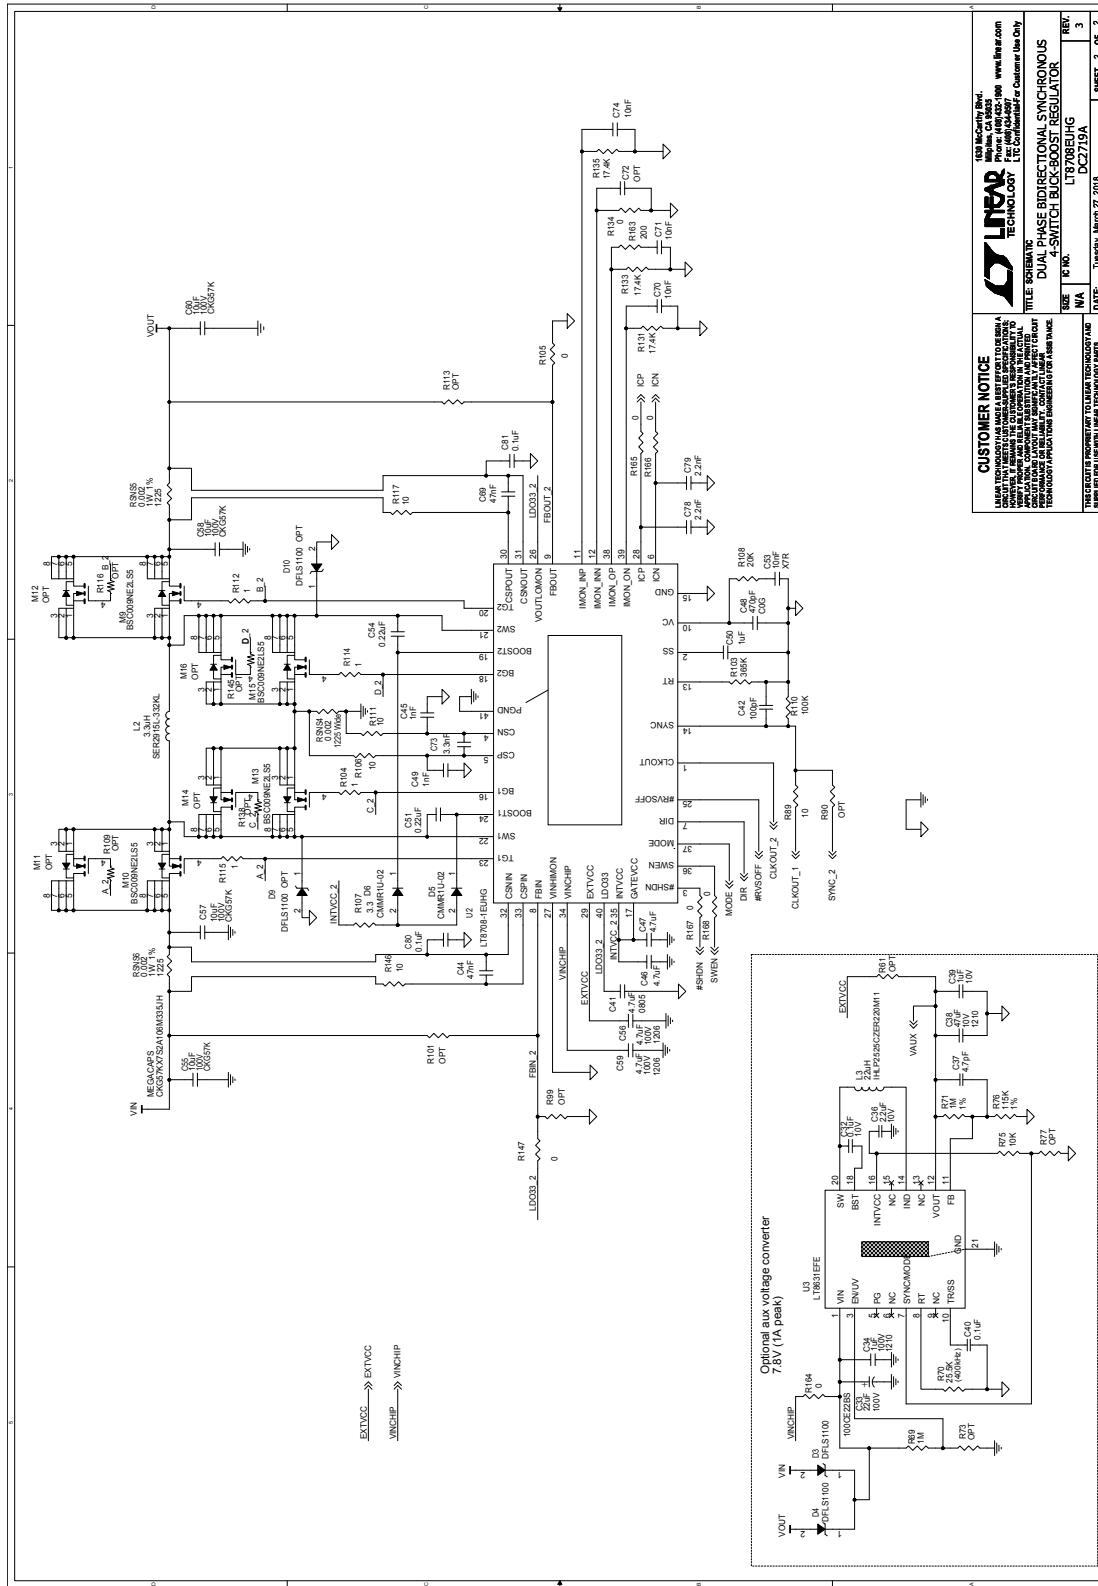

DEMO MANUAL DC2719A



ESD Caution

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.