


## FM IF IC FOR PAGERS

### ■ GENERAL DESCRIPTION

The **NJM2537** is a low power FM IF IC for pagers.

It is capable of designing dual conversion pager system because of including a mixer circuit. Also it includes RSSI function, so that it is easy to design automatic gain control (AGC) which improves interference when strong signal is received.

### ■ PACKAGE OUTLINE




**NJM2537V**

### ■ FEATURES

- Low Operating Voltage           1.1 to 4.0V
- Low Operating Current         1.2mA typ.at V<sup>+</sup>=1.4V
- RF Input Frequency           10 to 50MHz
- 2nd Mixer
- Package Outline                SSOP20

### ■ PIN FUNCTION AND BLOCK DIAGRAM

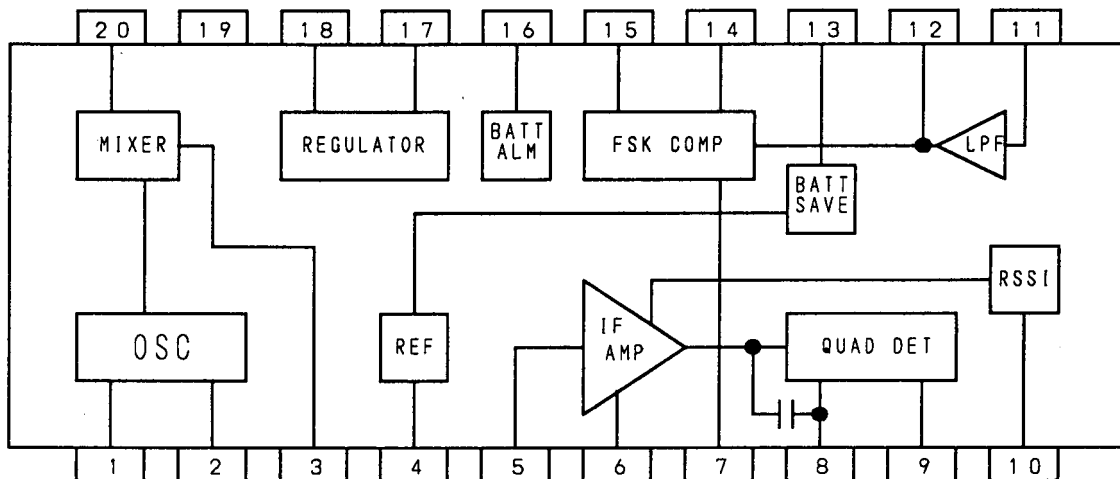

- |                   |              |
|-------------------|--------------|
| 1. OSC IN         | 11. LPF IN   |
| 2. OSC OUT        | 12. LPF OUT  |
| 3. MIXER OUT      | 13. BS       |
| 4. V <sup>+</sup> | 14. CHARGE   |
| 5. IF IN          | 15. FSK OUT  |
| 6. DECOUPLING     | 16. VALM     |
| 7. FSK REF        | 17. REG CONT |
| 8. QUAD IN        | 18. REG OUT  |
| 9. AF OUT         | 19. GND      |
| 10. RSSI          | 20. MIXER IN |

# NJM2537

## ■ ABSOLUTE MAXIMUM RATINGS

( $T_a=25^\circ\text{C}$ )


PARAMETER	SYMBOL	RATINGS	UNIT
Supply voltage	$V_{CC}$	4.0	V
Power Dissipation	$P_D$	300	mW
Operating Temperature Range	$T_{opr}$	-30 to +85	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-40 to +125	$^\circ\text{C}$

## ■ ELECTRICAL CHARACTERISTICS

( $V^+=1.4\text{V}$ ,  $f_c=21.7\text{MHz}$ ,  $f_{IF}=455\text{kHz}$ ,  $f_{mod}=600\text{Hz}$ ,  $f_{dev}=\pm 4\text{kHz}$ ,  $T_a=25^\circ\text{C}$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
No Signal Operating Current	$I_{CCq}$		-	1.2	1.5	mA
Battery Saving	$I_{CCS}$		-	0	5	$\mu\text{A}$
Operating Current Mixer Gain	GMIX	After Ceramic Filter	11	14.5	18	dB
Mixer Intercept Point	IP		-	103	-	dB $\mu\text{VEMF}$
Mixer Input Resistance	$R_{inMIX}$		-	5	-	k $\Omega$
Mixer Output Resistance	$R_{oMIX}$		-	2	-	k $\Omega$
IF Amplifier Input Resistance	$R_{inIF}$		-	2	-	k $\Omega$
S / N 1	S / N 1	MIXER Input, $V_i=60\text{dB}\mu\text{VEMF}$	-	63	-	dB
S / N 2	S / N 2	IF Input, $V_i=60\text{dB}\mu\text{VEMF}$	-	63	-	dB
S / N 3	S / N 3	IF Input, $V_i=22\text{dB}\mu\text{VEMF}$	-	25	-	dB
-3dB Limiting Sensitivity 1	LIM1	MIXER Input	-	12	17	dB $\mu\text{VEMF}$
-3dB Limiting Sensitivity 2	LIM2	IF Input	-	22	27	dB $\mu\text{VEMF}$
Demodulated Output Level	$V_{od}$	IF Input, $V_i=60\text{dB}\mu\text{VEMF}$	30	46	65	mVrms
AM Rejection Ratio	AMR	IF Input, $V_i=60\text{dB}\mu\text{VEMF}$ , AM=30%	-	50	-	dB
Duty Ratio at Wave Shaped Output	DR	IF Input, $V_i=60\text{dB}\mu\text{VEMF}$	40	50	60	%
RSSI Output Voltage	$V_{RSSI}$	IF Input, $V_i=65\text{dB}\mu\text{VEMF}$	0.48	0.62	0.76	V
RSSI Output Resistance	$R_{RSSI}$		-	62	-	k $\Omega$
Quick Charge / Discharge Current	$I_{ch}$	GND, 0.18V	40	70	115	$\mu\text{A}$
Alarm Detection Voltage	$V_{alm}$		1.05	1.10	1.15	V
Regulator Output Voltage	$V_{reg}$	$R_L=430\Omega$	0.95	1.00	1.05	V
Low level Output Voltage of VALM Terminal	$V_{almL}$	$I_L=100\mu\text{A}$	-	0.1	0.4	V
High Level Leak Current of VALM Terminal	$I_{almH}$		-	0	2	$\mu\text{A}$
Low Level Output Voltage of FSK-OUT Terminal	$V_{fskL}$	$I_L=100\mu\text{A}$	-	0.1	0.4	V
High Level Leak Current of FSK-OUT Terminal	$I_{fskH}$		-	0	2	$\mu\text{A}$
Low Level Output Voltage of REG-OUT Terminal	$V_{regL}$	$I_L=100\mu\text{A}$	-	-	0.6	V

## APPLICATION CIRCUIT

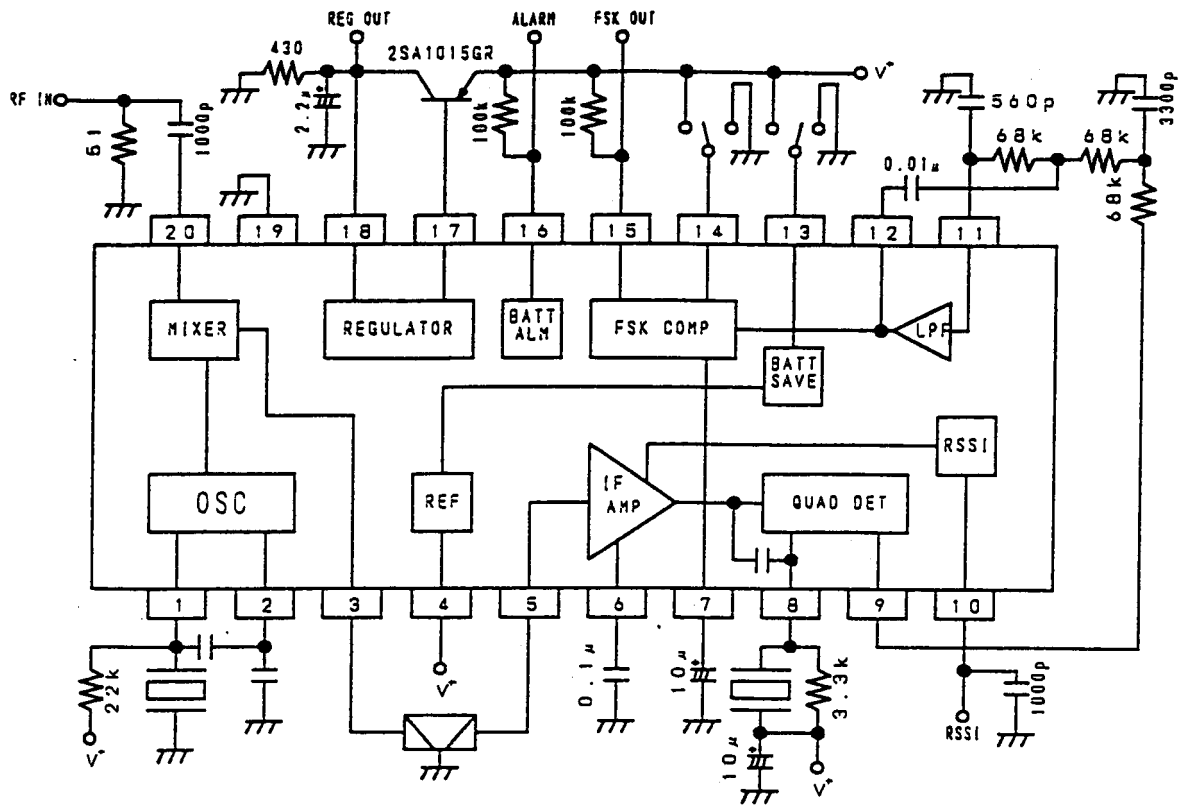

# NJM2537

## ■ TERMINAL FUNCTION

PIN NO.	SYMBOL	PIN VOLTAGE (V)	FUNCTION	EQUIVALENT CIRCUIT
1	OSC IN	1.38	Local Oscillator Input. In case of using a crystal oscillator, it is connected.	
2	OSC OUT	0.68	Local Oscillator Output. In case of using an external oscillator, the external clock is input.	
20	MIX IN	0.8	Mixer input. Input resistance is 5kΩ typical.	
3	MIX OUT	0.7	Mixer output. Output resistance is 2kΩ typical.	
5	IF IN	1.38	Limiter amplifier input. Input resistance is 2kΩ typical.	
6	DEC	1.38	Decoupling for bias.	
8	QUAD IN	1.4	Input of quadrature detection circuit. A ceramic discriminator is connected.	
9	AF OUT	0.16	Demodulated signal Output.	

## ■ TERMINAL FUNCTION

PIN NO.	SYMBOL	PIN VOLTAGE (V)	FUNCTION	EQUIVALENT CIRCUIT
10	RSSI	0	RSSI output	
11	LPF IN	0.18	Input of a low pass filter. It is biased from AF-OUT (9pin) through an external RC filter.	
12	LPF OUT	0.18	Output of a low pass filter.	
7	FSK REF	0.18	Reference input of a wave shaping comparator. An external capacitor is connected.	
13	BS	-	Control of a battery saving circuit. Hi : active Lo : suspended	
14	CHARGE	-	Control of a quick charge / discharge circuit. Hi : Its circuit turns ON Lo : Its circuit turns OFF	
15	FSK OUT	-	Output of a wave shaping circuit. The output signal is inverted against LPF output signal.	

# NJM2537


## ■ TERMINAL FUNCTION

PIN NO.	SYMBOL	PIN VOLTAGE (V)	FUNCTION	EQUIVALENT CIRCUIT
16	VALM	0.1	Output of the alarm signal. When $V^+$ drops down to 1.1V, this output becomes high.	
17	REG CONT	0.6	Control of an external PNP transistor used for the regulator.	
18	REG OUT	1.0	Monitoring of the regulator.	
4	$V^+$	-	Power Supply	-
19	GND	-	Ground	-

## ■ TYPICAL CHARACTERISTICS


**S+N, N, AMR vs. Mixer Input**

( $V^+ = 1.4V$ ,  $f_{RF} = 21.7MHz$ ,  $f_{LO} = 22.155MHz$   
 $V_{LO} = 110dBuV$ ,  $f_{dev} = \pm 4kHz$ ,  $f_{mod} = 600Hz$ )

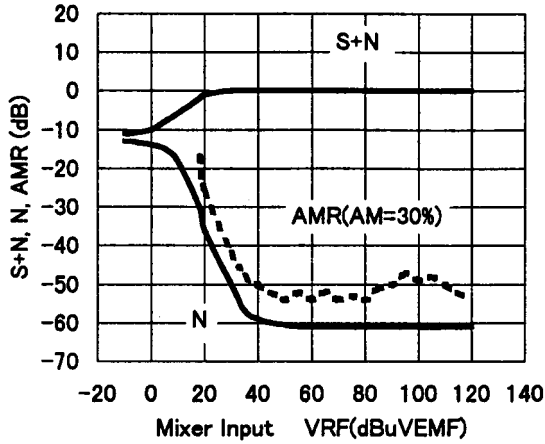


**S+N, N, AMR vs. IF Input**

( $V^+ = 1.4V$ ,  $f_{IF} = 455kHz$ ,  $f_{dev} = \pm 4kHz$ ,  $f_{mod} = 600Hz$ )

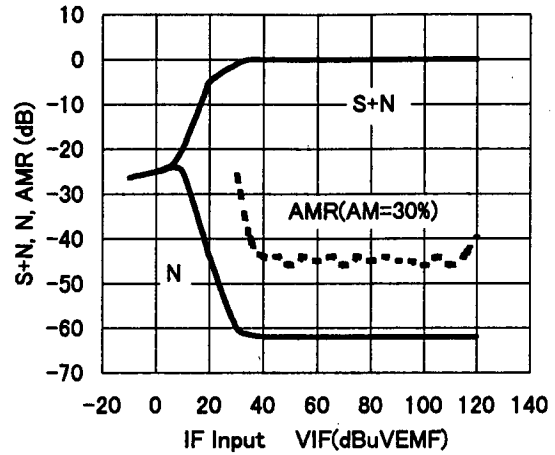


**Mixer Gain vs. Supply Voltage**

( $f_{in} = 21.7MHz$ ,  $V_{RF} = 60dBuV$ ,  $f_{LO} = 22.155MHz$ ,  $V_{LO} = 110dBuV$ )

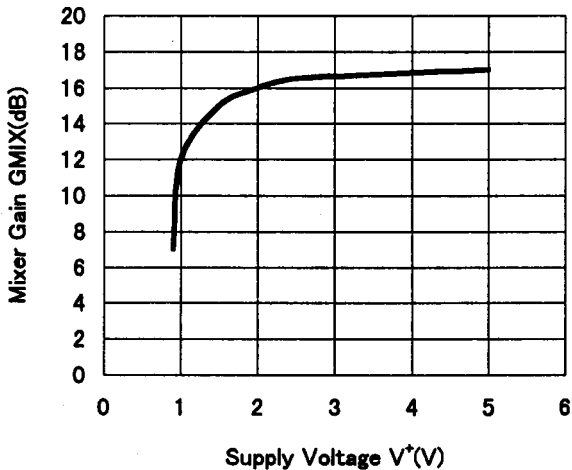


**Operating Current vs. Supply Voltage**

(No Signal)

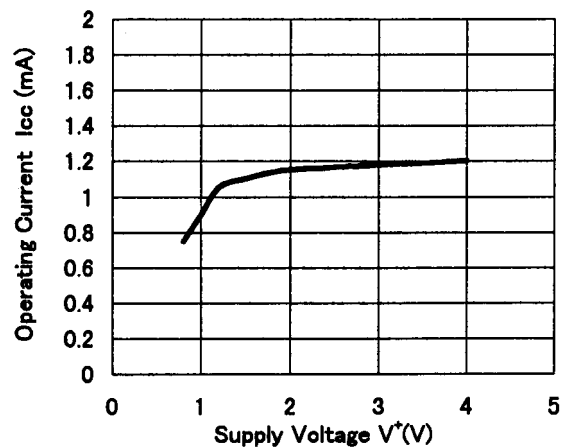


**RSSI vs. Supply Voltage**

( $V_{IF} = 65dBuVEMF$ ,  $f_{IF} = 455kHz$ )

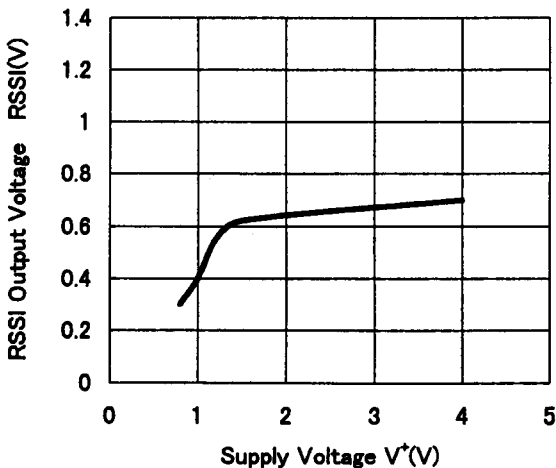


**Demodulated Output vs. Supply Voltage**

( $V_{in} = 60dBuVEMF$ ,  $f_{IF} = 455kHz$ ,  $f_{mod} = 600Hz$ )

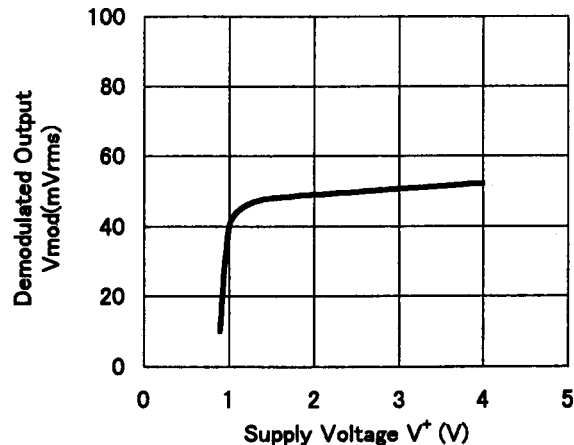


## ■ TYPICAL CHARACTERISTICS


Quick Charge Current vs. Supply Current  
(12pin=0.18V)

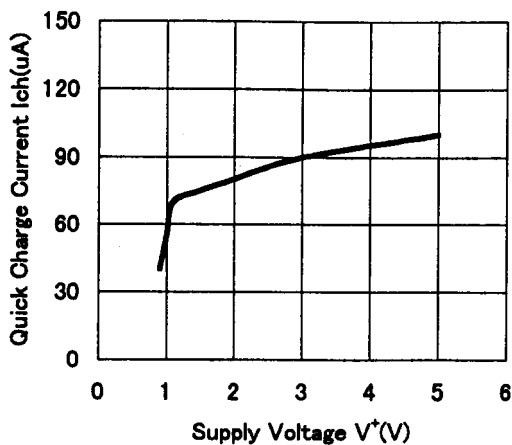


Operating Current vs. Temperature  
(V<sup>+</sup>=1.4V)

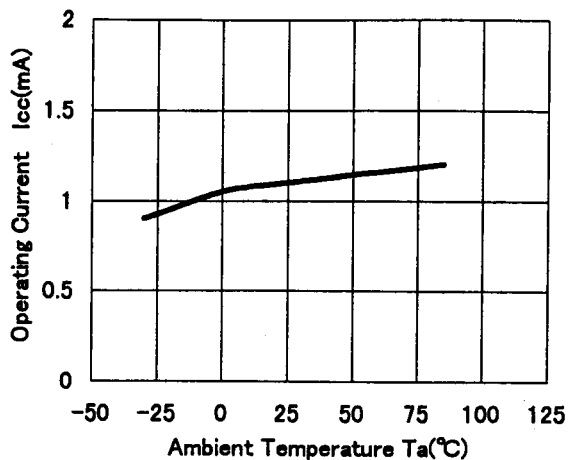


Battery Saving Operating Current vs. Temperature  
(V<sup>+</sup>=1.4V)

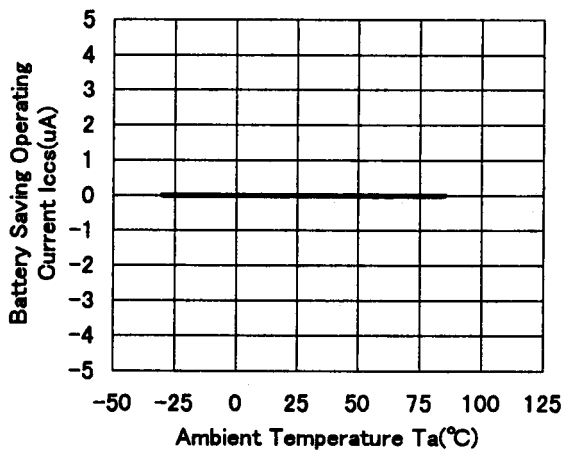


Quick Charge Current vs. Temperature  
(V<sup>+</sup>=1.4V, 12pin=0.18V)

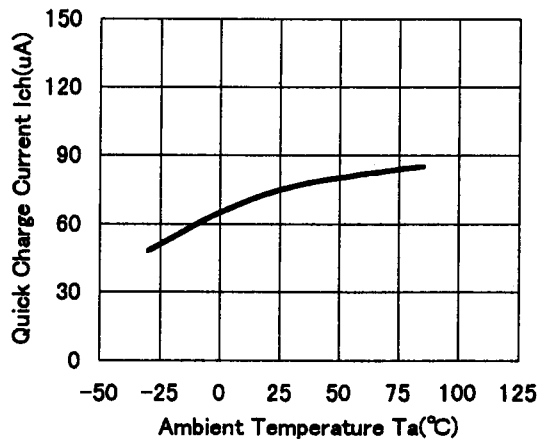

Mixer Gain vs. Temperature  
(V<sup>+</sup>=1.4V, f<sub>RF</sub>=21.7MHz, V<sub>in</sub>=60dBμV)

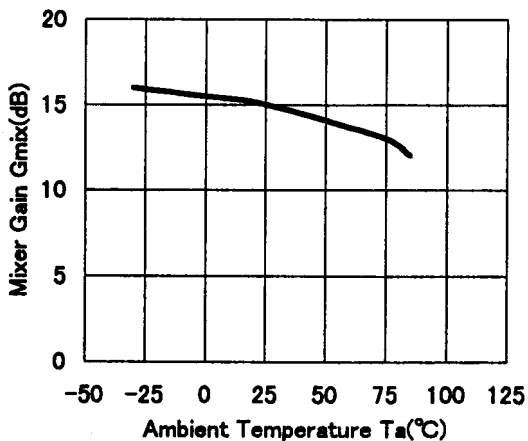

Demodulated Output vs. Temperature  
(V<sup>+</sup>=1.4V, f<sub>IF</sub>=455kHz, V<sub>in</sub>=60dBμVEMF, f<sub>mod</sub>=600Hz)

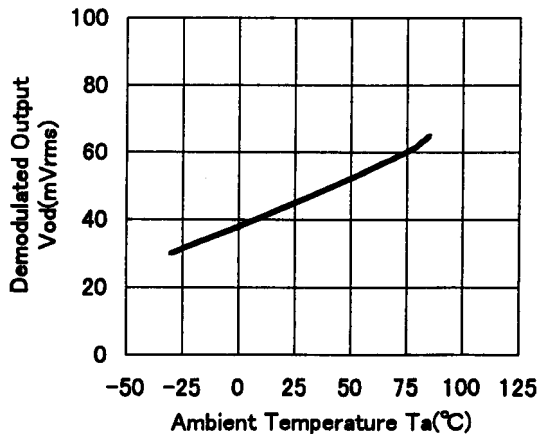




## ■ TYPICAL CHARACTERISTICS


**RSSI vs. Temperature**

( $V^+ = 1.4V$ ,  $f_{RF} = 21.7MHz$ ,  $V_{RF} = 50dBuVEMF$ ,  
 $f_{LO} = 22.155MHz$ ,  $V_{LO} = 110dBuV$ ,  $mod = OFF$ )

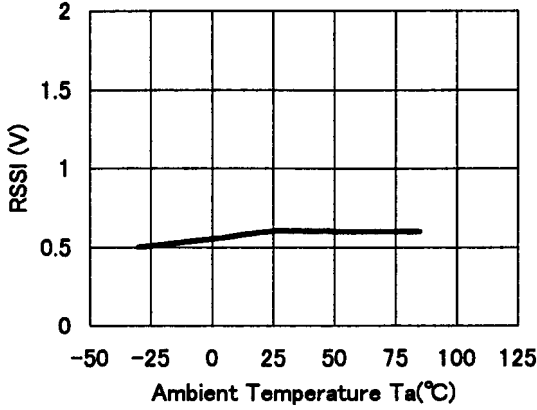


**-3dB Limiting Sensitivity vs. Temperature**

( $V^+ = 1.4V$ , Mixer input,  $f_{RF} = 21.7MHz$ ,  $f_{mod} = 600Hz$ )

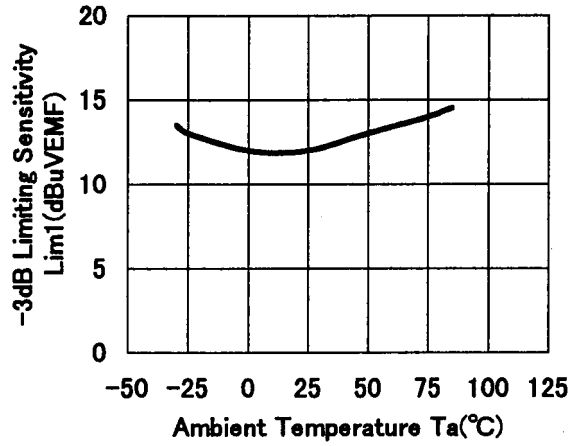


**Mixer Output vs. RF Input**

( $V^+ = 1.4V$ ,  $f_{RF} = 21.7MHz$ ,  $f_{LO} = 22.155MHz$ ,  $V_{LO} = 110dBuV$ )

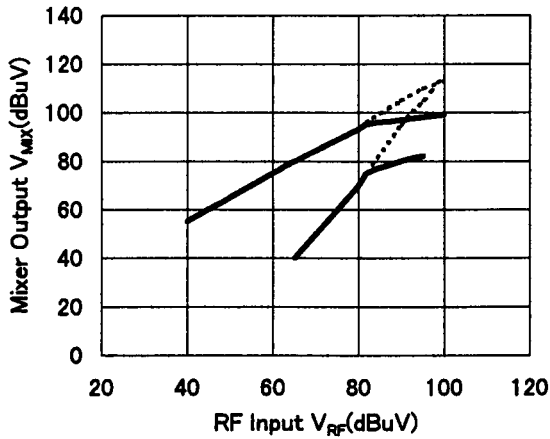


**Mixer Gain vs. Local Oscillation**

( $V^+ = 1.4V$ ,  $f_{RF} = 21.7MHz$ ,  $V_{RF} = 60dBuV$ ,  
 $f_{LO} = 22.155MHz$ ,  $V_{in} = 60dBuV$ )

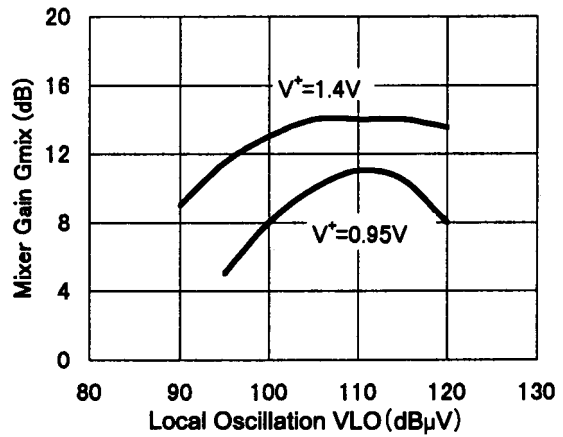


**Mixer Gain vs. Frequency**

( $V^+ = 1.4V$ ,  $V_{RF} = 60dBuV$ ,  $V_{LO} = 110dBuV$ ,  $f_{LO} = f_{RF} + 455kHz$ )

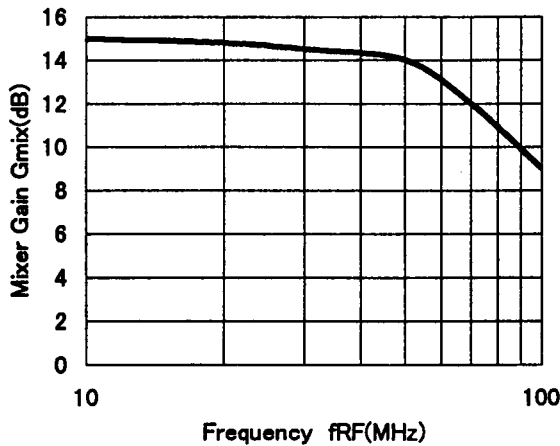

**RSSI vs. IF Input**

( $V^+ = 1.4V$ ,  $f_{IF} = 455kHz$ )

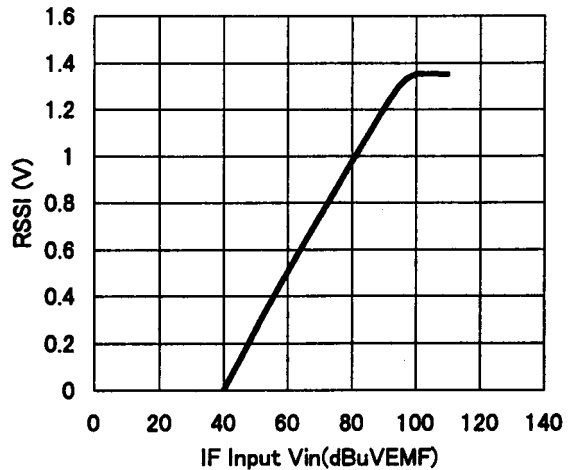

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.