



# TL062, TL062A, TL062B

## Low-power JFET dual operational amplifiers

Datasheet – production data

### Features

- Very low power consumption: 200  $\mu\text{A}$
- Wide common-mode (up to  $V_{CC}^+$ ) and differential voltage ranges
- Low input bias and offset currents
- Output short-circuit protection
- High input impedance JFET input stage
- Internal frequency compensation
- Latch up free operation
- High slew rate: 3.5  $\text{V}/\mu\text{s}$

### Description

The TL062, TL062A and TL062B devices are high-speed JFET input single operational amplifiers. Each of these JFET input operational amplifiers incorporates well matched, high-voltage JFET and bipolar transistors in a monolithic integrated circuit.

The devices feature high slew rates, low input bias and offset currents, and a low offset voltage temperature coefficient.




**N  
DIP8**  
(plastic package)



**D  
SO-8**  
(plastic micropackage)


**Pin connections**  
(top view)

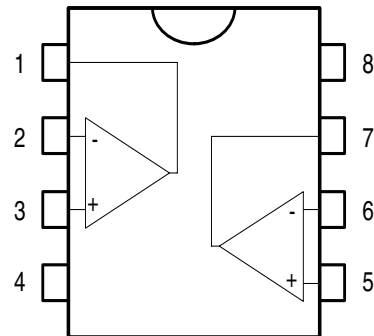

- 1 - Output 1
- 2 - Inverting input 1
- 3 - Non-inverting input 1
- 4 -  $V_{CC}^-$
- 5 - Non-inverting input 2
- 6 - Inverting input 2
- 7 - Output 2
- 8 -  $V_{CC}^+$

# 1 Schematic diagram

Figure 1. Schematic diagram

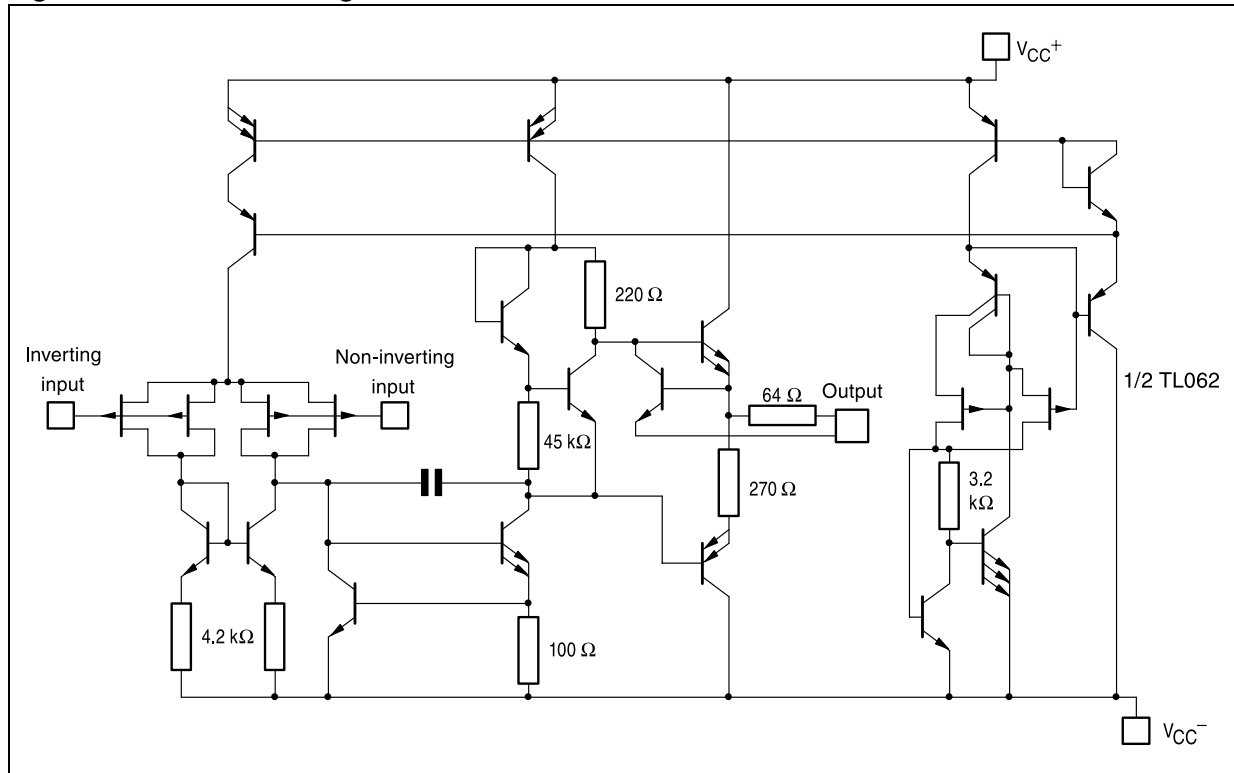

## 2 Absolute maximum ratings and operating conditions

**Table 1. Absolute maximum ratings**

| Symbol     | Parameter                                                  | Value    | Unit |
|------------|------------------------------------------------------------|----------|------|
| $V_{CC}$   | Supply voltage <sup>(1)</sup>                              | $\pm 18$ | V    |
| $V_i$      | Input voltage <sup>(2)</sup>                               | $\pm 15$ | V    |
| $V_{id}$   | Differential input voltage <sup>(3)</sup>                  | $\pm 30$ | V    |
| $P_{tot}$  | Power dissipation                                          | 680      | mW   |
|            | Output short-circuit duration <sup>(4)</sup>               | Infinite |      |
| $T_{stg}$  | Storage temperature range                                  |          | °C   |
| $R_{thja}$ | Thermal resistance junction-to-ambient <sup>(5), (6)</sup> |          | °C/W |
|            | SO-8                                                       | 125      |      |
|            | DIP8                                                       | 85       |      |
| $R_{thjc}$ | Thermal resistance junction-to-case <sup>(5), (6)</sup>    |          | °C/W |
|            | SO-8                                                       | 40       |      |
|            | DIP8                                                       | 41       |      |
| ESD        | HBM: human body model <sup>(7)</sup>                       | 900      | V    |
|            | MM: machine model <sup>(8)</sup>                           | 150      | V    |
|            | CDM: charged device model <sup>(9)</sup>                   | 1.5      | kV   |

1. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between  $V_{CC}^+$  and  $V_{CC}^-$ .
2. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
3. Differential voltages are the non-inverting input terminal with respect to the inverting input terminal.
4. The output may be shorted to ground or to either supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.
5. Short-circuits can cause excessive heating and destructive dissipation.
6.  $R_{th}$  are typical values.
7. Human body model: 100 pF discharged through a 1.5 k $\Omega$  resistor between two pins of the device, done for all couples of pin combinations with other pins floating.
8. Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5  $\Omega$ ), done for all couples of pin combinations with other pins floating.
9. Charged device model: all pins plus package are charged together to the specified voltage and then discharged directly to ground.

**Table 2. Operating conditions**

| Symbol     | Parameter                            | TL062I, AI, BI | TL062C, AC, BC | Unit |
|------------|--------------------------------------|----------------|----------------|------|
| $V_{CC}$   | Supply voltage range                 | 6 to 36        |                | V    |
| $T_{oper}$ | Operating free air temperature range | -40 to +105    | 0 to +70       | °C   |

### 3 Electrical characteristics

Table 3.  $V_{CC} = \pm 15\text{ V}$ ,  $T_{amb} = +25\text{ }^{\circ}\text{C}$  (unless otherwise specified)

| Symbol          | Parameter                                                                                                                                                            | TL062I     |            |           | TL062C     |            |           | Unit                           |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|-----------|------------|------------|-----------|--------------------------------|
|                 |                                                                                                                                                                      | Min.       | Typ.       | Max.      | Min.       | Typ.       | Max.      |                                |
| $V_{io}$        | Input offset voltage ( $R_S = 50\ \Omega$ )<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                        |            | 3          | 6<br>9    |            | 3          | 15<br>20  | mV                             |
| $DV_{io}$       | Temperature coefficient of input offset voltage<br>( $R_S = 50\ \Omega$ )                                                                                            |            | 10         |           |            | 10         |           | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{io}$        | Input offset current <sup>(1)</sup><br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                |            | 5          | 100<br>10 |            | 5          | 200<br>5  | pA<br>nA                       |
| $I_{ib}$        | Input bias current <sup>(1)</sup><br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                  |            | 30         | 200<br>20 |            | 30         | 400<br>10 | pA<br>nA                       |
| $V_{icm}$       | Input common mode voltage range                                                                                                                                      | $\pm 11.5$ | +15<br>-12 |           | $\pm 11.5$ | +15<br>-12 |           | V                              |
| $V_{opp}$       | Output voltage swing ( $R_L = 10\text{ k}\Omega$ )<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                 | 20<br>20   | 27         |           | 20<br>20   | 27         |           | V                              |
| $A_{vd}$        | Large signal voltage gain<br>$R_L = 10\text{ k}\Omega$ , $V_o = \pm 10\text{ V}$ ,<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$ | 4<br>4     | 6          |           | 3<br>3     | 6          |           | V/mV                           |
| GBP             | Gain bandwidth product<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                                                |            | 1          |           |            | 1          |           | MHz                            |
| $R_i$           | Input resistance                                                                                                                                                     |            | $10^{12}$  |           |            | $10^{12}$  |           | $\Omega$                       |
| CMR             | Common mode rejection ratio<br>$R_S = 50\ \Omega$                                                                                                                    | 80         | 86         |           | 70         | 76         |           | dB                             |
| SVR             | Supply voltage rejection ratio<br>$R_S = 50\ \Omega$                                                                                                                 | 80         | 95         |           | 70         | 95         |           | dB                             |
| $I_{CC}$        | Supply current, no load<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$ , no load, no signal                                                                              |            | 200        | 250       |            | 200        | 250       | $\mu\text{A}$                  |
| $V_{o1}/V_{o2}$ | Channel separation<br>$A_v = 100$ , $T_{amb} = 25\text{ }^{\circ}\text{C}$                                                                                           |            | 120        |           |            | 120        |           | dB                             |
| $P_D$           | Total power consumption<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$ , no load, no signal                                                                              |            | 6          | 7.5       |            | 6          | 7.5       | mW                             |
| SR              | Slew rate<br>$V_i = 10\text{ V}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $A_v = 1$                                                                     | 1.5        | 3.5        |           | 1.5        | 3.5        |           | V/ $\mu\text{s}$               |

Table 3.  $V_{CC} = \pm 15\text{ V}$ ,  $T_{amb} = +25\text{ }^{\circ}\text{C}$  (unless otherwise specified) (continued)

| Symbol   | Parameter                                                                                                                                 | TL062I |      |      | TL062C |      |      | Unit                                 |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------|--------|------|------|--------|------|------|--------------------------------------|
|          |                                                                                                                                           | Min.   | Typ. | Max. | Min.   | Typ. | Max. |                                      |
| $t_r$    | Rise time<br>$V_i = 20\text{ mV}$ , $R_L = 10\text{ k}\Omega$<br>$C_L = 100\text{ pF}$ , $A_v = 1$                                        |        | 0.2  |      |        | 0.2  |      | $\mu\text{s}$                        |
| $K_{ov}$ | Overshoot factor (see <a href="#">Figure 15</a> )<br>$V_i = 20\text{ mV}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $A_v = 1$ |        | 10   |      |        | 10   |      | %                                    |
| $e_n$    | Equivalent input noise voltage<br>$R_S = 100\text{ }\Omega$ , $f = 1\text{ kHz}$                                                          |        | 42   |      |        | 42   |      | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |

1. The input bias currents of a FET-input operational amplifier are normal junction reverse currents, which are temperature sensitive. Pulse techniques must be used that will maintain the junction temperature as close to the ambient temperature as possible.

Table 4.  $V_{CC} = \pm 15\text{ V}$ ,  $T_{amb} = +25\text{ }^{\circ}\text{C}$  (unless otherwise specified)

| Symbol    | Parameter                                                                                                                                                            | TL062AC, AI |            |          | TL062BC, BI |            |          | Unit                           |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------|----------|-------------|------------|----------|--------------------------------|
|           |                                                                                                                                                                      | Min.        | Typ.       | Max.     | Min.        | Typ.       | Max.     |                                |
| $V_{io}$  | Input offset voltage ( $R_S = 50\text{ }\Omega$ )<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                  |             | 3          | 3<br>7.5 |             | 2          | 3<br>5   | mV                             |
| $DV_{io}$ | Temperature coefficient of input offset voltage<br>( $R_S = 50\text{ }\Omega$ )                                                                                      |             | 10         |          |             | 10         |          | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{io}$  | Input offset current <sup>(1)</sup><br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                |             | 5          | 100<br>3 |             | 5          | 100<br>3 | pA<br>nA                       |
| $I_{ib}$  | Input bias current <sup>(1)</sup><br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                  |             | 30         | 200<br>7 |             | 30         | 200<br>7 | nA                             |
| $V_{icm}$ | Input common mode voltage range                                                                                                                                      | $\pm 11.5$  | +15<br>-12 |          | $\pm 11.5$  | +15<br>-12 |          |                                |
| $V_{opp}$ | Output voltage swing ( $R_L = 10\text{ k}\Omega$ )<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                 | 20<br>20    | 27         |          | 20<br>20    | 27         |          | V                              |
| $A_{vd}$  | Large signal voltage gain<br>$R_L = 10\text{ k}\Omega$ , $V_o = \pm 10\text{ V}$ ,<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$<br>$T_{min} \leq T_{amb} \leq T_{max}$ | 4<br>4      | 6          |          | 4<br>4      | 6          |          | V/mV                           |
| GBP       | Gain bandwidth product<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                                                |             | 1          |          |             | 1          |          | MHz                            |
| $R_i$     | Input resistance                                                                                                                                                     |             | $10^{12}$  |          |             | $10^{12}$  |          | $\Omega$                       |
| CMR       | Common mode rejection ratio<br>$R_S = 50\text{ }\Omega$                                                                                                              | 80          | 86         |          | 80          | 86         |          | dB                             |
| SVR       | Supply voltage rejection ratio<br>$R_S = 50\text{ }\Omega$                                                                                                           | 80          | 95         |          | 80          | 95         |          | dB                             |

Table 4.  $V_{CC} = \pm 15\text{ V}$ ,  $T_{amb} = +25\text{ }^{\circ}\text{C}$  (unless otherwise specified) (continued)

| Symbol          | Parameter                                                                                                                                 | TL062AC, AI |      |      | TL062BC, BI |      |      | Unit                                 |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------|------|------|-------------|------|------|--------------------------------------|
|                 |                                                                                                                                           | Min.        | Typ. | Max. | Min.        | Typ. | Max. |                                      |
| $I_{CC}$        | Supply current, no load<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$ , no load, no signal                                                   |             | 200  | 250  |             | 200  | 250  | $\mu\text{A}$                        |
| $V_{O1}/V_{O2}$ | Channel separation<br>$A_V = 100$ , $T_{amb} = +25\text{ }^{\circ}\text{C}$                                                               |             | 120  |      |             | 120  |      |                                      |
| $P_D$           | Total power consumption<br>$T_{amb} = +25\text{ }^{\circ}\text{C}$ , no load, no signal                                                   |             | 6    | 7.5  |             | 6    | 7.5  | mW                                   |
| SR              | Slew rate<br>$V_i = 10\text{ V}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $A_V = 1$                                          | 1.5         | 3.5  |      | 1.5         | 3.5  |      | $\text{V}/\mu\text{s}$               |
| $t_r$           | Rise time<br>$V_i = 20\text{ mV}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $A_V = 1$                                         |             | 0.2  |      |             | 0.2  |      | $\mu\text{s}$                        |
| $K_{ov}$        | Overshoot factor (see <a href="#">Figure 15</a> )<br>$V_i = 20\text{ mV}$ , $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $A_V = 1$ |             | 10   |      |             | 10   |      | %                                    |
| $e_n$           | Equivalent input noise voltage<br>$R_S = 100\text{ }\Omega$ , $f = 1\text{ kHz}$                                                          |             | 42   |      |             | 42   |      | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |

1. The input bias currents of a FET-input operational amplifier are normal junction reverse currents, which are temperature sensitive. Pulse techniques must be used that will maintain the junction temperature as close to the ambient temperature as possible.

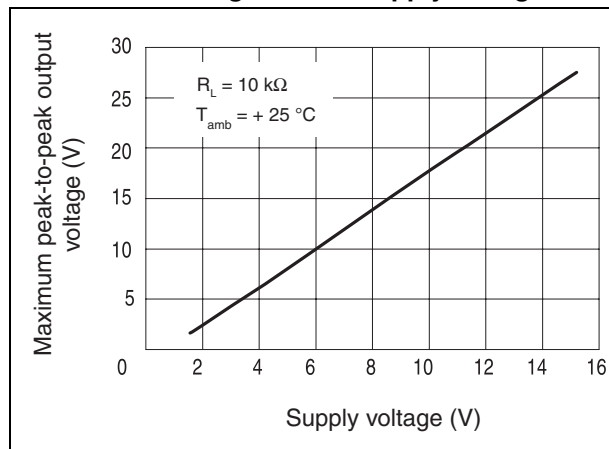
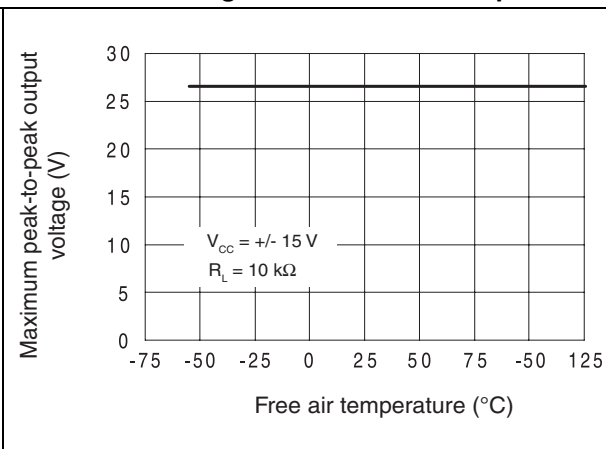
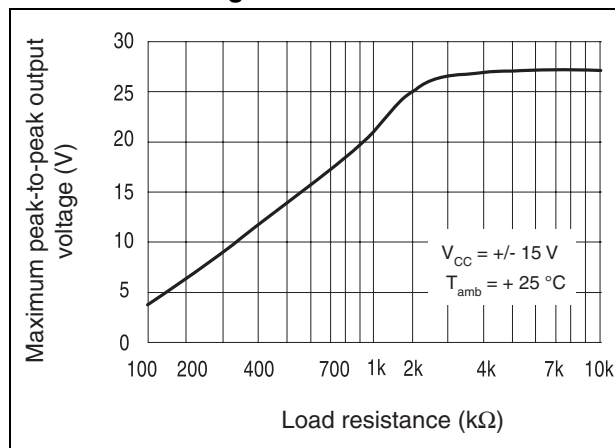
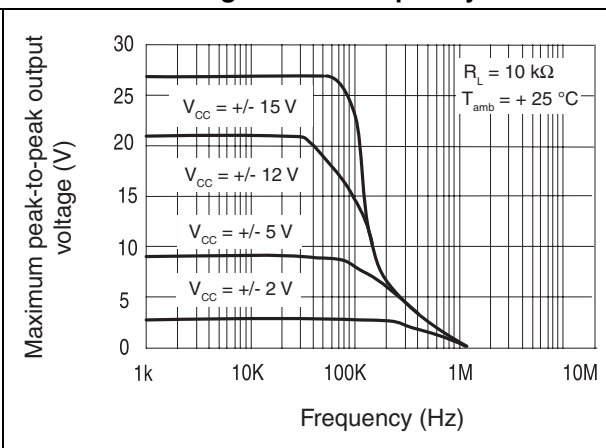
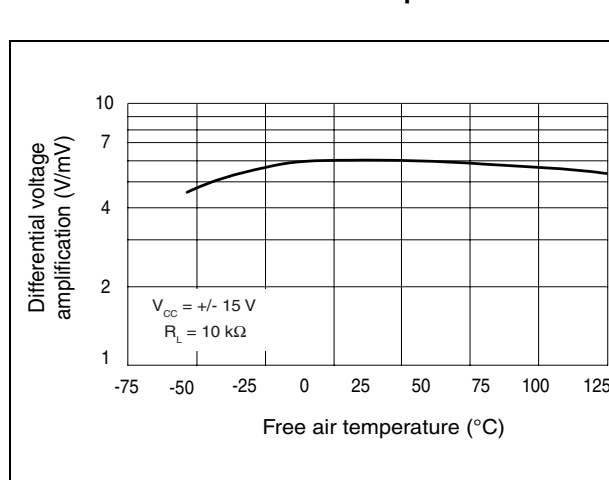
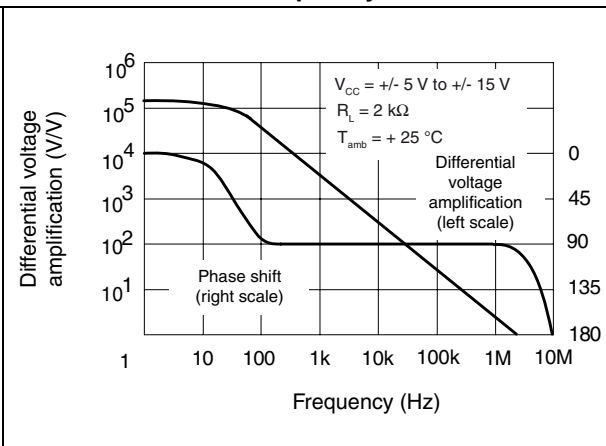
**Figure 2. Maximum peak-to-peak output voltage versus supply voltage****Figure 3. Maximum peak-to-peak output voltage versus free air temperature****Figure 4. Maximum peak-to-peak output voltage versus load resistance****Figure 5. Maximum peak-to-peak output voltage versus frequency****Figure 6. Differential voltage amplification versus free air temperature****Figure 7. Large signal differential voltage amplification and phase shift versus frequency**

Figure 8. Supply current per amplifier versus supply voltage

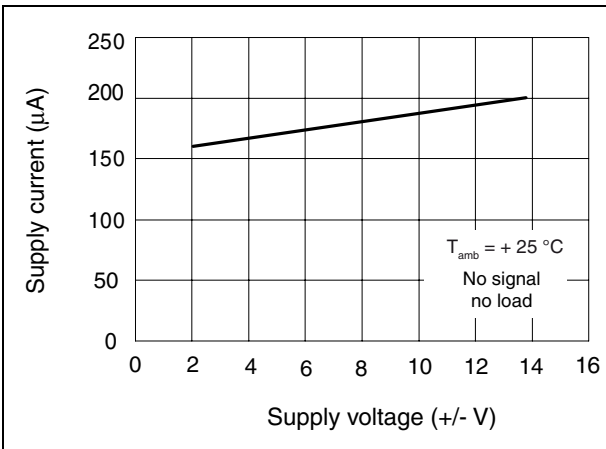


Figure 9. Supply current per amplifier versus free air temperature

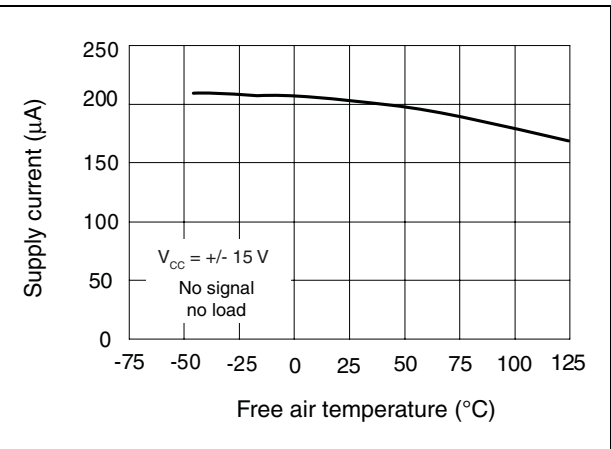


Figure 10. Total power dissipated versus free air temperature

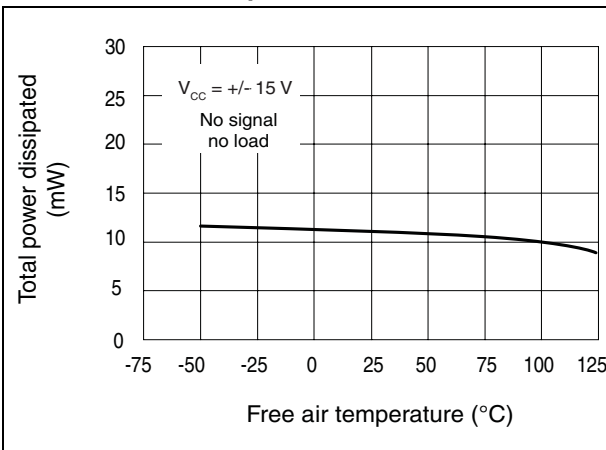


Figure 11. Common-mode rejection ratio versus free air temperature

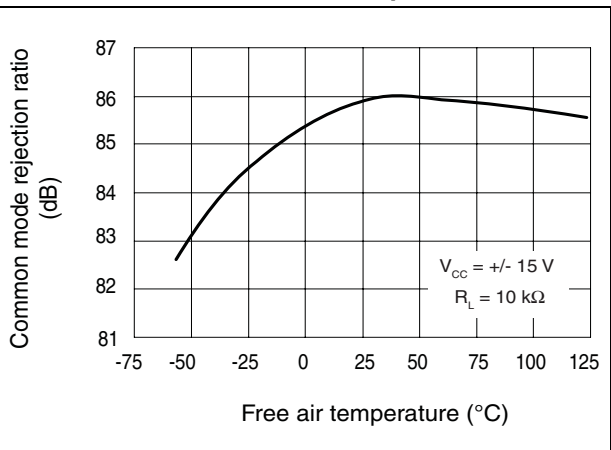


Figure 12. Normalized unity gain bandwidth slew rate and phase shift versus temperature

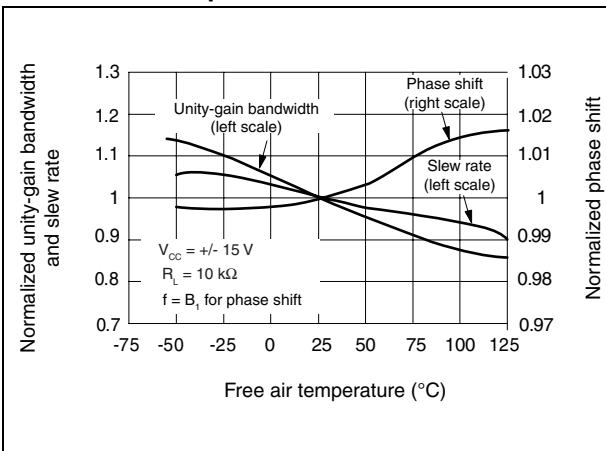


Figure 13. Input bias current versus free air temperature

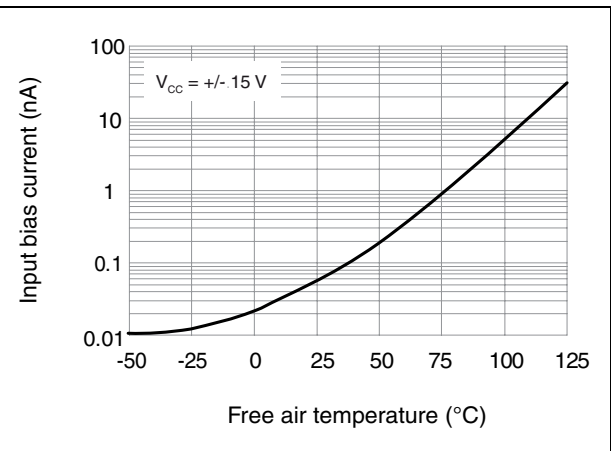


Figure 14. Voltage follower large signal pulse response

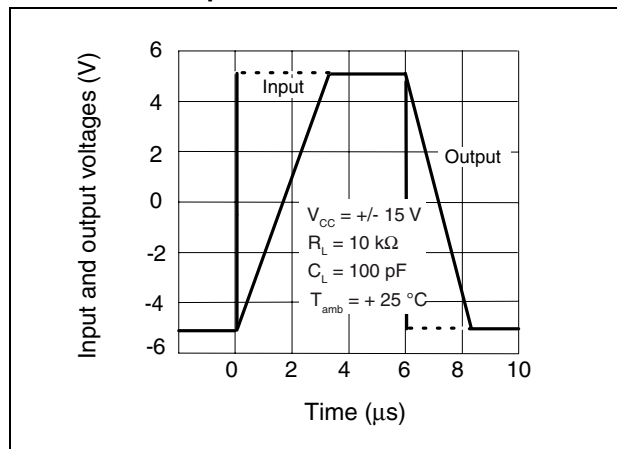


Figure 15. Output voltage versus elapsed time response


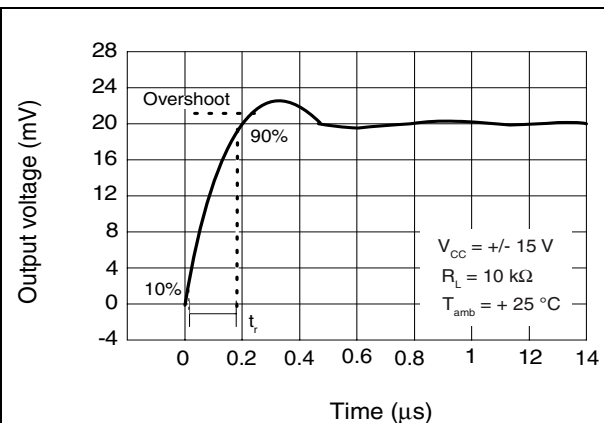


Figure 16. Equivalent input noise voltage versus frequency

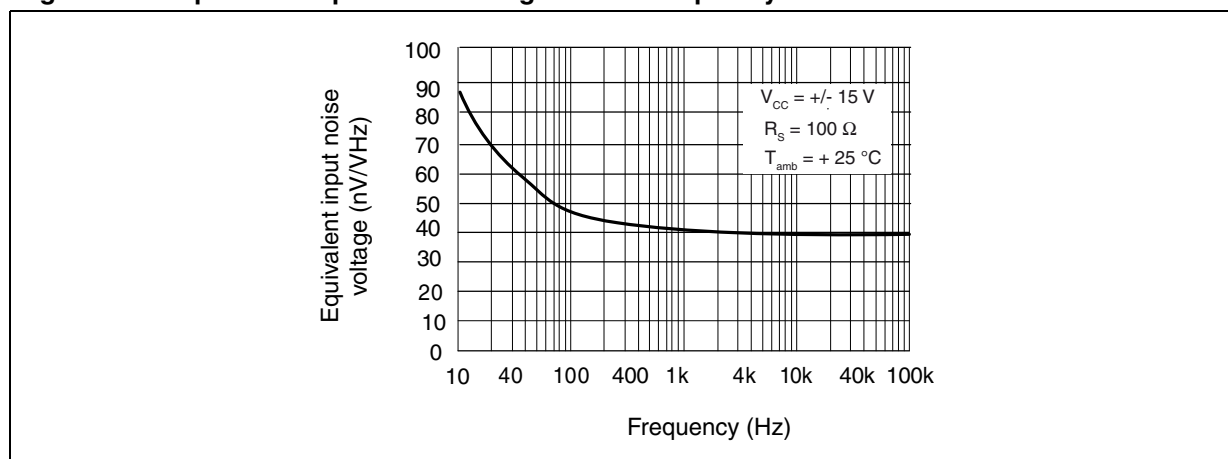

## Parameter measurement information

Figure 17. Voltage follower



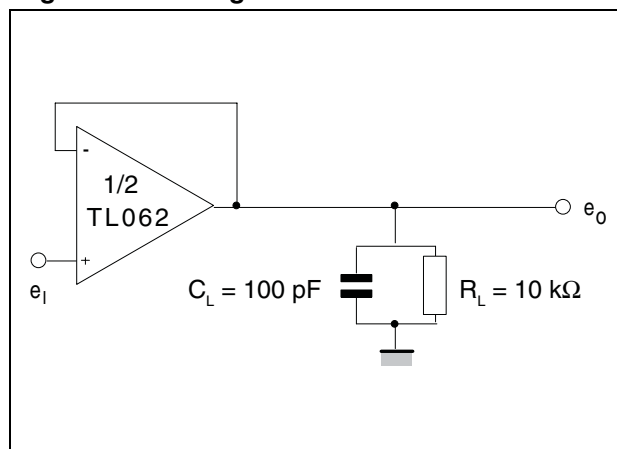


Figure 18. Gain of 10 inverting amplifier

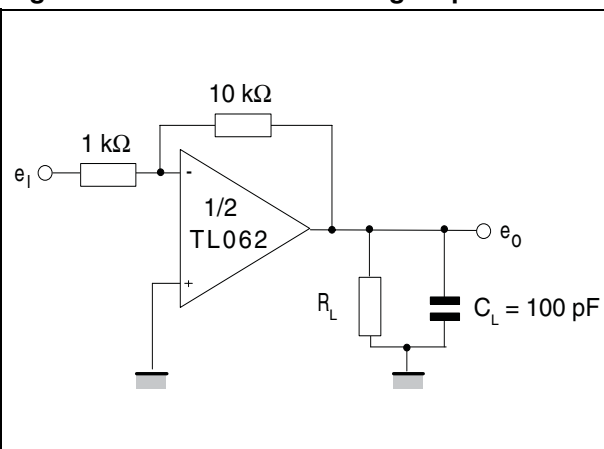

## 4 Typical applications

Figure 19. 100 kHz quadrature oscillator

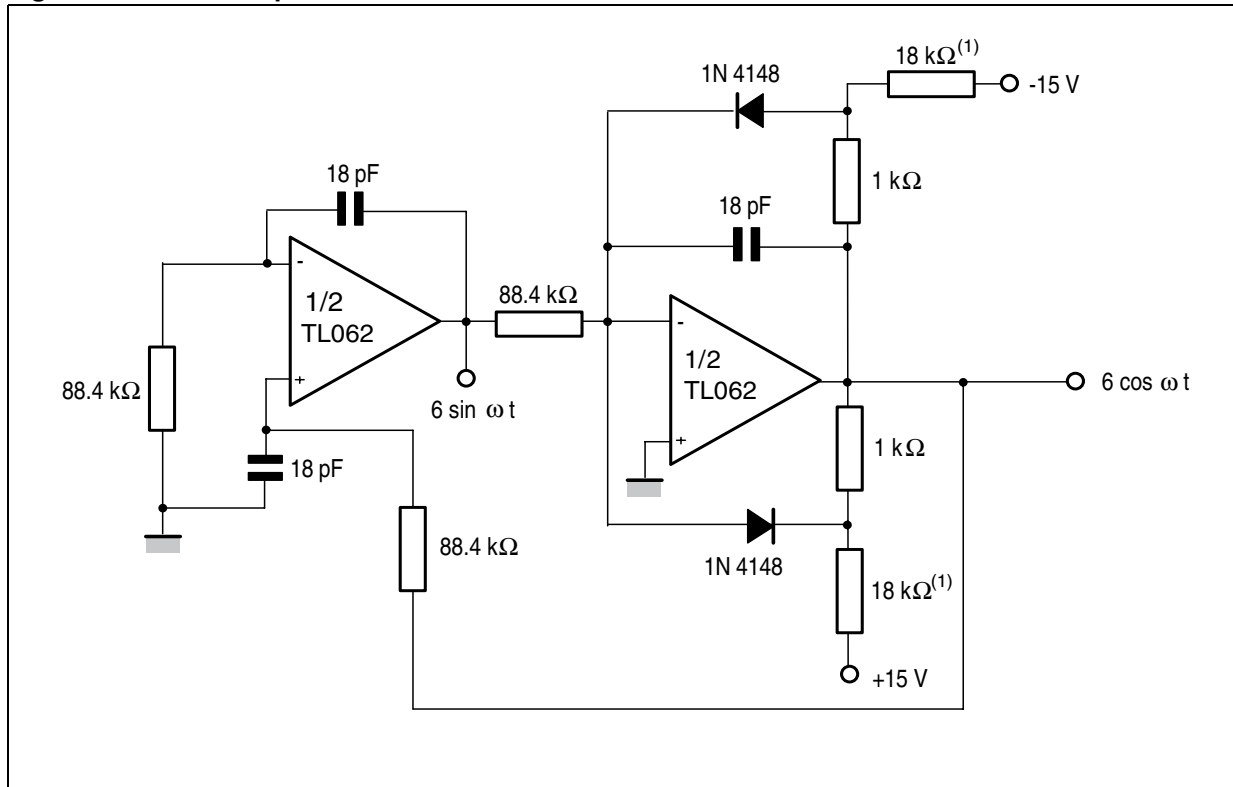

1. These resistor values may be adjusted for a symmetrical output.

## 5 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

## 5.1 DIP8 package information

Figure 20. DIP8 package outline

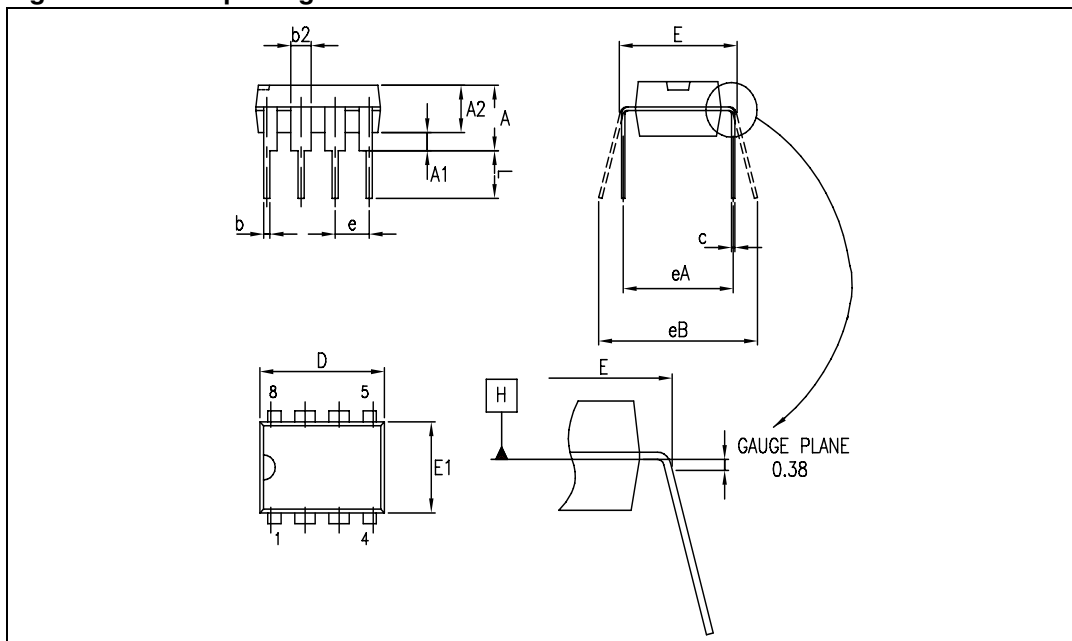


Table 5. DIP8 package mechanical data

| Symbol | Dimensions  |      |       |        |       |       |
|--------|-------------|------|-------|--------|-------|-------|
|        | Millimeters |      |       | Inches |       |       |
|        | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A      |             |      | 5.33  |        |       | 0.210 |
| A1     | 0.38        |      |       | 0.015  |       |       |
| A2     | 2.92        | 3.30 | 4.95  | 0.115  | 0.130 | 0.195 |
| b      | 0.36        | 0.46 | 0.56  | 0.014  | 0.018 | 0.022 |
| b2     | 1.14        | 1.52 | 1.78  | 0.045  | 0.060 | 0.070 |
| c      | 0.20        | 0.25 | 0.36  | 0.008  | 0.010 | 0.014 |
| D      | 9.02        | 9.27 | 10.16 | 0.355  | 0.365 | 0.400 |
| E      | 7.62        | 7.87 | 8.26  | 0.300  | 0.310 | 0.325 |
| E1     | 6.10        | 6.35 | 7.11  | 0.240  | 0.250 | 0.280 |
| e      |             | 2.54 |       |        | 0.100 |       |
| eA     |             | 7.62 |       |        | 0.300 |       |
| eB     |             |      | 10.92 |        |       | 0.430 |
| L      | 2.92        | 3.30 | 3.81  | 0.115  | 0.130 | 0.150 |

**Note:** Dimensions "D" and "E1" do not include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.25 mm in total (both sides). Datum plane "H" coincides with the bottom of the lead, where the lead exits the body.

## 5.2 SO-8 package information

Figure 21. SO-8 package outline

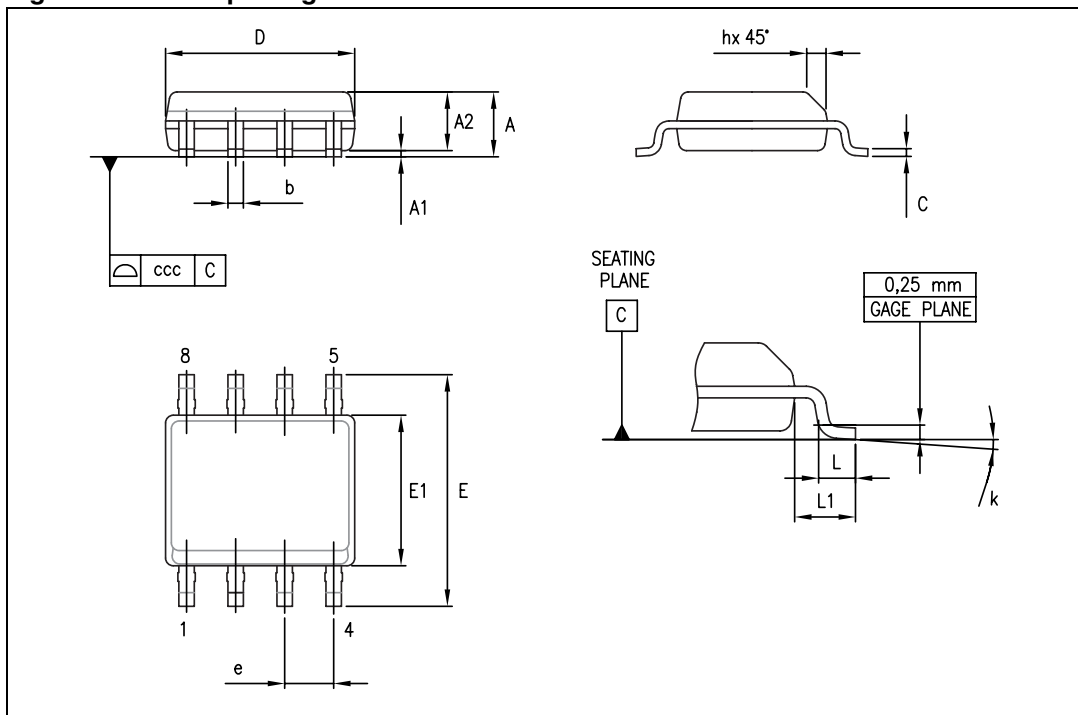


Table 6. SO-8 package mechanical data

| Symbol | Dimensions  |      |      |        |       |       |
|--------|-------------|------|------|--------|-------|-------|
|        | Millimeters |      |      | Inches |       |       |
|        | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A      |             |      | 1.75 |        |       | 0.069 |
| A1     | 0.10        |      | 0.25 | 0.004  |       | 0.010 |
| A2     | 1.25        |      |      | 0.049  |       |       |
| b      | 0.28        |      | 0.48 | 0.011  |       | 0.019 |
| c      | 0.17        |      | 0.23 | 0.007  |       | 0.010 |
| D      | 4.80        | 4.90 | 5.00 | 0.189  | 0.193 | 0.197 |
| E      | 5.80        | 6.00 | 6.20 | 0.228  | 0.236 | 0.244 |
| E1     | 3.80        | 3.90 | 4.00 | 0.150  | 0.154 | 0.157 |
| e      |             | 1.27 |      |        | 0.050 |       |
| h      | 0.25        |      | 0.50 | 0.010  |       | 0.020 |
| L      | 0.40        |      | 1.27 | 0.016  |       | 0.050 |
| L1     |             | 1.04 |      |        | 0.040 |       |
| k      | 0           |      | 8°   | 1°     |       | 8°    |
| ccc    |             |      | 0.10 |        |       | 0.004 |

## 6 Ordering information

**Table 7. Order codes**

| Part number                                   | Temperature range | Package | Packaging                | Marking                         |
|-----------------------------------------------|-------------------|---------|--------------------------|---------------------------------|
| TL062IN<br>TL062AIN<br>TL062BIN               | -40 °C, +105 °C   | DIP8    | Tube                     | TL062IN<br>TL062AIN<br>TL062BIN |
| TL062ID/IDT<br>TL062AID/AIDT<br>TL062BID/BIDT |                   | SO-8    | Tube or<br>tape and reel | 062I<br>062AI<br>062BI          |
| TL062CN<br>TL062ACN<br>TL062BCN               | 0 °C, +70 °C      | DIP8    | Tube                     | TL062CN<br>TL062ACN<br>TL062BCN |
| TL062CD/CDT<br>TL062ACD/ACDT<br>TL062BCD/BCDT |                   | SO-8    | Tube or<br>tape and reel | 062C<br>062AC<br>062BC          |

## 7 Revision history

**Table 8. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 28-Mar-2001 | 1        | Initial release.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 27-Jul-2007 | 2        | Added values for $R_{thja}$ and $R_{thjc}$ in <a href="#">Table 1: Absolute maximum ratings</a> .<br>Added <a href="#">Table 2: Operating conditions</a> .<br>Updated format.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 15-Mar-2010 | 3        | Updated document format.<br>Added TL062A and TL062B in title on cover page.<br>Updated package information in <a href="#">Chapter 5</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 21-Sep-2012 | 4        | Removed TL062M, AM, BM /TL062I, AI, BI / TL062C, AC, BC part numbers and temperature ranges from <a href="#">Table 1</a> . and TL062M, AM, BM from <a href="#">Table 2</a> .<br>Removed TL062M, updated min. "Input common mode voltage range" for TL062C device in <a href="#">Table 3</a> .<br>Removed TL062AM and TL062BM devices, updated max. "Input offset voltage - $T_{amb}$ " for TL062AC, AI devices in <a href="#">Table 4</a> .<br>Removed TL062MN, TL062AMN, TL062BMN, TL062MD/MDT, TL062AMD/AMDT, TL062BMD/BMDT part numbers from <a href="#">Table 7</a> .<br>Minor corrections throughout document. |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.