

# FAN53701, FAN53702, FAN53703

## 300 mA / 600 mA / 1 A Synchronous Buck Regulator

### Description

The FAN5370X is a Super Low I<sub>q</sub>, step-down switching voltage regulator, that delivers a fixed output from an input voltage supply of 2.3 V to 5.5 V. Using a proprietary architecture with synchronous rectification, the FAN5370X is capable of delivering a peak efficiency of 93%, while maintaining efficiency over 90% at load currents as low as 1 mA.

The regulator operates with 0402 and 0603 input and output capacitors, respectively, which reduces the total solution size to 5.5 mm<sup>2</sup>. At moderate and light load, Pulse Frequency Modulation (PFM) is used to operate the device with a low quiescent current. Even with such a low quiescent current, the part exhibits excellent transient response during load swings. In Shutdown Mode, the supply current drops to 100 nA, reducing power consumption. The Mode pin allows the part to be in a Super Low IQ (SLIQ) mode with a typical quiescent current of 2  $\mu$ A.

The FAN5370X is available in 6-bump, 0.4 mm pitch, Wafer-Level Chip-Scale Package (WLCSP).

### Features

- 2  $\mu$ A Typical Quiescent Current
- 5.5 mm<sup>2</sup> Total Solution Size
- 300 mA / 600 mA / 1 A Output Current Capability
- 0.6 V to 3.3 V Fixed Output Voltage
- 2.3 V to 5.5 V Input Voltage Range
- Best-in-Class Load Transient Response
- Best-in-Class Efficiency with Sub 1 mA Output Currents
- Internal Soft-Start Limits Battery Current Below 150 mA to Avoid Brown-out Scenarios
- Protection Faults (UVLO, OCP and OTP)
- Thermal Shutdown and Overload Protection
- 6-Bump WLCSP, 0.4 mm Pitch
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Applications

- Wearables
- Smart Watch
- Health Monitoring
- Sensor Drive
- Energy Harvesting
- Utility and Safety Modules
- RF Modules




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



WLCSP6  
CASE 567UH

### MARKING DIAGRAM



12	= Alphanumeric Device Marking
KK	= Lot Run Code
X	= Alphabetical Year Code
Y	= 2-weeks Date Code
Z	= Assembly Plant Code

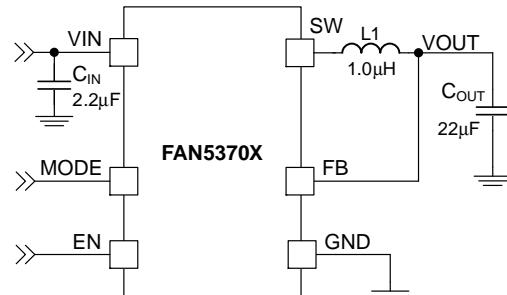


Figure 1. Typical Application

### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

# FAN53701, FAN53702, FAN53703

**Table 1. ORDERING INFORMATION**

Part Number	Output Voltage (Note 1)	Max. Output Current (Note 1)	Temperature Range	Package	Packing Method	Device Marking
FAN53703UC48X	3.0 V	1.0 A	–40 to 85°C	WLCSP	Tape & Reel	GH

1. Other voltage and output current options are available. Contact an On Semiconductor representative.

**Table 2. RECOMMENDED EXTERNAL COMPONENTS**

Component	Description	Vendor	Parameter	Typ	Unit
L	1.0 $\mu$ H, 20%, 2.3 A, 107 m $\Omega$ , 1608	DFE160810S–1R0M (Murata)	L	1.0	$\mu$ H
$C_{IN}$	2.2 $\mu$ F, 20%, 6.3 V, X5R, 0402	C1005X5R0J225M050BC (TDK)	C	2.2	$\mu$ F
$C_{OUT}$ (Note 2)	22 $\mu$ F, 20%, 6.3 V, X5R, 0603	C1608X5R0J226M080AC (TDK)	C	22	$\mu$ F

2. A 10  $\mu$ F, 0402 capacitor can be used to reduce total solution size at the expense of load transient performance.

**Pin Configuration**




Figure 2. Top View




Figure 3. Bottom View

**Table 3. PIN DEFINITIONS**

Pin #	Name	Description
A1	EN	Enable. The device is in Shutdown Mode when voltage to this pin is <0.4 V and enabled when >1.2 V. Do not leave this pin floating. Recommended for GPIO 1.8 V to drive this pin.
A2	VIN	Input Voltage. Connect to input power source across $C_{IN}$ .
B1	MODE	MODE. Logic “LOW” allows the IC to be in a Super Low IQ (SLIQ) state. A Logic HIGH allows the part to be in normal IQ state Auto Mode.
B2	SW	Switching Node. Connect to SW pad of inductor.
C1	FB	Feedback. Connect to positive side of output capacitor.
C2	GND	Ground. Power and IC ground. All signals are referenced to this pin.

**Table 4. ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Min	Max	Unit
$V_{IN}$	Input Voltage	–0.3	6.5	V
$V_{SW}$	Voltage on SW Pin	–0.3	$V_{IN}+0.3$ (Note 3)	V
$V_{CTRL}$	EN, FB and Mode Pin Voltage	–0.3	$V_{IN}+0.3$ (Note 3)	V
ESD	Human Body Model per JESD22–A114	2.0		kV
	Charged Device Model per JESD22–C101	1.0		
$T_J$	Junction Temperature	–40	+150	°C
$T_{STG}$	Storage Temperature	–40	+150	°C
$T_L$	Lead Soldering Temperature, 10 Seconds		+260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

3. Lesser of 6 V or  $V_{IN} + 0.3$  V

# FAN53701, FAN53702, FAN53703

**Table 5. RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Typ	Max	Unit
$V_{IN}$	Supply Voltage Range	2.3		5.5	V
$I_{OUT}$	Output Current	0		1.0	A
$C_{IN}$	Input Capacitor		2.2		$\mu F$
$C_{OUT}$ (Note 4)	Output Capacitance	3		100	$\mu F$
$L$	Inductor	0.47	1.0	1.3	$\mu H$
$T_A$	Operating Ambient Temperature	-40		+85	$^{\circ}C$
$T_J$	Operating Junction Temperature	-40		+125	$^{\circ}C$

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

4. Effective output capacitance after DC bias.

**Table 6. ELECTRICAL CHARACTERISTICS** (Minimum and maximum values are at  $V_{IN} = V_{EN} = 3.6$  V,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = 25^{\circ}C$ ,  $V_{IN} = V_{EN} = 3.6$  V,  $V_{OUT} = 1.8$  V.)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$I_{Q,SLIQ}$	Quiescent Current	SLIQ Mode, no load, non-switching		2		$\mu A$
$I_{Q,PFM}$	PFM Quiescent Current	PFM Mode, no load, non-switching		5		$\mu A$
$I_{SD}$	Shutdown Supply Current	$EN = GND$ , $V_{IN}=3.6$ V, no load		100		nA
$V_{UVLO\_RISE}$	Under-Voltage Lockout Threshold	$V_{IN}$ Rising	2.10	2.15	2.21	V
		$V_{IN}$ Falling	2.00	2.05	2.10	V
$V_{IH}$	HIGH-Level Input Voltage		1.2			V
$V_{IL}$	LOW-Level Input Voltage				0.4	V
$I_{LIM}$	Peak Current Limit, 300 mA Option	$V_{IN} = 4.35$ V, open-loop		1065		mA
	Peak Current Limit, 600 mA Option	$V_{IN} = 4.35$ V, open-loop		1365		
	Peak Current Limit, 1 A Option	$V_{IN} = 4.35$ V, open-loop		1765		
$V_{OACC}$	Output Voltage Accuracy	$V_{OUT}=0.6$ V to 2.0 V, $I_{OUT}=0$ A, PWM Mode	-25		+25	mV
		$V_{OUT}=2.0$ V to 3.3 V, $I_{OUT}=0$ A, PWM Mode	-1.25		+1.25	%
		$V_{OUT}=0.6$ V to 2.0 V, $I_{OUT}=0$ A, PFM Mode	-40		+40	mV
		$V_{OUT}=2.0$ V to 3.3 V, $I_{OUT}=0$ A, PFM Mode	-2		+2	%
$R_{DS(on)}$	PMOS On Resistance	$V_{IN} = V_{GS} = 3.6$ V		135		$m\Omega$
	NMOS On Resistance	$V_{IN} = V_{GS} = 3.6$ V		95		$m\Omega$
$T_{TSD}$	Thermal Shutdown			150		$^{\circ}C$
$T_{HYS}$	Thermal Shutdown Hysteresis			15		$^{\circ}C$

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

**Table 7. THERMAL PROPERTIES**

Symbol	Parameter	Min	Typ	Max	Unit
$\theta_{JA}$	Junction-to-Ambient Thermal Resistance (Note 5)		125		$^{\circ}C/W$

5. Junction-to-ambient thermal resistance is a function of application and board layout. This data is simulated with four-layer 2s2p boards with vias in accordance to JESD51- JEDEC standard. Special attention must be paid not to exceed the junction temperature.

## FAN53701, FAN53702, FAN53703

**Table 8. SYSTEM CHARACTERISTICS** Recommended operating conditions, unless otherwise noted,  $V_{IN} = 2.3$  V to  $5.5$  V,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ,  $V_{OUT} = 1.8$  V. Typical values are given at  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = 3.6$  V. System characteristics are based on circuit per Figure 1.  $L = 1.0 \mu\text{H}$ ,  $2.3$  A,  $107 \text{ m}\Omega$  DCR, DFE160810S-1R0M (TOKO),  $C_{IN} = 1 \times 2.2 \mu\text{F}$ ,  $6.3$  V, 0402 (1005 metric), C1005X5R0J225M050BC (TDK) and  $C_{OUT} = 1 \times 22 \mu\text{F}$ ,  $6.3$  V, 0603 (1608 metric), C1608X5R0J226M080AC (TDK).

Symbol	Parameter	Conditions	Min	Typ	Max	Units
LOAD <sub>REG</sub>	Load Regulation	$I_{OUT} = 10 \mu\text{A}$ to $1$ mA, SLIQ Mode		-9.0		$\text{mV}/\text{mA}$
		$I_{OUT} = 200$ mA to $1$ A, PWM Mode		-2.0		$\text{mV}/\text{A}$
LINE <sub>REG</sub>	Line Regulation	$3.0 \text{ V} \leq V_{IN} \leq 4.35 \text{ V}$ , $I_{OUT} = 300$ mA, PWM		-0.5		$\text{mV}/\text{V}$
V <sub>OUT_RIPPLE</sub>	Ripple Voltage	$I_{OUT} = 250 \mu\text{A}$ , SLIQ Mode		40		$\text{mV}$
		$I_{OUT} = 20$ mA, PFM Mode		25		
		$I_{OUT} = 200$ mA, PWM Mode		5		
Eff	Efficiency	$I_{OUT} = 100 \mu\text{A}$ , SLIQ Mode		88		$\%$
		$I_{OUT} = 500 \mu\text{A}$ , SLIQ Mode		91		
		$I_{OUT} = 1$ mA, PFM Mode		90		
		$I_{OUT} = 100$ mA, PFM Mode		91		
		$I_{OUT} = 300$ mA, PWM Mode		91		
		$I_{OUT} = 500$ mA, PWM Mode		90		
		$I_{OUT} = 700$ mA, PWM Mode		88		
$\Delta V_{OUT\_LOAD}$	Load Transient	$I_{OUT} = 10$ mA $\leftrightarrow$ $150$ mA, $T_R = T_F = 1 \mu\text{s}$ , Auto Mode		$\pm 40$		$\text{mV}$
		$I_{OUT} = 100 \mu\text{A} \leftrightarrow 500 \mu\text{A}$ , $T_R = T_F = 1 \mu\text{s}$ , SLIQ Mode		$\pm 15$		$\text{mV}$
$\Delta V_{OUT\_LINE}$	Line Transient	$V_{IN} = 3.0 \text{ V} \leftrightarrow 3.6 \text{ V}$ , $T_R = T_F = 10 \mu\text{s}$ , $I_{OUT} = 300$ mA, PWM Mode		$\pm 20$		$\text{mV}$

NOTE: The above system characteristics are guaranteed by design and are not performed in production testing.

# FAN53701, FAN53702, FAN53703

## Typical Characteristics

Unless otherwise specified,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, Auto Mode,  $T_A = 25^\circ\text{C}$ ; circuit and components according to Figure 1 and Table 2.

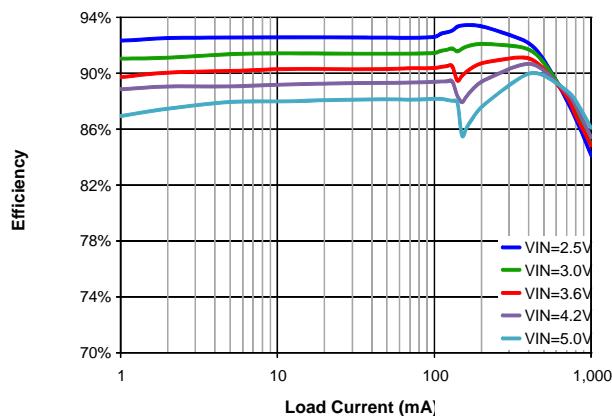


Figure 4. Efficiency vs. Load Current and Input Voltage,  $V_{OUT} = 1.8$  V, Auto Mode

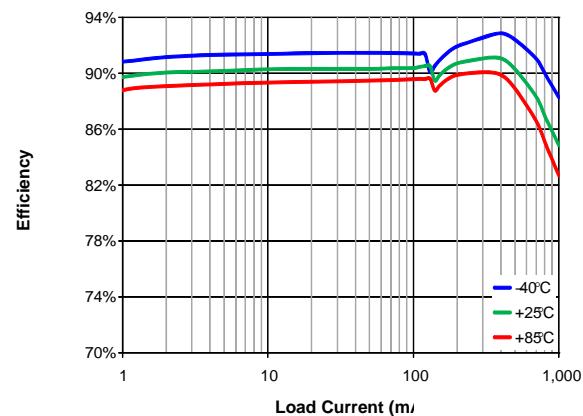


Figure 5. Efficiency vs. Load Current and Temperature,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, Auto Mode

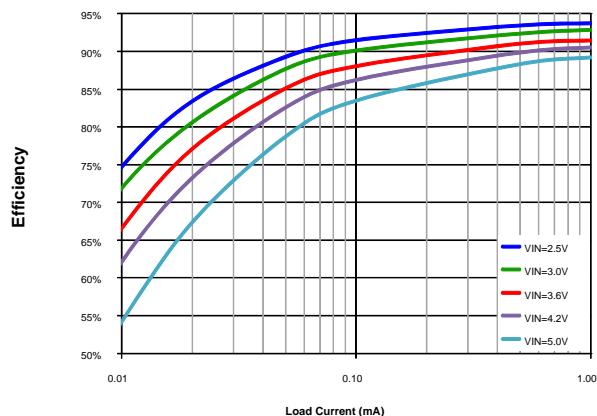


Figure 6. Efficiency vs. Load Current and Input Voltage,  $V_{OUT} = 1.8$  V, SLIQ Mode

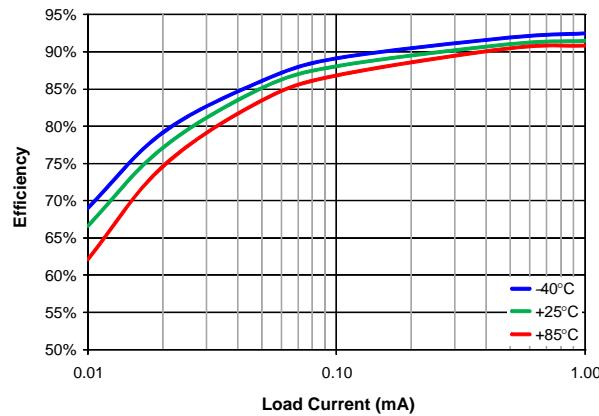


Figure 7. Efficiency vs. Load Current and Temperature,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, SLIQ Mode

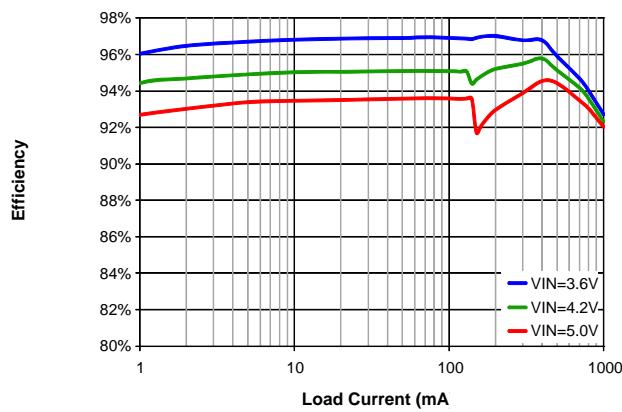


Figure 8. Efficiency vs. Load Current and Input Voltage,  $V_{OUT} = 3.3$  V, Auto Mode


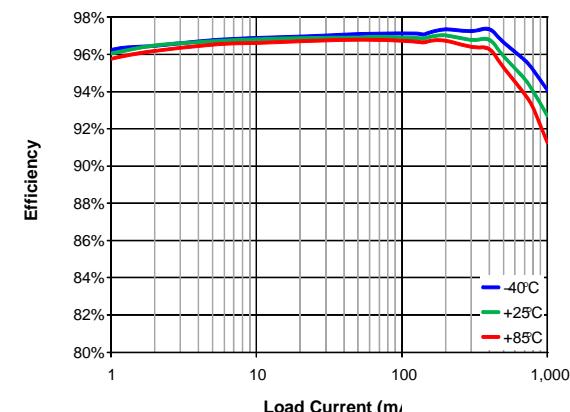


Figure 9. Efficiency vs. Load Current and Temperature,  $V_{IN} = 3.6$  V,  $V_{OUT} = 3.3$  V, Auto Mode


# FAN53701, FAN53702, FAN53703

## Typical Characteristics


Unless otherwise specified,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, Auto Mode,  $T_A = 25^\circ\text{C}$ ; circuit and components according to Figure 1 and Table 2.

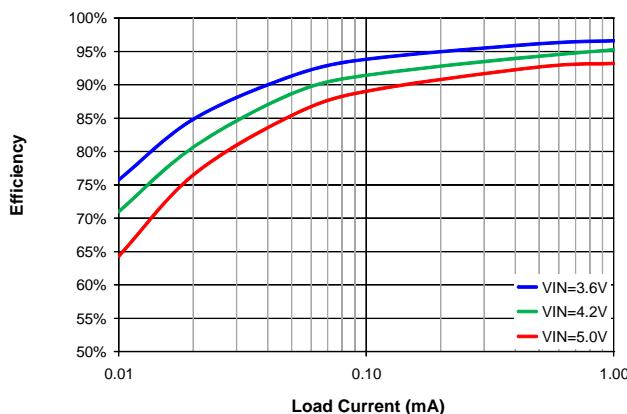


**Figure 10. Efficiency vs. Load Current and Input Voltage,  $V_{OUT} = 3.3$  V, SLIQ Mode**

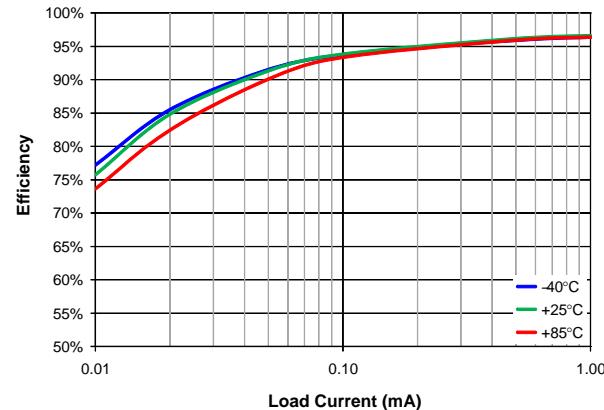


**Figure 11. Efficiency vs. Load Current and Temperature,  $V_{IN} = 3.6$  V,  $V_{OUT} = 3.3$  V, SLIQ Mode**

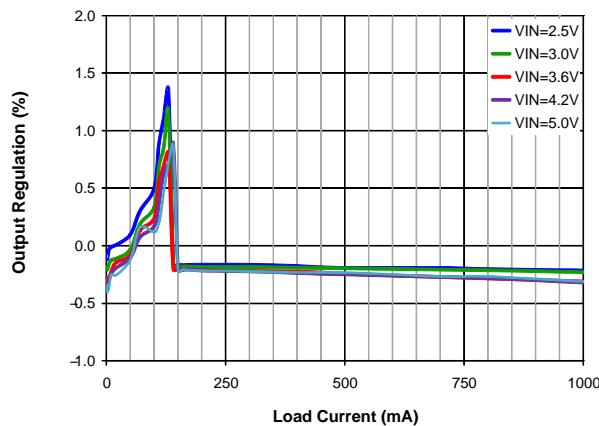


**Figure 12. Output Regulation vs. Load Current and Input Voltage,  $V_{OUT} = 1.8$  V, Auto Mode**

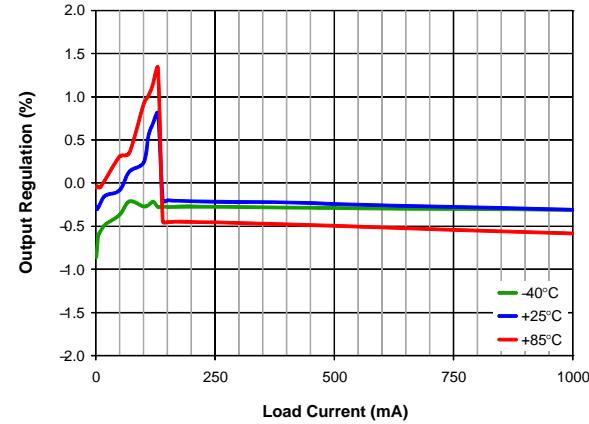

**Figure 13. Output Regulation vs. Load Current and Temperature,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, Auto Mode**

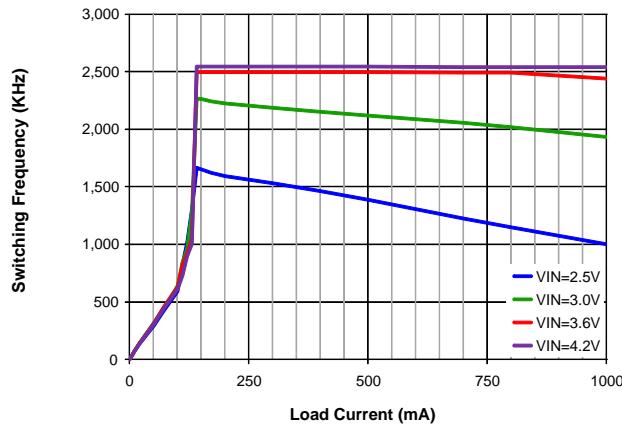

**Figure 14. Frequency vs. Load Current and Input Voltage, Auto Mode,  $V_{OUT} = 1.8$  V, Auto Mode**

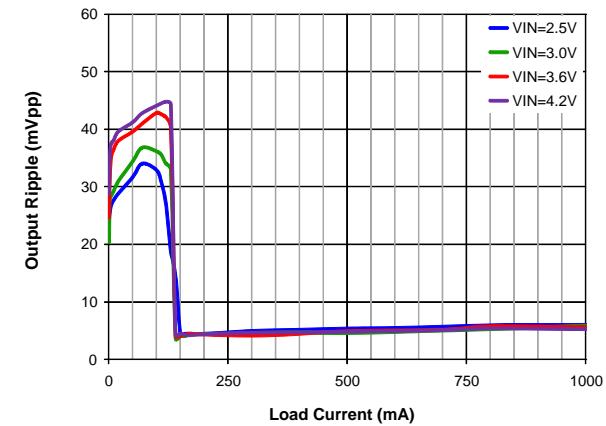

**Figure 15. Output Ripple vs. Load Current and Input Voltage,  $V_{OUT} = 1.8$  V, Auto Mode**

# FAN53701, FAN53702, FAN53703

## Typical Characteristics

Unless otherwise specified,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, Auto Mode,  $T_A = 25^\circ\text{C}$ ; circuit and components according to Figure 1 and Table 2.

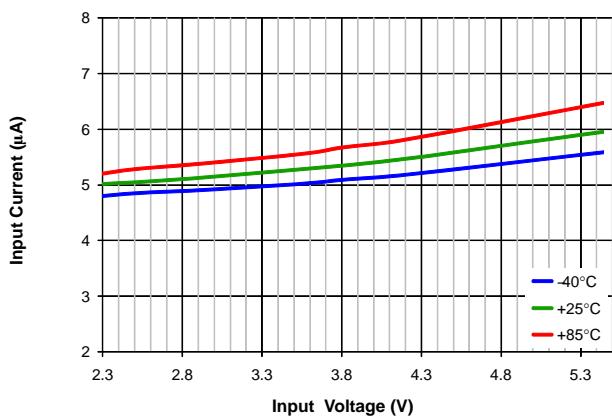


Figure 16. Quiescent Current vs. Input Voltage and Temperature,  $V_{OUT} = 1.8$  V, Auto Mode

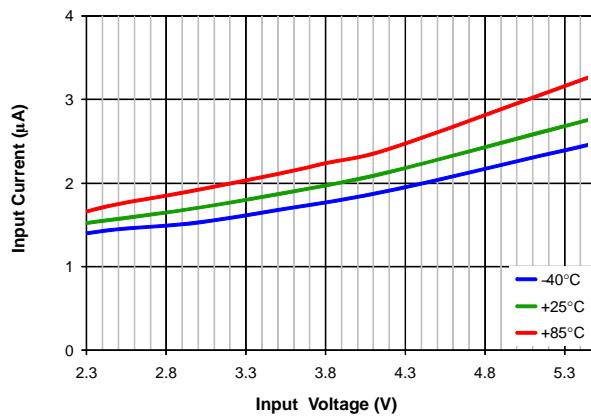


Figure 17. Quiescent Current vs. Input Voltage and Temperature,  $V_{OUT} = 1.8$  V, SLIQ Mode

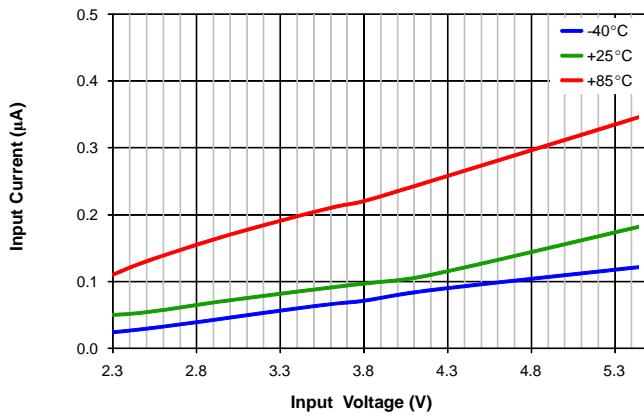


Figure 18. Shutdown Current vs. Input Voltage and Temperature

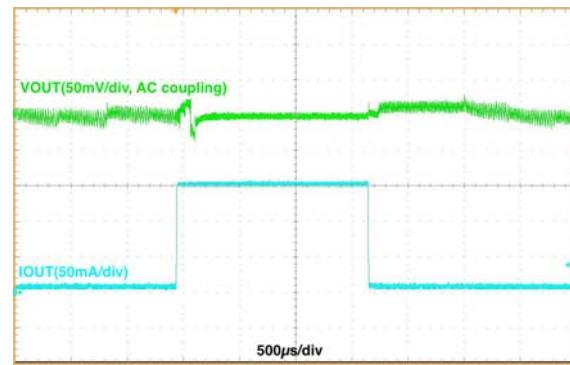


Figure 19. Load Transient,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V,  $10 \text{ mA} \leftrightarrow 150 \text{ mA}$ ,  $1 \mu\text{s}$  Edge, Auto Mode

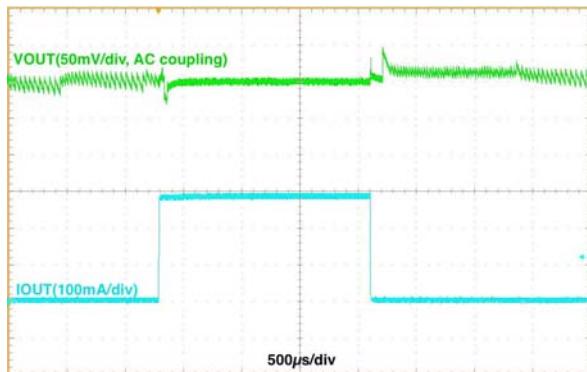


Figure 20. Load Transient,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V,  $5 \text{ mA} \leftrightarrow 300 \text{ mA}$ ,  $1 \mu\text{s}$  Edge, Auto Mode

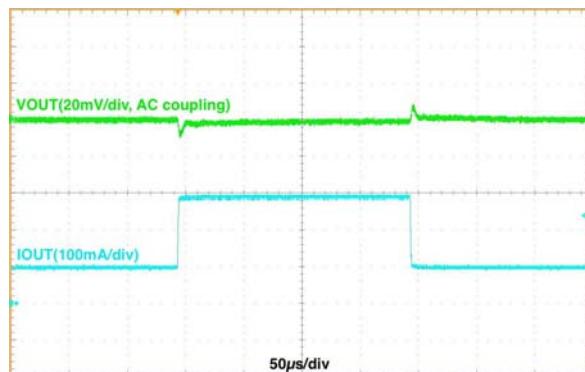


Figure 21. Load Transient,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V,  $100 \text{ mA} \leftrightarrow 300 \text{ mA}$ ,  $1 \mu\text{s}$  Edge, Auto Mode

# FAN53701, FAN53702, FAN53703

## Typical Characteristics

Unless otherwise specified,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, Auto Mode,  $T_A = 25^\circ\text{C}$ ; circuit and components according to Figure 1 and Table 2.

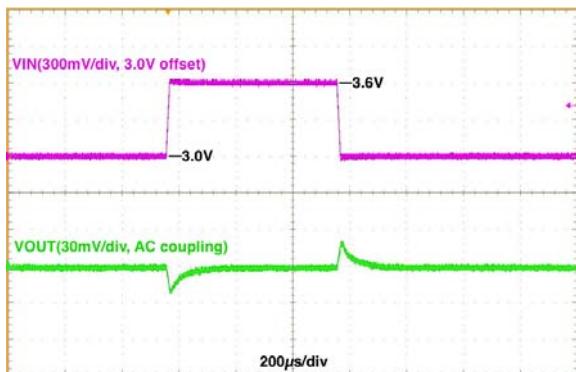


Figure 22. Line Transient,  $V_{IN} = 3.0$  V  $\leftrightarrow$  3.6 V,  $V_{OUT} = 1.8$  V, 10  $\mu$ s Edge, 300 mA Load, Auto Mode

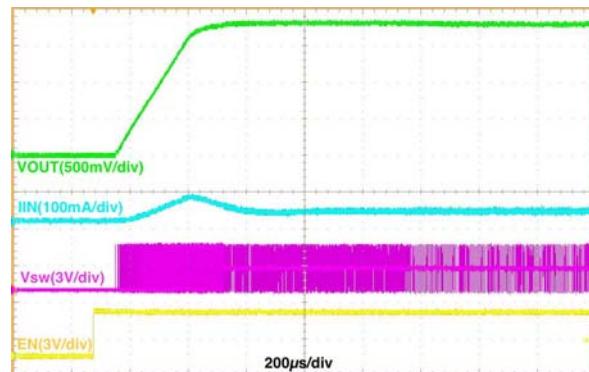


Figure 23. Start-up,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, 50 mA Resistive Load, Auto Mode

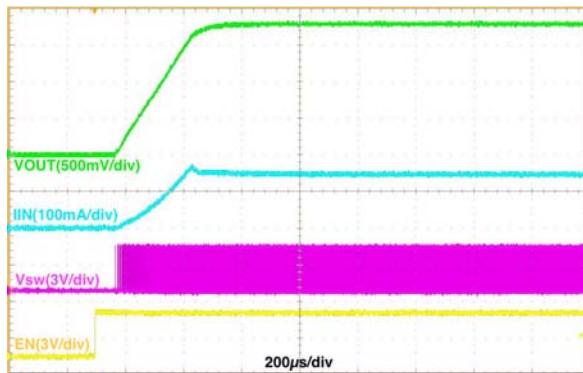


Figure 24. Start-up,  $V_{IN} = 3.6$  V,  $V_{OUT} = 1.8$  V, 300 mA Resistive Load, Auto Mode

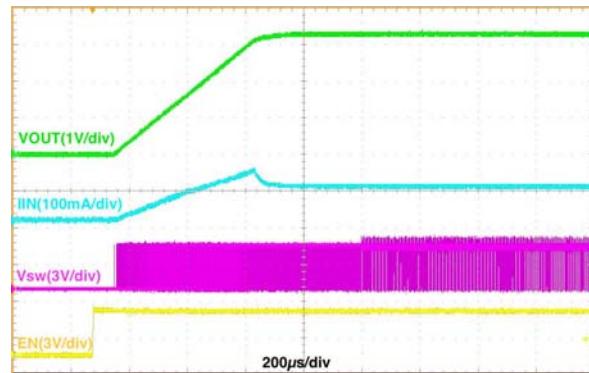


Figure 25. Start-up,  $V_{IN} = 3.6$  V,  $V_{OUT} = 3.3$  V, 100 mA Resistive Load, Auto Mode

## Operation Description

The FAN5370X is a Super Low I<sub>q</sub> (SLIQ), step-down switching voltage regulator, typically operating at 2.5 MHz in Continuous Conduction Mode(CCM). Using a proprietary architecture with synchronous rectification, the FAN5370X is capable of delivering a peak efficiency of 93%, while maintaining efficiency over 90% at load currents sub 1 mA.

In SLIQ mode the device is very efficient with load currents in the  $\mu$ A range. In SLIQ mode the device draws less than 2  $\mu$ A typical from the battery with no load. The load transients in SLIQ mode are best in class.

The FAN5370X provides a fixed output voltage range from 0.6 V to 3.3 V. There are three different max current flavors 300 mA, 600 mA and 1 A, which can support wearable or mobile phone applications which use Li-Ion batteries. Specialized soft-start limits the battery current to 150 mA to limit any brown out occurrences.

## Control Scheme

### Enable and Disable

When EN pin is Low, all circuits are off and the IC draws 100 nA current. When EN is High and V<sub>IN</sub> is above its UVLO threshold, the regulator begins a soft-start cycle. The FAN5370X has internal soft-start which limits the battery current draw to 150 mA. Once the part reaches 95% of V<sub>OUT</sub> target, the part will transition to the correct mode of operation depending on load current. The part starts up within 400  $\mu$ s typical with the recommended external components listed in Table 2.

### MODE Pin

Pulling Mode Pin Low sets the device in SLIQ mode; pulling Mode Pin High sets the device in normal I<sub>q</sub> Auto Mode.

## Protection Features

### V<sub>OUT</sub> Fault

If the V<sub>OUT</sub> fails to reach 95% of V<sub>OUT</sub> target within 1.8 ms during startup, a V<sub>OUT</sub> fault is declared. During the fault condition the part restarts every 20 ms to achieve the 95% target voltage. Once the output voltage reaches the 95% V<sub>OUT</sub> target voltage within 1.8 ms, the V<sub>OUT</sub> fault clears.

### Over-Current Protection (OCP)

A heavy load or short circuit on the output causes the current in the inductor to increase until a maximum current threshold is reached in the high-side switch. Upon reaching

this point, the high-side switch turns off, preventing high currents from causing damage. The regulator continues to limit the current cycle-by-cycle. After 500  $\mu$ s of current limit, the regulator triggers an over-current fault, causing the regulator to shut down for about 20 ms before attempting a restart.

### Under-Voltage Lockout (UVLO)

When EN is HIGH, the under-voltage lockout keeps the part from operating until the input supply voltage rises high enough to properly operate. This ensures no misbehavior of the regulator during startup or shutdown.

### Over-Temperature Protection (OTP)

When the die temperature increases, due to a high load condition and/or a high ambient temperature, the output switching is disabled until the die temperature falls sufficiently. The junction temperature at which the thermal shutdown activates is nominally 150°C with a 15°C hysteresis. Once the junction temperature falls below the hysteresis threshold, the regulator performs a soft-start.

## Modes of Operations

### SLIQ (Super Low IQ)

In SLIQ Mode the device acts in a modified PFM mode with a super low I<sub>q</sub> state. The part draws 2  $\mu$ A with no load.

The part enters SLIQ Mode when the Mode pin is set to logic “LOW”. Before pulling the Mode Pin Low, the load current should drop below 1 mA to maintain output voltage regulation in SLIQ mode. The maximum load current in SLIQ Mode that the device can support is 1 mA. If load current exceeds 1 mA, it is recommended to place part in Auto Mode by pulling Mode pin High so that the device can support more current.

The part can support more than 1 mA in SLIQ Mode if the output capacitor is increased.

### PFM

At light load operation in Auto Mode, the device enters PFM mode when load current is below 100 mA typically. PFM mode reduces switching frequency as well as battery current draw, which yields high efficiency.

When Mode pin goes High, the part will transition from SLIQ Mode into normal PFM mode within 10  $\mu$ s.

### PWM

When load is high, the part transitions smoothly from PFM mode to PWM mode. The part enters PWM mode when load current exceeds 132 mA typically.

## Applications Information

### Selecting the Inductor

The output inductor must meet both the required inductance and the energy-handling capability of the application. The inductor value affects average current limit, output voltage ripple, and efficiency.

The ripple current ( $\Delta I$ ) of the regulator is:

$$\Delta I \approx \frac{V_{OUT}}{V_{IN}} \cdot \left( \frac{V_{IN} - V_{OUT}}{L \cdot f_{SW}} \right) \quad (\text{eq. 1})$$

The maximum average load current,  $I_{MAX(LOAD)}$ , is related to the peak current limit,  $I_{LIM(PK)}$ , by the ripple current, given by:

$$I_{MAX(LOAD)} = I_{LIM(PK)} - \frac{\Delta I}{2} \quad (\text{eq. 2})$$

The transition between PFM and PWM operation is determined by the point at which the inductor valley current crosses zero. The regulator DC current when the inductor current crosses zero,  $I_{DCM}$ , is:

$$I_{DCM} = \frac{\Delta I}{2} \quad (\text{eq. 3})$$

The FAN5370X is optimized for operation with  $L = 1.0 \mu\text{H}$ , but is stable with inductances up to  $1.3 \mu\text{H}$  (nominal). The inductor should be rated to maintain at least 80% of its value at  $I_{LIM(PK)}$ .

Efficiency is affected by the inductor DCR and inductance value. Decreasing the inductor value for a given physical size typically decreases the DCR; but because  $\Delta I$  increases, the RMS current increases, as do the core and skin effect losses.

$$I_{RMS} = \sqrt{I_{OUT(DC)}^2 + \frac{\Delta I^2}{12}} \quad (\text{eq. 4})$$

The increased RMS current produces higher losses through the  $R_{DS(ON)}$  of the IC MOSFETs, as well as the inductor DCR.

Increasing the inductor value produces lower RMS currents, but degrades transient response. For a given physical inductor size, increased inductance usually results in an inductor with lower saturation current and higher DCR.

Table 9 shows the effects of inductance higher or lower than the recommended  $1.0 \mu\text{H}$  on regulator performance.

### Output Capacitor

Increasing  $C_{OUT}$  has no effect on loop stability and can therefore be increased to reduce output voltage ripple or to improve transient response. Vice versa, lower  $C_{OUT}$  can be used but with a compromise of load transient response. Output voltage ripple,  $\Delta V_{OUT}$ , is:

$$\Delta V_{OUT} = \Delta I_L \left[ \frac{f_{SW} \cdot C_{OUT} \cdot ESR^2}{2 \cdot D \cdot (1 - D)} + \frac{1}{8 \cdot f_{SW} \cdot C_{OUT}} \right] \quad (\text{eq. 5})$$

### Input Capacitor

The  $2.2 \mu\text{F}$  ceramic input capacitor should be placed as close as possible between the  $V_{IN}$  pin and  $GND$  to minimize the parasitic inductance. If a long wire is used to bring power to the IC, additional “bulk” capacitance (electrolytic or tantalum) should be placed between  $C_{IN}$  and the power source lead to reduce the ringing that can occur between the inductance of the power source leads and  $C_{IN}$ .

The effective capacitance value decreases as  $V_{IN}$  increases due to DC bias effects.

### PCB Layout Guidelines

1. The input capacitor ( $C_{IN}$ ) should be connected as close as possible to the  $V_{IN}$  and  $GND$  pins. Connect to  $V_{IN}$  and  $GND$  using only top metal. Do not route through vias (see Figure 26.)
2. Place the inductor ( $L$ ) as close as possible to the IC. Use short wide traces for the main current paths.
3. An output capacitor ( $C_{OUT}$ ) should be placed as close as possible to the IC. Connection to  $GND$  should only be on top metal. Feedback signal connection to  $V_{OUT}$  should be routed away from noisy components and traces (e.g. SW line).

**Table 9. EFFECTS OF CHANGES in Inductor Value (from 1.0  $\mu\text{H}$  Recommended Value) on Regulator Performance**

Inductor Value	$I_{MAX(LOAD)}$	$\Delta V_{OUT}$	Transient Response
Increase	Increase	Decrease	Degraded
Decrease	Decrease	Increase	Improved

## FAN53701, FAN53702, FAN53703

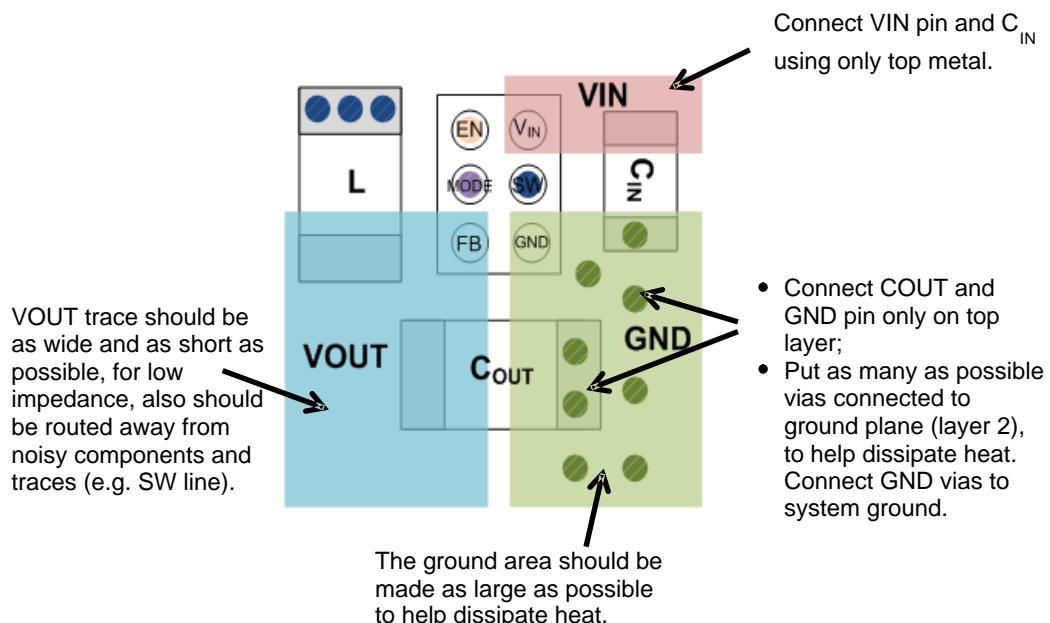


Figure 26. Top Layer

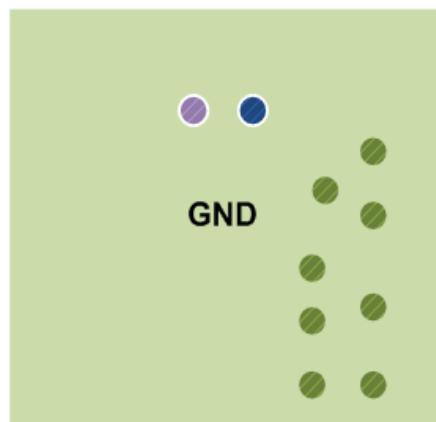


Figure 27. Layer 1






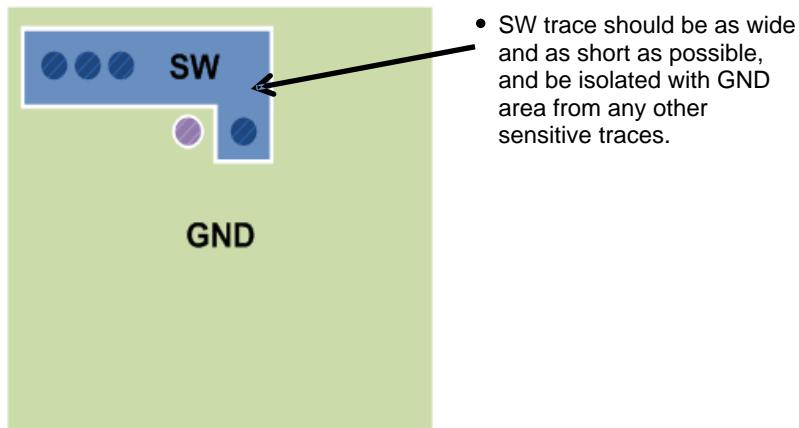


Figure 28. Layer 3

# FAN53701, FAN53702, FAN53703

## PACKAGE DIMENSIONS

WLCSP6 1.38x0.94x0.625  
CASE 567UH  
ISSUE O

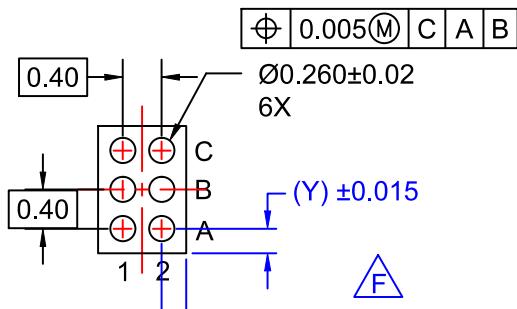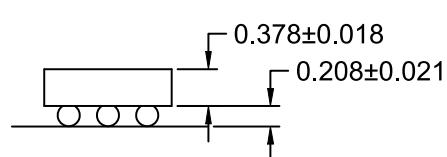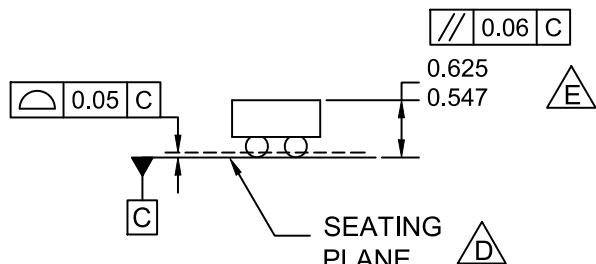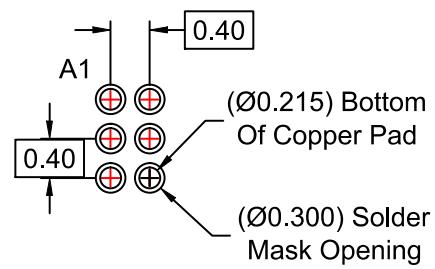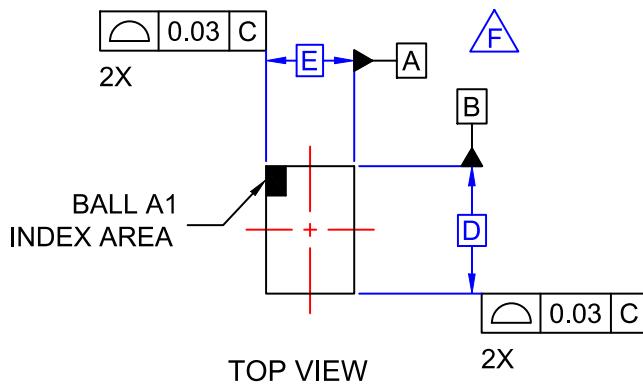

### NOTES

- A. NO JEDEC REGISTRATION APPLIES.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCE PER ASME Y14.5M, 2009.
- D. DATUM C IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.
- E. PACKAGE NOMINAL HEIGHT IS  $586 \pm 39$  MICRONS (547-625 MICRONS).
- F. FOR DIMENSIONS D,E,X, AND Y SEE PRODUCT DATASHEET.

### PRODUCT-SPECIFIC DIMENSIONS

D	E	X	Y
$1.380 \pm 0.030$	$0.940 \pm 0.030$	0.270	0.290

# FAN53701, FAN53702, FAN53703

All trademarks are the property of their respective owners.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.