PENT1040B

Universal 40 Watt (Pre-IEEE802.3at Compliant)

POWER ELECTRONICS

High Power PoE Gigabit Injector

- *10/100/1000 (MbPS) Data Rates*
- *Self-contained Injector*
- *100-250VAC Universal Input*
- *Desktop Style / Non-vented Case*
- *Pre-IEEE802.3at Compliant Detection, Disconnect, and Over Voltage Control Function*
- *Load Diagnostic LED*
- *Over Load Shutdown and Short Circuit Protection*
- *Regulated Output With Low Ripple*
- *Complies with EMI/RFI Regulations*
- *CE Compliant*

International Safety Standard Approvals

EN 60950-1 c UL us CE

AULT®

Specifications

Output Specifications

Combined Line and Load Voltage Regulation	Excluding Cord	±1%
Ripple		1% Vp-p max.
Transient Response		0.5ms for 50% Load Change Typical
Protection		Foldback Overcurrent Protection, Short Circuit Protection

Input Specifications

AC Input Voltage Range	100-250VAC -10%, +6%
Line Frequency	47-63Hz
AC Input Current	1.0A max.
Protection	Internal Primary Current Fuse, Inrush Limiting

Environmental Specifications

Thermal Performance	Operating Temperature No Derating, Convectional Cooling Non Vented Case	0° C to 40° C
Relative Humidity	Non-Condensing	5% to 95%
Altitude		0-10,000 feet

General Specifications

Topology		Switching-Fixed Frequency Flyback
Dielectric Withstand	Primary-Secondary Secondary-Ground	3000VAC, 4250VDC 500VDC
Spacing		5mm Primary-Secondary
Leakage Current		Less than 250 uA
Efficiency		75.1% min.
EMC Information		
Emissions	FCC Part 15. EN55022.	Class B Class B
Harmonic	EN61000-3-2	
VFF	EN61000-3-3	
ESD	EN61000-4-2.	Level 2
RF EFI	EN61000-4-3.	Level 2
EFT	EN61000-4-4.	Level 2
Surge	EN61000-4-5.	Level 3
CDI	EN61000-4-6.	Level 2
CD	EN61000-4-8.	Level 1
Voltage Dips	EN61000-4-11	
CE	LVD, EMC, RoHS, WEEE, CE Compliant	
Hold-up Time	@120VAC	18ms min. typ.
Storage Temp		-30° C to +85° C
Approvals and Standards	Safety	cULus : UL/CSA60950 TUV : EN60950 CE: LVD, EMCD
MTBF		100,000 Calculated Hours

SL Power Electronics Corp • 6050 King Drive • Ventura, CA 93003 • Phone:805.486.4565 • Fax:805.487.8911 • Email:info@slpower.com • www.slpower.com

PENT1040B

Universal 40 Watt (Pre-IEEE802.3at Compliant)

High Power PoE Gigabit Injector

For the most current data and application support visit www.slpower.com

Ault Part Number	Output Voltage	Output Currents Min	Output Currents Max	Max Watts	Ripple Vp-p max.
PENT1040B5600F01	56 V	0.00 A	0.71 A	40 W	560 mV

Ault Part Number Key

PENT	1	040	B	56	00	F	01
Product Family Name	Number of Outputs	Output Wattage	Configuration Type	Output Voltage	Output Connector	Input Configuration	Standard (no modifications or special packaging)

Input Configuration

IEC320
w/ground
C14
(F)

General Specifications (continued from p. 1)

Weight	(excluding cord)	7 Ounces, 200 Grams
Case and Dimension		5.24L x 2.13W x 1.42H (in) 133.0L x 54.0W x 36.0H (mm)
Case Material		Black 94V0 Polycarbonate
Cord and Connectors		Dual RJ45 jacks built into the enclosure

Personalized PoE

Options (additional costs may apply):

- Custom label artwork
- Custom agency approvals available
- Surge protection (Input & Output)
- Mounting bracket
- Custom PoE modifications

Power over Ethernet Plus (known as PoEP and/or PoE+) IEEE802.3at:

- Proposed standard is in development; decision expected in the next 4-6 months
- Operates on Cat5 and higher infrastructure
- Uses all four pairs of standard Ethernet Category 5 cable to provide up to 56 watts of power
- Backwards compatible with IEEE802.3af standard

Pin Connections

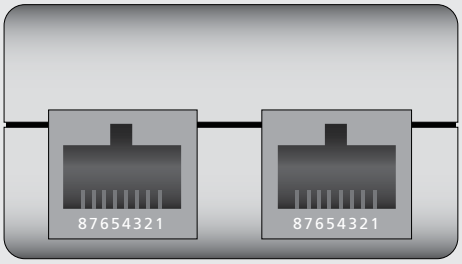

J2 (Power and Data Out) — J1 (Data In)

(Rear of Unit)

PoE Gigabit Pin-out Connections:

Data	POWER (+)	Pins 4/5 (Data + PWR)
Data		Pins 1/2 (Data Only)
Data		Pins 3/6 (Data Only)
Data	POWER (-)	Pins 7/8 (Data + PWR)

Note: = Transformer

LED Functions:

Amber	Power On
Green	Power Active
Blink	Load Error

SL Power Electronics Corp • 6050 King Drive • Ventura, CA 93003 • Phone:805.486.4565 • Fax:805.487.8911 • Email:info@slpower.com • www.slpower.com

Data Sheet © 2008 SL Power Electronics Corp. The information and specifications contained in this data sheet are believed to be correct at time of publication.
However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.

Rev.9/3/08

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.