

Power Supplies

DC to AC Inverters

Connector type, Dimming, 8W, For 2 Bulbs

CXA Series CXA-P1212A-WJL

FEATURES

- Optimum one-connector, two-output design for thin liquid crystal panel displays.
- This inverter carries a PMW(pulse modulation width) circuit, TDK's unique circuit design. This allows dimming of lighting over a much wider range than is possible using conventional types of dimmer circuits. The type of dimmer control can be selected as desired, either voltage control(Vbr:0 to 1.6V) or resistance control(VR:0 to 10kΩ).
- Built-in overcurrent protection circuit increases safety.
- Monitor brightness is always kept stable since the built-in current feedback illumination stabilization circuit compensates for inverter input voltage variation(±10%).
- The board backside is free of wiring pattern. Cost reduction and simplified mounting are made possible by a design that only uses one side of the board.
- Operational safety is increased by the use of two types of insulation for high voltage components.


APPLICATIONS

Various types of color liquid crystal displays, computer touch panels, controllers, medical devices, ATMs, POS terminals, telecommunication terminals, microscope monitors, fishdetectors, ticket sales machines, amusement arcade machines.

TEMPERATURE AND HUMIDITY RANGES

Temperature range (°C)	Operating	-10 to +70
	Storage	-30 to +85
Humidity range(%)RH		95max.
		[Maximum wet-bulb temperature 38°C]

SHAPES AND DIMENSIONS

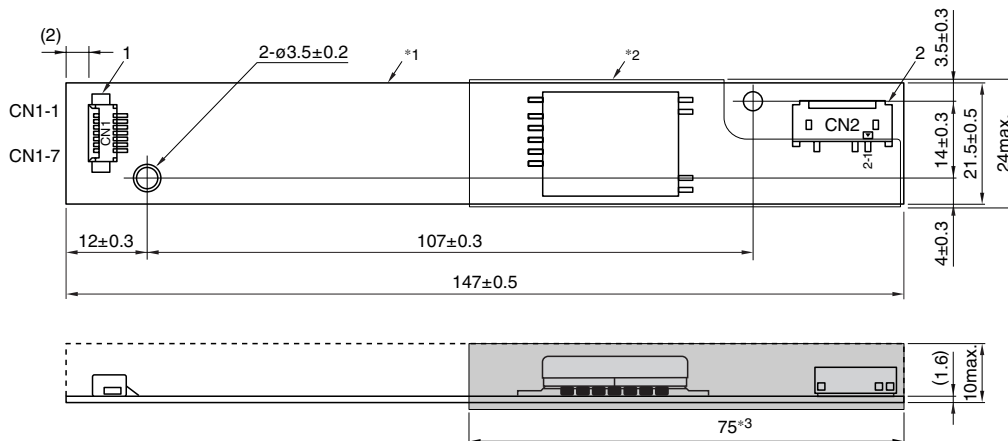

*1 Substrate(PWB: Printed wiring board): Flame retardant material UL 94V-0(FR-4 or CEM-3)

*2 Voltage protection insulating cover t=0.38mm

*3 : High-voltage generator (The entire surface within a range of 75mm away from the end of the base in the output)

Weight: 24.5g typ.

Dimensions in mm

	Connector manufacturer's company and type			Symbol
1	Input connector	Morex Japan Co., Ltd.	53261-0790	CN1
2	Output connector	Japan Solderless Terminal Co., Ltd.	SM03(7-D1)B-BHS-1	CN2

TERMINAL NUMBERS AND FUNCTIONS

CN1

Terminal No.	Functions	Symbol
CN1-1,-2	Input voltage Edc: 10.8 to 13.2V 12V[nom.]	Vin
CN1-3,-4	0V	GND
CN1-5	Remote voltage Edc 0V: off/5 to 13.2V:on	Vrmt
CN1-6	Brightness dimmer terminal: GND/0 to 10kΩ*	Vbr1/VR1
CN1-7	Brightness dimmer terminal: 0 to 0.6V/0 to 10kΩ* Vbr2/VR2	

* According to a connection method, either a voltage control brightness adjustment or a resistance control brightness adjustment can be selected as follows:

Voltage control brightness adjustment: 0V → Maximum brightness adjustment (Maximum light volume), 0.6V → Minimum brightness adjustment (Minimum light volume)

Resistance control brightness adjustment: 0Ω → Maximum brightness adjustment (Maximum light volume), 10kΩ → Minimum brightness adjustment (Minimum light volume)

CN2

Terminal No.	Functions		Symbol
CN2-1	Output 1[High voltage] Irms	2 to 6mA	V _{HIGH1}
CN2-2	Output 2[High voltage] Irms	2 to 6mA	V _{HIGH2}
CN2-3	—	—	N.C.
CN2-4	Output[Low voltage]	(2V)	V _{Low}

Power Supplies

CXA Series CXA-P1212A-WJL

DC to AC Inverters

Connector type, Dimming, 8W, For 2 Bulbs

ELECTRICAL CHARACTERISTICS

Items	Unit	Symbol	Specifications			Conditions						Brightness
			min.	typ.	max.	V _{in} (V)	V _{rmt} (V)	V _{br} (V)* ¹	VR(k Ω)* ²	T _a (°C)	RL1/RL2	
Output current I _{rms}	mA	I _{out1} /I _{out2}	5.3	6	6.7	12 $\pm$ 1.2	5 $\pm$ 0.25	0	0	-10 to +70	95 to 116	Maximum
		I _{out1} /I _{out2}	5.5	6	6.5	12 $\pm$ 0.6	5 $\pm$ 0.25	0	0	23 $\pm$ 5	106	Maximum
		I _{out1} /I _{out2}	1.1	2	2.9	12 $\pm$ 1.2	5 $\pm$ 0.25	0.6	10	-10 to +70	95 to 116	Minimum
		I _{out1} /I _{out2}	1.2	2	2.8	12 $\pm$ 0.6	5 $\pm$ 0.25	0.6	10	23 $\pm$ 5	106 $\pm$ 0.5	Minimum
Input current I _{dc}	A	I _{in1}	—	0.8	1	12 $\pm$ 0.6	5 $\pm$ 0.25	0	0	23 $\pm$ 5	106	
	mA	I _{in2}	—	—	1	12 $\pm$ 0.6	0 to 0.4	0	0	23 $\pm$ 5	95 to 116	
	mA	I _{in3} * ³	—	—	1	12 $\pm$ 1.2	5 $\pm$ 0.25	0 to 0.6	0 to 10	-10 to +70	∞	3sec typ.
Oscillation frequency	kHz	F _L	35	40	45	12 $\pm$ 0.6	5 $\pm$ 0.25	0	0	-10 to +70	95 to 116	
Open circuit output voltage E _{rms}	V	V _{open}	1500	1700	—	10.8	5 $\pm$ 0.25	0	0	-10 to +70	∞	


- This product permits a selection between the voltage control brightness adjustment and the resistance control brightness adjustment according to a connection method.

*¹ When voltage control brightness adjustment is selected.

*² When resistance control brightness adjustment is selected.

*³ This inverter has a built-in feature which stops an operation in approx. 3 sec when the RL1 and the RL2 are open at the start-up of the inverter or when they are opened during the inverter operation.



TYPICAL CONNECTION

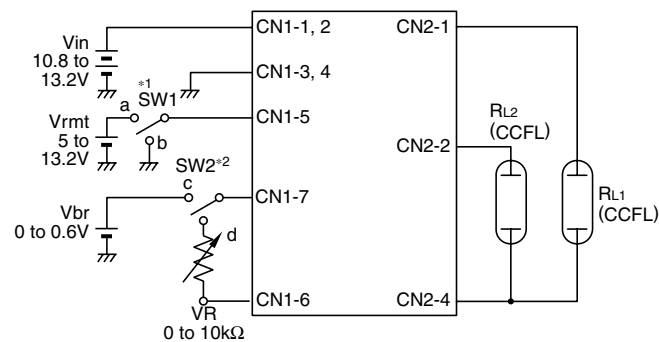

*¹ SW1 Remote function a: on, b: off

*² SW2 Dimmer control method c: voltage dimmer control, d: resistance dimmer control

V_{br} vs. I_{out} CHARACTERISTICS VR vs. I_{out} CHARACTERISTICS

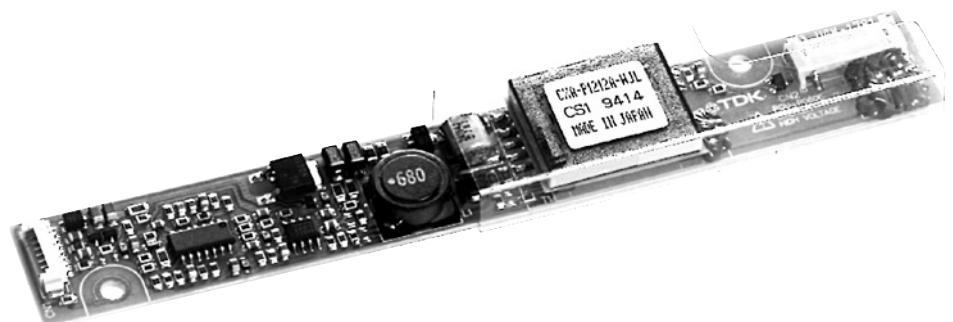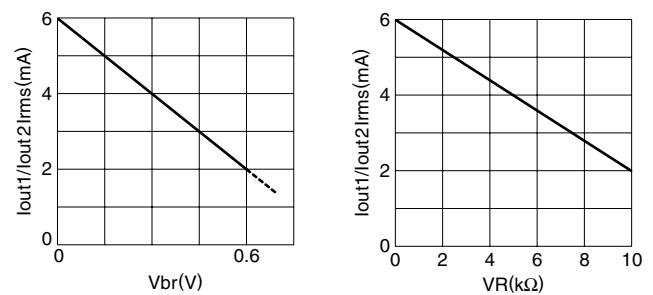



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.