

LTM8023 36V, 2A DC/DC μModule® Regulator

DESCRIPTION

Demonstration circuit 1195 features the LTM®8023, a step-down regulator preconfigured to deliver 3.3V at up to 2A from a 5V to 36V input supply. The LTM8023 is a step-down converter, so minimum amount of headroom is required to keep the output in regulation. In addition, the input voltage required to turn on is higher than that required to run (see Minimum Input Voltage section in the data sheet for detail). The optional Burst Mode® operation of LTM8023 supports high efficiency and low output ripple at light load conditions.

The LTM8023 data sheet gives a complete description of the part, operation and application information. The LTM8023 data sheet must be read in conjunction with this manual to operate or modify demo circuit 1195.

Design files for this circuit board are available at <http://www.linear.com/demo>


LT, LT, LTC, LTM, Linear Technology, Burst Mode, μModule and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY (T_A = 25°C)

PARAMETER	CONDITION	VALUE
Input Voltage Range		5V (Note 1) to 36V
Output Voltage V _{OUT}		3.3V
Maximum Output Current		2A
Typical Switching Frequency		600kHz

Note 1: The circuit requires more than 5V to run at full load. See Figure 1 and the data sheet for detail.

BOARD PHOTO

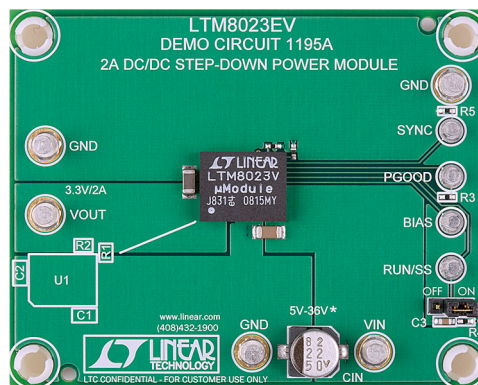

QUICK START PROCEDURE

Demonstration circuit 1195 is a simple way to evaluate the performance of the LTM8023. Refer to Figure 2 and Figure 3 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT} and GND terminals. See Figure 3 for proper scope probe technique.

1. Place JP1 on the ON position.
2. With power off, connect the input power supply to V_{IN} and GND.

3. Turn on the power at the input. The output voltage should rise to 3.3V.
4. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

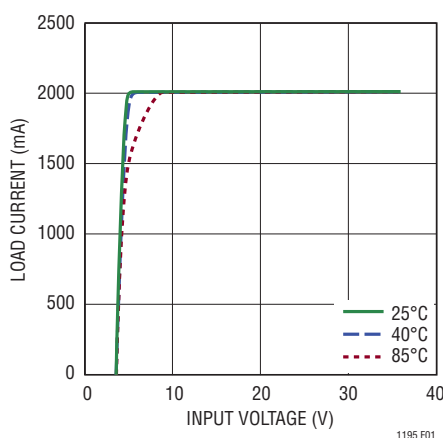


Figure 1. Load Current vs Input Voltage ($3.3V_{OUT}$)

QUICK START PROCEDURE

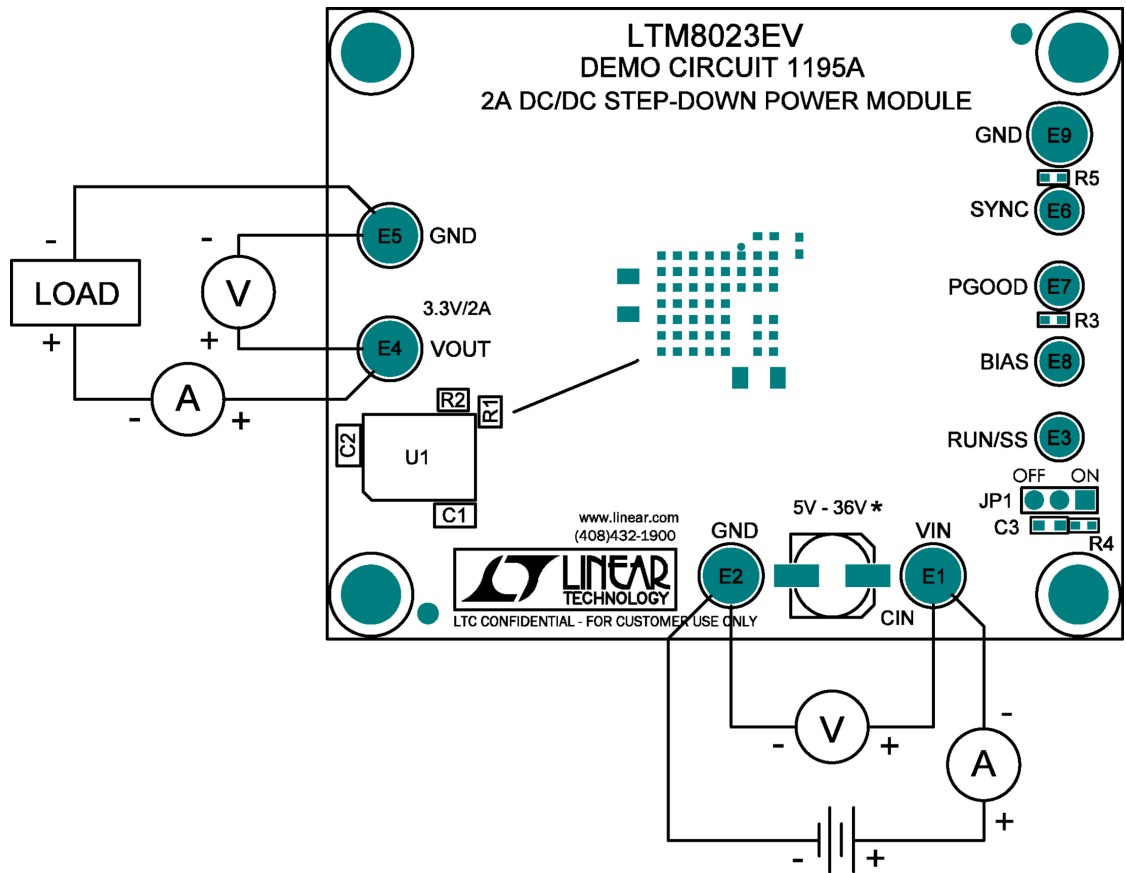


Figure 2. Proper Measurement Equipment Setup




Figure 3. Measuring Input or Output Ripple

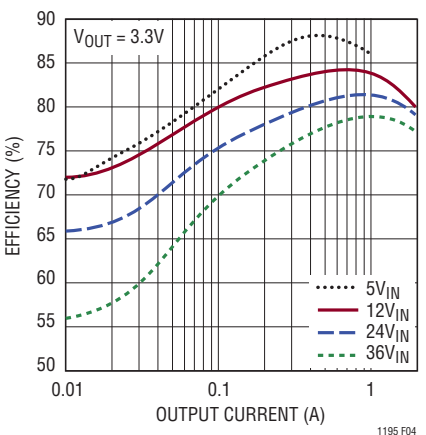



Figure 4. Efficiency

DEMO MANUAL DC1195A

PARTS LIST

ITEM	QUANTITY	REFERENCE-DESCRIPTION	DESCRIPTION	MANUFACTURER'S PART NUMBER
1	1	CIN	Cap, 22 μ F 20% 50V Alum	Sanyo 50CE22BS
2	1	C1	Cap, 2.2 μ F 10% 50V X7R, 1206	Murata GRM31CR71H225KA88L
3	1	C2	Cap, 22 μ F 20% 10V X5R, 1206	Taiyo Yuden LMK316BJ226ML-T
4	1	C3	Cap, 0.1 μ F 10% 50V X7R, 0603	TDK C1608X7R1H104K
5	5	E1, E2, E4, E5, E9	Turret	Mill-Max 2501-2-00-80-00-00-07-0
6	4	E3, E6, E7, E8	Turret	Mill-Max 2308-2-00-80-00-00-07-0
7	1	JP1	Header, 3 Pin, 2mm	Samtec TMM-103-02-L-S
8	1	R1	Res, 154k 1% 1/16W, 0402	Vishay CRCW0402154KFKEA
9	1	R2	Res, 56.2k 1% 1/16W, 0402	Vishay CRCW040256K2FKED
10	2	R4, R3	Res, 100k 1% 1/16W, 0402	Vishay CRCW0402100KFKEA
11	1	R5	Res, 10k 5% 1/16W, 0402	Vishay CRCW040210K0JNED
12	1	U1	IC, Module	Linear Technology LTM8023EV
13	4		Standoff, Snap On	Keystone 8831
14	1	XJP1	Shunt, 2mm	Samtec 2SN-BK-G

SCHEMATIC DIAGRAM

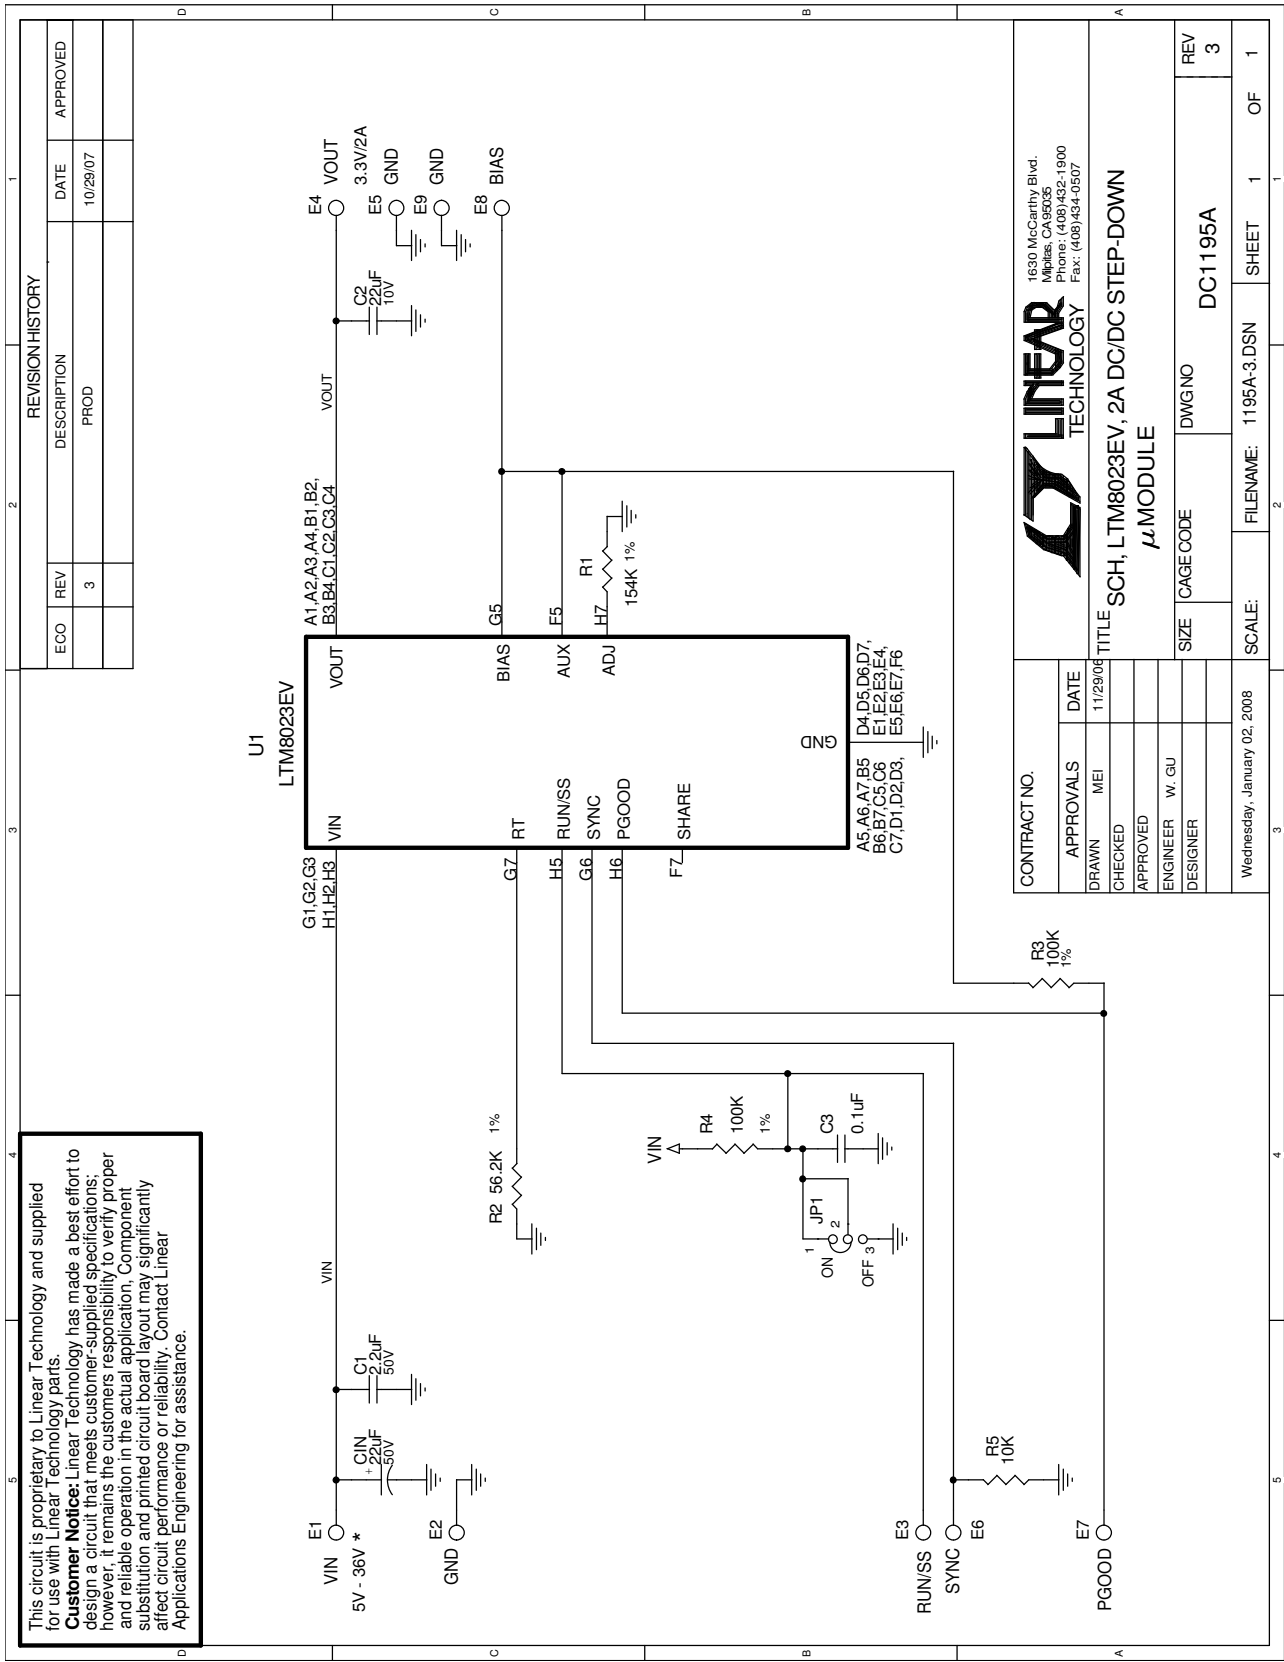

dc1195af

DEMO MANUAL DC1195A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.