

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

General Description

The MAX2014 complete multistage logarithmic amplifier is designed to accurately convert radio-frequency (RF) signal power in the 50MHz to 1000MHz frequency range to an equivalent DC voltage. The outstanding dynamic range and precision over temperature of this log amplifier make it particularly useful for a variety of base-station and other wireless applications, including automatic gain control (AGC), transmitter power measurements, and received-signal-strength indication (RSSI) for terminal devices.

The MAX2014 can also be operated in a controller mode where it measures, compares, and controls the output power of a variable-gain amplifier as part of a fully integrated AGC loop.

This logarithmic amplifier provides much wider measurement range and superior accuracy compared to controllers based on diode detectors, while achieving excellent temperature stability over the full -40°C to +85°C operating range.

Applications

AGC Measurement and Control
 RF Transmitter Power Measurement
 RSSI Measurements
 Cellular Base-Station, WLAN, Microwave Link,
 Radar, and other Military Applications
 Optical Networks

μMAX is a registered trademark of Maxim Integrated Products, Inc.


Features

- ◆ Complete RF Detector/Controller
- ◆ 50MHz to 1000MHz Frequency Range
- ◆ Exceptional Accuracy Over Temperature
- ◆ High Dynamic Range
- ◆ 2.7V to 5.25V Supply Voltage Range*
- ◆ Scaling Stable Over Supply and Temperature Variations
- ◆ Controller Mode with Error Output
- ◆ Shutdown Mode with Typically 1μA of Supply Current
- ◆ Available in 8-Pin TDFN and 8-pin μMAX® Package

*See the Power-Supply Connections section.

Ordering Information appears at end of data sheet.

Functional Diagram

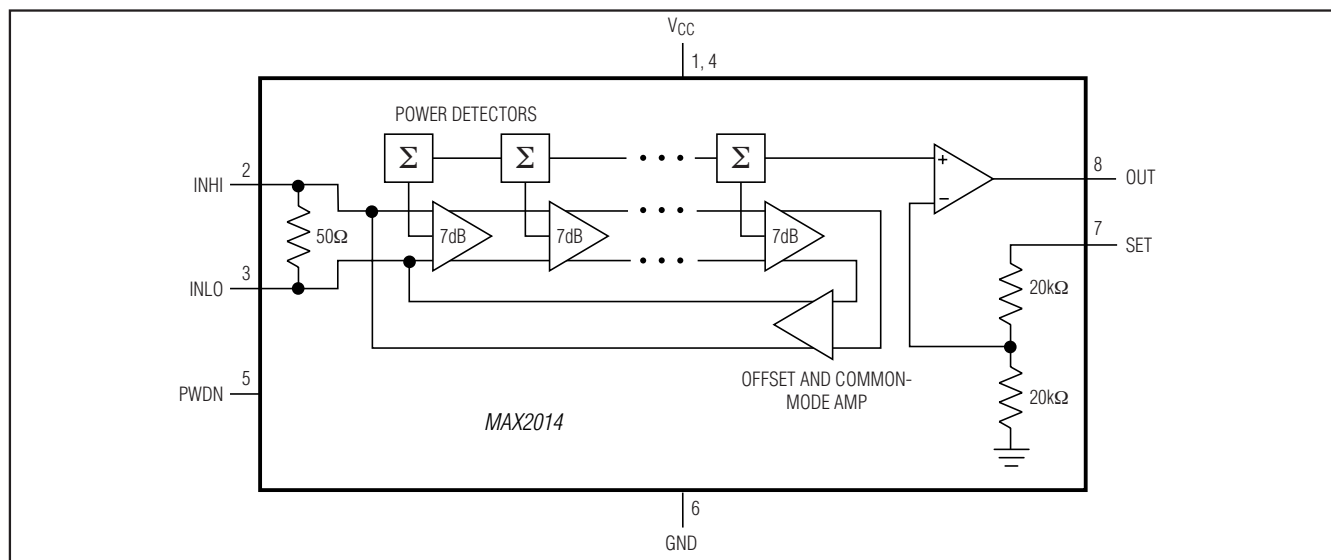

Pin Configuration appears at end of data sheet.

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

ABSOLUTE MAXIMUM RATINGS

| | |
|---|-----------------------------------|
| V _{CC} (Pins 1, 4) to GND | -0.3V to +5.25V |
| SET, PWDN to GND | -0.3V to (V _{CC} + 0.3V) |
| Input Power Differential (INHI, INLO) | +23dBm |
| Input Power Single Ended (INHI or INLO grounded) | +19dBm |
| Continuous Power Dissipation (T _A = +70°C) | |
| TDFN (derate 18.5mW/°C above +70°C) | 1480mW |
| μMAX (derate 4.5mW/°C above +70°C) | 362mW |

| | |
|-----------------------------------|-----------------|
| Operating Temperature Range | -40°C to +85°C |
| Junction Temperature | +150°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (soldering, 10s) | +300°C |
| Soldering Temperature (reflow) | +260°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

PACKAGE THERMAL CHARACTERISTICS (Note 1)

TDFN:

| | |
|---|--------|
| Junction-to-Ambient Thermal Resistance (θ _{JA}) | 54°C/W |
| Junction-to-Case Thermal Resistance (θ _{JC}) | 8°C/W |

μMAX:

| | |
|---|---------|
| Junction-to-Ambient Thermal Resistance (θ _{JA}) | 221°C/W |
| Junction-to-Case Thermal Resistance (θ _{JC}) | 42°C/W |

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7. For detailed information on package thermal considerations, refer to www.maxim-ic.com/thermal-tutorial.

DC ELECTRICAL CHARACTERISTICS

(Typical Application Circuit (Figure 1), V_S = +3.3V, f_{RF} = 50MHz to 1000MHz, R₁ = 0Ω, R₄ = 0Ω, R_L = 10kΩ, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------------|-----------------------|--|------|------------|------|-------|
| POWER SUPPLY | | | | | | |
| Supply Voltage | V _S | R ₄ = 75Ω ±1%, PWDN must be connected to GND | 4.75 | | 5.25 | V |
| | | R ₄ = 0Ω | 2.7 | | 3.6 | |
| Supply Current | I _{CC} | T _A = +25°C, V _S = 5.25V, R ₄ = 75Ω | | 17.3 | | mA |
| | | T _A = +25°C | | 17.3 | 20.5 | |
| Supply Current Variation with Temp | I _{CC} | T _A = -40°C to +85°C | | 0.05 | | mA/°C |
| Shutdown Current | I _{CC} | V _{PWDN} = V _{CC} | | 1 | | μA |
| CONTROLLER REFERENCE (SET) | | | | | | |
| SET Input Voltage Range | | | | 0.5 to 1.8 | | V |
| SET Input Impedance | | | | 40 | | kΩ |
| DETECTOR OUTPUT (OUT) | | | | | | |
| Source Current | | | | 4 | | mA |
| Sink Current | | | | 450 | | μA |
| Minimum Output Voltage | V _{OUT(MIN)} | | | 0.5 | | V |
| Maximum Output Voltage | V _{OUT(MAX)} | | | 1.8 | | V |

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

MAX2014

AC ELECTRICAL CHARACTERISTICS

(Typical Application Circuit (Figure 1), $V_S = +3.3V$, $f_{RF} = 50MHz$ to $1000MHz$, $R_1 = 0\Omega$, $R_4 = 0\Omega$, $R_L = 10k\Omega$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted. Typical values are at $T_A = +25^\circ C$, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|----------|---|-----|--------------|-----|------------------|
| RF Input Frequency Range | f_{RF} | | | 50 to 1000 | | MHz |
| Return Loss | S_{11} | | | -15 | | dB |
| Large-Signal Response Time | | $P_{IN} =$ no signal to $0dBm$, $\pm 0.5dB$ settling accuracy | | 150 | | ns |
| RSSI MODE—50MHz | | | | | | |
| RF Input Power Range | | (Note 3) | | -65 to +5 | | dBm |
| $\pm 3dB$ Dynamic Range | | $T_A = -40^\circ C$ to $+85^\circ C$ (Note 4) | | 70 | | dB |
| Range Center | | | | -30 | | dBm |
| Temp Sensitivity when $T_A > +25^\circ C$ | | $T_A = +25^\circ C$ to $+85^\circ C$, $P_{IN} = -25dBm$ | | +0.0083 | | dB/ $^\circ C$ |
| Temp Sensitivity when $T_A < +25^\circ C$ | | $T_A = -40^\circ C$ to $+25^\circ C$, $P_{IN} = -25dBm$ | | -0.0154 | | dB/ $^\circ C$ |
| Slope | | (Note 5) | | 19 | | mV/dB |
| Typical Slope Variation | | $T_A = -40^\circ C$ to $+85^\circ C$ | | -4 | | $\mu V/^\circ C$ |
| Intercept | | (Note 6) | | -100 | | dBm |
| Typical Intercept Variation | | $T_A = -40^\circ C$ to $+85^\circ C$ | | 0.03 | | dBm/ $^\circ C$ |
| RSSI MODE—100MHz | | | | | | |
| RF Input Power Range | | (Note 3) | | -65 to +5 | | dBm |
| $\pm 3dB$ Dynamic Range | | $T_A = -40^\circ C$ to $+85^\circ C$ (Note 4) | | 70 | | dB |
| Range Center | | | | -30 | | dBm |
| Temp Sensitivity when $T_A > +25^\circ C$ | | $T_A = +25^\circ C$ to $+85^\circ C$, $P_{IN} = -25dBm$ | | +0.0083 | | dB/ $^\circ C$ |
| Temp Sensitivity when $T_A < +25^\circ C$ | | $T_A = -40^\circ C$ to $+25^\circ C$, $P_{IN} = -25dBm$ | | -0.0154 | | dB/ $^\circ C$ |
| Slope | | (Note 5) | | 19 | | mV/dB |
| Typical Slope Variation | | $T_A = -40^\circ C$ to $+85^\circ C$ | | -4 | | $\mu V/^\circ C$ |
| Intercept | | (Note 6) | | -100 | | dBm |
| Typical Intercept Variation | | $T_A = -40^\circ C$ to $+85^\circ C$ | | 0.03 | | dBm/ $^\circ C$ |
| RSSI MODE—900MHz | | | | | | |
| RF Input Power Range | | (Note 3) | | -65 to +5 | | dBm |
| $\pm 3dB$ Dynamic Range | | $T_A = -40^\circ C$ to $+85^\circ C$ (Note 4) | | 70 | | dB |
| Range Center | | | | -30 | | dBm |
| Temp Sensitivity when $T_A > +25^\circ C$ | | $T_A = +25^\circ C$ to $+85^\circ C$, $P_{IN} = -25dBm$ | | ± 0.0083 | | dB/ $^\circ C$ |

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

AC ELECTRICAL CHARACTERISTICS (continued)

(Typical Application Circuit (Figure 1), $V_S = +3.3V$, $f_{RF} = 50MHz$ to $1000MHz$, $R_1 = 0\Omega$, $R_4 = 0\Omega$, $R_L = 10k\Omega$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted. Typical values are at $T_A = +25^\circ C$, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--------|---|-----|---------|-----|------------------|
| Temp Sensitivity when $T_A < +25^\circ C$ | | $T_A = -40^\circ C$ to $+25^\circ C$, $P_{IN} = -25dBm$ | | -0.0154 | | dB/ $^\circ C$ |
| Slope | | (Note 5) | | 18.1 | | mV/dB |
| Typical Slope Variation | | $T_A = -40^\circ C$ to $+85^\circ C$ | | -4 | | $\mu V/^\circ C$ |
| Intercept | | (Note 6) | | -97 | | dBm |
| Typical Intercept Variation | | $T_A = -40^\circ C$ to $+85^\circ C$ | | 0.02 | | dBm/ $^\circ C$ |

Note 2: The MAX2014 is guaranteed by design for $T_A = -40^\circ C$ to $+85^\circ C$, as specified.

Note 3: Typical minimum and maximum range of the detector at the stated frequency.




Note 4: Dynamic range refers to the range over which the error remains within the stated bounds. The error is calculated at $T_A = -40^\circ C$ and $+85^\circ C$, relative to the curve at $T_A = +25^\circ C$.

Note 5: The slope is the variation of the output voltage per change in input power. It is calculated by fitting a root-mean-square (RMS) straight line to the data indicated by RF input power range.

Note 6: The intercept is an extrapolated value that corresponds to the output voltage for which the output voltage is zero. It is calculated by fitting an RMS straight line to the data.

Typical Operating Characteristics

(Typical Application Circuit (Figure 1), $V_S = V_{CC} = 3.3V$, $P_{IN} = -10dBm$, $f_{IN} = 100MHz$, $R_1 = 0\Omega$, $R_4 = 0\Omega$, $R_L = 10k\Omega$, $V_{PWRN} = 0V$, $T_A = +25^\circ C$, unless otherwise noted.)

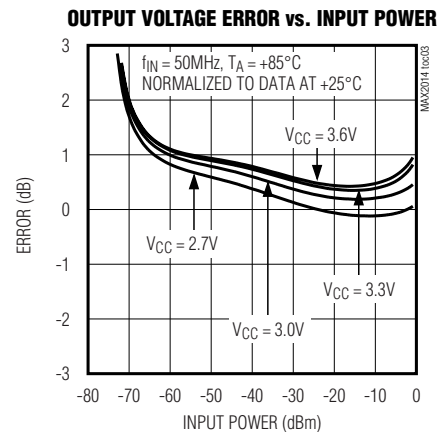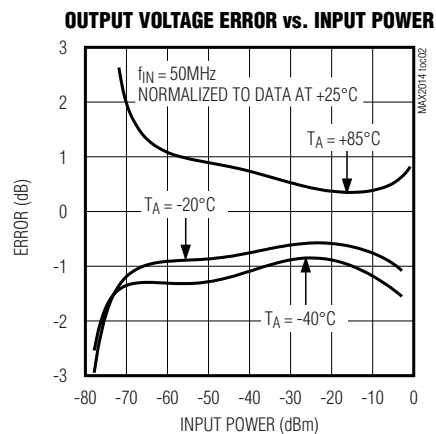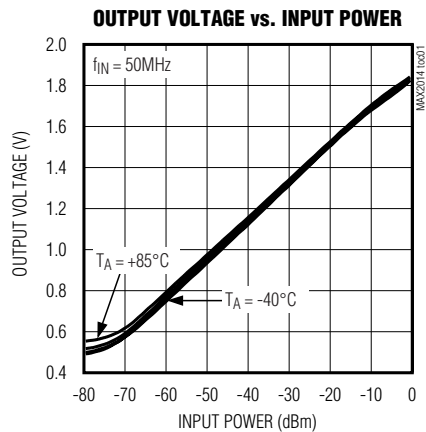


50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

MAX2014


Typical Operating Characteristics (continued)

(Typical Application Circuit (Figure 1), $V_S = V_{CC} = 3.3V$, $P_{IN} = -10dBm$, $f_{IN} = 100MHz$, $R_1 = 0\Omega$, $R_4 = 0\Omega$, $R_L = 10k\Omega$, $V_{PWDN} = 0V$, $T_A = +25^\circ C$, unless otherwise noted.)


OUTPUT VOLTAGE ERROR vs. INPUT POWER

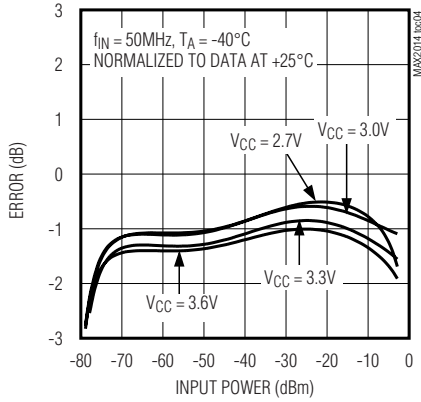


OUTPUT VOLTAGE vs. INPUT POWER

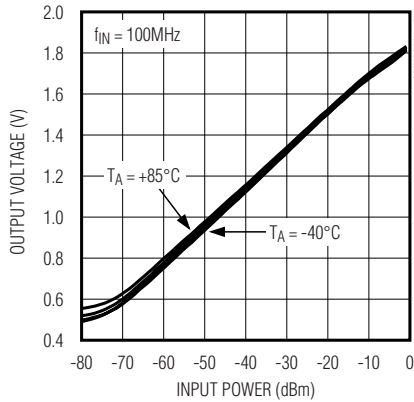


OUTPUT VOLTAGE ERROR vs. INPUT POWER

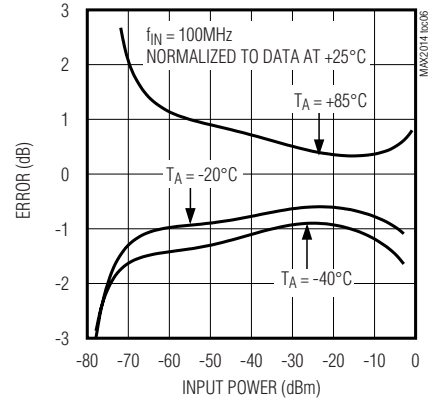

OUTPUT VOLTAGE ERROR vs. INPUT POWER

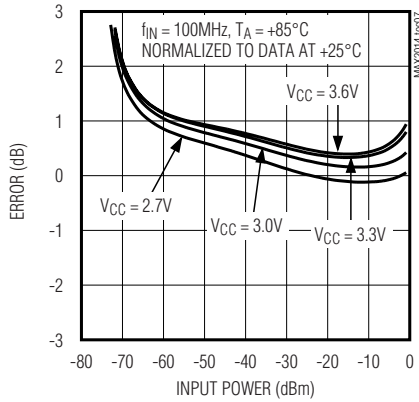








OUTPUT VOLTAGE ERROR vs. INPUT POWER

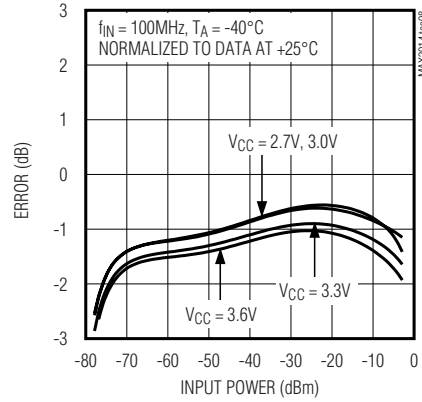

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

Typical Operating Characteristics (continued)

(Typical Application Circuit (Figure 1), $V_S = V_{CC} = 3.3V$, $P_{IN} = -10dBm$, $f_{IN} = 100MHz$, $R_1 = 0\Omega$, $R_4 = 0\Omega$, $R_L = 10k\Omega$, $V_{P_WDN} = 0V$, $T_A = +25^\circ C$, unless otherwise noted.)

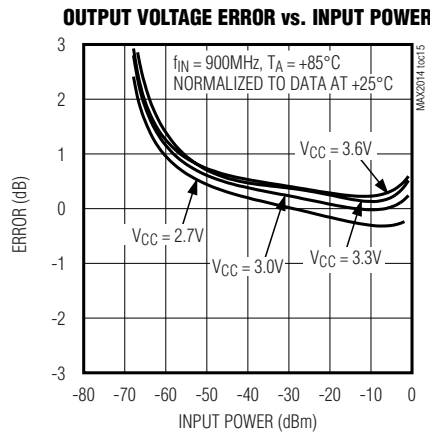
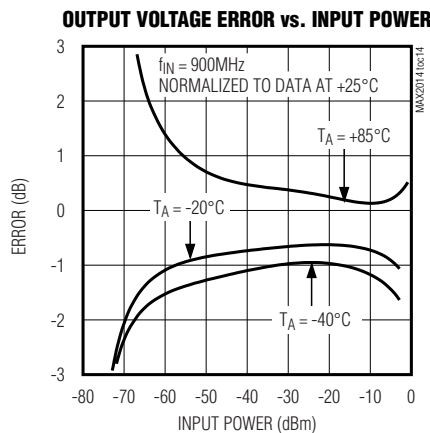
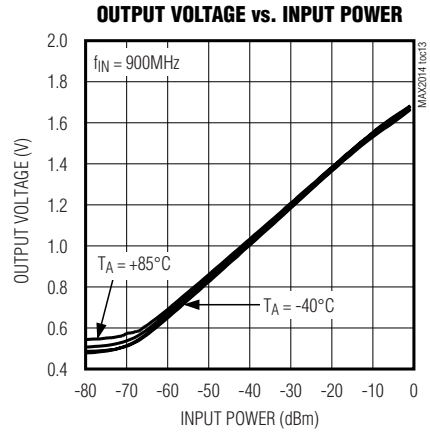
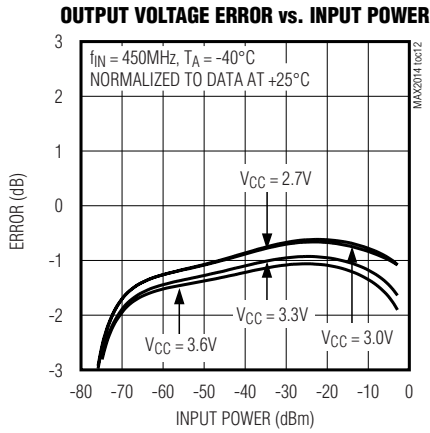
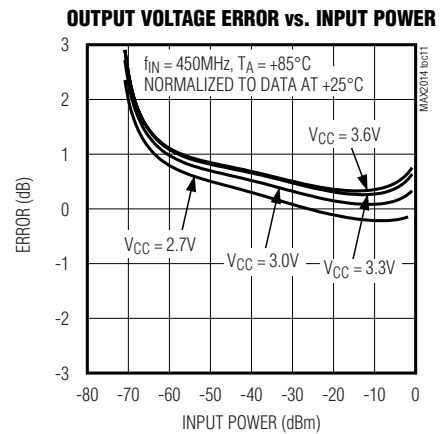
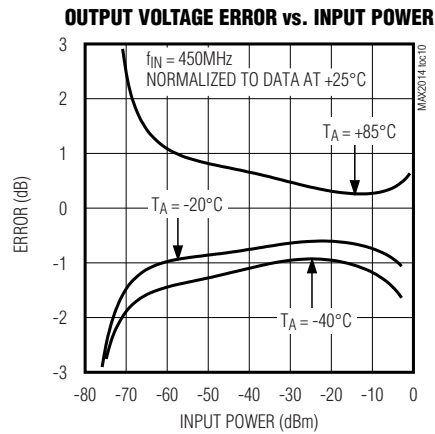
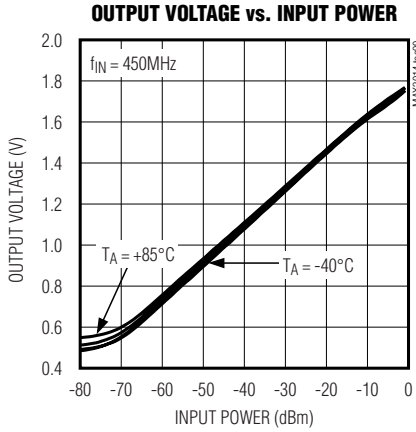


50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

MAX2014

Typical Operating Characteristics (continued)





(Typical Application Circuit (Figure 1), $V_S = V_{CC} = 3.3V$, $P_{IN} = -10dBm$, $f_{IN} = 100MHz$, $R_1 = 0\Omega$, $R_4 = 0\Omega$, $R_L = 10k\Omega$, $V_{PWRN} = 0V$, $T_A = +25^\circ C$, unless otherwise noted.)

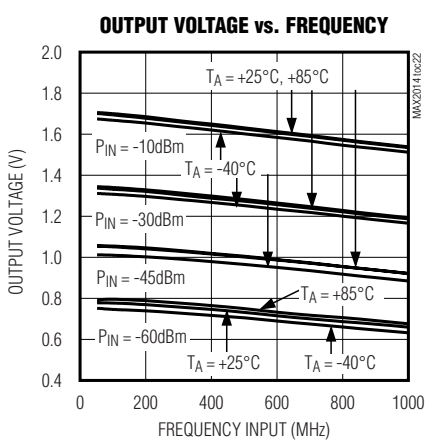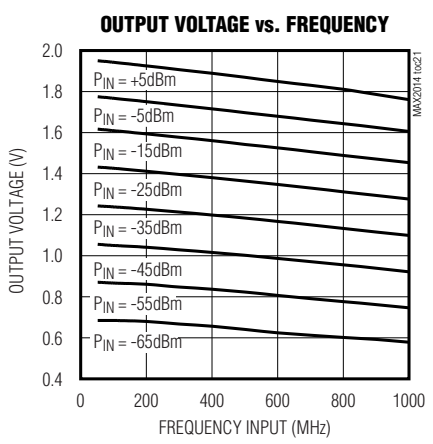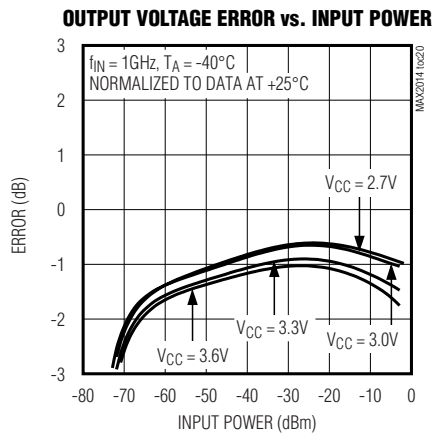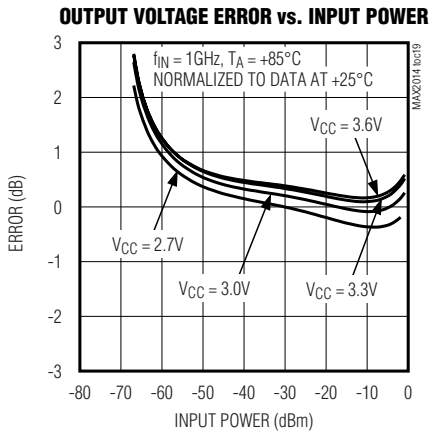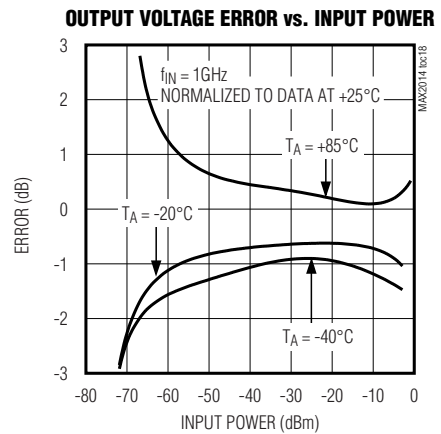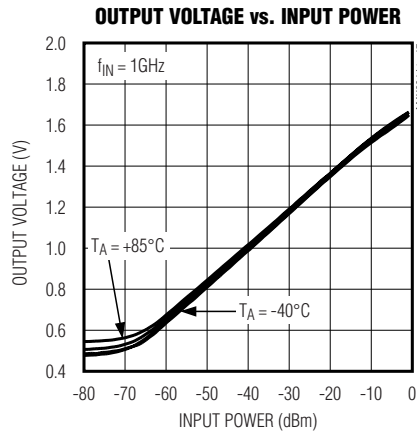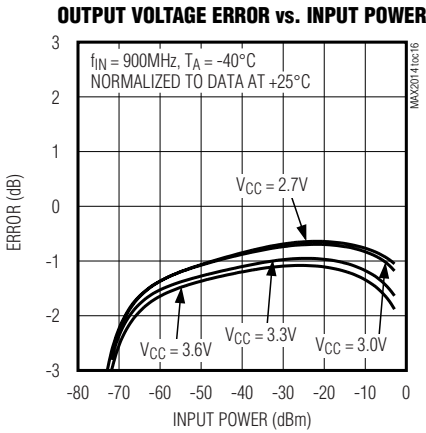

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

Typical Operating Characteristics (continued)

(Typical Application Circuit (Figure 1), $V_S = V_{CC} = 3.3V$, $P_{IN} = -10dBm$, $f_{IN} = 100MHz$, $R_1 = 0\Omega$, $R_4 = 0\Omega$, $R_L = 10k\Omega$, $V_{PWDN} = 0V$, $T_A = +25^\circ C$, unless otherwise noted.)

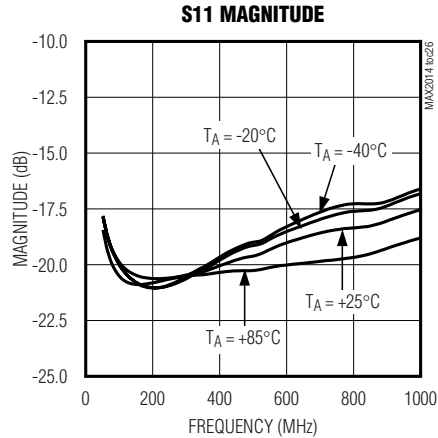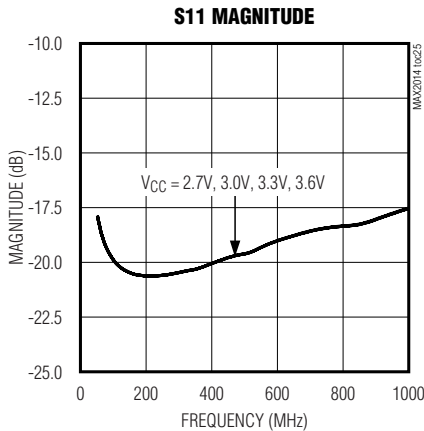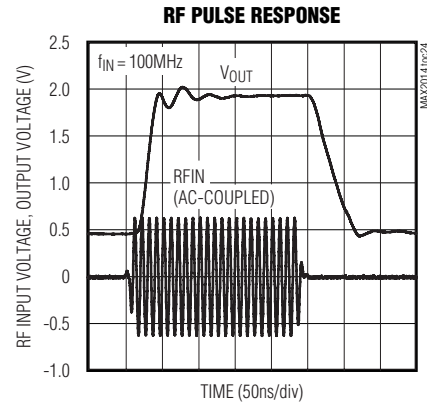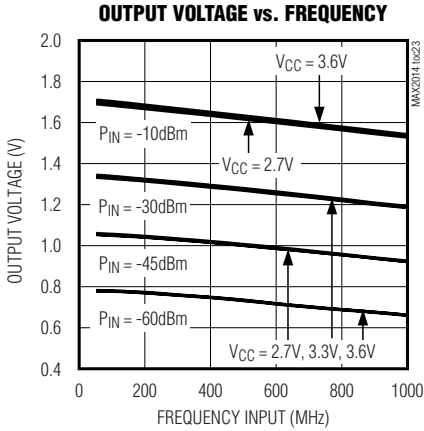

Pin Description

| PIN | NAME | DESCRIPTION |
|------|------------|--|
| 1, 4 | V_{CC} | Supply Voltage. Bypass with capacitors as specified in the typical application circuits. Place capacitors as close to the pin as possible (see the <i>Power-Supply Connections</i> section). |
| 2, 3 | INH1, INLO | Differential RF Inputs |
| 5 | PWDN | Power-Down Input. Drive PWDN with a logic-high to power down the IC. PWDN must be connected to GND for V_S between 4.75V and 5.25V with $R_4 = 75\Omega$. |
| 6 | GND | Ground. Connect to the printed circuit (PC) board ground plane. |
| 7 | SET | Set-Point Input. To operate in detector mode, connect SET to OUT. To operate in controller mode, connect a precision voltage source to control the power level of a power amplifier. |
| 8 | OUT | Detector Output. In detector mode, this output provides a voltage proportional to the log of the input power. In controller mode, this output is connected to a power-control input on a power amplifier (PA). |
| — | EP | Exposed Pad (TDFN Package Only). Connect EP to GND using multiple vias, or the EP can also be left unconnected. |

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

MAX2014

Detailed Description

The MAX2014 is a successive detection logarithmic amplifier designed for use in RF power measurement and AGC applications with a 50MHz to 1000MHz frequency range from a single 2.7V to 3.6V power supply. It is pin compatible with other leading logarithmic amplifiers.

The MAX2014 provides for improved performance with a high 75dB dynamic range at 100MHz, and exceptional accuracy over the extended temperature range and supply voltage range.

RF Input

The MAX2014 differential RF input (INHI, INLO) allows for broadband signals between 50MHz and 1000MHz. For single-ended signals, AC-couple INLO to ground. The RF inputs are internally biased and need to be AC-coupled using 680pF capacitors as shown in Figures 1 and 2. An internal 50Ω resistor between INHI and INLO provides a good 50MHz to 1000MHz match.

SET Input

The SET input is used for loop control when in controller mode or to set the slope of the output signal (mV/dB) when in detector mode. The internal input structure of SET is two series 20kΩ resistors connected to ground. The center node of the resistors is fed to the negative input of the internal output op amp.

Power-Supply Connections

The MAX2014 requires power-supply bypass capacitors connected close to each VCC pin. At each VCC pin, connect a 0.1μF capacitor (C4, C6) and a 100pF capacitor (C3, C5), with the 100pF capacitor being closest to the pin.

For power-supply voltages (V_S) between 2.7V and 3.6V, set $R_4 = 0\Omega$ (see the typical application circuits, Figures 1 and 2).

For power-supply voltages (V_S) between 4.75V and 5.25V, set $R_4 = 75\Omega \pm 1\%$ (100ppm/°C max) and PWDN must be connected to GND.

Power-Down Mode

The MAX2014 can be powered down by driving PWDN with logic-high (logic-high = V_{CC}). In power-down mode, the supply current is reduced to a typical value of 1μA. For normal operation, drive PWDN with a logic-low. It is recommended when using power-down that an RF signal not be applied before the power-down signal is low.

Applications Information

Detector (RSSI) Mode

In detector mode, the MAX2014 acts like an RSSI, which provides an output voltage proportional to the input power. This is accomplished by providing a feedback path from OUT to SET ($R_1 = 0\Omega$; see Figure 1).

By connecting SET directly to OUT, the op amp gain is set to 2V/V due to two internal 20kΩ feedback resistors.

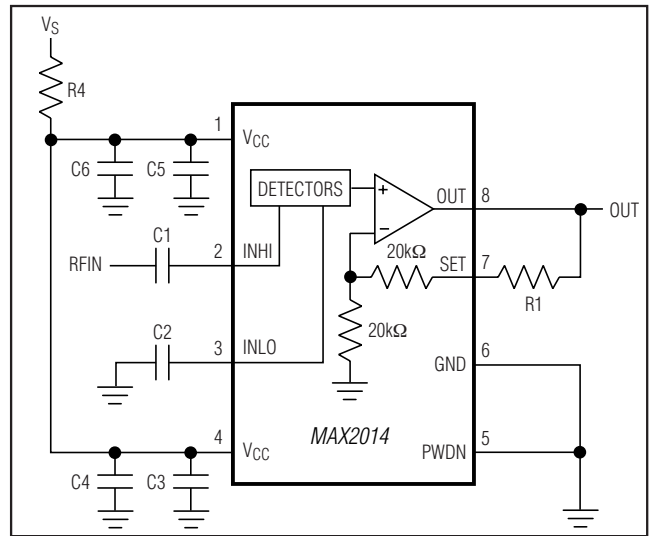


Figure 1. Detector-Mode (RSSI) Typical Application Circuit

Table 1. Suggested Components of Typical Application Circuits

| DESIGNATION | VALUE | TYPE |
|-------------|-------|-------------------------|
| C1, C2 | 680pF | 0603 ceramic capacitors |
| C3, C5 | 100pF | 0603 ceramic capacitors |
| C4, C6 | 0.1μF | 0603 ceramic capacitors |
| R1* | 0Ω | 0603 resistor |
| R4** | 0Ω | 0603 resistor |

*RSSI mode only.

** $V_S = 2.7V$ to $3.6V$.

This provides a detector slope of approximately 18mV/dB with a 0.5V to 1.8V output range.

Controller Mode

The MAX2014 can also be used as a detector/controller within an AGC loop. Figure 3 depicts one scenario where the MAX2014 is employed as the controller for a

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

variable-gain PA. As shown in the figure, the MAX2014 monitors the output of the PA through a directional coupler. An internal integrator (Figure 2) compares the detected signal with a reference voltage determined by V_{SET} . The integrator, acting like a comparator, increases or decreases the voltage at OUT, according to how closely the detected signal level matches the V_{SET} reference. The MAX2014 adjusts the power of the PA to a level determined by the voltage applied to SET. With $R1 = 0\Omega$, the controller mode slope is approximately 19mV/dB (RF = 100MHz).

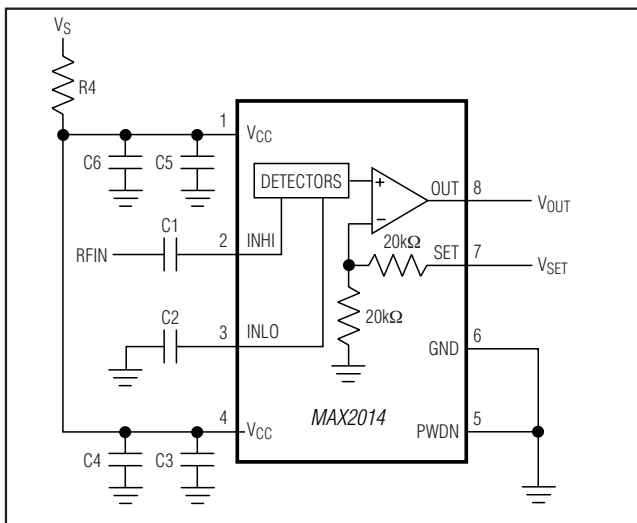


Figure 2. Controller-Mode Typical Application Circuit


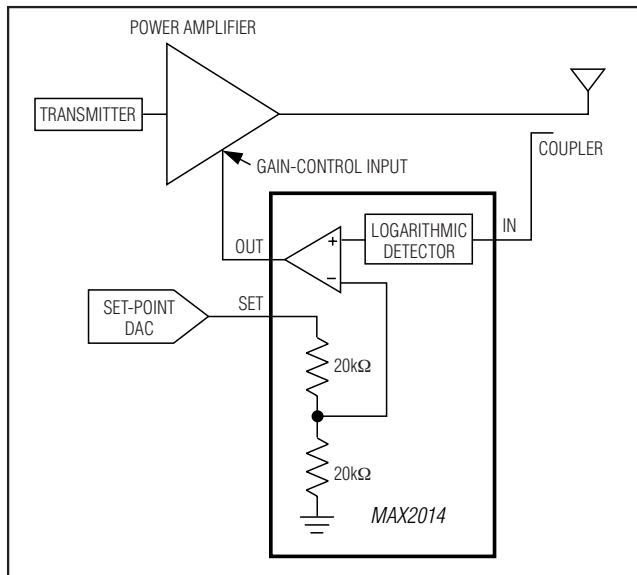


Figure 3. System Diagram for Automatic Gain-Control Loop

Layout Considerations

As with any RF circuit, the layout of the MAX2014 circuit affects the device's performance. Use an abundant number of ground vias to minimize RF coupling. Place the input capacitors (C1, C2) and the bypass capacitors (C3–C6) as close to the IC as possible. Connect the bypass capacitors to the ground plane with multiple vias.

Pin Configurations

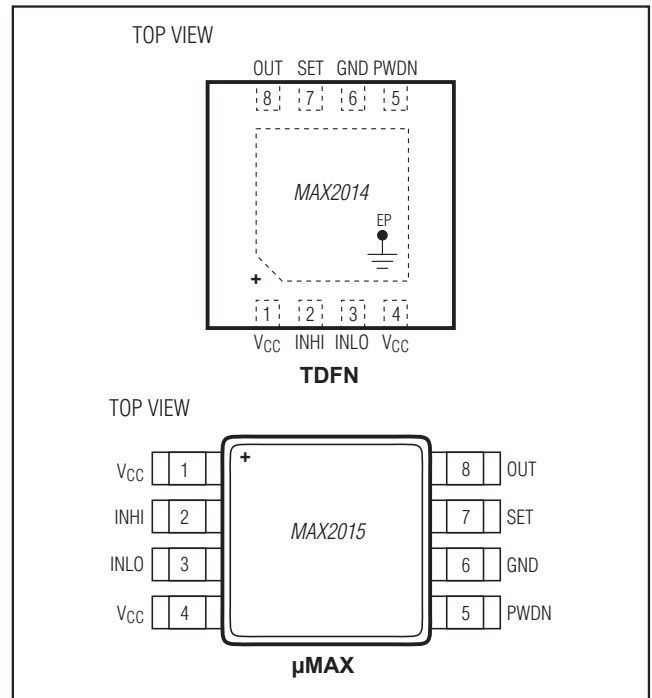

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

MAX2014

Package Information

For the latest package outline information and land patterns (footprints), go to www.maxim-ic.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO. | LAND PATTERN NO. |
|--------------|--------------|-------------------------|-------------------------|
| 8 TDFN-EP | T833+2 | 21-0137 | 90-0059 |
| 8 μ MAX | U8+1 | 21-0036 | 90-0092 |

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX2014ETA+ | -40°C to +85°C | 8 TDFN-EP* |
| MAX2014ETA+T | -40°C to +85°C | 8 TDFN-EP* |
| MAX2014EUA+ | -40°C to +85°C | 8 μ MAX |
| MAX2014EUA+T | -40°C to +85°C | 8 μ MAX |

+Denotes a lead(Pb)-free/RoHS-compliant package.

*EP = Exposed pad.

T = Tape and reel.

Chip Information

PROCESS: BiCMOS

50MHz to 1000MHz, 75dB Logarithmic Detector/Controller

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0 | 6/06 | Initial release | — |
| 1 | 2/12 | Added μ MAX package and updated style | 1-7, 9, 10 |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

12 **Maxim Integrated Products, 160 Rio Robles, San Jose, CA 95134 408-601-1000**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.