

**Advanced PMU for Microcontrollers and Solid State Drive Applications****BENEFITS and FEATURES**

- **Wide input voltage range**
  - **V<sub>in</sub> = 2.8V to 5.5V**
- **Complete integrated power solution**
  - **One 4A DC/DC Step-Down (Buck) Regulator**
  - **Three 2.5A DC/DC Step-Down (Buck) Regulators**
  - **One 800mA LDO**
  - **Two 200mA LDOs**
- **Space Savings**
  - **Fully integrated**
  - **High F<sub>sw</sub> = 2.25MHz or 1.125MHz**
  - **Integrated sequencing**
- **Easy system level design**
  - **Configurable sequencing**
  - **Seamless sequencing with external supplies**
- **Buck 1 Bypass Mode for 3.3V system level compliance**
- **Highly configurable**
  - **uP interface for status reporting and controllability**
  - **Programmable Reset and Power Good GPIO's**
  - **Flexible Sequencing Options**
- **I<sup>2</sup>C Interface – 1MHz**

**APPLICATIONS**

- Microcontroller Applications
- Solid-State Drives
- FPGA
- Video Processor


**GENERAL DESCRIPTION**

The ACT8870 PMIC is an integrated ActivePMU power management unit. It is designed to power a wide range of processors, including Atmel's SAMA5D2, FPGA's, peripherals, microcontrollers, and solid-state drive applications. It is highly flexible and can be reconfigured via I<sup>2</sup>C for multiple applications without the need for PCB changes. The low external component count and high configurability significantly speeds time to market. Examples of configurable options include output voltage, startup time, slew rate, system level sequencing, switching frequency, sleep modes, operating modes etc. ACT8870 is programmed at the factory with default configuration. These settings can be optimized for a specific design through the I<sup>2</sup>C interface. The ACT8870 comes in several default configuration. Contact the factory for specific default configurations.


The core of the device includes four DC/DC step down converters using integrated power FETs, three low-dropout regulators (LDOs), and an optional load switch. Each DC/DC regulator switches at 2.25MHz, requiring only three small components for operation. The LDOs only require small ceramic capacitors. All are highly configurable via the I<sup>2</sup>C interface.

The ACT8870 PMIC is available in a 5 x 5 mm 40 pin QFN package or a 3.2x4.2 mm 0.5mm 48 ball wafer chip-scale package.

## Typical Application Diagram

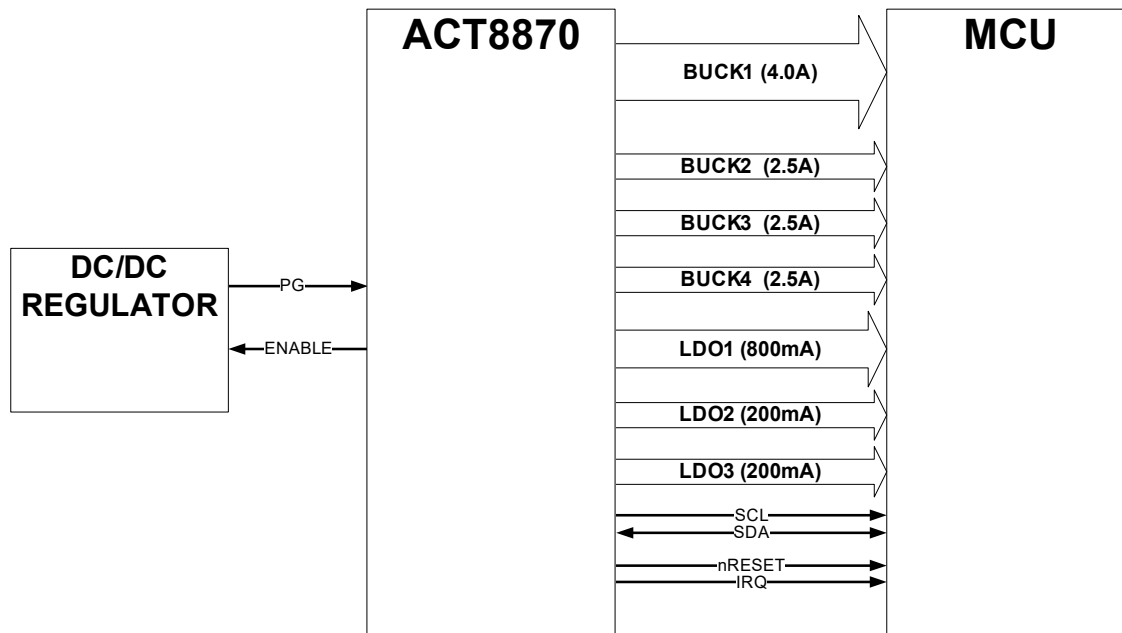


# FUNCTIONAL BLOCK DIAGRAM

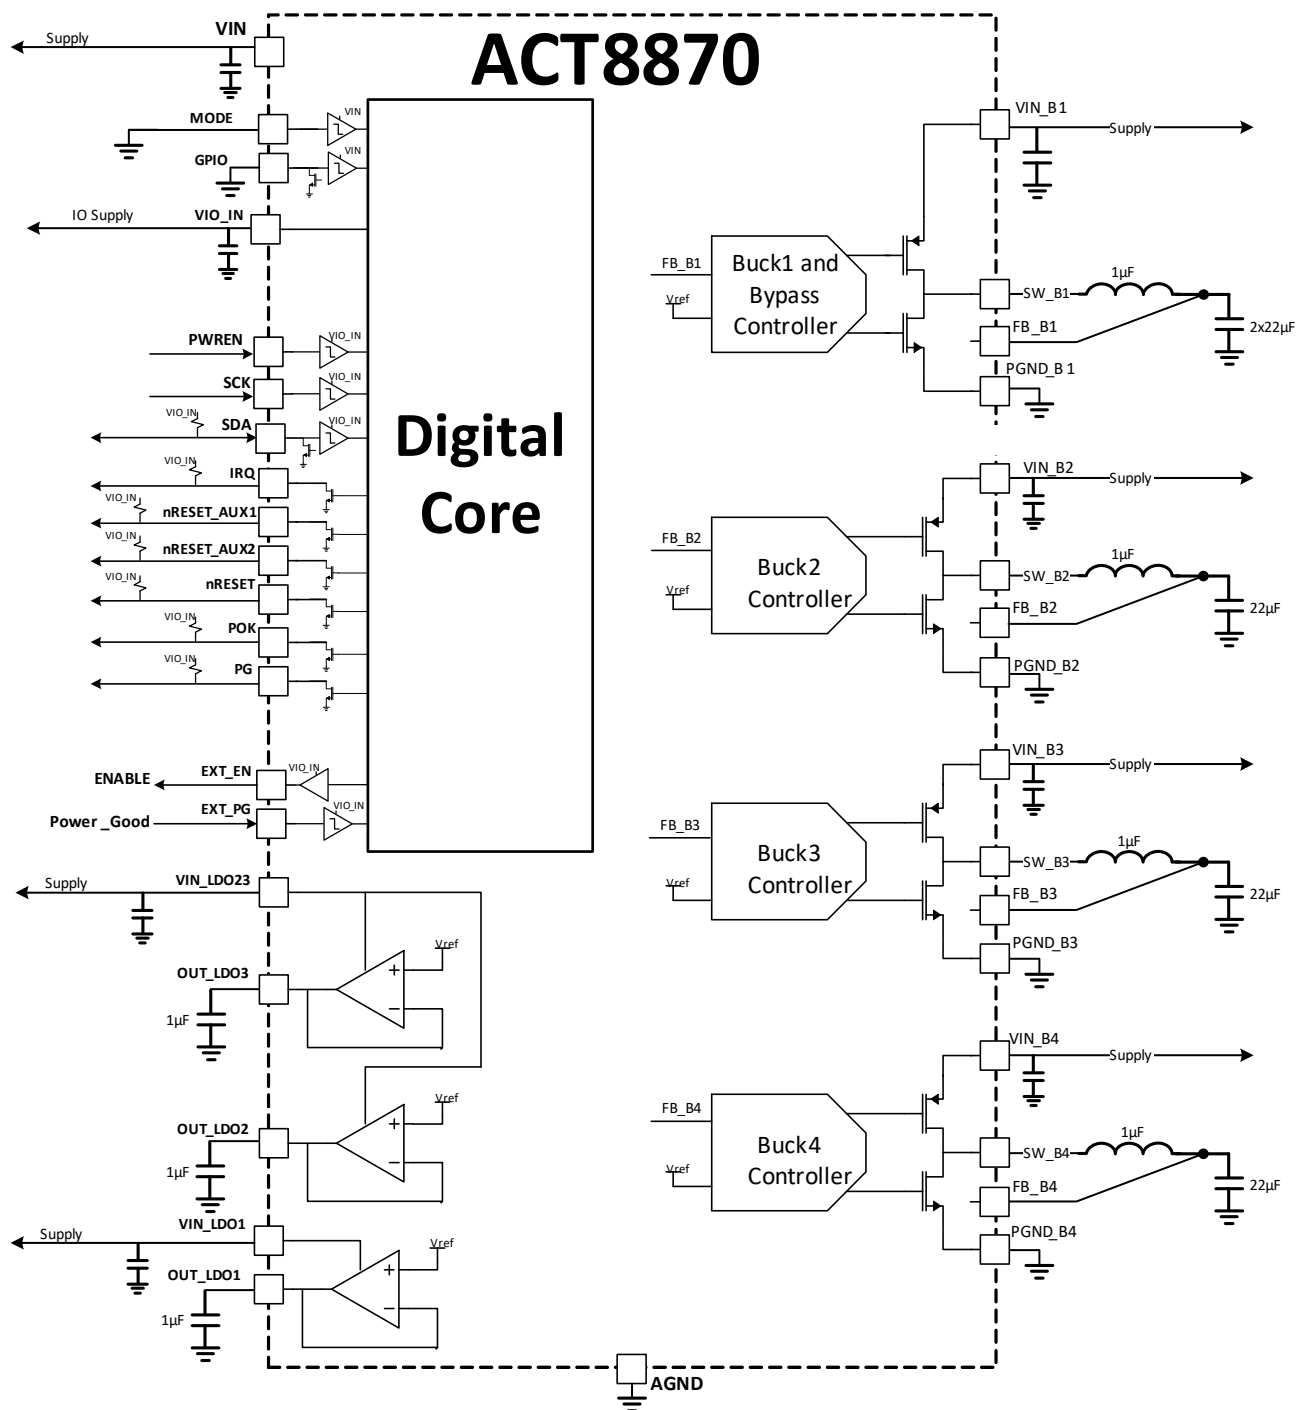

**ORDERING INFORMATION**

| PART NUMBER    | V <sub>OUT1</sub> | V <sub>OUT2</sub> | V <sub>OUT3</sub> | V <sub>OUT4</sub> | V <sub>LDO1</sub> | V <sub>LDO2</sub> | V <sub>LDO3</sub> | Device ID<br>0x7DFh | Package    |
|----------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|---------------------|------------|
| ACT8870QJ101-T | Off               | 1.5V              | 1.25V             | 3.3V              | 3.3V              | 1.8V              | 2.5V              | 0x2Fh               | 5x5 40 pin |
| ACT8870QJ102-T | 3.3V              | 1.5V/1.35V        | 1.2V/1.8V         | 1.15V             | 3.3V              | 1.8V              | 1.8V              | 0x0Bh               | 5x5 40 pin |
| ACT8870QJ104-T | 3.3V              | 1.5V/1.35V        | 1.2V/1.8V         | 1.2V              | 3.3V              | 1.8V              | 1.8V              | 0x0Dh               | 5x5 40 pin |
| ACT8870QJ109-T | 2.7V              | 0.9V              | 1.2V              | 1.2V/1.8V         | 1.8V              | 1.8V              | 2.5V              | 0x12h               | 5x5 40 pin |

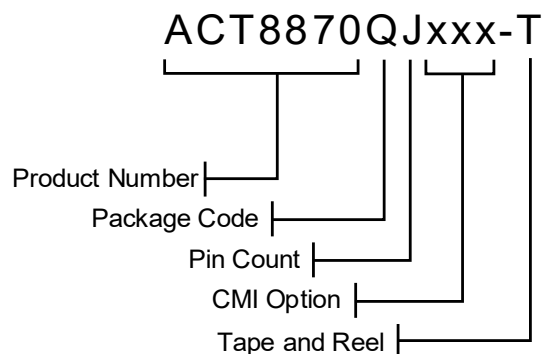

Note 1: Standard product options are identified in this table. Contact factory for custom options, minimum order quantity required.


Note 2: All Active-Semi components are RoHS Compliant and with Pb-free plating unless specified differently. The term Pb-free means semiconductor products that are in compliance with current RoHS (Restriction of Hazardous Substances) standards.

Note 3: Package Code designator "Q" represents QFN

Note 4: Pin Count designator "J" represents 40 pins

Note 5: "xxx" represents the CMI (Code Matrix Index) option The CMI identifies the IC's default register settings.

**PIN CONFIGURATION - QFN**

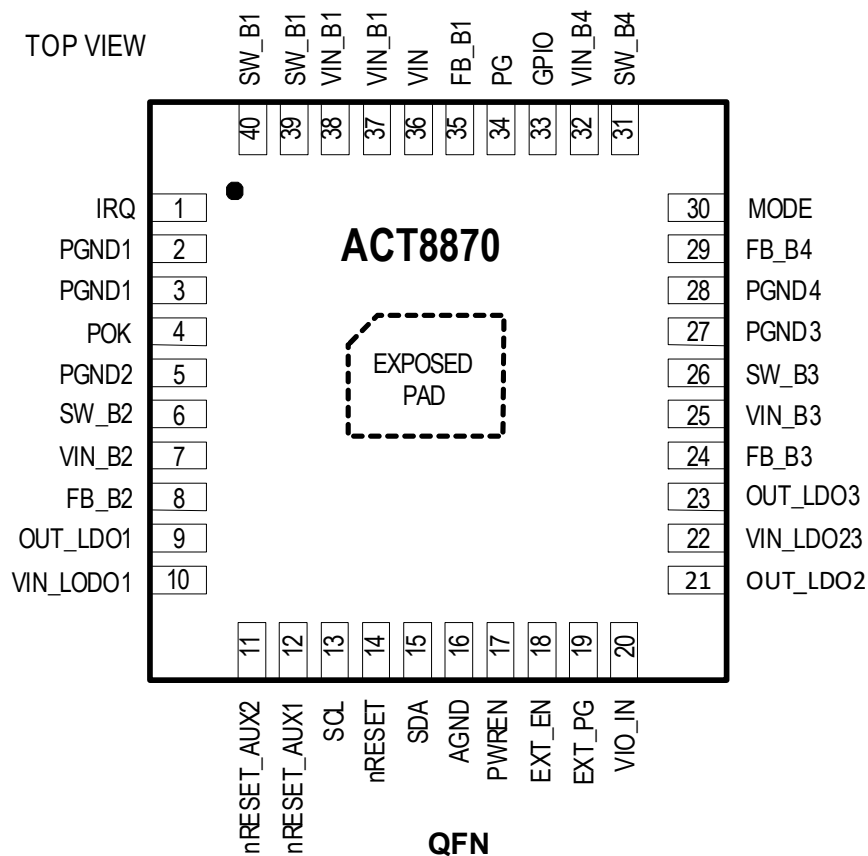

**Figure 1: Pin Configuration – Top View – QFN55-40**

**PIN DESCRIPTIONS - QFN**

| PIN         | NAME        | DESCRIPTION                                                                                      |
|-------------|-------------|--------------------------------------------------------------------------------------------------|
| 1           | IRQ         | Interrupt IRQ Open Drain Output indicates a fault occurred.                                      |
| 2,3         | PGND1       | Dedicated Power Ground for BUCK1 Regulator.                                                      |
| 4           | POK         | Power OK Open Drain Output, indicates Overvoltage or Undervoltage on VIN input supply.           |
| 5           | PGND2       | Dedicated Power Ground for Buck 2 Regulator.                                                     |
| 6           | SW_B2       | Switch Pin for BUCK2 Regulator.                                                                  |
| 7           | VIN_B2      | Dedicated VIN power input for BUCK2 Regulator.                                                   |
| 8           | FB_B2       | Feedback for BUCK2 Regulator. Connect to the BUCK2 output.                                       |
| 9           | OUT_LDO1    | Output for LDO1 Regulator (Leave unconnected if LDO1 is not used and disabled).                  |
| 10          | VIN_LDO1    | Dedicated VIN power input for LDO1 Regulator.                                                    |
| 11          | nRESET_AUX2 | Auxiliary nRESET configurable, Open Drain Output (configurable as an input).                     |
| 12          | nRESET_AUX1 | Auxiliary nRESET configurable. Open Drain Output (configurable as an input).                     |
| 13          | SCL         | I <sup>2</sup> C Clock Input.                                                                    |
| 14          | nRESET      | nRESET Open Drain Output. This pin is configurable.                                              |
| 15          | SDA         | I <sup>2</sup> C Data Input and Output.                                                          |
| 16          | AGND        | Analog Ground.                                                                                   |
| 17          | PWREN       | Power Enable Digital Input. This pin is configurable.                                            |
| 18          | EXT_EN      | External Regulator Enable Push-Pull Digital Output.                                              |
| 19          | EXT_PG      | External Power Good Digital Input. This pin is configurable.                                     |
| 20          | VIO_IN      | Digital Input Reference Voltage Input. Connect a 0.1uF ceramic capacitor between VIN_IN and AGND |
| 21          | OUT_LDO2    | Output for LDO2 Regulator (Leave unconnected if LDO2 is not used and disabled).                  |
| 22          | VIN_LDO23   | Dedicated VIN power input for LDO2 and LDO3 Regulator.                                           |
| 23          | OUT_LDO3    | Output for LDO3 Regulator (Leave unconnected if LDO3 is not used and disabled).                  |
| 24          | FB_B3       | Feedback for BUCK3 Regulator. Connect to the BUCK3 output.                                       |
| 25          | VIN_B3      | Dedicated VIN power input for BUCK3 Regulator.                                                   |
| 26          | SW_B3       | Switch Pin for BUCK3 Regulator.                                                                  |
| 27          | PGND3       | Dedicated Power Ground for BUCK3 Regulator.                                                      |
| 28          | PGND4       | Dedicated Power Ground for BUCK4 Regulator.                                                      |
| 29          | FB_B4       | Feedback for BUCK4 Regulator. Connect to the BUCK4 output.                                       |
| 30          | MODE        | Configuration input pin. This pin is read at power up to configure BUCK1.                        |
| 31          | SW_B4       | Switch Pin for BUCK4 Regulator.                                                                  |
| 32          | VIN_B4      | Dedicated VIN power input for BUCK4 Regulator.                                                   |
| 33          | GPIO        | Configurable General purpose input/open drain output.                                            |
| 34          | PG          | Power Good Output. This pin is configurable. Open Drain Output.                                  |
| 35          | FB_B1       | Feedback for BUCK1 Regulator. Connect to the BUCK1 output.                                       |
| 36          | VIN         | Analog Input supply monitored by POK thresholds.                                                 |
| 37,38       | VIN_B1      | Dedicated VIN power input for BUCK1 Regulator.                                                   |
| 39,40       | SW_B1       | Switch pin for BUCK1 Regulator.                                                                  |
| Exposed Pad |             | Tie to Ground Plane for best performance                                                         |

## ABSOLUTE MAXIMUM RATINGS

| PARAMETER                                                             | VALUE                | UNIT |
|-----------------------------------------------------------------------|----------------------|------|
| All I/O and Power pins except PGND_B1, PGND_B2, PGND_B3, PGND_B4, GND | -0.3 to 6            | V    |
| Grounds: Any PGND referenced to GND                                   | -0.3 to +0.3         | V    |
| SW_Bx to PGNDx                                                        | -0.3 to VIN_Bx + 1   | V    |
| FB_Bx to PGNDx                                                        | -0.3 to VIN_Bx + 0.3 | V    |
| OUT_LDOx to PGNDx                                                     | -0.3 to VINx + 0.3   | V    |
| EXT_EN, nRESET_AUX1, nRESET_AUX2                                      | -0.3 to VIO_IN + 0.3 | V    |
| Junction to Ambient Thermal Resistance, QFN (Note2)                   | 26                   | °C/W |
| Junction to Ambient Thermal Resistance, WCSP (Note2)                  | 31                   | °C/W |
| Operating Junction Temperature                                        | -40 to 125           | °C   |
| Storage Temperature                                                   | -55 to 150           | °C   |

Note1: Do not exceed these limits to prevent damage to the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.

Note2: Measured on Active-Semi Evaluation Kit

## RECOMMENDED OPERATING CONDITIONS

| PARAMETER                                                | TEST CONDITIONS              | MIN  | TYP | MAX        | UNIT |
|----------------------------------------------------------|------------------------------|------|-----|------------|------|
| VIN, VIN_B1, VIN_B2, VIN_B3, VIN_B4, VIN_LDO1, VIN_LDO23 |                              | 2.8  |     | 5.5        | V    |
| VIO_IN                                                   |                              | 1.62 |     | 5.5        | V    |
| Average lifetime operating current. QFN. (Note 1)        | SW_B2, SW_B3, SW_B4<br>SW_B1 |      |     | 1.6<br>3.2 | A    |
| Operating Junction Temperature                           |                              | -40  |     | 105        | °C   |

Note1: This temperature range is used for lifetime reliability testing.

## DIGITAL I/O ELECTRICAL CHARACTERISTICS

( $V_{VIO\_IN} = 1.8V$ ,  $T_A = 25^\circ C$ , unless otherwise specified.)

| PARAMETER                                                            | TEST CONDITIONS      | MIN                  | TYP | MAX  | UNIT    |
|----------------------------------------------------------------------|----------------------|----------------------|-----|------|---------|
| PWREN, EXT_PG Input Low                                              | $V_{VIO\_IN} = 1.8V$ |                      |     | 0.4  | V       |
| PWREN, EXT_PG Input High                                             | $V_{VIO\_IN} = 1.8V$ | 1.25                 |     |      | V       |
| PWREN, EXT_PG Input Low                                              | $V_{VIO\_IN} = 3.3V$ |                      |     | 1.0  | V       |
| PWREN, EXT_PG Input High                                             | $V_{VIO\_IN} = 3.3V$ | 2.3                  |     |      | V       |
| POK, IRQ, nRESET, nRESET_AUX1, nRESET_AUX2, GPIO, PG Leakage Current | Output = 5V          |                      |     | 1    | $\mu A$ |
| POK, IRQ, nRESET, nRESET_AUX1, nRESET_AUX2, GPIO, PG Output Low      | $I_{OL} = 5mA$       |                      |     | 0.35 | V       |
| EXT_EN Output Low                                                    | $I_{OL} = 1mA$       |                      |     | 0.35 | V       |
| EXT_EN Output High                                                   | $I_{OH} = 1mA$       | $V_{VIO\_IN} - 0.35$ |     |      | V       |
| MODE, GPIO Input Low                                                 | $V_{AVIN} = 3.3V$    |                      |     | 1.0  | V       |
| MODE, GPIO Input High                                                | $V_{AVIN} = 3.3V$    | 2.3                  |     |      | V       |
| MODE, GPIO Input Low                                                 | $V_{AVIN} = 5.0V$    |                      |     | 1.5  | V       |
| MODE, GPIO Input High                                                | $V_{AVIN} = 5.0V$    | 3.5                  |     |      | V       |
| PWREN, EXT_PG, MODE Deglitch Time                                    |                      |                      | 10  |      | $\mu s$ |
| $V_{VIO\_IN}$ UVLO Threshold Falling                                 |                      |                      |     | 1.2  | V       |

## SYSTEM CONTROL ELECTRICAL CHARACTERISTICS

(V<sub>VIO\_IN</sub> = 1.8V, T<sub>A</sub> = 25°C, unless otherwise specified.)

| PARAMETER                                                 | TEST CONDITIONS                                                               | MIN  | TYP  | MAX  | UNIT |
|-----------------------------------------------------------|-------------------------------------------------------------------------------|------|------|------|------|
| Supply Inputs Voltage Range: VIN_B1 referenced to PGND_B1 |                                                                               |      |      |      |      |
| VIN_B2 referenced to PGND_B2                              |                                                                               | 2.8  |      | 5.5  | V    |
| VIN_B3 referenced to PGND_B3                              |                                                                               |      |      |      |      |
| VIN_B4 referenced to PGND_B4                              |                                                                               |      |      |      |      |
| VIN_LDO1 referenced to GND                                |                                                                               | 2.4  |      | 5.5  | V    |
| VIN_LDO23 referenced to GND                               |                                                                               | 2.8  |      | 5.5  | V    |
| UVLO Threshold Falling (Note 1)                           | VIN_LVL=0                                                                     | 2.6  | 2.7  | 2.8  | V    |
|                                                           | VIN_LVL=1 UV_LVL=0                                                            | 2.6  | 2.7  | 2.8  | V    |
|                                                           | VIN_LVL=1 UV_LVL=1                                                            | 3.7  | 3.8  | 3.9  | V    |
| UVLO Hysteresis (Note 1)                                  | VIN_LVL=0                                                                     | 50   | 100  | 150  | mV   |
|                                                           | VIN_LVL=1 UV_LVL=0                                                            | 50   | 100  | 150  | mV   |
|                                                           | VIN_LVL=1 UV_LVL=1                                                            | 200  | 300  | 400  | mV   |
| OV Threshold Rising (Note 1)                              | VIN_LVL = 0                                                                   | 3.6  | 3.7  | 3.8  | V    |
|                                                           | VIN_LVL = 1                                                                   | 5.55 | 5.75 | 5.95 | V    |
| OV Hysteresis (Note 1)                                    | VIN_LVL = 0                                                                   | 50   | 100  | 150  | mV   |
|                                                           | VIN_LVL = 1                                                                   | 100  | 150  | 200  | mV   |
| Operating Supply Current                                  | All Regulators Disabled                                                       |      | 60   |      | μA   |
|                                                           | All Regulators Enabled but no load                                            |      | 300  |      | μA   |
| Thermal Shutdown Temperature TSD_SHUTDWN                  | Temperature rising                                                            | 150  | 165  | 180  | °C   |
| Thermal Shutdown Hysteresis                               |                                                                               |      | 20   |      | °C   |
| Startup Delay after initial VIN                           | start of first regulator output assuming start delay=100μsec minimum (Note 2) |      | 435  | 485  | μs   |
| SLEEP Mode exit delay after de-asserting PWREN pin        | Configuration dependent (Note 2)                                              | 30   | 38   | 50   | μs   |
| Thermal Interrupt Threshold TSD_ALERT                     | Temperature rising. Typically 30 degrees lower than TSD_SHUTDWN               |      | 135  |      | °C   |

|                                                                                 |                                                                                                                         |                                                                   |    |
|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|----|
| Thermal Interrupt Hysteresis                                                    |                                                                                                                         | 15                                                                | °C |
| POK UV Interrupt Threshold Falling (VIN_LVL=0)<br>(Note 3) (Note 4)             | POK_UV_SET=00 (88% of 3.3V)<br>POK_UV_SET=01 (86% of 3.3V)<br>POK_UV_SET=10 (84% of 3.3V)<br>POK_UV_SET=11 (Disable)    | 2.80 2.90 3.00<br>2.74 2.84 2.94<br>2.67 2.77 2.87<br>N/A N/A N/A | V  |
| POK UV Interrupt Threshold Falling (VIN_LVL=1)<br>(Note 3) (Note 4)             | POK_UV_SET=00 (88% of 3.3V)<br>POK_UV_SET=01 (85% of 3.3V)<br>POK_UV_SET=10 (85% of 5.0V)<br>POK_UV_SET=11 (Disable)    | 2.80 2.90 3.00<br>2.70 2.80 2.90<br>4.08 4.25 4.42<br>N/A N/A N/A | V  |
| POK OV Interrupt Threshold Rising (VIN_LVL=0)<br>(Note 3) (Note 4)              | POK_OV_SET=00 (107% of 3.3V)<br>POK_OV_SET=01 (109% of 3.3V)<br>POK_OV_SET=10 (110% of 3.3V)<br>POK_OV_SET=11 (Disable) | 3.43 3.53 3.63<br>3.50 3.60 3.70<br>3.53 3.63 3.73<br>N/A N/A N/A | V  |
| POK OV Interrupt Threshold Rising (VIN_LVL=1,<br>POK_LVL = 0) (Note 3) (Note 4) | POK_OV_SET=00 (133% of 3.3V)<br>POK_OV_SET=01 (136% of 3.3V)<br>POK_OV_SET=10 (136% of 3.3V)<br>POK_OV_SET=11 (Disable) | 4.23 4.40 4.57<br>4.33 4.50 4.67<br>4.33 4.50 4.67<br>N/A N/A N/A | V  |
| POK OV Interrupt Threshold Rising<br>(VIN_LVL=1, POK_LVL = 1) (Note 3) (Note 4) | POK_OV_SET=00 (110% of 5.0V)<br>POK_OV_SET=01 (112% of 5.0V)<br>POK_OV_SET=10 (114% of 5.0V)<br>POK_OV_SET=11 (Disable) | 5.33 5.50 5.67<br>5.43 5.60 5.77<br>5.53 5.70 5.87<br>N/A N/A N/A | V  |
| POK Deglitch Time OV or UV                                                      |                                                                                                                         | 5                                                                 | µs |

Note 1: All Under-voltage Lockout, Overvoltage measurements are referenced to the AVIN Input and GND Pins.

Note 2: This delay can be affected by programming sequence and startup delays.

Note 3: All POK Under-voltage and Overvoltage measurements are referenced to the VIN Input and GND Pins.

Note 4: There is no hysteresis on OV and UV threshold for the POK interrupt.

**INTERNAL STEP-DOWN DC/DC ELECTRICAL CHARACTERISTICS REGULATOR: (BUCK1)**

(VIN\_B1 = 5V, TA = 25°C, unless otherwise specified.)

| PARAMETER                                                   | CONDITIONS                                                       | MIN   | TYP                      | MAX   | UNIT  |
|-------------------------------------------------------------|------------------------------------------------------------------|-------|--------------------------|-------|-------|
| Input Operating Voltage Range                               |                                                                  | 2.8   |                          | 5.5   | V     |
| Output Voltage Range                                        | Configurable in 12.5mV steps                                     | 0.8   |                          | 4.0   | V     |
| Standby Supply Current, Low Power Mode Enabled              | VOUT_B1 = 103%, Regulator Enabled, No Load                       |       | 45                       |       | μA    |
| Shutdown Current                                            | Regulator Disabled                                               |       |                          | 1     | μA    |
| Output Voltage Accuracy – Default Voltage - PWM Mode        | VOUT_B1 = 3.3V, IOUT = 2A                                        | -1%   | VNOM                     | 1%    | V     |
| Output Voltage Accuracy – Default Voltage - PFM Mode        | VOUT_B1 = 3.3V, IOUT = 1mA                                       | -1%   | VNOM                     | 1%    | V     |
| Line Regulation                                             | VOUT_B1 = 2.8V VIN_B1 = 3.3V to 5.5V, PWM Regulation             |       | 0.02                     |       | %/V   |
| Load Regulation                                             | VOUT_B1 = 3.3V PWM Regulation                                    |       | 0.04                     |       | %/A   |
| Power Good Threshold                                        | VOUT_B1 Rising                                                   | 92    | 93                       | 94    | %VNOM |
| Power Good Hysteresis                                       | VOUT_B1 Falling                                                  |       | 3                        |       | %VNOM |
| Overvoltage Fault Threshold                                 | VOUT_B1 Rising                                                   | 107.5 | 110                      | 112.5 | %VNOM |
| Overvoltage Fault Hysteresis                                | VOUT_B1 Falling                                                  |       | 3                        |       | %VNOM |
| Switching Frequency                                         | VOUT_B1 ≥ 20% of VNOM                                            | 1.075 | 1.125                    | 1.180 | MHz   |
| Programmable Soft-Start Time, TSET                          | Configurable<br>10% to 90% VNOM                                  | 300   |                          | 1000  | μs    |
| Soft-Start Time Tolerance                                   | Tolerance from TSET                                              | -25   |                          | +25   | %     |
| High Side FET Peak Current Limit (Cycle-by-Cycle) ILIMSET   | B1_ILIMSET=11<br>B1_ILIMSET=10<br>B1_ILIMSET=01<br>B1_ILIMSET=00 |       | 3.0<br>3.8<br>4.6<br>5.3 |       | A     |
| High Side FET Peak Current Limit (Cycle-by-Cycle) Tolerance | At default ILIMSET                                               | -10   | ILIMSET                  | +10   | %     |
|                                                             | At other set points                                              | -15   | ILIMSET                  | +15   | %     |
| High Side FET Peak Current Limit, IRQ Trigger Level         | Below ILIMSET = 00, 01, 10                                       | -30.0 | -22.5                    | -15.0 | %     |
|                                                             | Below ILIMSET = 11                                               | -32.5 | -22.5                    | -12.5 | %     |
| High Side FET Peak Current Limit, Shutdown Level            | Above ILIMSET = 00, 01, 10                                       | +15.0 | +22.5                    | +30   | %     |
|                                                             | Above ILIMSET = 11                                               | +12.5 | +22.5                    | +32.5 | %     |
| PMOS On-Resistance                                          | ISW = -1A, VIN = 5.0V                                            |       | 0.025                    | 0.04  | Ω     |
| NMOS On-Resistance                                          | ISW = 1A, VIN = 5.0V                                             |       | 0.025                    |       | Ω     |
| SW Leakage Current                                          | VIN_B1 = 5.5V, VSW = 0 or 5.5V                                   |       |                          | 1     | μA    |

|                              |                                                                                |                                          |          |
|------------------------------|--------------------------------------------------------------------------------|------------------------------------------|----------|
| Dynamic Voltage Scaling Rate | B1_SLEW=00 (not allowed)<br>B1_SLEW=01<br>B1_SLEW=10<br>B1_SLEW=11             | N/A<br>14.0<br>3.50<br>0.88              | mV/us    |
| Switching Rise / Fall Times  | B1_DRVADJ=00 $V_{IN\_B1} = 5V$<br>B1_DRVADJ=01<br>B1_DRVADJ=10<br>B1_DRVADJ=11 | 6.3/9.0<br>4.5/7.4<br>3.1/5.9<br>3.0/5.0 | ns       |
| Discharge Resistance         | Enabled when regulator disabled                                                | 2.75      4.4      8.75                  | $\Omega$ |

# INTERNAL STEP-DOWN DC/DC ELECTRICAL CHARACTERISTICS REGULATOR: (BUCK1) – BYPASS MODE

 (VIN\_B1 = 3.3V, T<sub>A</sub> = 25°C, unless otherwise specified.)

| PARAMETER                                     | CONDITIONS                                                              | MIN  | TYP   | MAX  | UNIT  |
|-----------------------------------------------|-------------------------------------------------------------------------|------|-------|------|-------|
| <b>Bypass Mode</b>                            |                                                                         |      |       |      |       |
| Input Voltage for By-Pass Mode                |                                                                         | 2.7  | 3.3   | 3.7  | V     |
| PMOS On-Resistance                            | I <sub>SW</sub> = -1A, VIN = 3.3V<br>Max=125°C at T <sub>Junction</sub> |      | 0.025 | 0.04 | Ω     |
| Internal PMOS Current Detection               | Triggers Interrupt on IRQ Pin                                           | 1.4  | 3     | 4.6  | A     |
| Internal PMOS Current Detection Deglitch Time |                                                                         |      | 10    |      | μs    |
| Internal PMOS Current Shutdown                | Shuts down after deglitch time and stays off for Off Time               | 5.4  | 6.0   | 6.6  | A     |
| Internal PMOS Current Shutdown Deglitch Time  |                                                                         |      | 10    |      | μs    |
| Internal PMOS Current Shutdown Off time       |                                                                         |      | 100   |      | ms    |
| Internal PMOS Softstart                       | Only used with 3.3V Input                                               | 5.94 | 6.6   | 7.26 | mV/us |

**INTERNAL STEP-DOWN DC/DC ELECTRICAL CHARACTERISTICS REGULATOR: (BUCK2-4)**

(VIN\_Bx = 5V, TA = 25°C, unless otherwise specified.)

| PARAMETER                                              | CONDITIONS                                                       | MIN   | TYP                      | MAX   | UNIT  |
|--------------------------------------------------------|------------------------------------------------------------------|-------|--------------------------|-------|-------|
| Input Operating Voltage Range                          |                                                                  | 2.8   |                          | 5.5   | V     |
| Output Voltage Range                                   | Configurable in 12.5mV steps                                     | 0.8   |                          | 4     | V     |
| Maximum Output Current                                 |                                                                  | 2     |                          |       | A     |
| Standby Supply Current, Low Power Mode Enabled         | VOUT_Bx = 103%, Regulator Enabled, No load                       |       | 35                       |       | μA    |
| Shutdown Current                                       | VIN_Bx = 5.5V, Regulator Disabled                                |       | 0.1                      | 1     | μA    |
| B2 Voltage Accuracy – Default Voltage – PWM Mode       | CMI101 VOUT_B2 = 1.5V, IOUT = 1A                                 | -1%   | VNOM                     | 1%    | V     |
| B3 Voltage Accuracy – Default Voltage – PWM Mode       | CMI101 VOUT_B3 = 1.25V, IOUT = 1A                                | -1%   | VNOM                     | 1%    | V     |
| B4 Voltage Accuracy – Default Voltage – PWM Mode       | CMI101 VOUT_B4 = 3.3V, IOUT = 1A                                 | -1%   | VNOM                     | 1%    | V     |
| B2 Voltage Accuracy – Default Voltage – PFM Mode       | CMI101 VOUT_B2 = 1.5V, IOUT = 1A                                 | -1%   | VNOM                     | 1%    | V     |
| B3 Voltage Accuracy – Default Voltage – PFM Mode       | CMI101 VOUT_B3 = 1.25V, IOUT = 1A                                | -1%   | VNOM                     | 1%    | V     |
| B4 Voltage Accuracy – Default Voltage – PFM Mode       | CMI101 VOUT_B4 = 3.3V, IOUT = 1A                                 | -1%   | VNOM                     | 1%    | V     |
| Line Regulation                                        | VOUT_Bx = 1.8V VIN_Bx = 2.8V to 5.5V PWM Regulation              |       | 0.02                     |       | %/V   |
| Load Regulation                                        | VOUT_Bx = 1.8V PWM Regulation                                    |       | 0.04                     |       | %/A   |
| Power Good Threshold                                   | VOUT_B2 Rising                                                   | 92    | 93                       | 94    | %VNOM |
|                                                        | VOUT_B3 Rising                                                   | 94    | 95                       | 96    |       |
|                                                        | VOUT_B4 Rising                                                   | 94    | 95                       | 96    |       |
| Power Good Hysteresis                                  | VOUT_Bx Falling                                                  |       | 3                        |       | %VNOM |
| Overvoltage Fault Threshold                            | VOUT_Bx Rising                                                   | 107.5 | 110                      | 112.5 | %VNOM |
| Overvoltage Fault Hysteresis                           | VOUT_Bx Falling                                                  |       | 3                        |       | %VNOM |
| Switching Frequency                                    | VOUT_Bx ≥ 20% of VNOM                                            | 2.15  | 2.25                     | 2.36  | MHz   |
| Programmable Soft-Start Time, TSET                     | Configurable<br>10% to 90% VNOM                                  | 300   |                          | 1000  | μs    |
| Soft-Start Time Tolerance                              | Tolerance from TSET                                              | -25   |                          | +25   | %     |
| High Side FET Current Limit (Cycle-by-Cycle) ILIMSET   | Bx_ILIMSET=11<br>Bx_ILIMSET=10<br>Bx_ILIMSET=01<br>Bx_ILIMSET=00 |       | 2.0<br>2.5<br>3.0<br>3.5 |       | A     |
| High Side FET Current Limit (Cycle-by-Cycle) Tolerance | At default ILIMSET                                               | -10   | ILIMSET                  | +10   | %     |
|                                                        | At other setpoints                                               | -15   | ILIMSET                  | +15   | %     |
| High Side FET Peak Current Limit, IRQ                  | Below ILIMSET = 00, 01, 10                                       | -27.5 | -22.5                    | -17.5 | %     |

|                                                  |                                                                                      |                                          |       |       |       |
|--------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------|-------|-------|-------|
| Trigger Level                                    | Below ILIMSET = 11                                                                   | -30.0                                    | -22.5 | -15.0 | %     |
| High Side FET Peak Current Limit, Shutdown Level | Above ILIMSET = 00, 01, 10                                                           | +15.0                                    | +22.5 | +30   | %     |
|                                                  | Above ILIMSET = 11                                                                   | +12.5                                    | +22.5 | +32.5 | %     |
| PMOS On-Resistance                               | I <sub>SW</sub> = -500mA                                                             | 0.08                                     |       |       | Ω     |
| NMOS On-Resistance                               | I <sub>SW</sub> = 500mA                                                              | 0.05                                     |       |       | Ω     |
| SW Leakage Current                               | V <sub>VIN_BX</sub> = 5.5V, V <sub>SW</sub> = 0 or 5.5V                              | 1                                        |       |       | μA    |
| Dynamic Voltage Scaling Rate                     | Bx_SLEW=00<br>Bx_SLEW=01<br>Bx_SLEW=10<br>Bx_SLEW=11                                 | Not Allowed<br>14.0<br>3.50<br>0.88      |       |       | mV/us |
| Switching Rise / Fall Times                      | Bx_DRVADJ=00 V <sub>IN_Bx</sub> = 5V<br>Bx_DRVADJ=01<br>Bx_DRVADJ=10<br>Bx_DRVADJ=11 | 6.3/9.0<br>4.5/7.4<br>3.1/5.9<br>3.0/5.0 |       |       | ns    |
| Discharge Resistance                             | Enabled when regulator disabled                                                      | 6.25                                     | 9.40  | 20    | Ω     |

## LDO1 ELECTRICAL CHARACTERISTICS

(VIN\_LDO1 = 5V, TA = 25°C, unless otherwise specified.)

| PARAMETER                    | TEST CONDITIONS                                                                                                   | MIN  | TYP                              | MAX  | UNIT  |
|------------------------------|-------------------------------------------------------------------------------------------------------------------|------|----------------------------------|------|-------|
| Operating Voltage Range      |                                                                                                                   | 2.4  |                                  | 5.5  | V     |
| Output Voltage Range–VSET    | Configurable in 25mV steps                                                                                        | 0.8  |                                  | 4.0  | V     |
| Output Current               | VIN_LDO1 = 2.8V to 5.5V, LDO1_ILIM=11                                                                             | 0.75 |                                  |      | A     |
| Output Current               | VIN_LDO1 = 2.4V to 2.8V, LDO1_ILIM=1x                                                                             | 0.4  |                                  |      | A     |
| Output Voltage Accuracy      | VIN_LDO1 - VLDO1_OUT > 0.4V                                                                                       | -1   | VSET                             | 1    | %     |
| Line Regulation              | VIN_LDO1 - VLDO1_OUT > 0.4V<br>VIN_LDO1 = 2.8V to 5.5V<br>ILDO1_OUT = 1mA                                         |      | 0.005                            |      | % / V |
| Load Regulation              | ILDO1_OUT = 1mA to 750mA, LDO1_ILIM=11                                                                            |      | 0.15                             |      | % / A |
| Power Supply Rejection Ratio | f = 1kHz, ILDO1_OUT = 20mA, VLDO1_OUT = 2.5V                                                                      |      | 54                               |      | dB    |
|                              | f = 10kHz, ILDO1_OUT = 20mA, VLDO1_OUT = 2.5V                                                                     |      | 53                               |      |       |
|                              | f = 2.25MHz, ILDO1_OUT = 20mA, VLDO1_OUT = 2.5V                                                                   |      | 44                               |      |       |
| Supply Current per Output    | Regulator Enabled No Load                                                                                         |      | 25                               | 42   | μA    |
|                              | Regulator Disabled                                                                                                |      | 0                                | 1    |       |
| Soft-Start Period            | VLDO1_OUT = 1.8V Setting (10% to 90%)<br>LDO1_SS_RAMP=00<br>LDO1_SS_RAMP=01<br>LDO1_SS_RAMP=10<br>LDO1_SS_RAMP=11 |      | 240<br>330<br>450<br>575         |      | μs    |
|                              | VLDO1_OUT = 2.5V Setting (10% to 90%)<br>LDO1_SS_RAMP=00<br>LDO1_SS_RAMP=01<br>LDO1_SS_RAMP=10<br>LDO1_SS_RAMP=11 |      | Not allowed<br>385<br>465<br>600 |      |       |
|                              | VLDO1_OUT = 3.3V Setting (10% to 90%)<br>LDO1_SS_RAMP=00<br>LDO1_SS_RAMP=01<br>LDO1_SS_RAMP=10<br>LDO1_SS_RAMP=11 |      | Not allowed<br>450<br>525<br>660 |      |       |
|                              |                                                                                                                   |      |                                  |      |       |
|                              |                                                                                                                   |      |                                  |      |       |
|                              |                                                                                                                   |      |                                  |      |       |
| Power Good Threshold         | VLDO1_OUT Rising                                                                                                  | 92   | 93                               | 94   | %VNOM |
| Power Good Hysteresis        | VLDO1_OUT Falling                                                                                                 |      | 3                                |      | %VNOM |
| Overvoltage Fault Threshold  | VLDO1_OUT Rising                                                                                                  | 105  | 110                              | 114  | %VNOM |
| Overvoltage Fault Hysteresis | VLDO1_OUT Falling                                                                                                 |      | 3                                |      | %VNOM |
| Discharge Resistance         |                                                                                                                   | 10   | 25                               | 75   | Ω     |
| Dropout Voltage              | ILDO1_OUT = 200mA                                                                                                 |      |                                  | 200  | mV    |
| Dropout Voltage              | ILDO1_OUT = 400mA, LDO1_ILIM=1x                                                                                   |      |                                  | 300  | mV    |
| Dropout Voltage              | ILDO1_OUT = 750mA VIN_LDO1 > 2.8<br>LDO_ILIM=11                                                                   |      |                                  | 400  | mV    |
| Output Current Limit         | LDO1_ILIM=00<br>LDO1_ILIM=01<br>LDO1_ILIM=10<br>LDO1_ILIM=11 (800mA min)                                          | -15% | 350<br>500<br>630<br>1000        | +15% | mA    |
| Startup Delay                | Additional startup delay required before soft start ramp<br>LDO1_SS_RAMP=00                                       | 31   | 44                               | 65   | μs    |

**LDO2 AND LDO3 ELECTRICAL CHARACTERISTICS**

(VIN\_LDO23 = 5V, TA = 25°C, unless otherwise specified.)

| PARAMETER                    | TEST CONDITIONS                                                                                                       | MIN | TYP                      | MAX | UNIT  |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------|-----|--------------------------|-----|-------|
| Operating Voltage Range      |                                                                                                                       | 2.4 |                          | 5.5 | V     |
| Output Voltage Range – VSET  | Configurable in 25mV steps                                                                                            | 0.8 |                          | 4.0 | V     |
| Output Voltage Accuracy      | VIN_LDO23 - VLDOX_OUT > 0.4V                                                                                          | -1  | VSET                     | 1   | %     |
| Line Regulation              | VIN_LDO23 - VLDOX_OUT > 0.4V<br>VIN_LDO23 = 2.8V to 5.5V<br>ILDOX_OUT = 1mA                                           |     | 0.007                    |     | % / V |
| Load Regulation              | ILDOX_OUT = 1mA to 100mA, LDOX_ILIM=1X                                                                                |     | -1                       |     | % / A |
| Power Supply Rejection Ratio | f = 1kHz, ILDOX_OUT = 20mA,<br>VLDOX_OUT = 1.8V                                                                       |     | 56                       |     | dB    |
|                              | f = 10kHz, ILDOX_OUT = 20mA,<br>VLDOX_OUT = 1.8V                                                                      |     | 45                       |     |       |
|                              | f = 2.25MHz, ILDOX_OUT = 20mA,<br>VLDOX_OUT = 1.8V                                                                    |     | 55                       |     |       |
| Supply Current per Output    | Regulator Disabled                                                                                                    |     | 0.02                     | 1   | μA    |
| Supply Current per Output    | Regulator Enabled, No load                                                                                            |     | 15                       |     | μA    |
| Soft-Start Period            | VLDOX_OUT = 1.8V Setting (10% to 90%)<br>LDO23 SS_RAMP=00<br>LDO23 SS_RAMP=01<br>LDO23 SS_RAMP=10<br>LDO23 SS_RAMP=11 |     | 110<br>110<br>165<br>215 |     | μs    |
|                              | VLDOX_OUT = 2.5V Setting (10% to 90%)<br>LDO23 SS_RAMP=00<br>LDO23 SS_RAMP=01<br>LDO23 SS_RAMP=10<br>LDO23 SS_RAMP=11 |     | 145<br>145<br>175<br>215 |     |       |
|                              | VLDOX_OUT = 3.3V Setting (10% to 90%)<br>LDO23 SS_RAMP=00<br>LDO23 SS_RAMP=01<br>LDO23 SS_RAMP=10<br>LDO23 SS_RAMP=11 |     | 200<br>200<br>210<br>235 |     |       |
| Power Good Threshold         | VLDOX_OUT Rising                                                                                                      | 91  | 93                       | 95  | %VNOM |
| Power Good Hysteresis        | VLDOX_OUT Falling                                                                                                     |     | 3                        |     | %VNOM |
| Overvoltage Fault Threshold  | VLDOX_OUT Rising                                                                                                      | 105 | 110                      | 114 | %VNOM |
| Overvoltage Fault Hysteresis | VLDOX_OUT Falling                                                                                                     |     | 3                        |     | %VNOM |
| Discharge Resistance         |                                                                                                                       | 20  | 50                       | 125 | Ω     |
| Dropout Voltage              | ILDOX_OUT = 30mA                                                                                                      |     | 50                       | 90  | mV    |
| Dropout Voltage              | ILDOX_OUT = 50mA, LDOX_ILIM=01                                                                                        |     | 90                       | 150 | mV    |
| Dropout Voltage              | ILDOX_OUT = 100mA, LDOX_ILIM=1x                                                                                       |     | 180                      | 310 | mV    |
| Dropout Voltage              | ILDOX_OUT = 150mA VIN_LDO23 > 2.8<br>LDOX_ILIM=11                                                                     |     | 285                      | 500 | mV    |

|                      |                                                                             |                         |                         |    |    |
|----------------------|-----------------------------------------------------------------------------|-------------------------|-------------------------|----|----|
| Output Current Limit | LDOx_ILIM=00<br>LDOx_ILIM=01<br>LDOx_ILIM=10<br>LDOx_ILIM=11                | 60<br>100<br>150<br>200 | 80<br>145<br>225<br>290 |    | mA |
| Startup Delay        | Additional startup delay required before soft start ramp<br>LDOx_SS_RAMP=01 | 20                      | 36                      | 55 | μs |

**OVERALL SYSTEM TIMING REQUIREMENTS**

| PARAMETER                                                              | TEST CONDITIONS                                                                                      | MIN                                                   | TYP                                                                 | MAX                                                                 | UNIT |
|------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|------|
| Regulator Programmable Startup Delay<br>Timings between turn on events | ONDLY=000<br>ONDLY=001<br>ONDLY=010<br>ONDLY=011<br>ONDLY=100<br>ONDLY=101<br>ONDLY=110<br>ONDLY=111 | 32.6<br>101<br>196<br>291<br>386<br>481<br>576<br>671 | 34.5<br>106.5<br>206.5<br>306.5<br>406.5<br>506.5<br>606.5<br>706.5 | 51.5<br>127.5<br>132.5<br>337.5<br>442.5<br>547.5<br>652.5<br>757.5 | μs   |
| nRESET, nRESET_AUX2<br>Programmable Delay Range                        | Step Size = 114μs                                                                                    | 199                                                   |                                                                     | 996                                                                 | μs   |
| nRESET, nRESET_AUX2 Min Delay<br>Timing                                | Setting nRST_DLY=000                                                                                 | 160                                                   | 199                                                                 | 240                                                                 | μs   |
| nRESET, nRESET_AUX2 Max Delay<br>Timing                                | Setting nRST_DLY=111                                                                                 | 920                                                   | 996                                                                 | 1080                                                                | μs   |
| nRESET_AUX1 Delay Timings<br>Programmable Delay Range                  | Step Size = 228μs                                                                                    | 398                                                   |                                                                     | 1991                                                                | μs   |
| nRESET_AUX1 Min Delay Timing                                           | Setting nRST_AUX1_DLY=000                                                                            | 360                                                   | 398                                                                 | 435                                                                 | μs   |
| nRESET_AUX1 Max Delay Timing                                           | Setting nRST_AUX1_DLY=111                                                                            | 1876                                                  | 1991                                                                | 2114                                                                | μs   |
| AUX TIMER Delay Timing                                                 | Setting AUX_DLY=00<br>Setting AUX_DLY=01<br>Setting AUX_DLY=10<br>Setting AUX_DLY=11                 | 3.7<br>7.7<br>15.7<br>31.7                            | 4<br>8<br>16<br>32                                                  | 4.3<br>8.3<br>16.3<br>32.3                                          | ms   |

## I<sup>2</sup>C INTERFACE ELECTRICAL CHARACTERISTICS

(V<sub>IO\_IN</sub> = 1.8V, T<sub>A</sub> = 25°C, unless otherwise specified.)

| PARAMETER                                               | TEST CONDITIONS           | MIN  | TYP | MAX  | UNIT |
|---------------------------------------------------------|---------------------------|------|-----|------|------|
| SCL, SDA Input Low                                      | V <sub>IO_IN</sub> = 1.8V |      |     | 0.4  | V    |
| SCL, SDA Input High                                     | V <sub>IO_IN</sub> = 1.8V | 1.25 |     |      | V    |
| SCL, SDA Input Low                                      | V <sub>IO_IN</sub> = 3.3V |      |     | 1.0  | V    |
| SCL, SDA Input High                                     | V <sub>IO_IN</sub> = 3.3V | 2.3  |     |      | V    |
| SDA Leakage Current                                     | SDA=5V                    |      |     | 1    | μA   |
| SDA Output Low                                          | I <sub>OL</sub> = 5mA     |      |     | 0.35 | V    |
| SCL Clock Frequency, f <sub>SCL</sub>                   |                           | 0    |     | 1000 | kHz  |
| SCL Low Period, t <sub>LOW</sub>                        |                           | 0.5  |     |      | μs   |
| SCL High Period, t <sub>HIGH</sub>                      |                           | 0.26 |     |      | μs   |
| SDA Data Setup Time, t <sub>SU</sub>                    |                           | 50   |     |      | ns   |
| SDA Data Hold Time, t <sub>HD</sub>                     | (Note1)                   | 0    |     |      | ns   |
| Start Setup Time, t <sub>ST</sub>                       | For Start Condition       | 260  |     |      | ns   |
| Stop Setup Time, t <sub>SP</sub>                        | For Stop Condition        | 260  |     |      | ns   |
| Capacitance on SCL or SDA Pin                           |                           |      |     | 10   | pF   |
| SDA Fall Time SDA, T <sub>of</sub>                      | Device requirement        |      |     | 120  | ns   |
| Pulse Width of spikes must be suppressed on SCL and SDA |                           | 0    |     | 50   | ns   |

Note1: Comply to I<sup>2</sup>C timings for 1MHz operation - "Fast Mode Plus".

Note2: No internal timeout for I<sup>2</sup>C operations, however, I<sup>2</sup>C communication state machine will be reset when entering RESET, IDLE, OVUVFLT, and THERMAL states to clear any transactions that may have been occurring when entering the above states.

Note3: This is an I<sup>2</sup>C system specification only. Rise and fall time of SCL & SDA not controlled by the device.

Note4: Device Address is 7'h5A

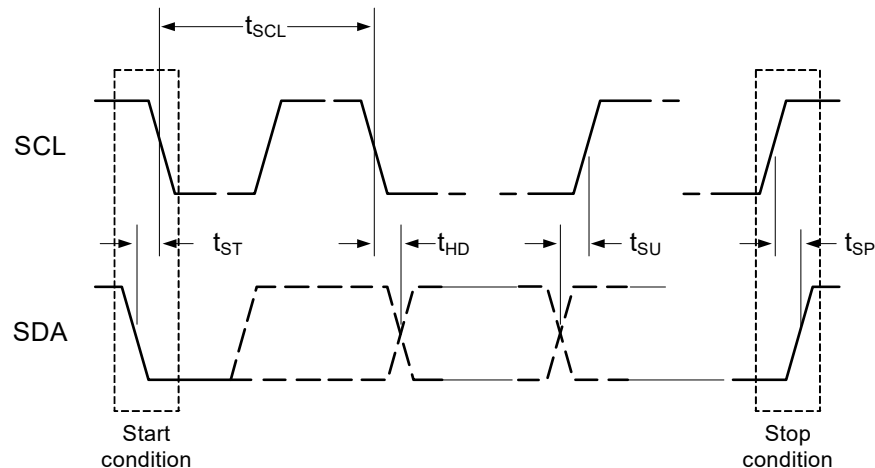


Figure 2: I<sup>2</sup>C Data Transfer

## SYSTEM CONTROL INFORMATION

### General

The ACT8870 is a single-chip integrated power management solution designed to power many processors such as the Atmel SAMA5D3. It integrates four highly efficient buck regulators, three LDOs, and an integrated load bypass switch. Its high integration and high switching frequency result in an extremely small footprint and lost power solution. It contains a master controller that manages startup sequencing, timing, voltages, slew rates, sleep states, and fault conditions. I<sup>2</sup>C configurability allows system level changes without the need for costly PCB changes. The built-in load bypass switch enables full sequencing configurability in 3.3V systems.

The ACT8870 master controller monitors all outputs and reports faults via I<sup>2</sup>C and hardwired status signals. Faults can be masked and fault levels and responses are configurable via I<sup>2</sup>C.

Many of the ACT8870 pins and functions are configurable. The IC's default functionality is defined by the default CMI (Code Matrix Index), but much of this functionality can be changed via I<sup>2</sup>C. The first part of the datasheet describes basic IC functionality and default pin functions. The end of the datasheet provides the configuration and functionality specific to each CMI version. Contact [sales@active-semi.com](mailto:sales@active-semi.com) for additional information about other configurations.

### I<sup>2</sup>C Serial Interface

To ensure compatibility with a wide range of systems, the ACT8870 uses standard I<sup>2</sup>C commands. The ACT8870 operates as a slave device, and is addressed using a 7-bit slave address followed by an eighth bit, which indicates whether the transaction is a read-operation or a write-operation. As an example, the 7-bit slave address 0x5Ah follows the format 1011010x where "x" is a 0 for write operation and 1 for a read operation. This results in 0xB4h for write operations and 0xB5h for read operations.

There is no timeout function in the I<sup>2</sup>C packet processing state machine, however, any time the I<sup>2</sup>C state machine receives a start bit command, it immediately resets the packet processing, even if it is in the middle of a valid packet.

The ACT8870 holds the I<sup>2</sup>C state machine in reset during the RESET, Idle, OVUVFLT, and THERMAL states to avoid a corruption of registers when the voltage regulators are out of spec.

I<sup>2</sup>C commands are communicated using the SCL and SDA pins. SCL is the I<sup>2</sup>C serial clock input. SDA is the data input and output. SDA is open drain and must have a pullup resistor. Signals on these pins must meet timing requirements in the Electrical Characteristics Table.

### I<sup>2</sup>C Registers

The ACT8870 contains an array of internal registers that contain the IC's basic instructions for setting up the IC configuration, output voltages, sequencing, fault thresholds, fault masks, etc. These registers are what give the IC its operating flexibility. The two types of registers are described below.

**Basic Volatile** – These are R/W (Read and Write) and RO (Read only). After the IC is powered, the user can modify the R/W register values to change IC functionality. Changes in functionality include things like masking certain faults. The RO registers communicate IC status such as fault conditions. Any changes to these registers are lost when power is recycled. The default values are fixed and cannot be changed by the factory or the end user.

**Basic Non-Volatile** – These are R/W and RO. After the IC is powered, the user can modify the R/W register values to change IC functionality. Changes in functionality include things like output voltage settings, startup delay time, and current limit thresholds. Any changes to these registers are lost when power is recycled. The default values can be modified at the factory to optimize IC functionality for specific applications. Please consult [sales@active-semi.com](mailto:sales@active-semi.com) for custom options and minimum order quantities.

When modifying only certain bits within a register, take care to not inadvertently change other bits. Inadvertently changing register contents can lead to unexpected device behavior.

### State Machine

The ACT8870 contains an internal state machine with five internal states.

#### RESET State

In the RESET, or "cold" state, the ACT8870 is waiting for the input voltage on VIN to be within a valid range defined by I<sup>2</sup>C bits POK\_OV\_SET and POK\_UV\_SET. All regulators are off in RESET. nRESET, nRESET\_AUX1, and nRESET\_AUX2 are asserted low. All volatile registers are reset to defaults and Non-Volatile registers are reset to programmed defaults. The IC transitions from RESET to ACTIVE when the input voltage enters the valid range. The IC transitions from any other state to RESET if the input voltage drops below the UVLO threshold voltage.

#### ACTIVE State

The ACTIVE state is the normal operating state when the input voltage is within the allowable range, all outputs are turned on, and no faults are present. When en-

tering the ACTIVE state from the RESET state, all regulators are powered on following their programmed power up sequence. The regulators are not sequenced when entering ACTIVE from SLEEP.

## SLEEP State

The SLEEP state is a low power mode for the operating system. Each output can be programmed to be on or off in the SLEEP state. The outputs do not follow any sequencing when turning on or off as they enter or exit the SLEEP state. They do turn on with their programmed softstart time. Buck1/2/3/4 can be programmed to regulate to their VSET0 voltage, VSET1 voltage, or be turned off in the SLEEP state. LDO1/2/3 can be programmed to regulate to their VSET0 voltage or can be programmed to be turned off. Note that LDO1/2/3 do not have a VSET1 voltage.

The IC can enter SLEEP via a hardware input pin or an I<sup>2</sup>C command. The hardware input is typically the PWREN pin, but this can be reconfigured to other pins. To enable SLEEP via I<sup>2</sup>C, program the following:

Set register 0x08h bit1 (PWR\_DN\_MODE) = 1

Set register 0x00h bit0 (PWRDN\_EN) = 1

To enter SLEEP, program register 0x01h bit1 (SLP\_ENTR) = 1.

I<sup>2</sup>C is disabled in SLEEP mode, to the only way to exit SLEEP mode is to toggle the PWREN pin.

## THERMAL State

In the THERMAL state the chip has exceeded the thermal shutdown temperature. To protect the device, all the regulators are shut down and all three nRESETx pins are asserted low. This state can be disabled by setting register 0x0Ah bit4 (TSD\_nMASK) = 0. Note that thermal shutdown fault flag, TSD\_SHUTDOWN, still provides the thermal status even TSD\_nMASK = 0.

## OVUVFLT State

In the OVUVFLT state one of the regulators has exceed an OV level at any time or UV level after the soft start ramp has completed. All regulators shutdown and all three nRESETx outputs are asserted low when the IC enters OVUVFLT state. The OVUVFLT state is timed to retry after 100ms and enter the ACTIVE state. If the OV or UV condition still exists in the ACTIVE state the IC returns back to the OVUVFLT state. The cycle continues until the OV or UV fault is removed or the input power is removed. This state can be disabled by setting the OV\_nMASK or UV\_nMASK non-volatile bits low. The IC does not directly enter OVUVFLT in an overcurrent condition, but does enter this state due to the resulting UV condition.

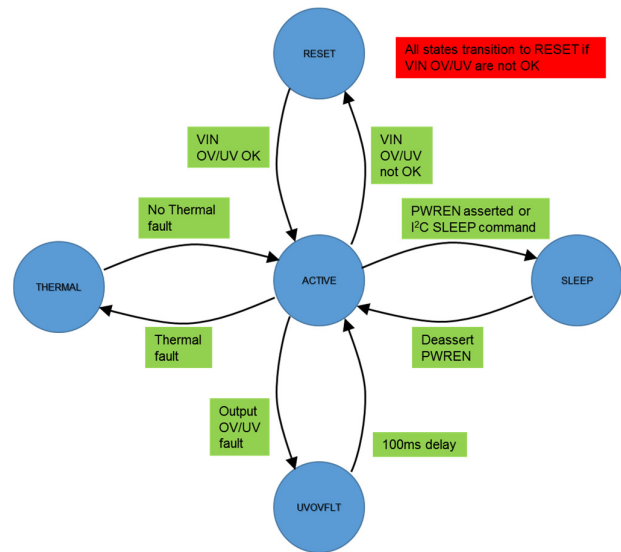


Figure 3. State Machine

## Sequencing

The ACT8870 provides the end user with extremely versatile sequencing capability that can be optimized for many different applications. Each of the seven outputs has four basic sequencing parameters: input trigger, turn-on delay, softstart time, and output voltage. Each of these parameters is controlled via the ICs internal registers. As an example, the ACT8870QJ101-T sequencing and output voltages are optimized for the Atmel SAMA5D3D3 processor. The specifics for this IC as well as others are detailed at the end of the datasheet. Contact [sales@active-semi.com](mailto:sales@active-semi.com) for custom sequencing configurations. Refer to the Active-Semi Application Note describing the Register Map for full details on I<sup>2</sup>C functionality and programming ranges.

**Input trigger.** The input trigger for a regulator is the event that turns that regulator on. Each output can have a separate input trigger. The input trigger can be the internal power ok (POK) signal from one of the other regulators, the internal VIN POK signal, or an external signal applied to an input pin such as EXT\_PG or GPIO. This flexibility allows a wide range of sequencing possibilities, including have some of the outputs be sequenced with another external power supply or a control signal from the host. As an example, if the LDO1 input trigger is Buck1, LDO1 will not turn on until Buck1 is in regulation. Input triggers are defined at the factory and can only be changed with a custom CMI configuration. The nRESETx, POK, PG, and EXT\_EN outputs can be connected to a power supply's internal POK signal and used to trigger external supplies in the overall sequencing scheme.

**Turn-on Delay.** The turn-on delay is the time between an input trigger going active and the output starting to turn on. Each output's turn-on delay is configured via its I<sup>2</sup>C bit ONDLY. Turn-on delays can be changed after the IC is powered on, but they are volatile and reset to the factory defaults when power is recycled.

**Softstart Time.** The softstart time is the time it takes an output to ramp from 0V to its programmed voltage. Each output's softstart time is configured via its I<sup>2</sup>C bit SS\_RAMP. Softstart times can be changed after the IC is powered on, but they are volatile and reset to the factory defaults when power is recycled.

**Output Voltage.** The output voltage is each regulator's desired voltage. Each buck's output voltage is programmed via its I<sup>2</sup>C bits Bx\_VSET0 and Bx\_VSET1. The output regulates to Bx\_VSET0 in ACTIVE mode. They can be programmed to regulate to Bx\_VSET1 in DVS mode or SLEEP mode. Each output's voltage can be changed after the IC is powered on, but the new setting is volatile and is reset to the factory defaults when power is recycled. Output voltages can be changed on the fly. If a large output voltage change is required, it is best to make multiple smaller changes. This prevents the IC from detecting an instantaneous over or under voltage condition because the fault threshold are immediately changed, but the output takes time to respond.

### Dynamic Voltage Scaling

On-the-fly dynamic voltage scaling (DVS) for the four buck converters is available via the I<sup>2</sup>C interface. This allows systems to save power by quickly adjusting the microprocessor performance level when the workload changes. Note that DVS is not a different operating state. The IC operates in the ACTIVE state, but just regulates the outputs to a different voltage. For fault free operation, the user must ensure output load conditions plus the current required to charge the output capacitance during a DVS rising voltage condition does not exceed the current limit setting of the regulator. As with any power supply, changing an output voltage too fast can require a current higher than the current limit setting. The user must ensure that the voltage step, slew rate, and load current conditions do not result in an instantaneous loading that results in a current limit condition.

Enter DVS by programming register 0x00h bit1 (DVS\_EN) = 1 and then pulling the EXT\_EN pin high. Note that some CMI configurations may not require DVS\_EN = 1 and may use different input pins.

### Fault Protection

The ACT8870 contains several levels of fault protection, including the following:

Output Overvoltage

Output Undervoltage

Output Current Limit

Thermal Warning

Thermal Shutdown

There are three types of I<sup>2</sup>C register bits associated with each fault condition: fault flag bits, fault bits, and mask bits. The fault flag bits display the real-time fault status. Their status is valid regardless of whether or not that fault is masked. The mask bits either block or allow the fault to affect the fault bit. Each potential fault condition can be masked via I<sup>2</sup>C if desired. Any unmasked fault condition results in the fault bit going high, which asserts the IRQ pin. IRQ is typically active low. The IRQ pin only de-asserts after the fault condition is no longer present and the corresponding fault bit is read via I<sup>2</sup>C. Note that masked faults can still be read in the fault flag bit. Refer to Active-Semi Application Note describing the Register Map for full details on I<sup>2</sup>C functionality and programming ranges.

### Output Under/Over Voltage

The ACT8870 monitors the output voltages for under voltage and over voltage conditions. If one output enters an UV/OV fault condition, the IC shuts down all outputs for 100ms and restarts with the programmed power up sequence. If an output is in current limit, it is possible that its voltage can drop below the UV threshold which also shuts down all outputs. If that behavior is not desired, mask the appropriate fault bit. Each output still provides its real-time UV/OV fault status via its fault flag, even if the fault is masked. Masking an OV/UV fault just prevents the fault from being reported via the IRQ pin. A UV/OV fault condition pulls the nRESETx pins low. Note that nRESETx pins are configurable via CMI settings.

### Output Current Limit

The ACT8870 incorporates a three level overcurrent protection scheme for the buck converters and a single level scheme for the LDOs. For the buck converters, the overcurrent current threshold refers to the peak switch current. The first protection level is when a buck converter's peak switch current reaches 80% of the Cycle-by-Cycle current limit threshold for greater than 16 switching cycles. Under this condition, the IC reports the fault via the appropriate fault flag bit. If the fault is unmasked, it asserts the IRQ pin. This may or may not turn off that output or other outputs depending on the specific CMI. The next level is when the current increases to the Cycle-by-Cycle threshold. The buck converter limits the peak switch current in each switching cycle. This reduces the effective duty cycle

and causes the output voltage to drop, potentially creating an undervoltage condition. When the overcurrent condition results in an UV condition, and UV is not masked, the IC turns off all supplies off for 100ms and restarts. The third level is when the peak switch current reaches 120% of the Cycle-by-Cycle current limit threshold. This immediately shuts down the regulator and waits 14ms before restarting.

For LDOs, the overcurrent thresholds are set by each LDO's Output Current Limit setting. When the output current reaches the Current Limit threshold, the LDO limits the output current. This reduces the output voltage, creating an undervoltage condition, causing all supplies to turn off for 100ms before restarting.

The overcurrent fault limits for each output are adjustable via I<sup>2</sup>C. Overcurrent fault reporting can be masked via I<sup>2</sup>C, but the overcurrent limits are always active and will shut down the IC when exceeded.

### Thermal Warning and Thermal Shutdown

The ACT8870 monitors its internal die temperature and reports a warning via IRQ when the temperature rises above the Thermal Interrupt Threshold of typically 135 deg C. It reports a fault when the temperature rises above the Thermal Shutdown Temperature of typically 165 deg C. A temperature fault shuts down all outputs unless the fault is masked. Both the fault and the warning can be masked via I<sup>2</sup>C. The temperature warning and fault flags still provide real-time status even if the faults are masked. Masking just prevents the faults from being reported via the IRQ pin.

### Pin Descriptions

The ACT8870 input and output pins are configurable via CMI configurations. The following descriptions are refer to the most common pin functions. Refer to the CMI Options section in the back of the datasheet for specific pin functionality for each CMI.

#### PWREN

The PWREN pin controls the IC's SLEEP state. When I<sup>2</sup>C bit PWREN\_MODE = 0, the PWREN pin moves the IC between the SLEEP and ACTIVE states.

PWREN must be enabled via the PWRDN\_EN I<sup>2</sup>C bit after power up. PWREN is ignored if the PWRDN\_EN bit is low. The PWREN polarity is controlled by the PWREN\_POL I<sup>2</sup>C bit. PWREN is active low when PWREN\_POL is high, and active high when PWREN\_POL is low. The host processor can read the PWREN status via I<sup>2</sup>C in the PWREN\_STAT I<sup>2</sup>C bit.

PWREN is referenced to the VIO\_IN pin, and is 5.5V tolerant meaning that PWREN can go to 5.5V even if VIO\_IN is less than 5.5V. PWREN has a 10us bidirectional filter to prevent noise from triggering

unwanted operation.

#### EXT\_PG

The EXT\_PG pin is a dual purpose input. It functions as either a power good input from an external supply or a dynamic scaling control input. Configure EXT\_PG as a power good input by setting I<sup>2</sup>C bit DVS\_EN = 0. When configured as a power good input, EXT\_PG can be used as an input to the nRESETx pins. EXT\_PG polarity is controlled by the EXT\_PG\_POL bit. EXT\_PG is active high when EXT\_PG\_POL = 0 and active low when EXT\_PG\_POL = 1.

Configure EXT\_PG as a dynamic voltage scaling (DVS) control input by setting I<sup>2</sup>C bit DVS\_EN = 1. When EXT\_PG is de-asserted, all buck regulators regulate to their VSET0 voltage. When EXT\_PG is asserted, the buck regulators regulate to their VSET1 voltage. Note that EXT\_PG input is only valid for DVS toggling when the IC is in the ACTIVE state of operation. I<sup>2</sup>C bit EXT\_PG\_POL has no effect in DVS Mode.

EXT\_PG is referenced to the VIO\_IN pin, and is 5.5V tolerant meaning that EXT\_PG can go to 5.5V even if VIO\_IN is less than 5.5V. The EXT\_PG input has a 10us bidirectional filter to prevent noise from triggering unwanted operation.

#### VIO\_IN

VIO\_IN is the input bias supply for the IC. Apply an input voltage between 1.62V and 5.5V. Bypass to AGND with a high quality, 1uF ceramic capacitor.

#### MODE

Setting MODE = 0 configures Buck1 as a standard integrated buck regulator. Setting MODE = 1 configures Buck1 as an integrated bypass switch. In bypass mode, the Buck1 P-ch power FET is used to sequence the 3.3V supply to the downstream load. This provides full sequencing flexibility for 3.3V systems by allowing the 3.3V input to be used as the input supply for the other regulators but still be sequenced in any order for the downstream loads. Bypass mode is only valid for a 3.3V input voltage. The MODE pin must be tied directly to VIN or AGND. MODE is only sampled when VIN reaches its UVLO threshold during power. Changing MODE after power up has no effect on functionality. I<sup>2</sup>C bit MODE\_STAT shows the status of the MODE pin when it was read at startup.

#### GPIO

The GPIO pin can be configured as a digital input or an open drain output. It has multiple uses, including a sequencing input, sequencing output, status output, or control input to toggle a supply's output voltage. Set I<sup>2</sup>C bit GPIO\_OUT = 0 to configure GPIO as an input. When using GPIO as an output, GPIO\_OUT = 0 configures it as an open drain output, and GPIO\_OUT = 1 configures

it as a logic low output. When used as either an input or an output, I<sup>2</sup>C bit GPIO\_STAT always provides the real-time status of the GPIO pin. GPIO\_STAT = 0 when GPIO pin is a logic 0. GPIO\_STAT = 1 when GPIO pin is a logic 1.

## IRQ

The IRQ pin is an output that issues an interrupt to the host CPU/Controller when an ACT8870 fault or warning condition occurs.

IRQ is triggered by:

1. Die temperature exceeding Thermal Interrupt Threshold of 135C.
2. Any buck regulator reaching peak current limit, ILIMSET, for 16 cycles after softstart.
3. Any LDO regulator reaching current limit, LDOx\_ILIM, for more than 16us after softstart.
4. BUCK1 PMOS switch exceeding Current Detection threshold 75% of ILIMSET when system is configured in bypass mode.

IRQ is masked by the I<sup>2</sup>C register 0x00h bit2 (IRQ\_nMASK) by default to mask all IRQ conditions. To enable IRQ functionality, set IRQ\_nMASK = 1. IRQ is an active-low open drain 5.5V compatible output.

## POK

POK indicates that the voltage on the VIN pin is inside the POK UV and OV Interrupt Thresholds. If the VIN voltage is above or below these values, POK pulls low to interrupt the host CPU/Controller. POK is masked by the I<sup>2</sup>C bit POK\_nMASK by default. To enable POK functionality, set I<sup>2</sup>C bit POK\_nMASK = 1. I<sup>2</sup>C bits POK\_OV and POK\_UV provide real-time UV and OV status, even when POK is masked. The POK UV and OV threshold are configurable via the I<sup>2</sup>C bits POK\_UV\_SET and POK\_OV\_SET.

POK is an open drain output and is 5.5V tolerant meaning that POK can be pulled up to 5.5V even if VIO\_IN is less than 5.5V.

## nRESET\_AUX1 and nRESET\_AUX2

nRESET\_AUX1 and nRESET\_AUX2 pins can be used to signal that the IC is in the SLEEP state or that the input voltage is above or below the UV or OV threshold. They can also be tied to one or a combination of the power supply's internal POK signal. These outputs are immediately asserted low, but follow a programmed delay when de-asserted. The nRESET\_AUX1 delay time is controlled by the I<sup>2</sup>C bits RST\_AUX1\_DLY[2:0], which programs the delay between 400us and 2mS in 227us steps. The nRESET\_AUX2 delay time is

controlled by the I<sup>2</sup>C bits RST\_AUX2\_DLY[2:0], which programs the delay between 200us and 1ms in 114us steps. These pins are open drain output and 5.5V tolerant meaning that they can be pulled up to 5.5V even if VIO\_IN is less than 5.5V.

## nRESET

nRESET issues the main reset to the CPU/controller. nRESET is immediately asserted low when either the VIN voltage is above or below the UV or OV thresholds or any valid output supply voltage is below its Power Good threshold. After startup, nRESET de-asserts after a programmable delay time when VIN and all outputs are above their respective UVLO thresholds. The nRESET delay time is controlled by the I<sup>2</sup>C bits nRST\_DLY[2:0], which programs the delay between 200us and 1ms in 114us steps. nRESET is configurable, so refer to the CMI Options section in the back of the datasheet for its specific functionality for each CMI. nRESET is an open drain output and is 5.5V tolerant meaning that nRESET can be pulled up to 5.5V even if VIO\_IN is less than 5.5V.

## EXT\_EN

EXT\_EN is used to control an external regulator or to provide a control signal to other system components. Depending on the MODE pin status, EXT\_EN is either an exact output of the ACT8870's internal BUCK1 enable signal or an exact output of the bypass switch enable signal. The I<sup>2</sup>C bit EXT\_EN\_POL controls the EXT\_EN polarity. EXT\_EN is active high when EXT\_EN\_POL is low and EXT\_EN is active low when EXT\_EN\_POL is high. EXT\_EN is a push-pull CMOS output using VIO\_IN supply. Note that the EXT\_EN output is enabled and valid in all modes of operation. EXT\_EN is configurable, so refer to the CMI Options section in the back of the datasheet for its specific functionality for each CMI.

PG signals the status of a regulator's Power Good / UV comparator. When the regulator is below the Power Good threshold, the PG pin is pulled low. When above the threshold, the PG pin is open drain. The PG functionality is enabled by default, but can be disabled by I<sup>2</sup>C. Disable PG for each regulator using the regulator's UV\_FLTMSK bit. PG is configurable, so refer to the back of the datasheet for its specific functionality for each CMI. PG is an open drain output and is 5V tolerant meaning that PG can be pulled up to 5.5V even if VIO\_IN is less than 5.5V.

## Step-down dc/dc Converters

### General Description

The ACT8870 contains four fully integrated step-down converters. Buck1 is a 4A output, while Buck2, Buck3, and Buck4 are 2.5A outputs. All buck converters are fixed frequency, current-mode controlled, synchronous

PWM converters that achieve peak efficiencies of up to 96.5%. The buck converters switch at 2.25MHz and are internally compensated, requiring only three small external components (Cin, Cout, and L) for operation. They ship with default output voltages that can be modified via the I<sup>2</sup>C interface for systems that require advanced power management functions.

Each buck converter has a dedicated input pin and power ground pin. Each buck converter should have a dedicated input capacitor that is optimally placed to minimize the power routing loops for each buck converter. Note that even though each buck converter has separate inputs, all buck converter inputs must be connected to the same voltage potential.

Buck 1 is configurable as a bypass switch for systems with a 3.3V bus voltage. The bypass switch provides full sequencing capability by allowing the 3.3V bus to be used as the input to the other supplies and still be properly sequenced to the downstream load.

Tie MODE to AGND to configure Buck1 for a switching power supply. Tie MODE to VIN to configure Buck1 as a bypass switch. MODE is only sampled when VIN reaches its UVLO threshold. Changing the MODE pin after startup has no effect. When Buck1 is configured as a power supply, EXT\_EN is a direct output of the ACT8870 Buck1 enable signal. When Buck1 is configured as a bypass switch, EXT\_EN is a direct output of the bypass switch enable signal.

The ACT8870 buck regulators are highly configurable and can be quickly and easily reconfigured via I<sup>2</sup>C. This allows them to support changes in hardware requirements without the need for PCB changes. Examples of I<sup>2</sup>C functionality are given below:

Real-time power good, OV, and current limit status

Ability to mask individual faults

Dynamically change output voltage

On/Off control

Softstart ramp

Slew rate control

Switching delay and phase control

Low power mode

Overcurrent thresholds

Refer to the Active-Semi Application Note describing the Register Map for full details on I<sup>2</sup>C functionality and programming ranges.

## Operating Mode

The buck converters operate in fixed-frequency PWM mode at medium to heavy loads. They transition to a proprietary power-saving low power mode (LPM) at light loads in order to save power. Each buck converter's LPM can be independently enabled or disabled via its DISLPM I<sup>2</sup>C bit. Setting DISLPM = 0 enables LPM while setting DISLPM = 1 disables LPM. Operating in LPM saves power, while operating in forced PWM mode gives better transient response. Each buck converter output can be programmed between 2.8V and 5.5V with the I<sup>2</sup>C register Bx\_VSEL0[7:0].

## Enable / Disable Control

When power is applied to the IC, all converters automatically turn on according to a pre-programmed sequence. Once in normal operation (ACTIVE state), each converter can be independently disabled via I<sup>2</sup>C. Each CMI version requires a different set of command to disable a converter, so contact the factory for specific instructions if needed. Each converter contains an optional integrated discharge resistor that actively discharges the output capacitor when the regulator is disabled. The discharge function is enabled via the I<sup>2</sup>C bit Bx\_DisPull-down.

## Soft-Start

Each buck regulator contains a softstart circuit that limits the rate of change of the output voltage, minimizing input inrush current and ensuring that the outputs power up monotonically. This circuitry is effective any time the regulator is enabled, as well as after responding to a short circuit or other fault condition. Each regulator's softstart time is adjustable between 300us and 1000us via its I<sup>2</sup>C bits SS\_RAMP.

## 100% Duty Cycle Operation

The buck regulators are capable of operating at up to 100% duty cycle. During 100% duty cycle operation, the high-side power MOSFETs are held on continuously, providing a direct connection from the input to the output (through the inductor), ensuring the lowest possible dropout voltage in battery powered applications.

## Dynamic Voltage Scaling

Each buck converter supports Dynamic Voltage Scaling (DVS). DVS allows the user to optimize the processor's energy to complete tasks by lowering the processor's operating frequency and input voltage when lower performance is acceptable. In normal operation, each output regulates to the voltage programmed in the I<sup>2</sup>C register Bx\_VSET0. During DVS, each output regulates to Bx\_VSET1. The output transitions from Bx\_VSET0 to Bx\_VSET1 at a rate determined by the output capacitance and the load current. The outputs transition between VSET1 and VSET0 by the rate determined by the I<sup>2</sup>C bits SLEW.

For fault free operation, the user must ensure output load conditions plus the current required to charge the output capacitance during a DVS rising voltage condition does not exceed the current limit setting of the regulator. As with any power supply, changing an output voltage too fast can require a current higher than the current limit setting. The user must ensure that the voltage step, slew rate, and load current conditions do not result in an instantaneous loading that results in a current limit condition.

Enter DVS by programming register 0x00h bit1 (DVS\_EN) = 1 and then pulling the EXT\_EN pin high. Note that some CMI configurations may not require DVS\_EN = 1 and may use different input pins.

Bx\_VSET0 must be higher than Bx\_VSET1. PWR\_GOOD, OV, and ILIM are automatically masked during DVS transitions to avoid asserting nRESET.

### Optimizing Noise

Each buck converter contains several features available via I<sup>2</sup>C to further optimize functionality. The top P-ch FET's turn-on timing can be shifted 100ns from the master clock edge via the PHASE\_DELAY I<sup>2</sup>C bit. It can also be aligned to the rising or falling clock edge via the PHASE I<sup>2</sup>C bit. The internal FET rise and fall times can be optimized to minimize switching noise at the cost of lower efficiency via the DRVADJ I<sup>2</sup>C bit.

### Overcurrent and Short Circuit Protection

Each buck converter provides overcurrent and short circuit protection. Overcurrent protection is achieved with cycle-by-cycle current limiting. The peak current threshold is set by the Bx\_ILIM I<sup>2</sup>C bits. If the peak current reaches the programmed threshold for 16 consecutive switching cycles, the IC asserts IRQ low. A short circuit condition that results in the peak switch current being 122% of Bx\_ILIMSET immediately shuts down all supplies, asserts IRQ low and restarts the system in 100ms. If a buck converter reaches overcurrent or short circuit protection, the status is reported in the ILIM\_REG[x] I<sup>2</sup>C registers. The contents of these registers are latched until read via I<sup>2</sup>C. Overcurrent and short circuit conditions can be masked via the I<sup>2</sup>C bit Bx\_ILIM\_FLTMSK.

### Compensation

The buck converters utilize current-mode control and a proprietary internal compensation scheme to simultaneously simplify external component selection and optimize transient performance over their full operating range. No compensation design is required; simply follow a few simple guide lines described below when choosing external components.

### Minimum On-Time

The ACT8870 minimum on-time is 120ns. If the calcu-

lated on-time is less than 120ns with 2.25MHz operation, then the user must configure the output to switch at 1.125MHz. Setting I<sup>2</sup>C bits Bx\_HalfFreq = 0 sets Fsw = 2.25MHz. Setting Bx\_HalfFreq = 1 sets Fsw = 1.125MHz. The following equation calculates the on-time.

$$T_{ON} = \frac{V_{OUT}}{V_{IN} * F_{SW}}$$

Where V<sub>out</sub> is the output voltage, V<sub>in</sub> is the input voltage, and F<sub>sw</sub> is the switching frequency.

### BUCK1 Bypass Switch

The ACT8870 provides a bypass mode for 3.3V systems. This allows the 3.3V input voltage to power the ACT8870 regulators and also be sequenced to the downstream loads. In bypass mode, the Buck1 P-ch FET acts as a switch and the N-ch FET is disabled. The bypass switch turns on the 3.3V rail with the programmed delay and softstart time.

In bypass mode, the ACT8870 I<sup>2</sup>C registers are reconfigured to the following.

1. B1\_PWR\_GOOD register bit reconfigured to the output of the Soft Start ramp. When soft start is complete, this bit goes high to allow the sequencing of the other regulators to continue. B1\_PWR\_GOOD no longer reports the Buck1 output voltage status. It stays high as long as the bypass switch is enabled.
2. B1\_ILIM bit is the output of the internal PMOS Current Detection circuit. This is set to 3A typical. If the bypass current exceeds the Internal PMOS Current Detection current, B1\_ILIM triggers an IRQ output and gets latched in the ILIM\_REG[0] if configured by the IRQ\_nMASK. The B1\_ILIM can also be masked with the B1\_ILIM\_FLTMSK register.
3. B1\_UV register bit reconfigured to the output of the Internal PMOS Current Shutdown circuit. This is set to 6A typical. If the bypass switch current exceeds 6A, limits the current which triggers an under voltage fault condition and moves the IC into the OVUVFLT state. This immediately shuts down all regulators including the bypass switch. The system restarts in 100mS, following the programmed startup sequencing. This fault can be masked with I<sup>2</sup>C bit UV\_nMASK. This fault is latched in the UV\_REG I<sup>2</sup>C bit. Shutdown due to overcurrent can also be masked via the I<sup>2</sup>C bit B1\_PG\_FLTMSK.
4. B1\_OV is disabled. There is no overvoltage detection circuitry on the output of the bypass switch.

## Input Capacitor Selection

Each regulator requires a high quality, low-ESR, ceramic input capacitor. Note that even though each buck converter has separate input pins, all input pins must be connected to the same voltage potential. 10uF capacitors are typically suitable, but this value can be increased without limit. Smaller capacitor values can be used with lighter output loads. Choose the input capacitor value to keep the input voltage ripple less than 50mV.

$$V_{\text{ripple}} = I_{\text{out}} * \frac{V_{\text{out}}}{V_{\text{in}}} * \left(1 - \frac{V_{\text{out}}}{V_{\text{in}}}\right) \frac{1}{F_{\text{sw}} * C_{\text{in}}}$$

Be sure to consider the capacitor's DC bias effects and maximum ripple current rating when using capacitors smaller than 0805.

A capacitor's actual capacitance is strongly affected by its DC bias characteristics. The input capacitor is typically an X5R, X7R, or similar dielectric. Use of Y5U, Z5U, or similar dielectrics is not recommended. Input capacitor placement is critical for proper operation. Each buck's input capacitor must be placed as close to the IC as possible. The traces from VIN\_Bx to the capacitor and from the capacitor to PGNDx should as short and wide as possible.

## Inductor Selection

The Buck converters utilize current-mode control and a proprietary internal compensation scheme to simultaneously simplify external component selection and optimize transient performance over their full operating range. The ACT8870 is optimized for operation with 1.0-1.5uH inductors. Choose an inductor with a low DC-resistance, and avoid inductor saturation by choosing inductors with DC ratings that exceed the maximum output current by at least 30%. The following equation calculates the inductor ripple current.

$$\Delta I_L = \frac{\left(1 - \frac{V_{\text{OUT}}}{V_{\text{IN}}}\right) * V_{\text{OUT}}}{F_{\text{SW}} * L}$$

Where V<sub>OUT</sub> is the output voltage, V<sub>IN</sub> is the input voltage, F<sub>SW</sub> is the switching frequency, and L is the inductor value.

## Output Capacitor Selection

The ACT8870 is designed to use small, low ESR, ceramic output capacitors. Buck1 typically requires a 44uF output capacitor while Buck2, Buck3, and Buck4 require a 22uF output capacitor each. In order to ensure stability, the actual Buck1 capacitance should be greater than 33uF while Buck2, Buck3, and Buck4 should be greater than 15uF. The output capacitance can be increased to reduce output voltage ripple and

improve load transients if needed. Design for an output ripple voltage less than 1% of the output voltage. The following equation calculates the output voltage ripple as a function of output capacitance.

$$V_{\text{RIPPLE}} = \frac{\Delta I_L}{8 * F_{\text{SW}} * C_{\text{OUT}}}$$

Where ΔI<sub>L</sub> is the inductor ripple current, F<sub>SW</sub> is the switching frequency, and C<sub>OUT</sub> is the output capacitance after taking DC bias into account.

Be sure to consider the capacitor's DC bias effects and maximum ripple current rating when using capacitors smaller than 0805.

A capacitor's actual capacitance is strongly affected by its DC bias characteristics. The output capacitor is typically an X5R, X7R, or similar dielectric. Use of Y5U, Z5U, or similar dielectrics are not recommended due to their wide variation in capacitance over temperature and voltage ranges.

## LDO CONVERTERS

### General Description

The ACT8870 contains three fully integrated low dropout linear regulators (LDO). LDO1 is an 800mA output, while LDO2 and LDO3 are 200mA outputs. The LDOs are require only two small external components (C<sub>in</sub>, C<sub>out</sub>) for operation. They ship with default output voltages that can be modified via the I<sup>2</sup>C interface for systems that require advanced power management functions.

LDO1 has a dedicated input pin. LDO2 and LDO3 share an input pin. The LDOs can operate from different input voltages than the buck converters. LDO1 and LDO2/3 can operate from different input voltage from each other.

### Enable / Disable Control

When power is applied to the IC, all LDOs automatically turn on according to a pre-programmed sequence. Once in normal operation (ACTIVE state), each converter can be independently disabled via I<sup>2</sup>C. Each CMI version requires a different set of command to disable a converter, so contact the factory for specific instructions if needed. Each converter contains an optional integrated discharge resistor that actively discharges the output capacitor when the regulator is disabled. Each LDO's discharge function is enabled via its I<sup>2</sup>C bit DIS\_PULLDOWN.

### Soft-Start

Each LDO contains a softstart circuit that limits the rate of change of the output voltage, minimizing input inrush current and ensuring that the outputs power up in a monotonically. This circuitry is effective any time the

LDO is enabled, as well as after responding to a short circuit or other fault condition. Each LDO's softstart time is adjustable via its I<sup>2</sup>C bits SS\_RAMP. LDO1 is adjustable between 240μs and 660μs, depending on output voltage. LDO2 and LDO3 are adjustable between 110μs and 235μs, depending on output voltage. See the EC table for available programming ranges.

### Overcurrent and Short Circuit Protection

Each LDO provides overcurrent and short circuit protection. The overcurrent threshold is set by the LDOx\_ILIM I<sup>2</sup>C bits. In both an overload and a short circuit condition, the LDO limits the output current which causes the output voltage to drop. This can result in an undervoltage fault in addition to the current limit fault. If an LDO reaches current limit protection, the status is reported in the ILIM\_REG[x] I<sup>2</sup>C registers. The contents of these registers are latched until read via I<sup>2</sup>C. When the current limiting results in a drop in output voltage that triggers an undervoltage condition, the IC shuts down all power supplies, asserts IRQ low, and enters the UVLOFLT state. The IC restarts in 100ms and starts up with default sequencing. Overcurrent and short circuit conditions can be masked via the I<sup>2</sup>C bit LDOx\_ILIM\_FLTMSK.

### Input Capacitor Selection

Each LDO requires a high quality, low-ESR, ceramic input capacitor. A 1μF is typically suitable, but this value can be increased without limit. The input capacitor is should be a X5R, X7R, or similar dielectric.

### Output Capacitor Selection


Each LDO requires a high quality, low-ESR, ceramic output capacitor. A 1μF is typically suitable, but this value can be increased without limit. The input capacitor is should be a X5R, X7R, or similar dielectric.







### PC board layout guidance

Proper parts placement and PCB layout are critical to the operation of switching power supplies. Follow the following layout guidelines when designing the ACT8870 PCB. Refer to the Active-Semi ACT8870 Evaluation Kits for layout examples

1. Place the buck input capacitors as close as possible to the IC. Connect the capacitors directly to the corresponding VIN\_Bx input pin and PGNDx power ground pin. Avoid the use of vias if possible.
2. Minimize the switch node trace length between each SW\_Bx pin and the inductor. Avoid routing sensitive analog signals near these high frequency, high dV/dt traces.
3. Place the LDO input capacitors close to their input pins. Connect their ground pins into the ground plane that connects the IC's exposed pad.
4. The input capacitor and output capacitor grounds should be connected as close together as possible, with short, direct, and wide traces.
5. Connect the PGNDx ground pins and the AGND ground pin directly to the exposed pad under the IC. The AGND ground plane should be routed separately from the other ground planes and only connect to the main ground plane under the IC at the AGND pin.
6. Connect the VIO\_IN input capacitor to the AGND ground pin.
7. Connect the VIN input capacitor to the AGND ground pin.
8. Remember that all open drain outputs need pullup resistors.
9. Connect the exposed pad directly the top layer ground plane. Connect the top layer ground plane to both internal ground planes and the PCB backside ground plane with thermal vias. Provide ground plane routing on multiple layers that allows the IC's heat to flow into the PCB and then spread radially from the IC. Avoid cutting the ground planes and adding vias that restrict the radial flow of heat of operating conditions, and are relatively insensitive to layout considerations.

## Typical Operating Characteristics

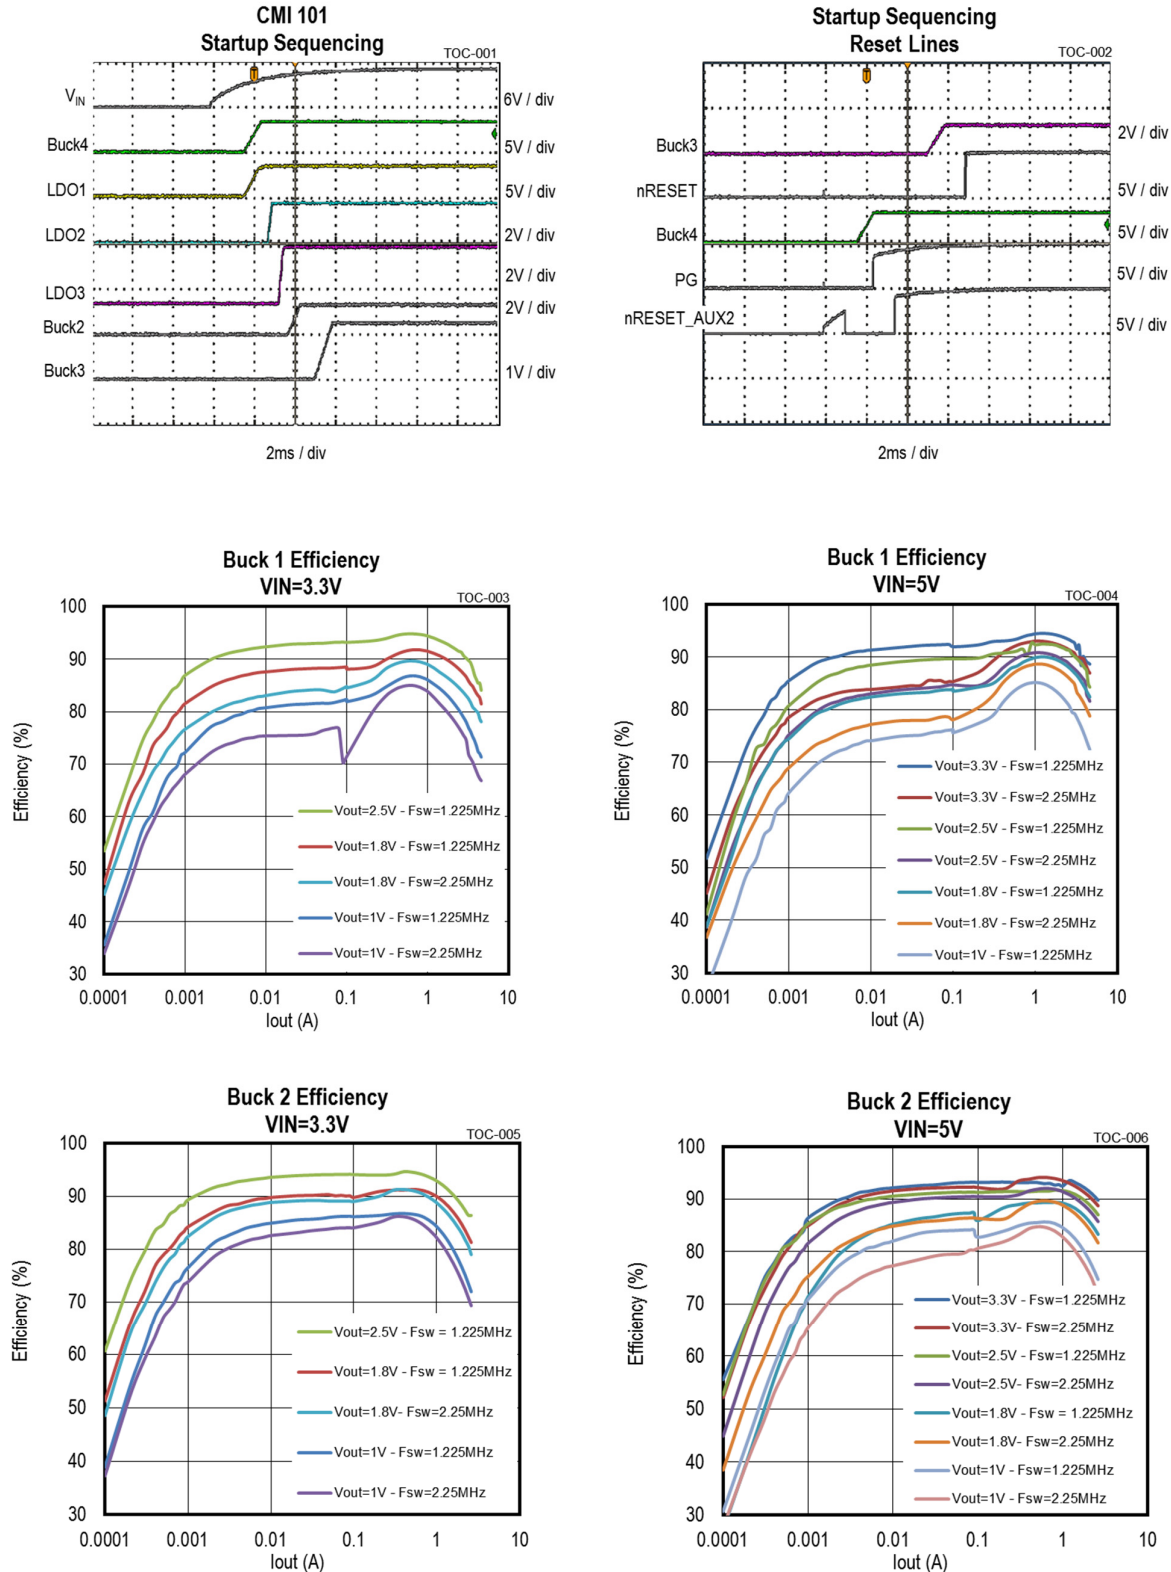


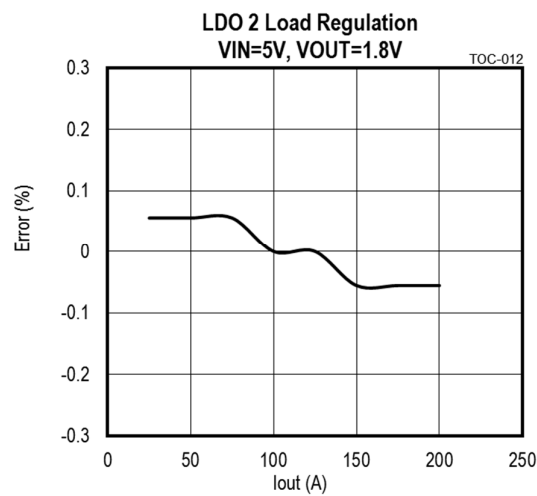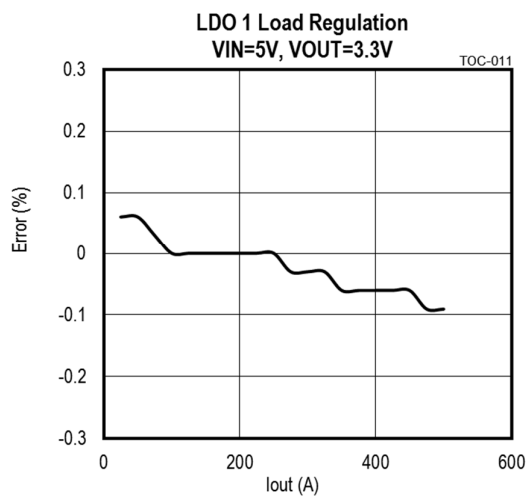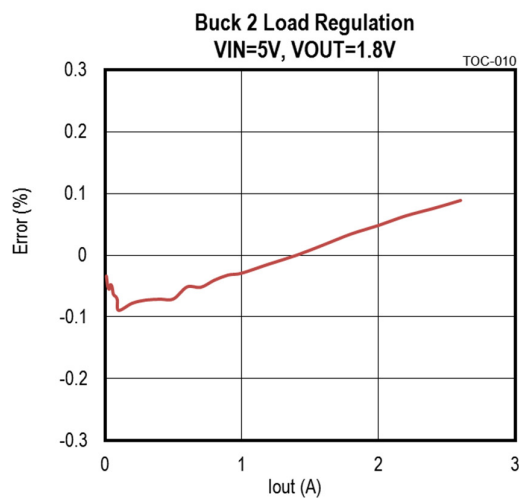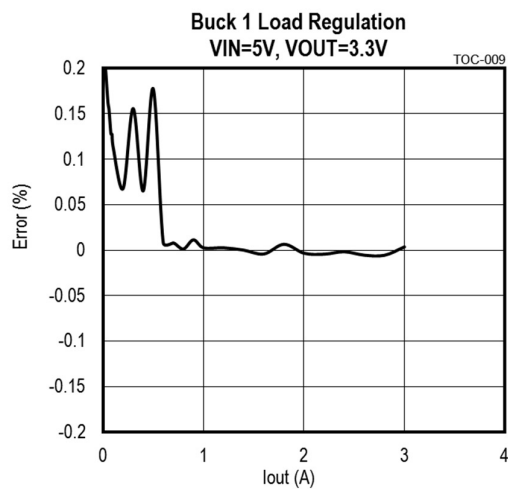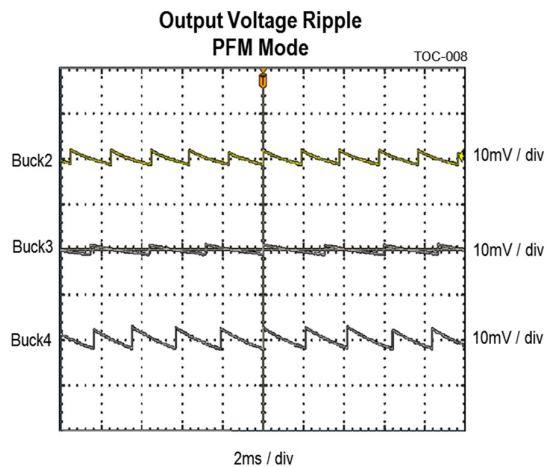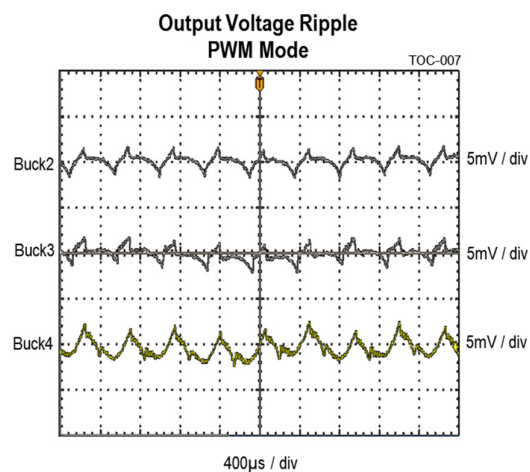

**DVS Transition**


**Buck2**

1.35V to 1.50V

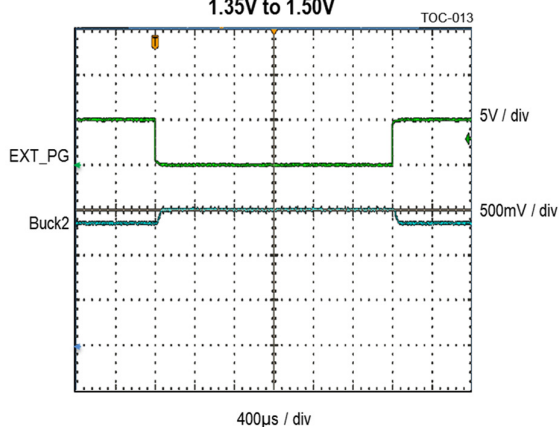


**Overcurrent**

**Buck2**

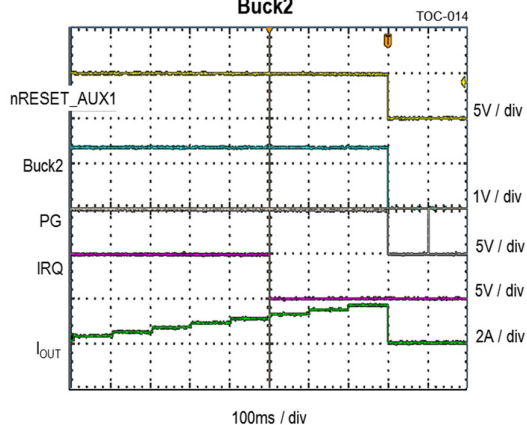


**Short Circuit**

**Buck2**

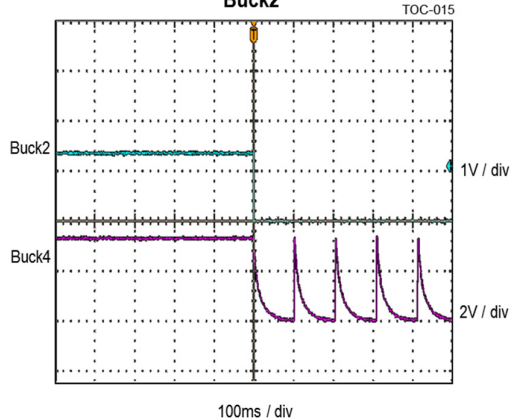


**Overcurrent**

**LDO1**

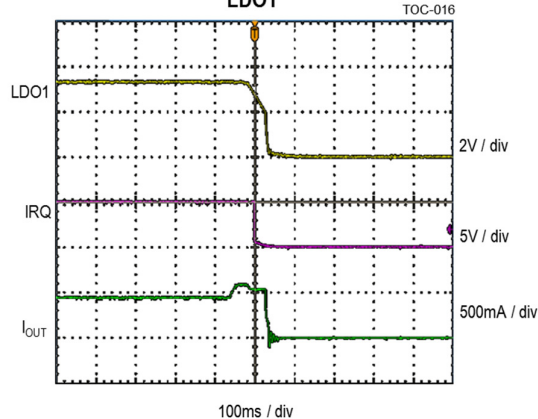

**Short Circuit**


**LDO1**





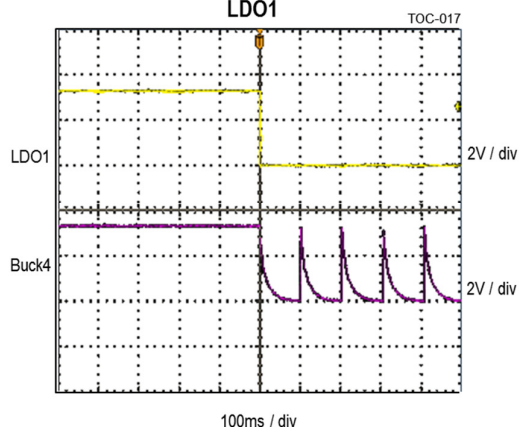


**Load Transient**

**Buck2 - Vout=1.5V**

125mA to 1500mA

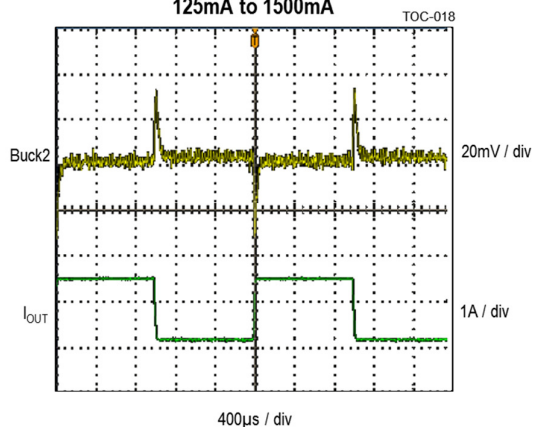

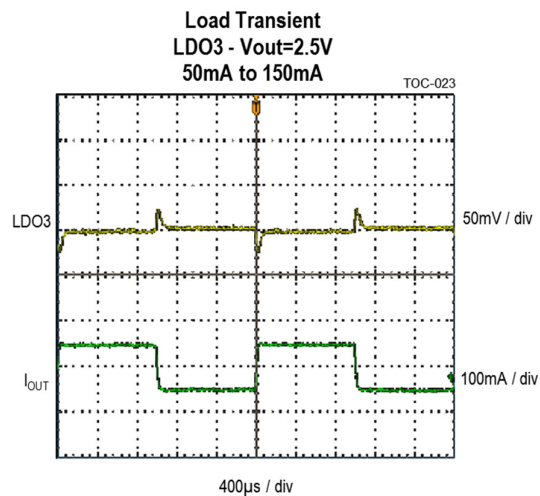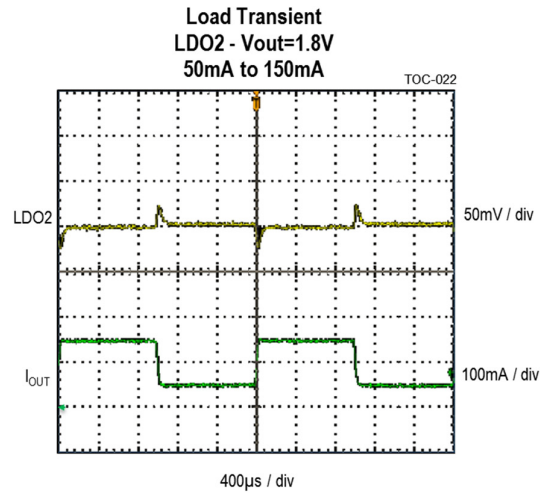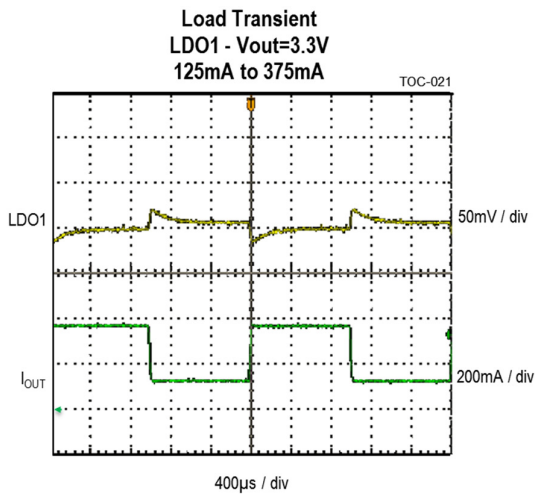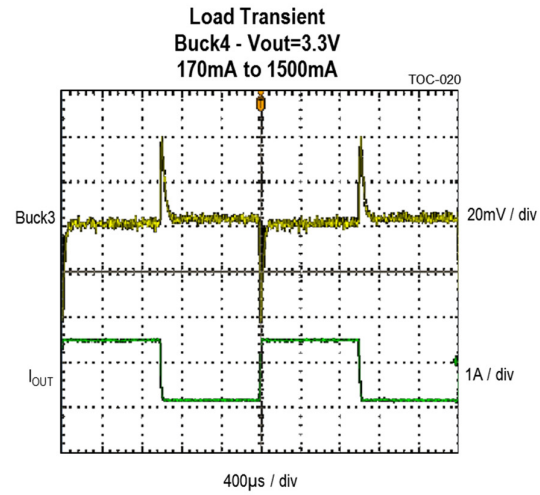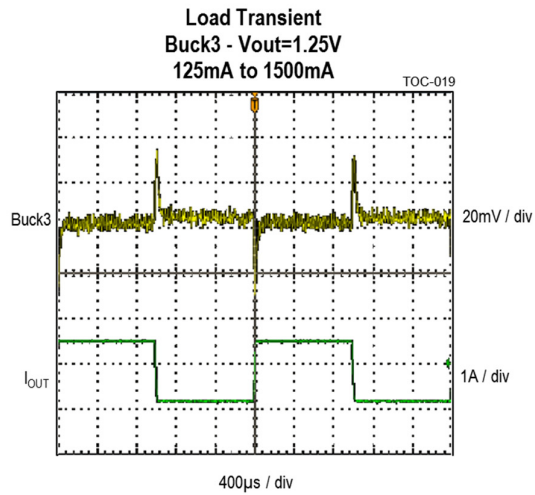

## Recommended External Components

The following components have been used with the ACT8870.

| REFERENCE                   | DESCRIPTION       | MANUFACTURER             |
|-----------------------------|-------------------|--------------------------|
| Input Capacitor, Buck1      | 22uF, 6.3V, X5R   | Samsung, CL10A226MQ8NRNC |
| Input Capacitor, Buck2/3/4  | 10uF, 10V, X5R    | Samsung, CL10A106KP8NNNC |
| Input Capacitor, LDO1/2/3   | 1uF, 25V, X7R     | Yageo, CC0603KRX7R8BB105 |
| Output Capacitor, Buck1     | 2x22uF, 6.3V, X5R | Samsung, CL10A226MQ8NRNC |
| Output Capacitor, Buck2/3/4 | 22uF, 6.3V, X5R   | Samsung, CL10A226MQ8NRNC |
| Output Capacitor, LDO1/2/3  | 1uF, 25V, X7R     | Yageo, CC0603KRX7R8BB105 |
| Inductor, Buck1             | 1uH, 10.8mohm     | Coilcraft, XFL4020-102   |
| Inductor, Buck2/3/4         | 1uH, 15mohm       | Würth, 74438356010       |
| VIO_IN                      | 100nF, 6.3V, X5R  | Standard                 |
| VIN                         | 1uF, 6.3V, X5R    | Standard                 |

## CMI OPTIONS


This section provides the basic default configuration settings for each available ACT8870 CMI option. Refer to each option's application note for the comprehensive list of default settings

### CMI 101: ACT8870QJ101-T

CMI 101 is optimized for Atmel SAMA5D2. Buck1 is not used in this application. Buck4 and LDO1 power the SAMA5D2 Group 2 power supply inputs. Buck2 and Buck3 power the Group 1 power supply inputs. LDO3 powers VDDFUSE which is not part of Group 1 or Group 2. LDO2 provides 1.8V power for other parts of the system.

### Sequencing

| Rail   | Active Mode Voltage (V) | Sleep Mode Voltage (V) | DVS Voltage (V) | DVS slew rate (mV/us) | Nominal Current (A) | Current Limit Setting(A) | Sequencing Input Trigger | StartUp Delay (us) | Soft-Start (us) |
|--------|-------------------------|------------------------|-----------------|-----------------------|---------------------|--------------------------|--------------------------|--------------------|-----------------|
| Buck 1 | OFF                     | N/A                    | OFF             | N/A                   | N/A                 | N/A                      | N/A                      |                    |                 |
| Buck 4 | 3.3                     | N/A                    | 3.3             | 3.12                  | 0.1                 | 2                        | VIN_UVLO                 | 300                | 700             |
| LDO1   | 3.3                     | N/A                    | 3.3             | NA                    | 0.4                 | 0.5                      | VIN_UVLO                 | 100                | 613             |
| LDO2   | 1.8                     | N/A                    | 1.8             | NA                    | 0.05                | 0.2                      | BUCK4_PG                 | 300                | 150             |
| LDO3   | 2.5                     | N/A                    | 2.5             | NA                    | 0.05                | 0.2                      | LDO2_PG                  | 300                | 150             |
| Buck 2 | 1.5                     | N/A                    | 1.35            | 3.12                  | 0.1                 | 2                        | LDO3_PG                  | 200                | 500             |
| Buck 3 | 1.25                    | N/A                    | 1.25            | 3.12                  | 0.1                 | 2                        | BUCK2_PG                 | 700                | 700             |

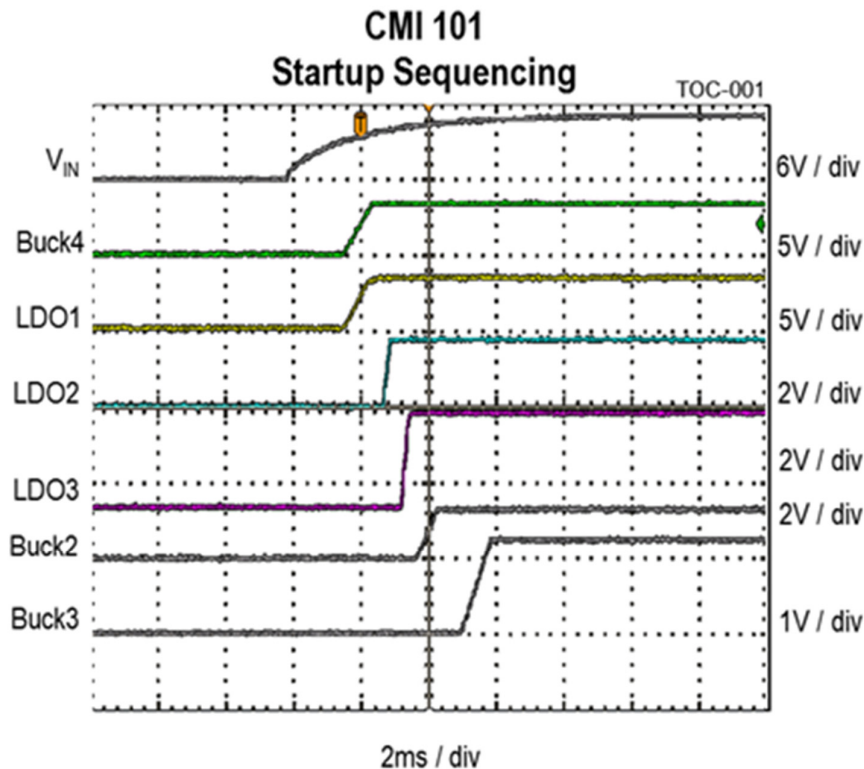

### SLEEP Mode

SLEEP Mode is not available in CMI 101. Connect PWREN to AGND

### DVS Mode

DVS mode does not require changing I<sup>2</sup>C bit DVS\_EN. The IC can enter DVS mode regardless of the DVS\_EN setting. Drive EXT\_PG to a logic L for normal operation. Drive EXT\_PG to a logic H for DVS mode. Note that Buck3/4 cannot enter DVS mode with this CMI code. Their VSET1 setting is not used.

### POK Thresholds

POK\_UV = 2.8V

POK\_OV = 5.5V

### PG

The PG pin is asserted high when Buck4 is in regulation.

### I<sup>2</sup>C Address

The CMI 101 7-bit I<sup>2</sup>C address is 0x5Ah. This results in 0xB4h for a write address and 0xB5h for a read address.

### Device ID

The CMI 101 Device ID (register 0x7Dh) = 0x2Fh

**nRESET**

nRESET is asserted low when any output is out of regulation. The reset timing is 996us

**nRESET\_AUX1**

nRESET\_AUX1 is asserted low when Buck2 is out of regulation. The reset timing is 1764us

**nRESET\_AUX2**

nRESET\_AUX2 is asserted low when Buck4 is out of regulation. The reset timing is 996us

**Default Mask Settings**

| CMI 101 Default Mask Settings |             |             |          |        |        |                  |          |          |
|-------------------------------|-------------|-------------|----------|--------|--------|------------------|----------|----------|
| nRESET                        | nRESET_AUX1 | nRESET_AUX2 | VIN_OV   | IRQ    | POK    | Thermal Shutdown | UV       | OV       |
| Masked                        | Masked      | Masked      | Unmasked | Masked | Masked | Unmasked         | Unmasked | Unmasked |

## CMI 102: ACT8870QJ102-T

CMI 102 is optimized for Silicon Motion SM2258 and SM2259 solid state disk drive controllers. It incorporates boot voltage options for Buck2 and Buck3 that allow it to be used with 1.5V or 1.35V DRAM VDDQ and with 1.2V or 1.8V NAND flash I/O.

## SM225x Configuration

The following table shows how to connect the ACT8870 outputs to the SM225x. The EXT\_PG and nRESET\_AUX2 input settings define Buck2 and Buck3 to be 1.5V and 1.2V respectively.


|                           | SM2258<br>Voltage (V) | SM2259<br>Voltage (V) | SM225x Connections                       |
|---------------------------|-----------------------|-----------------------|------------------------------------------|
| EXT_PG Input Setting      | n/a                   | n/a                   | n/a, EXT_PG sets Buck2 boot voltage      |
| nRESET_AUX2 Input Setting | n/a                   | n/a                   | n/a, nRESET_AUX2 sets Buck3 boot voltage |
| Buck1                     | 3.3                   | 3.3                   | VCCF for Flash Die Power                 |
| Buck2                     | 1.5/1.35              | 1.5/1.35              | DRAM – DDR3                              |
| Buck3                     | 1.2/1.8               | 1.2/1.8               | VCCFQ for Flash I/O                      |
| Buck4                     | 1.15                  | 1.15                  | VCCK/A1V1                                |
| LDO1                      | 3.3                   | 3.3                   | A3V3 Analog Power                        |
| LDO2                      | 1.8                   | 1.8                   | VCCIO Power                              |
| LDO3                      | 1.8                   | 1.8                   | VCCIO Power                              |

## Sequencing

| Rail  | Active<br>Mode Volt-<br>age (V) | Sleep<br>Mode Volt-<br>age (V) | DVS Volt-<br>age (V) | DVS slew<br>rate<br>(mV/us) | Current<br>Limit<br>Setting(A) | Sequencing<br>Input<br>Trigger | StartUp<br>Delay<br>(us) | Soft-Start<br>(us) |
|-------|---------------------------------|--------------------------------|----------------------|-----------------------------|--------------------------------|--------------------------------|--------------------------|--------------------|
| LDO1  | 3.3                             | 3.3                            | N/A                  | N/A                         | 0.5                            | VIN_UVLO                       | 28                       | 660                |
| LDO2  | 1.8                             | 1.8                            | N/A                  | N/A                         | 0.2                            | VIN_UVLO                       | 28                       | 165                |
| LDO3  | 1.8                             | 1.8                            | N/A                  | N/A                         | 0.2                            | VIN_UVLO                       | 28                       | 165                |
| Buck4 | 1.15                            | 0.95                           | N/A                  | N/A                         | 3.5                            | LDO1                           | 700                      | 500                |
| Buck1 | 3.3                             | OFF                            | N/A                  | N/A                         | 5.3                            | Buck4                          | 500                      | 500                |
| Buck3 | 1.2/1.8                         | OFF                            | N/A                  | N/A                         | 3                              | Buck1                          | 500                      | 500                |
| Buck2 | 1.5/1.35                        | OFF                            | N/A                  | N/A                         | 3                              | Buck3                          | 500                      | 500                |

## Startup

### CMI 102 Startup

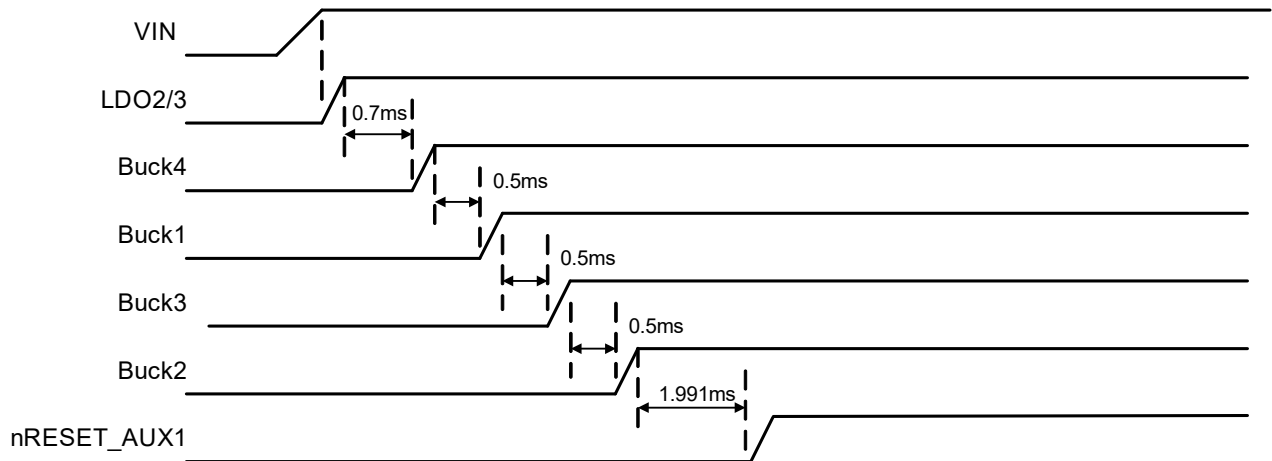

## SLEEP Mode

Enter SLEEP Mode by pulling PWREN low. The IC operates in Active mode when PWREN is high. Note that in the default configuration, nRESET\_AUX1 goes low when the IC enters Sleep mode. If the user requires nRESET\_AUX1 to stay high in Sleep mode, write a 1 into register 0x00h, bit 7.

## DVS Mode

CMI 102 does not include the DVS function. Note that the processor can change Buck2 and Buck3 output voltages on the fly with EXT\_PG and nRESET\_AUX2. This effectively provides independent DVS control for these two outputs.

## Buck2 VID Boot Voltage - EXT\_PG

The EXT\_PG input sets the Buck2 boot up voltage. When EXT\_PG = 0, Buck2 = 1.5V. When EXT\_PG = 1, Buck2 = 1.35V. EXT\_PG changes Buck2 at startup and during normal operation.

## Buck3 VID Boot Voltage - nRESET\_AUX2

The nRESET\_AUX2 input sets the Buck3 boot up voltage. When nRESET\_AUX2 = 0, Buck3 = 1.2V. When nRESET\_AUX2 = 1, Buck3 = 1.8V. nRESET\_AUX2 changes Buck3 at startup and during normal operation.

## POK Thresholds

POK\_UV = 4.25V

POK\_OV = 5.7V

## PG

The PG pin is not functional with CMI 102. Leave the PG pin floating.

## nRESET

nRESET is not functional in CMI 102. Leave the nRESET pin floating.

### nRESET\_AUX1

nRESET\_AUX1 is asserted low when any regulator is out of regulation. The reset timing is 1991us. Note that in the default configuration, nRESET\_AUX1 goes low when the IC enters Sleep mode. If the user requires nRESET\_AUX1 to stay high in Sleep mode, write a 1 into register 0x00h, bit 7.

### nRESET\_AUX2

nRESET\_AUX2 is used for Buck3 boot voltage. See above.

### MODE

The MODE pin must be tied to ground.

### GPIO

The GPIO pin must be tied to ground.

### Default Mask Settings

| CMI 102 Default Mask Settings |             |             |          |        |        |                  |          |          |
|-------------------------------|-------------|-------------|----------|--------|--------|------------------|----------|----------|
| nRESET                        | nRESET_AUX1 | nRESET_AUX2 | VIN_OV   | IRQ    | POK    | Thermal Shutdown | UV       | OV       |
| Masked                        | Masked      | Masked      | Unmasked | Masked | Masked | Unmasked         | Unmasked | Unmasked |

### Device ID

The CMI 102 Device ID (register 0x7Dh) = 0x0Bh

### I2C Address

The CMI 102 7-bit I2C address is 0x5Ah. This results in 0xB4h for a write address and 0xB5h for a read address.

## CMI 104: ACT8870QJ104-T

CMI 104 is optimized for Silicon Motion SM2246 solid state disk drive controllers. It incorporates boot voltage options for Buck2 and Buck3 that allow it to be used with 1.5V or 1.35V DRAM VDDQ and with 1.2V or 1.8V NAND flash I/O.

### SM2246 Configuration

The following table shows how to connect the ACT8870 outputs to the SM2246. The EXT\_PG and nRESET\_AUX2 input settings define Buck2 and Buck3 default startup voltages.


|                           | SM2246 Voltage (V) | SM2246 Connections                       |
|---------------------------|--------------------|------------------------------------------|
| EXT_PG Input Setting      | n/a                | n/a. EXT_PG sets Buck2 boot voltage      |
| nRESET_AUX2 Input Setting | n/a                | n/a. nRESET_AUX2 sets Buck3 boot voltage |
| Buck1                     | 3.3                | VCCF for Flash Die Power                 |
| Buck2                     | 1.5/1.35           | DRAM – DDR3                              |
| Buck3                     | 1.2/1.8            | VCCFQ for Flash I/O                      |
| Buck4                     | 1.2                | VCC/A1V1                                 |
| LDO1                      | 3.3                | A3V3 Analog Power                        |
| LDO2                      | 1.8                | VCCIO Power                              |
| LDO3                      | 1.8                | VCCIO Power                              |

### Sequencing

| Rail  | Active Mode Volt-age (V) | Sleep Mode Volt-age (V) | DVS Volt-age (V) | DVS slew rate (mV/us) | Current Limit Setting(A) | Sequencing Input Trigger | StartUp Delay (us) | Soft-Start (us) |
|-------|--------------------------|-------------------------|------------------|-----------------------|--------------------------|--------------------------|--------------------|-----------------|
| LDO1  | 3.3                      | 3.3                     | N/A              | N/A                   | 0.5                      | VIN_UVLO                 | 28                 | 660             |
| LDO2  | 1.8                      | 1.8                     | N/A              | N/A                   | 0.2                      | VIN_UVLO                 | 28                 | 165             |
| LDO3  | 1.8                      | 1.8                     | N/A              | N/A                   | 0.2                      | VIN_UVLO                 | 28                 | 165             |
| Buck4 | 1.2                      | 1                       | N/A              | N/A                   | 3.5                      | LDO1                     | 700                | 500             |
| Buck1 | 3.3                      | OFF                     | N/A              | N/A                   | 5.3                      | Buck4                    | 500                | 500             |
| Buck3 | 1.2/1.8                  | OFF                     | N/A              | N/A                   | 3                        | Buck1                    | 500                | 500             |
| Buck2 | 1.5/1.35                 | OFF                     | N/A              | N/A                   | 3                        | Buck3                    | 500                | 500             |

## Startup

### CMI 104 Startup

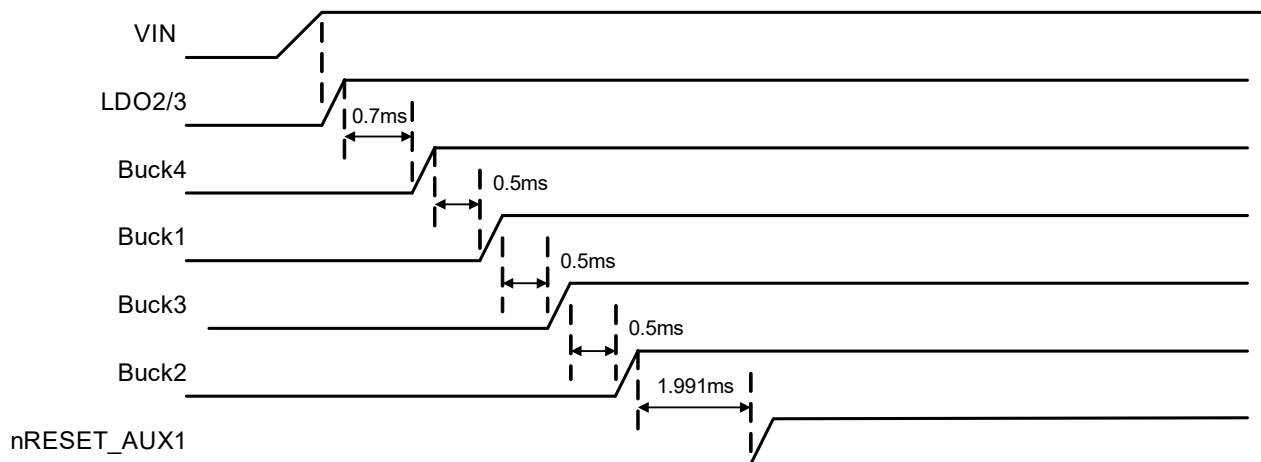

## SLEEP Mode

Enter SLEEP Mode by pulling PWREN low. The IC operates in Active mode when PWREN is high. Note that in the default configuration, nRESET\_AUX1 goes low when the IC enters Sleep mode. If the user requires nRESET\_AUX1 to stay high in Sleep mode, write a 1 into register 0x00h, bit 7.

## DVS Mode

CMI 104 does not include the DVS function. Note that the processor can change Buck2 and Buck3 output voltages on the fly with EXT\_PG and nRESET\_AUX2. This effectively provides independent DVS control for these two outputs.

### Buck2 VID Boot Voltage - EXT\_PG

The EXT\_PG input sets the Buck2 boot up voltage. When EXT\_PG = 0, Buck2 = 1.5V. When EXT\_PG = 1, Buck2 = 1.35V. EXT\_PG changes Buck2 at startup and during normal operation.

### Buck3 VID Boot Voltage - nRESET\_AUX2

The nRESET\_AUX2 input sets the Buck3 boot up voltage. When nRESET\_AUX2 = 0, Buck3 = 1.2V. When nRESET\_AUX2 = 1, Buck3 = 1.8V. nRESET\_AUX2 changes Buck3 at startup and during normal operation.

## POK Thresholds

POK\_UV = 4.25V

POK\_OV = 5.7V

## PG

The PG pin is not functional with CMI 104. Leave the PG pin floating.

## nRESET

nRESET is not functional in CMI 104. Leave the nRESET pin floating.

**nRESET\_AUX1**

nRESET\_AUX1 is asserted low when any regulator is out of regulation. The reset timing is 1991us. Note that in the default configuration, nRESET\_AUX1 goes low when the IC enters Sleep mode. If the user requires nRESET\_AUX1 to stay high in Sleep mode, write a 1 into register 0x00h, bit 7.

**EXT\_PG**

EXT\_PG is used for Buck2 boot voltage. See the Buck2 VID Boot Voltage section above.

**nRESET\_AUX2**

nRESET\_AUX2 is used for Buck3 boot voltage. See the Buck3 VID Boot Voltage section above.

**MODE**

The MODE pin must be tied to ground.

**GPIO**

The GPIO pin must be tied to ground.

**Default Mask Settings**

| CMI 104 Default Mask Settings |             |             |          |        |        |                  |          |          |
|-------------------------------|-------------|-------------|----------|--------|--------|------------------|----------|----------|
| nRESET                        | nRESET_AUX1 | nRESET_AUX2 | VIN_OV   | IRQ    | POK    | Thermal Shutdown | UV       | OV       |
| Masked                        | Masked      | Masked      | Unmasked | Masked | Masked | Unmasked         | Unmasked | Unmasked |

**Device ID**

The CMI 104 Device ID (register 0x7Dh) = 0xDh

**I2C Address**

The CMI 104 7-bit I2C address is 0x5Ah. This results in 0xB4h for a write address and 0xB5h for a read address.

**CMI 109: ACT8870QJ109-T**

CMI 109 is optimized for the Starblaze STAR1000/STAR1000P M.3, U.2, and AIC form factor solid state disk (SSD) drive controllers. It is designed to operate from a 3.3V input voltage.

**STAR1000 Configuration**

The following table shows how to connect the ACT8870QJ109 outputs to the STAR1000/STAR1000P.


|                              | STAR1000 /<br>STAR1000P<br>Voltage (V) | STAR1000 / STAR1000P Connections                                     |
|------------------------------|----------------------------------------|----------------------------------------------------------------------|
| EXT_PG                       | n/a                                    | EXT_PG sets Buck4 startup output voltage. Connect to VIO_IN or AGND. |
| nRESET_AUX1<br>Input Setting | n/a                                    | System Reset. Connects to RESETN pin.                                |
| nRESET_AUX2<br>Input Setting | n/a                                    | Buck3/LDO3 Enable Control. Connects to the GPIO_2 output.            |
| PWREN                        | n/a                                    | Buck1/Buck4/LDO2 Enable Control. Connects to the GPIO_1 output.      |
| IRQ                          | n/a                                    | Interrupt to the STAR1000/STAR1000P. Connect to GPIO_5               |
| Buck1                        | 2.7                                    | NFVDD                                                                |
| Buck2                        | 0.9                                    | PER/PSW2                                                             |
| Buck3                        | 1.2                                    | PSW3/PSQ2_PSW3                                                       |
| Buck4                        | 1.2/1.8                                | VDD_IO_FLASH                                                         |
| LDO1                         | 1.8                                    | PER                                                                  |
| LDO2                         | 1.8                                    | DDR_PLL_VDDR                                                         |
| LDO3                         | 2.5                                    | PSW3                                                                 |

**Sequencing**

| Rail  | Active Mode Voltage (V) | DVS Voltage (V) | DVS Trigger (V) | Sleep Mode Voltage (V) | DVS slew rate (mV/us) | Current Limit Setting (A) | Sequencing Input Trigger | StartUp Delay (us) | Soft-Start (us) |
|-------|-------------------------|-----------------|-----------------|------------------------|-----------------------|---------------------------|--------------------------|--------------------|-----------------|
| Buck2 | 0.9                     | 0.9             | N/A             | N/A                    | 3.5                   | 3.5                       | VIN_UVLO                 | 0                  | 800             |
| LDO1  | 1.8                     | N/A             | N/A             | N/A                    | N/A                   | 0.8                       | VIN_UVLO                 | 0                  | 330             |
| Buck1 | 2.7                     | 2.7             | N/A             | N/A                    | 3.5                   | 5.3                       | PWREN                    | 0                  | 500             |
| Buck3 | 1.2                     | 1.2             | N/A             | N/A                    | 3.5                   | 3                         | nRESET_AUX1              | 0                  | 500             |
| Buck4 | 1.8                     | 1.2             | EXT_PG          | N/A                    | 3.5                   | 3.5                       | PWREN                    | 0                  | 500             |
| LDO2  | 1.8                     | N/A             | N/A             | N/A                    | N/A                   | 0.2                       | PWREN                    | 0                  | 165             |
| LDO3  | 2.5                     | N/A             | N/A             | N/A                    | N/A                   | 0.2                       | nRESET_AUX1              | 0                  | 165             |

## Startup

### CMI 109 Startup

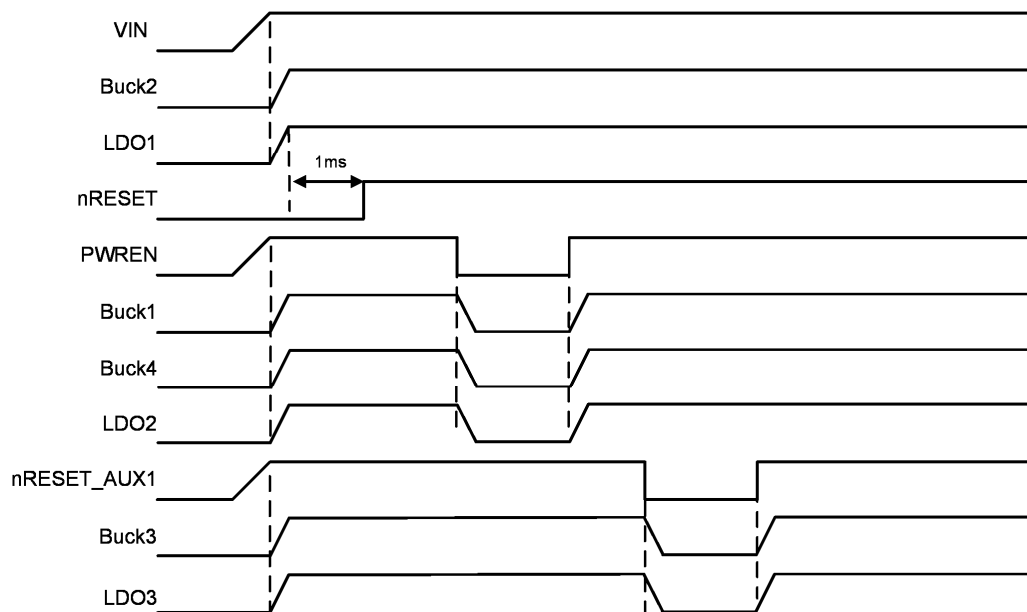

## SLEEP Mode

CMI 109 does not use SLEEP Mode.

## DVS Mode

CMI 109 can DVS Buck4. EXT\_PG is the DVS control input. When EXT\_PG = L, Buck4 = 1.8V. When EXT\_PG = H, Buck4 = 1.2V

## POK Thresholds

POK\_UV = 2.8V

POK\_OV = 3.6V

## PG

The PG pin is not functional with CMI 109. Leave the PG pin floating.

## POK

The POK pin is not functional with CMI 109. Leave the POK pin floating.

## EXT\_EN

The EXT\_EN pin is not functional with CMI 109. Leave the EXT\_EN pin floating.

## nRESET

nRESET is triggered from LDO1. It goes high 1ms after LDO1 goes into regulation. After power up, set register 0x00h to a value of 0x20h to prevent nRESET from asserting low during normal operation. This is required because different outputs are turned on and off in normal operation.

**nRESET\_AUX1**

nRESET\_AUX1 is the enable input for Buck3 and LDO3. It is active high.

**EXT\_PG**

EXT\_PG is the DVS control input for Buck4. When EXT\_PG = L, Buck4 = 1.8V. When EXT\_PG = H, Buck4 = 1.2V

**nRESET\_AUX2**

The nRESET\_AUX2 pin is not functional with CMI 109. Leave the nRESET\_AUX2 pin floating.

**MODE**

The MODE pin must be tied to ground.

**GPIO**

The GPIO pin must be tied to ground.

**Default Mask Settings**


| CMI 109 Default Mask Settings |             |             |          |        |        |                  |          |          |
|-------------------------------|-------------|-------------|----------|--------|--------|------------------|----------|----------|
| nRESET                        | nRESET_AUX1 | nRESET_AUX2 | VIN_OV   | IRQ    | POK    | Thermal Shutdown | UV       | OV       |
| Masked                        | Masked      | Masked      | Unmasked | Masked | Masked | Unmasked         | Unmasked | Unmasked |

**Device ID**


The CMI 109 Device ID (register 0x7Dh) = 0x12h

**I2C Address**


The CMI 109 7-bit I2C address is 0x5Ah. This results in 0xB4h for a write address and 0xB5h for a read address.

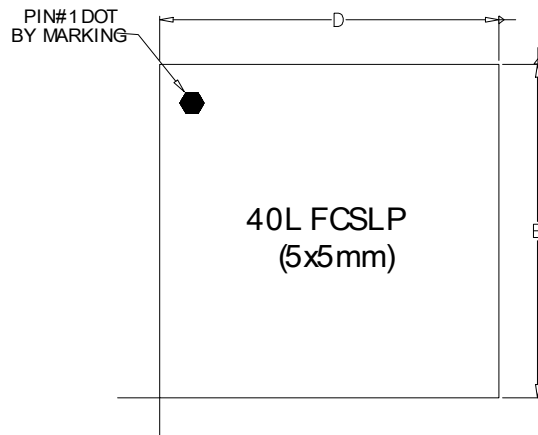**PACKAGE OUTLINE AND DIMENSIONS QFN55-40**


Top View

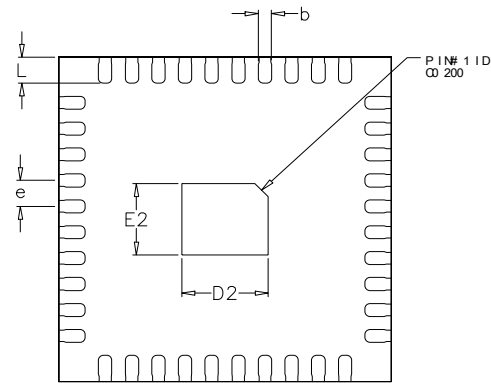

Bottom View

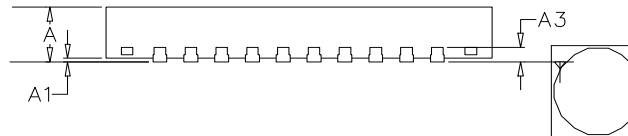

Side View

| SYMBOL | DIMENSION IN MILLIMETERS |       | DIMENSION IN INCHES |       |
|--------|--------------------------|-------|---------------------|-------|
|        | MIN                      | MAX   | MIN                 | MAX   |
| A      | 0.800                    | 0.900 | 0.031               | 0.035 |
| A1     | -                        | 0.050 | -                   | 0.002 |
| A3     | 0.203 REF                |       | 0.008 REF           |       |
| D      | 4.950                    | 5.050 | 0.195               | 0.199 |
| E      | 4.950                    | 5.050 | 0.195               | 0.199 |
| D2     | 1.250                    | 1.350 | 0.049               | 0.053 |
| E2     | 1.050                    | 1.150 | 0.041               | 0.045 |
| b      | 0.150                    | 0.250 | 0.006               | 0.010 |
| e      | 0.400 BSC                |       | 0.016 BSC           |       |
| L      | 0.350                    | 0.450 | 0.014               | 0.018 |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.