

3A Dual Monolithic  
 Step-Down DC/DC Converter

## DESCRIPTION

Demo circuit 964A is a dual monolithic step-down DC/DC converter featuring LT3501. The demo circuit is designed for 3.3V and 1.8V outputs from a 4.5V to 24V input. The current capability of each channel is up to 3A. Independent input voltage, feedback, soft-start and power good pins for each channel simplify complex power supply tracking/sequencing requirements.

Both converters are synchronized to either a common external clock input or a resistor programmable 250kHz to 1.5MHz internal oscillator. At all frequencies, a 180° phase shift between channels is maintained, reducing voltage ripple and component size. Programmable frequency allows for optimization between efficiency and external component size.

Minimum input-to-output voltage ratios are improved by allowing the switch to stay on through multiple clock cy-

cles, only switching off when the boost capacitor needs recharging, resulting in ~95% maximum duty cycle.

Each output can be independently disabled using its own soft-start pin, or by using the SHDN pin the entire part can be placed in a low quiescent current shutdown mode.

The LT3501 datasheet gives a complete description of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for demo circuit 964A.

**Design files for this circuit board are available. Call the LTC factory.**

---

 LTC and LT are registered trademarks of Linear Technology Corporation.

 Performance Summary (  $T_A = 25^{\circ}\text{C}$  )

| PARAMETER                                                      | CONDITION                                                                     | VALUE                    |
|----------------------------------------------------------------|-------------------------------------------------------------------------------|--------------------------|
| Minimum Input Voltage                                          |                                                                               | 4.5V                     |
| Maximum Input Voltage                                          |                                                                               | 24V                      |
| Output Voltage $V_{\text{OUT}1}$                               |                                                                               | $3.3\text{V} \pm 4\%$    |
| Output Voltage $V_{\text{OUT}2}$                               |                                                                               | $1.8\text{V} \pm 4\%$    |
| Switching Frequency                                            |                                                                               | $500\text{kHz} \pm 20\%$ |
| Maximum Output Current $I_{\text{out}1}$ and $I_{\text{out}2}$ | $V_{\text{IN}}=4.5\text{~}16\text{V}$<br>$V_{\text{IN}}=16\text{~}24\text{V}$ | 3.0A<br>2.8A             |
| Voltage Ripple $V_{\text{OUT}1}$                               | $V_{\text{IN}}=12\text{V}$ , $I_{\text{out}1}=3\text{A}$                      | <10mV                    |
| Voltage Ripple $V_{\text{OUT}2}$                               | $V_{\text{IN}}=12\text{V}$ , $I_{\text{out}2}=3\text{A}$                      | <10mV                    |

## QUICK START PROCEDURE

Demo circuit 964A is easy to set up to evaluate the performance of the LT3501. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

**NOTE .** When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the  $V_{IN}$  or  $V_{OUT}$  and GND terminals. See Figure 2 for proper scope probe technique.

1. Place JP1 on the COMBINED position.
2. With power off, connect the input power supply to  $V_{IN1}$  and GND. (Connect another input power supply to  $V_{IN2}$  and GND if INDEPENDENT is selected.)

3. Turn on the power at the input.

**NOTE .** Make sure that the input voltage does not exceed 24V.

4. Check for the proper output voltages.

**NOTE .** If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

5. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.


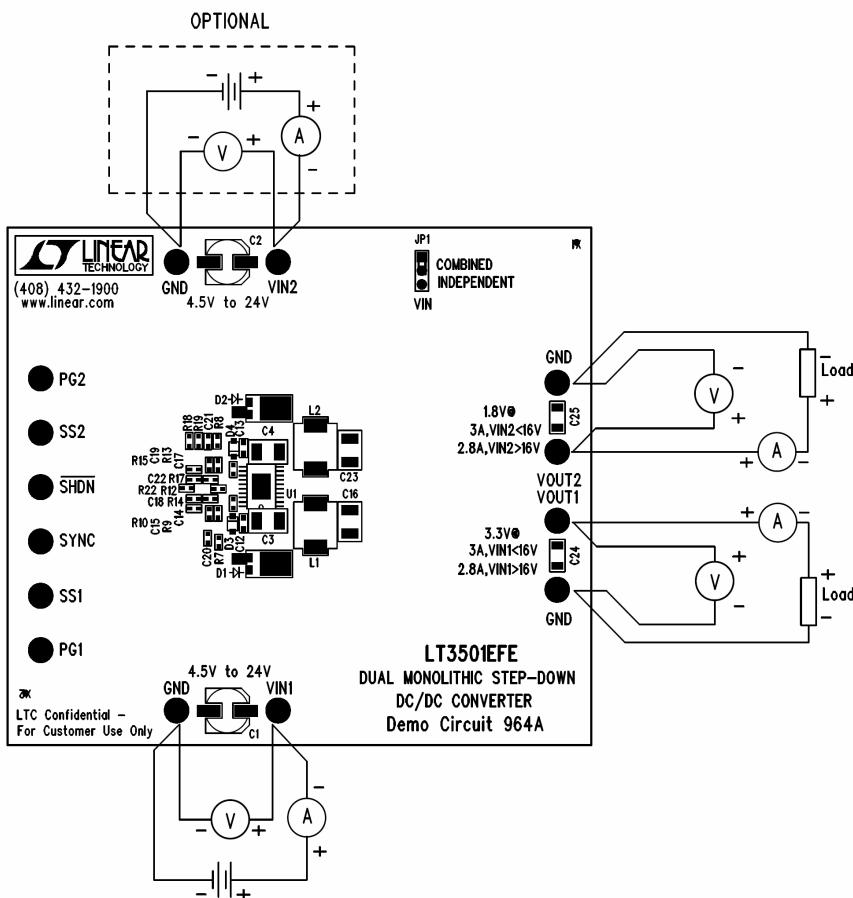



Figure 1. Proper Measurement Equipment Setup



**Figure 2. Measuring Input or Output Ripple**

## ADDITIONAL NOTES

1. Install a 10k resistor at R22 if the board is synchronized from an external signal generator.
2. Different tracking and sequencing schemes can be exercised. However, the Vout1 should stay on for proper operation of Vout2.

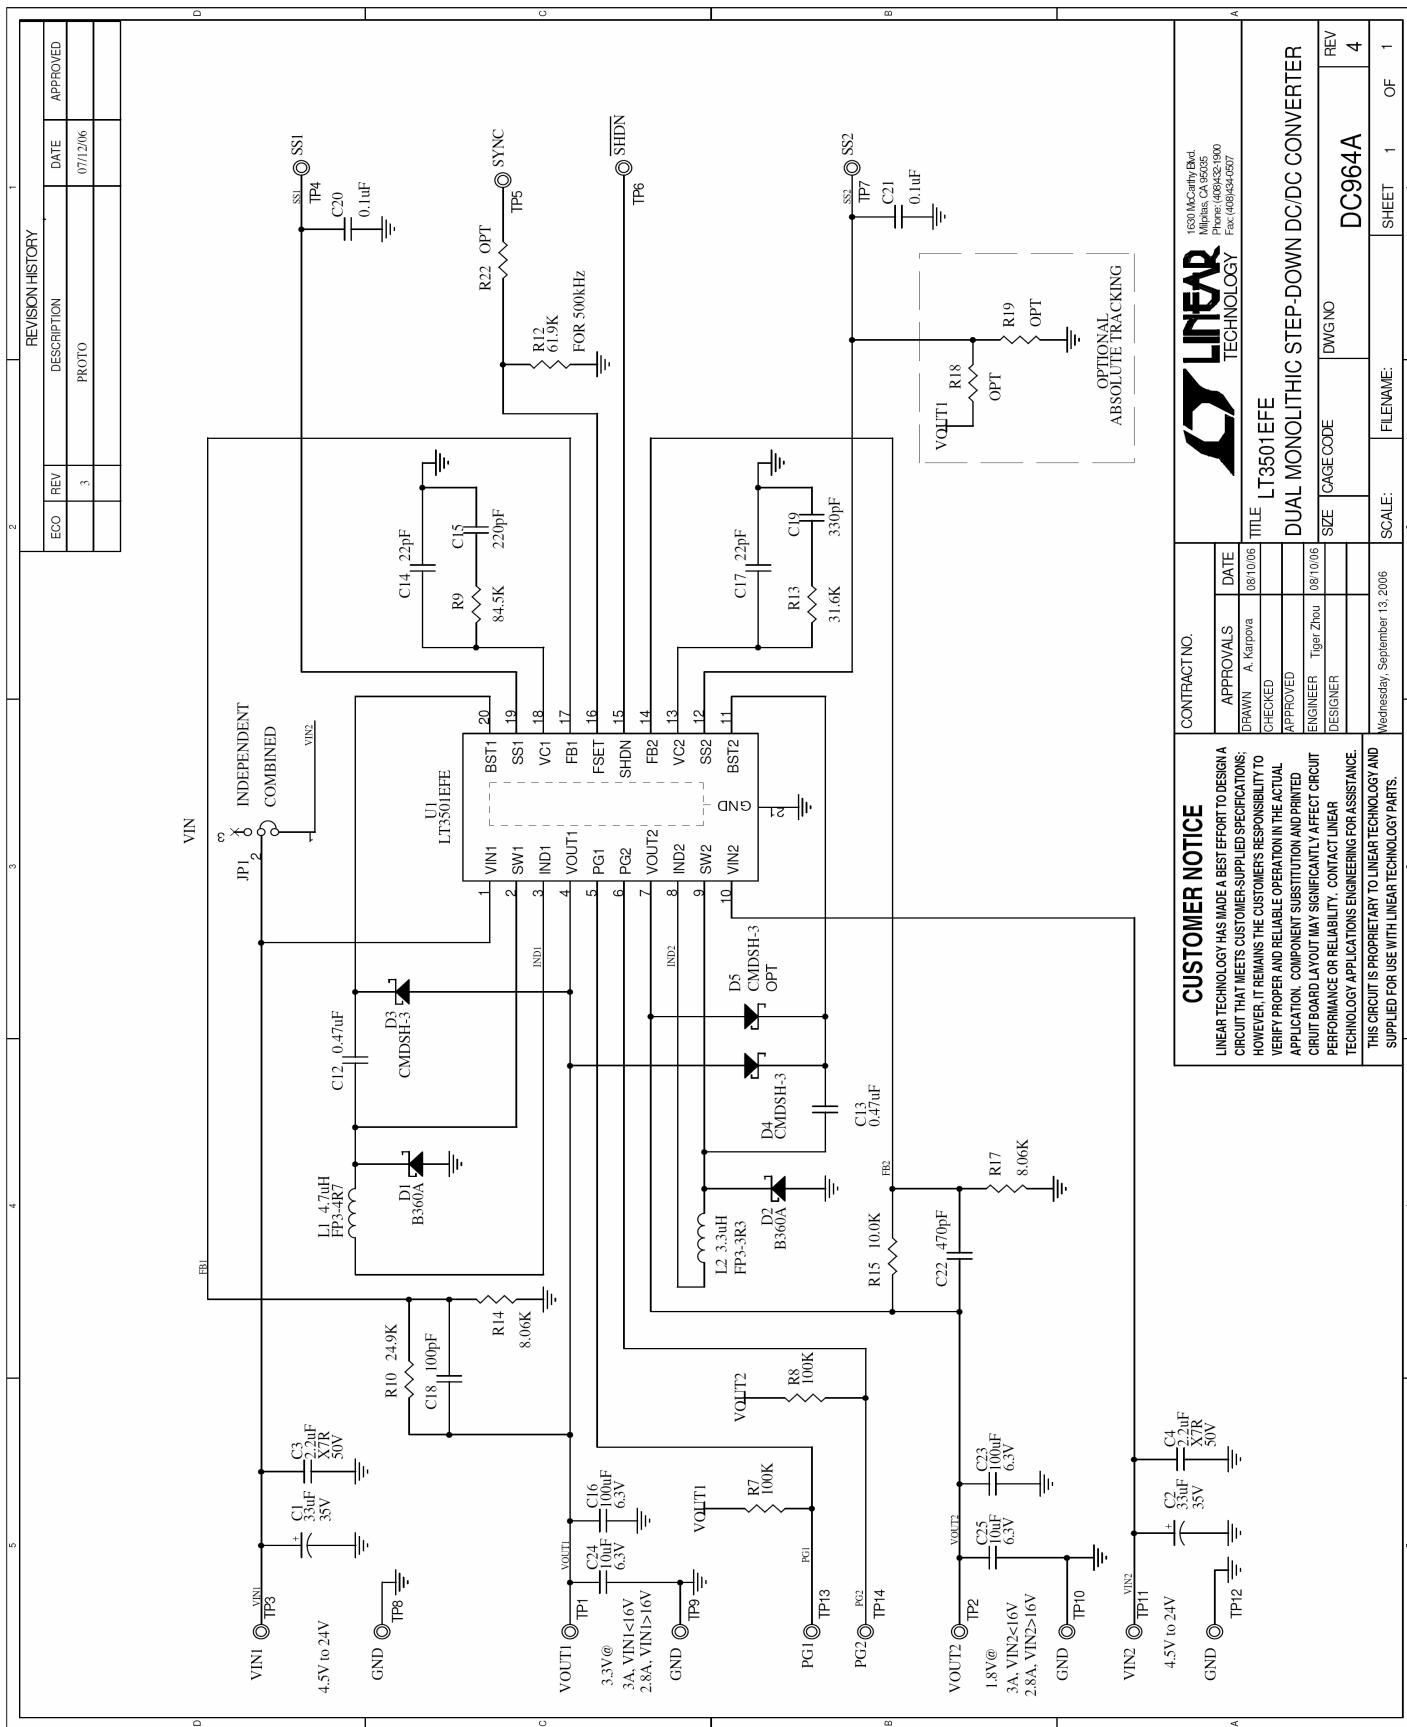
**CUSTOMER NOTICE**

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THE CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.



TECHNOLOGY

1630 McCarthy Blvd.  
Milpitas, CA 95035  
Phone: (408) 434-1900  
Fax: (408) 434-0537

A

LT3501EFE  
DUAL MONOLITHIC STEP-DOWN DC/DC CONVERTER

REV 4

SHEET 1 OF 1

1

2

3

4

5



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.