


SANYO Semiconductors

DATA SHEET

An ON Semiconductor Company

Bi-CMOS IC

LV7109E — AC Switch Europe SCART Standard

Overview

The LV7109E is a rationalized IC of AC switch LV7108 complying with the Europe SCART standard.

Features and functions

- Video/Audio Canal-SW
- 6dB-VideoAmp
- 6MHz/12MHz/27MHz-LowPassFilter
- 9ch VideoDriver (AV1/AV2/Line/RGB/Component)
- V-Sync. Detection
- 3ch Stereo Audio Input
- 2ch Stereo Audio Output

Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage 1	V _{CC1} max		6.0	V
Maximum supply voltage 2	V _{CC2} max		13.0	V
Recommended supply voltage 1	V _{CC1}		5.0	V
Recommended supply voltage 2	V _{CC2}		12.0	V
Operating supply range 1	V _{CC1} opg		4.5 to 5.3	V
Operating supply range 2	V _{CC2} opg		11.1 to 12.5	V
Allowable power dissipation	Pd max	* With specified substrate	1070	mW
Operating temperature	T _{opr}		-20 to +75	°C
Storage temperature	T _{stg}		-40 to +150	°C

* With specified substrate : 76.1mm × 114.3mm × 1.6mm, glass epoxy.

- Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment. The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for new introduction or other application different from current conditions on the usage of automotive device, communication device, office equipment, industrial equipment etc. , please consult with us about usage condition (temperature, operation time etc.) prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.
- Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

SANYO Semiconductor Co., Ltd.
<http://semicon.sanyo.com/en/network>

LV7109E

Electrical Characteristics at Ta = 25°C, V_{CCV} = 5.0V, V_{CCA} = 12V

Parameter	Symbol	Input point	Output point	Test condition	Ratings			Unit
					min	typ	max	
Current dissipation 1 (5V)	I _{CC1}			Non-signal	69.7	82.0	94.3	mA
Current dissipation 2 (ALL5V)	I _{CC2}			Non-signal	11.1	13.0	15.0	mA
Current dissipation 3 (12V)	I _{CC3}			Non-signal	7.7	9.0	10.4	mA
Video Canal SW part								
Output voltage 1	VDCC	17 38 40	12	AV1, AV2-OUT (Sync tip)	0.5	0.7	0.9	V
Voltage gain	VGC			V _{IN} = 1Vp-p, f = 100kHz, AV1, AV2-OUT	5.5	6.0	6.5	dB
Frequency characteristics 1	VFC1			V _{IN} = 1Vp-p, f = 10MHz/100kHz (P17, P19: Through)	-1.0	0.0	+1.0	dB
Frequency characteristics 2	VFC2			V _{IN} = 1Vp-p, f = 6MHz/100kHz (P38, P40: 6MHz-LPF)	-1.5	0.0	+1.5	dB
DG Differential gain	DGC	19	14	V _{IN} = Video : 1Vp-p	-1	0	+1	%
DP Differential phase	DPC	38		V _{IN} = Video : 1Vp-p	-1.5	0	+1.5	°C
Cross talk between channel	CTC	40		Selected input = GND Non-selected input = 1Vp-p, f = 4.43MHz		-60	-50	dB
Picture S/N	VSNC			V _{IN} = Video (50%White)		-70	-65	dB
Maximum output level 1	V _O MAXC1	17 19	12 14	Output level (Trough output) whose linearity exceeds 1% V _{IN} = Linearity (lamp) signal Output level at linearity 1%	2.8	3.0		Vp-p
Maximum output level 2	V _O MAXC2	38 40	12 14	Output level (ENC output) whose linearity exceeds 1% V _{IN} = Linearity (lamp) signal Output level at linearity 1%	2.6	2.7		Vp-p
Video INPUT SW part								
Output voltage 1	VDCI1	17, 19, 21	35	Composite (Sync-Tip)	0.8	1.0	1.2	V
Output voltage 2	VDCI2	17, 19, 21	35	Y (Sync-Tip)	0.8	1.0	1.2	V
Output voltage 3	VDCI3	3	33	Chroma (Center)	1.8	2.1	2.4	V
Voltage gain 1	VGI1	17, 19, 21 3	33 35	V _{IN} = 1Vp-p, f = 100kHz, load = 10kΩ	-0.5	0.0	+0.5	dB
Frequency characteristics	VFI	17, 19, 21 3	33 35	V _{IN} = 1Vp-p, f = 10MHz/100kHz	-1.0	0.0	+1.0	dB
DG Differential Gain	DGSW	17, 19, 21	35	V _{IN} = Video :1Vp-p	-1	0	+1	%
DP Differential Phase	DPSW	17, 19, 21	35	V _{IN} = Video :1Vp-p	-1.5	0	+1.5	°C
Cross talk between channel	CTAD	17, 19, 21 3	33 35	Selected input = GND Non-selected input = 1Vp-p, f = 4.43MHz		-60	-50	dB
Picture S/N	VSNC	17, 19, 21	35	V _{IN} = Video (50%White)		-66	-60	dB
Maximum output level	V _O MAXSW	17, 19, 21	35	Output level (ENC output) whose linearity exceeds 1% V _{IN} = Linearity (lamp) signal Output level at linearity 1%	1.8	2.0		Vp-p
Video Driver part								
Output voltage 1	VDCD1	64, 46 1, 44 3, 42	6 8 10	RGB (Pedestal)	0.6	0.8	1.0	V
Output voltage 2	VDCD2	40	16 27	CVBS (Sync tip) Y (Sync tip)	0.5	0.7	0.9	V
Output voltage 3	VDCD3	3 46 42	10 23 25	C, Pr, Pb (Center)	1.7	2.0	2.3	V
Output voltage 4	VDCD4	40	27	Y (Sync tip)	0.8	1.0	1.2	V
Voltage gain 1	VGD1	64, 46 1, 44 3, 42 40, 38	6, 23 8, 27 10, 25 12, 14, 16	For V _{IN} = 1Vp-p and f = 100kHz Line output only: 2 drives, Other outputs: 1drive	5.5	6.0	6.5	dB

Continued on next page.

LV7109E

Continued from preceding page.

Parameter	Symbol	Input point	Output point	Test condition	Ratings			Unit
					min	typ	max	
Frequency characteristics 1	VFD1	46, 44, 42 40, 38	6, 8, 10 23, 27, 25 12, 14 16	$V_{IN} = 1V_{p-p}$, $f = 6MHz/100kHz$ when 6MHzLPF is selected	-1.5	0.0	+1.5	dB
Frequency characteristics 2	VFD2	46 44 42	6 8 10	$f = 27MHz/100kHz$ when 6MHzLPF is selected		-35	-25	dB
Frequency characteristics 3	VFD3	46 44 42	23 27 25	$f = 12MHz/100kHz$ when 12MHzLPF is selected	-1.5	0.0	+1.5	dB
Frequency characteristics 4	VFD4	46 44 42	23 27 25	$f = 54MHz/100kHz$ when 12MHzLPF is selected		-40	-30	dB
Frequency characteristics 5	VFD5	46 42	23 25	$f = 13.5MHz/100kHz$ when 13.5MHzLPF is selected	-1.5	0.0	+1.5	dB
Frequency characteristics 6	VFD6	46 42	23 25	$f = 74MHz/100kHz$ when 13.5MHzLPF is selected		-40	-30	dB
Frequency characteristics 7	VFD7	44	27	$f = 25MHz/100kHz$ when 27MHzLPF is selected	-1.5	0.0	+1.5	dB
Frequency characteristics 8	VFD8	44	27	$f = 74MHz/100kHz$ when 27MHzLPF is selected		-40	-30	dB
Group delay 1	VGDD1	46, 44, 42 40, 38	6, 8, 10 23, 27, 25 12, 14 16	$f = 6MHz/100kHz$ when 6MHzLPF is selected		20	35	ns
Group delay 2	VGDD2	46 44 42	23 27 25	$f = 12MHz/100kHz$ when 12MHzLPF is selected		14	25	ns
Group delay 3	VGDD3	46 42	23 25	$f = 27MHz/100kHz$ when 13.5MHzLPF is selected		10	18	ns
Group delay 4	VGDD4	44	27	$f = 27MHz/100kHz$ when 27MHzLPF is selected		10	18	ns
Mute attenuation	VMUD		ALL	$V_{IN} = 1V_{p-p}$, $f=4.43MHz$		-60	-50	dB
DG Differential gain	DG1		ALL	$V_{IN} = \text{Video} : 1V_{p-p}$	-1	0	+1	%
DP Differential phase	DP1		ALL	$V_{IN} = \text{Video} : 1V_{p-p}$	-1.5	0	+1.5	°C
Cross talk between channel	CTD		ALL	$V_{IN} = 1V_{p-p}$, $f=4.43MHz$ Driver output terminated with 75Ω		-60	-50	dB
Picture S/N	VSND		ALL	$V_{IN} = \text{Video} (50\% \text{White})$		-70	-65	dB
Maximum output level 1	$V_{O}MAXD1$	64, 46 1, 44 3, 42	6 8 10	Output level (RGB) whose linearity exceeds 1% $V_{IN} = \text{Linearity (lamp) signal}$ Output level at linearity 1%	2.5	2.7		Vp-p
Maximum output level 2	$V_{O}MAXD2$	40	16 27	Output level (brightness, CVBS) whose linearity exceeds 1% $V_{IN} = \text{Linearity (lamp) signal}$ Output level at linearity 1%	2.6	2.8		Vp-p
Maximum output level 3	$V_{O}MAXD3$	46 42	23 25	Output level (color difference) whose linearity exceeds 1% $V_{IN} = \sin 10kHz$ Output level at linearity 1%	2.0	2.5		Vp-p
Sync-SEP part								
V.SYNC output High voltage	VVSH	17, 19, 21	34		4.3	4.7	5.0	V
V.SYNC output Low voltage	VVSL	17, 19, 21	34		0.0	0.3	0.6	V
V.SYNC output delay time	TDVS	17, 19, 21	34	Note 2)	7	15	25	μs
V.SYNC output pulse width	TWVS	17, 19, 21	34	$V_{IN} = \text{PAL Video} : 1V_{p-p}$ Note 2)	125	155	185	μs

Note 2) When pin 10 is open

Continued on next page.

LV7109E

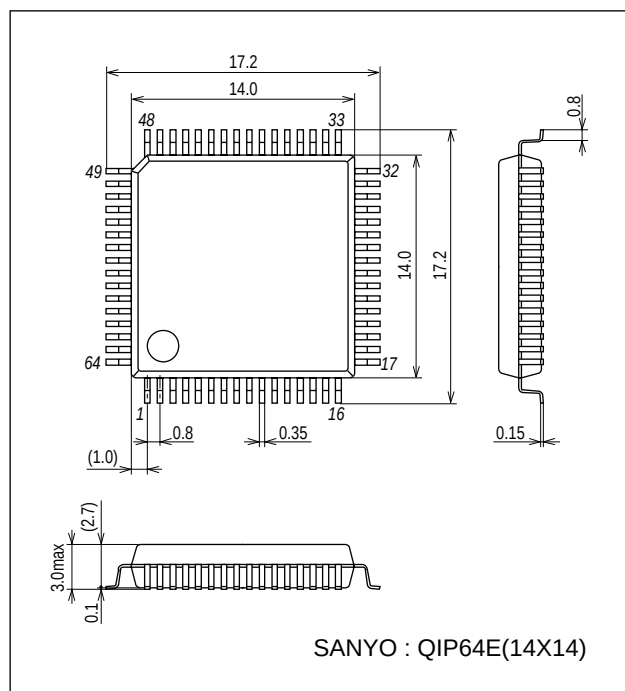
Continued from preceding page.

Parameter	Symbol	Input point	Output point	Test condition	Ratings			Unit
					min	typ	max	
Audio canal switches part								
Maximum output level	V _O MAXC	R-Ch. 49, 50, 51	R-Ch. 58, 61	AV1, AV2-OUT (L, R) Output level at f = 1kHz, THD = 1% BW = 400 to 30kHz	2.2	2.5		Vrms
Channel balance	CVSW			V _I N = 2Vrms, f = 1kHz Lch Gain-Rch Gain	-1.5	0.0	+1.5	dB
Total harmonic distortion	THDAC			V _I N = 2Vrms, f = 1kHz, BW = 400 to 30kHz		0.003	0.01	%
Output noise voltage	VNAC			Rg = 0Ω, BW = JIS-A		-100	-80	dBV
Mute attenuation	VMUAC	L-Ch. 54, 55, 56	L-Ch. 59, 62	V _I N = 2Vrms, f = 1kHz, BW = JIS-A 20log (V _O UT/V _I N)		-90	-75	dB
Input impedance	Z _I N				80	100	120	kΩ
Cross talk between channel and selctors	CTSW			V _I N = 2Vrms, f = 1kHz Rg = 0Ω, BW = JIS-A		-110	-80	dB
Output off set voltage	V _O FSET			Off set voltage at the time of changeover SW.	-20	0	+20	mV
External control part								
I ² C-BUS High level input voltage	V _I H	36 37			2.5		V _{CC} ⁵	V
I ² C-BUS Low level input voltage	V _I L	36 37			GND		0.8	V
FSS output H voltage	VHFSS		7	Serial control select FSS OUT H, load = 10kΩ external output resistor 470 recommended	10.6	11.1	11.6	V
FSS output M voltage	VMFSS		7	Serial control select FSS OUT M, load = 10kΩ external output resistor 470 recommended	5.5	6.3	7.0	V
FSS output L voltage	VLFS		7	Serial control select FSS OUT, load = 10kΩ	0.0	0.1	0.5	V
FSS risinge time	TFSSLH		7				1.0	ms
FB output H voltage	VHFB		18	Serial control select FB OUT H, load = 150Ω	3.0	4.0	5.0	V
FB output L voltage	VLFB		18	Serial control select FB OUT L, load = 150Ω	0.0	0.2	0.4	V
FB external control L range	VLFBIN	20	18	Pin 20 input voltage range at which the pin 18 output becomes "L".	0.0		0.5	V
FB external control H range	VHFBIN	20	18	Pin 20 input voltage range at which the pin 18 output becomes "H".	1.0		3.0	V
External control output H voltage	V _{EXT} H		26	2kΩ load for data 1	4.0	4.5	5.0	V
External control output L voltage	V _{EXT} L		26	2kΩ load for data 0	0.0	0.3	1.0	V
Internal reference regulator								
REG2.5V	VREG25		2 31		2.3	2.5	2.7	V
REG9.0V	VREG90		52 57		8.7	9.0	9.3	V
VRE4.5	VREG45		48		4.3	4.5	4.7	V

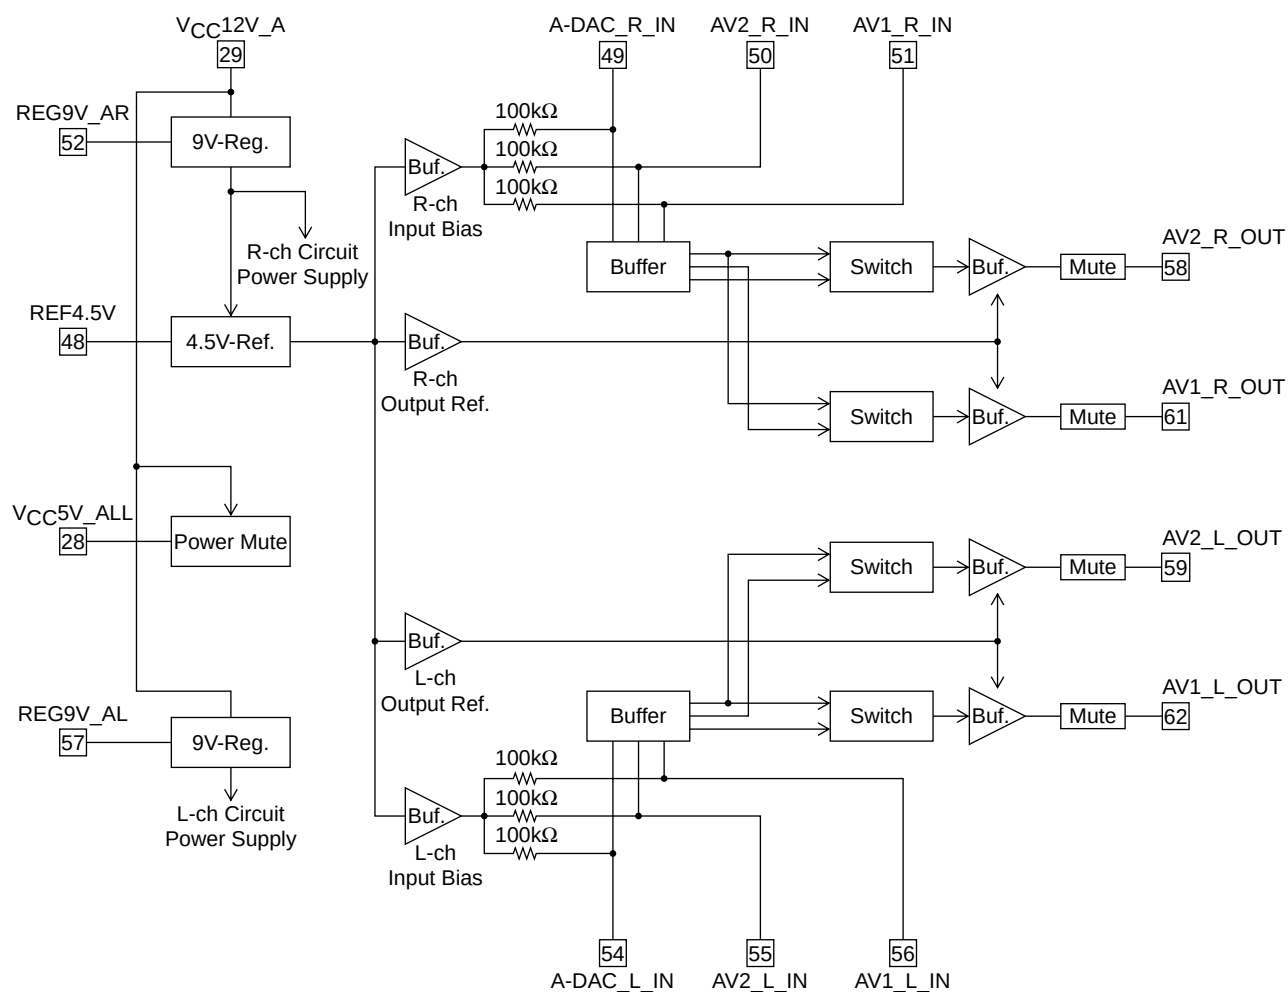
Package Dimensions

unit : mm (typ)

3159A



AudioPower Supply Block Diagram

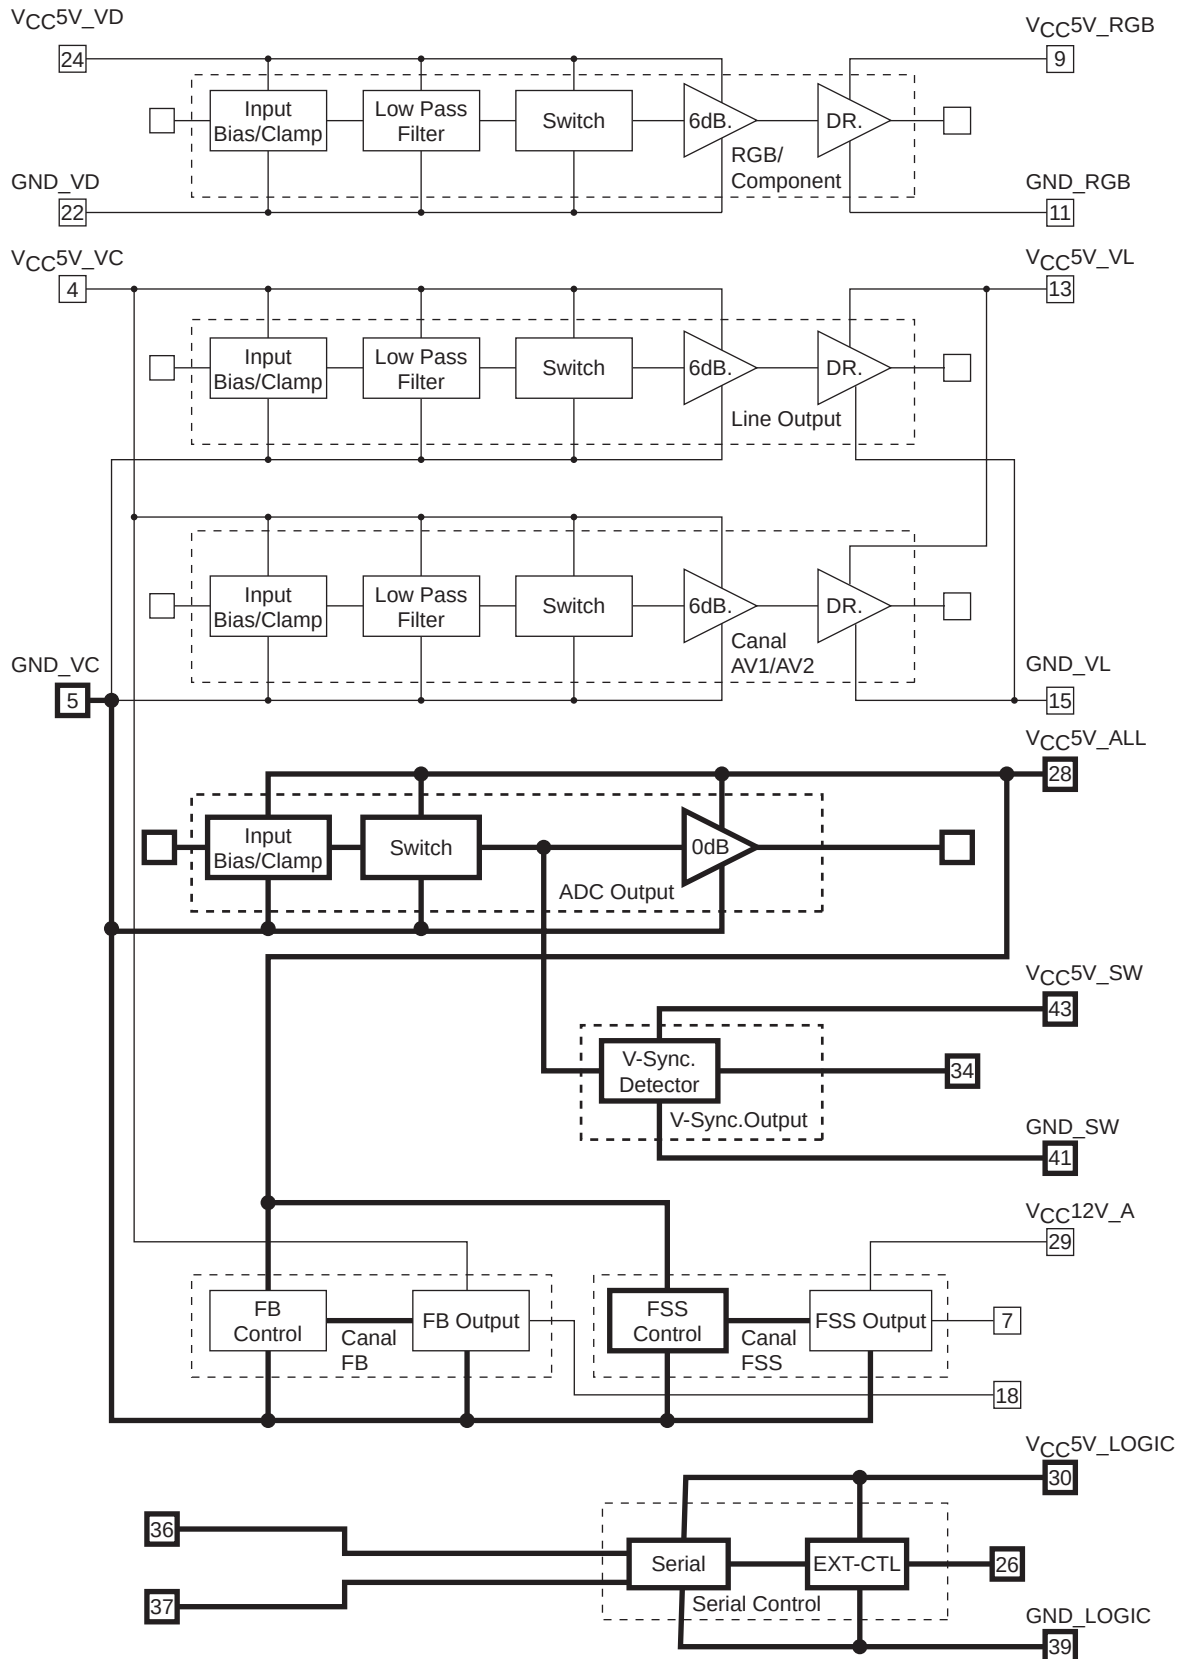


LV7109E

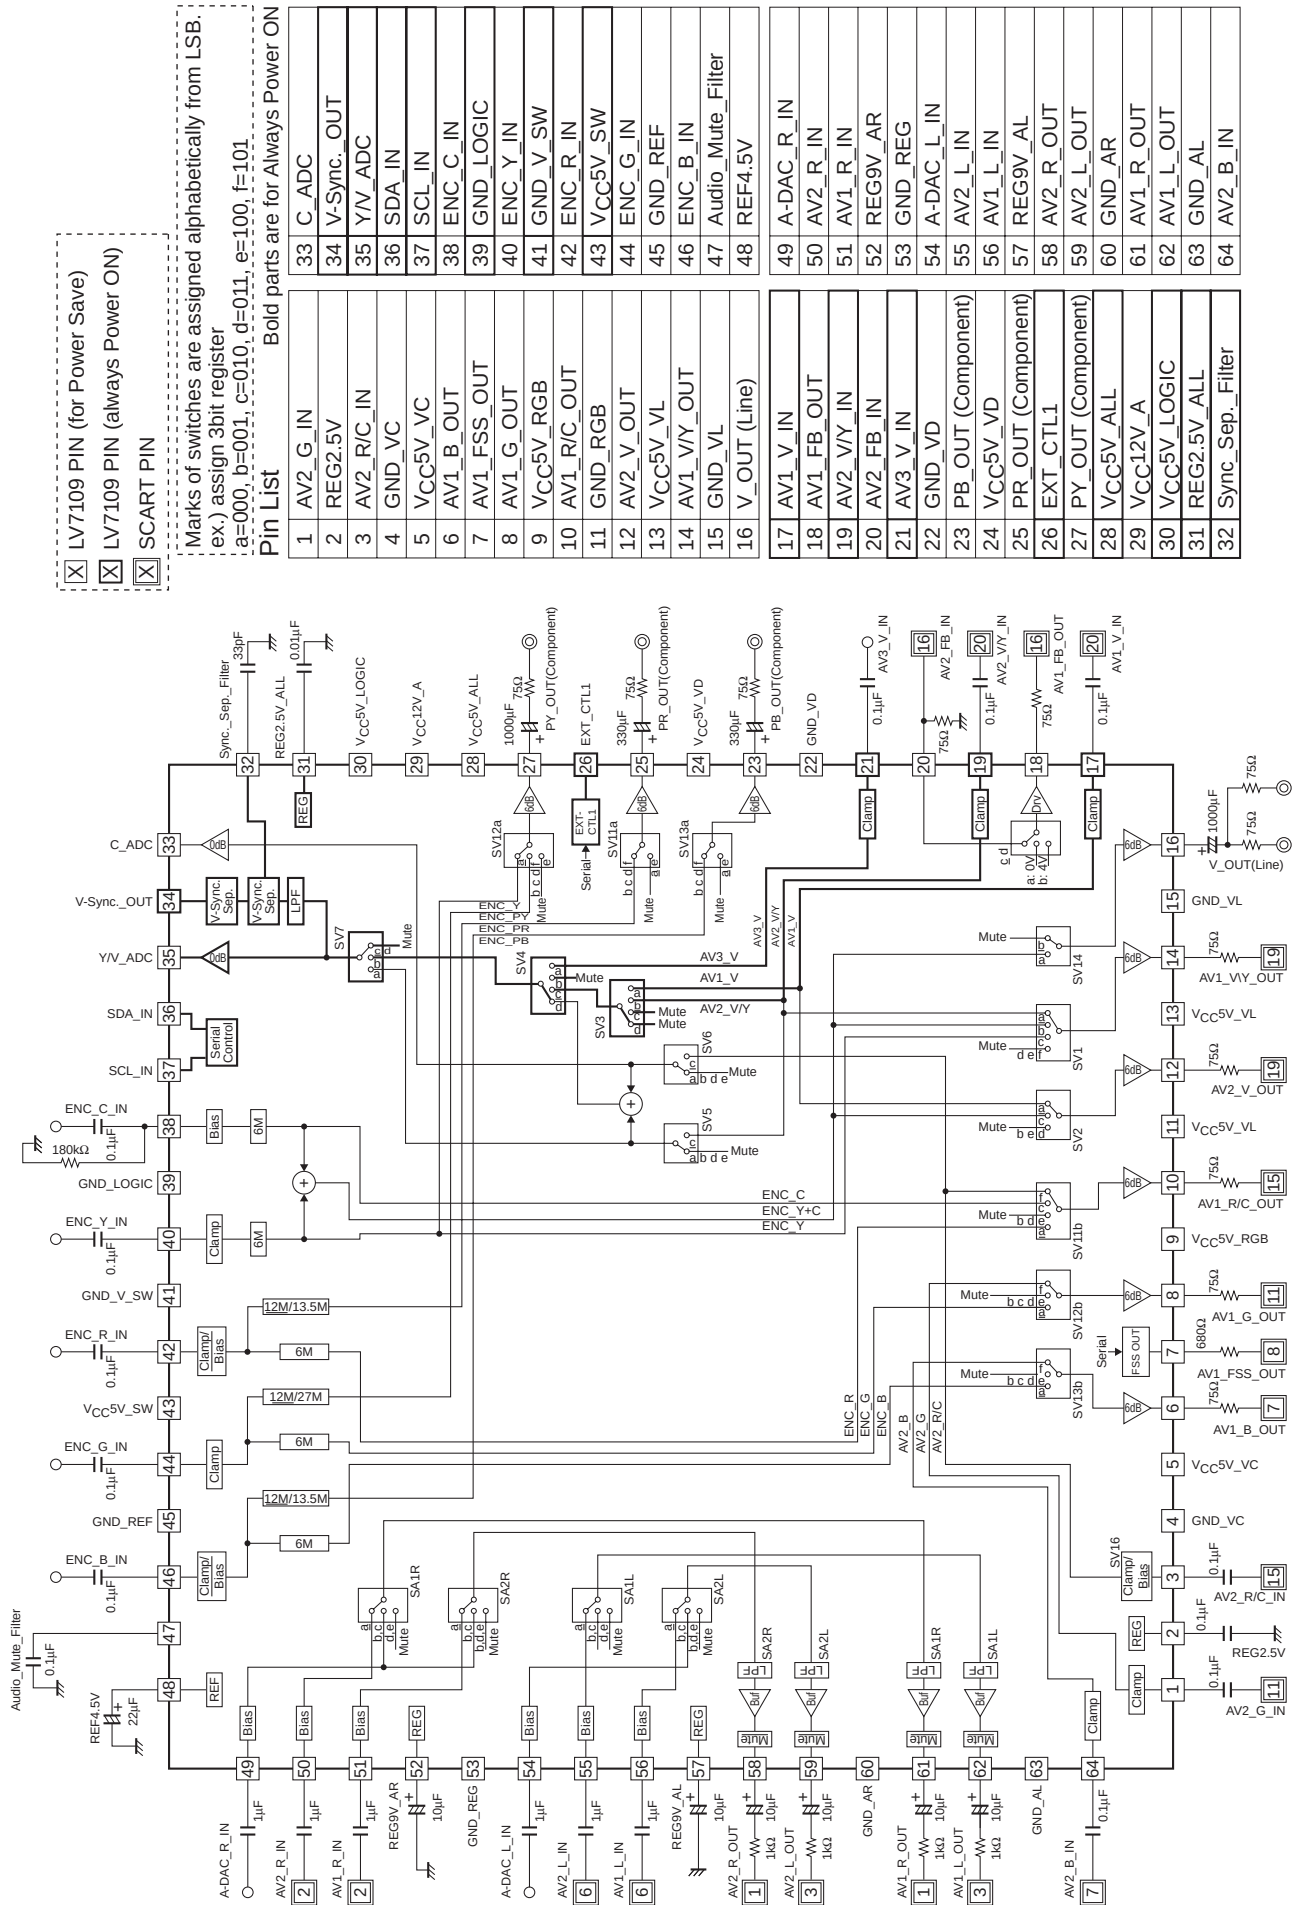
Video Power Supply Block Diagram

The thick line indicates the circuit operative in the power save mode.

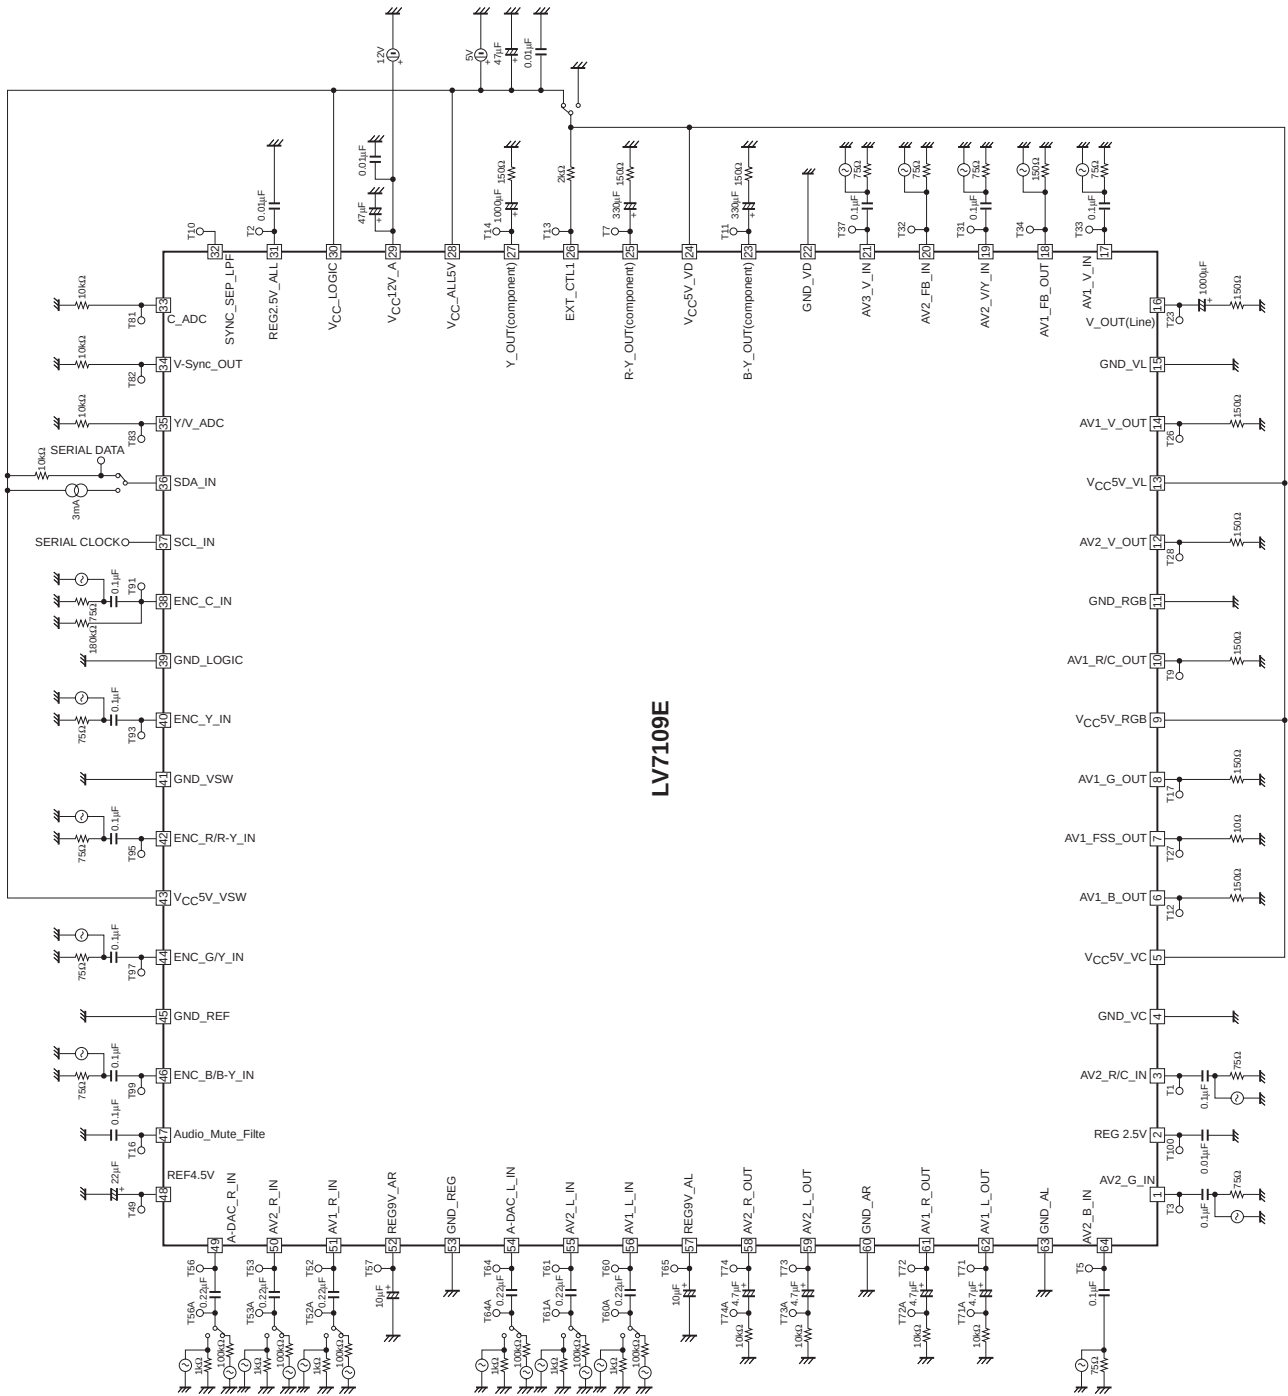
Applied power to V_{CC5V_All}, V_{CC5V_SW} and V_{CC_LOGIC} only in the power save mode.



Block Diagram



Test Circuit



LV7109E

LV7109E Serial Control Table

* indicates initial.

ADDRESS		8	7	6	5	4	3	2	1	Symbol	Input				Output	Remarks	
Group 1 0000 0001	SV1							0	0	a	P19	AV2_V/Y_IN			P10: AV1_R/C_OUT		*
								0	0	b	-	ENC_Y+C_MIX					
								0	1	C	P40	ENC_Y					
								0	1	d	-	MUTE					
								1	0	e	-	MUTE					
								1	0	f	-	MUTE					
								1	1	X	-	PROHIBIT					
	SV2			0	0	0				a	P17	AV1_V_IN			P12: AV2_V_OUT		*
				0	0	1				b	-	MUTE					
				0	1	0				c	-	ENC_Y+C_MIX					
				0	1	1				d		MUTE					
				1	0	0				e		MUTE					
				1	0	1				-		PROHIBIT					
	SV3			0	0					a	P17	AV1_V_IN			SV4		
				0	1					b	P19	AV2_V/Y_IN					*
				1	0					c	-	N/A					
				1	1					d	-	N/A					

ADDRESS		8	7	6	5	4	3	2	1	Symbol	Input						Output	Remarks	
Group 2 0000 0010 VIDEO INPUT-SW	SV4							0	0	a	P21	AV3_V_IN					SV7		
								0	1	b	-	N/A							
								1	0	C	According to SV3 control								*
								1	1	d	-	SV5/6 MIX							
	SV2				0	0	0			a	-	MUTE		MUTE			Y+C MIX SV7 P33: C_ADC		
					0	0	1			b	-	MUTE		MUTE					
					0	1	0			c	P19	AV2_V/Y_IN		AV2_R/C_IN					
					0	1	1			d	-	MUTE		MUTE					
					1	0	0			e	-	MUTE		MUTE		*			
					1	0	1			and after	-	-	PROHIBIT		PROHIBIT				
	SV3				0	0				a	SV5	Y				P35: Y/V_ADC			
					0	1				b	SV4	Composit Video							
					1	0				c	-	MUTE					*		
					1	1				d	-	MUTE							
	SV16 Note 1)	0								-	-	THROUGH						*	
		1								-	-	CLAMP input							

ADDRESS		8	7	6	5	4	3	2	1	Symbol	Input						Output	Remarks		
Group 3 0000 0011	12/27MHz LPF SW								0	-								x = 12MHz	*	
									1	-								x = 27MHz		
	RGB output								0	-	According to G3D3-5 control									
									1	-	Switch of SV11b-13b set to "f"								f: AV2_RGB (EXTERNAL)	*
	SV11a SV12a SV13a				0	0	0			a	-	MUTE	P40	ENC_Y_IN		-	MUTE	P25: PR_OUT P27: PY_OUT P23: PB_OUT	a: ENC_Y	*
					0	0	1			b	P42	ENC_R_IN	P44	ENC_G_IN	P46	ENC_B_IN	b: Component (× MLPF)			
					0	1	0			c	P42	ENC_R_IN	P44	ENC_G_IN	P46	ENC_B_IN	c: Component (× MLPF)			
					0	1	1			d	P42	ENC_R_IN	P44	ENC_G_IN	P46	ENC_B_IN	d: Component (× MLPF)			
					1	0	0			e	-	MUTE	-	MUTE	-	MUTE	e: mute			
					1	0	1			f	P42	ENC_R_IN	P44	ENC_G_IN	P46	ENC_B_IN	f: Component (× MLPF)			
					1	1	X			-	-	PROHIBIT	-	PROHIBIT	-	PROHIBIT				
	SV11b SV12b SV13b * effective at G3D2 = "0"				0	0	0			a	P42	ENC_R_IN	P44	ENC_G_IN	P46	ENC_B_IN	P10: AV1_R/C_OUT P8: AV1_G_OUT P6: AV1_B_OUT	a: ENC_RGB (6MLPF)	*	
					0	0	1			b	-	MUTE	-	MUTE	-	MUTE		b: mute		
					0	1	0			c	P38	ENC_C_IN	-	MUTE	-	MUTE		c: ENC_C		
					0	1	1			d	-	MUTE	-	MUTE	-	MUTE		d: mute		
					1	0	0			e	-	MUTE	-	MUTE	-	MUTE		e: mute		
					1	0	1			f	P3	AV2_R/C_IN	P1	AV2_G_IN	P64	AV2_B_IN		f: AV2_RGB (EXTERNAL)		
					1	1	X			-	-	PROHIBIT	-	PROHIBIT	-	PROHIBIT				
	SV14			0						a	-	ENC_Y+C					P16: V_OUT (Line)			
				1						b	-	MUTE							*	
	N/A			0						a	-	-	-	-						
				1						b	-	-	-	-					*	
SV16 Note 1)		0							-	-	THROUGH									
		1							-	-	BIAS input									

Note 1) G2D8/G3D8 = "11" is prohibited. Follow the AV2 (16) FB_IN (Pin32) the control in case of THROUGH.

AV2_16pin SV16
H a : Clamp input (RGB)
L b : Bias input (Y+C)

LV7109E

* indicates initial.

ADDRESS		8	7	6	5	4	3	2	1	Symbol	Input				Output	Remarks	
Group 4 0000 0100	N/A								0	a	-	N/A	-	N/A			*
									1	b	-	N/A	-	N/A			
	N/A								0	a	-	N/A	-	N/A			*
								1	b	-	N/A	-	N/A				
	FB AV1 (16) Note 2)					0			0	a	-	0V			P18: AV1_FB_OUT		
						0		1		b	-	5V					
						1		0		c	P20	THROUGH				*	
						1		1		d	P20	THROUGH					
	FSS AV1 (8)			0	0					-	-	LOW (0.5V)			P7: AV1_FSS_OUT		*
				0	1					-	-	MID (6.0V)					
				1	0					-	-	HIGH (11.0V)					
				1	1					-	-	HIGH (11.0V)					
	N/A			0						-	-	-					*
				1						-	-	-					
	A-MUTE			0						-	-	THROUGH					
				1						-	-	MUTE				P58,59,61,62 output MUTE	*

Note 2) Same polarity as the AV2 (16) FB_IN (Pin20) control in case of THROUGH.

ADDRESS		8	7	6	5	4	3	2	1	Symbol	Input						Output	Remarks		
Group 5 0000 0101 AUDIO CANAL-SW	SA1L/R							0	0	0	a	P55	AV2_L_IN	P50	AV2_R_IN			P62: AV1_L_OUT P61: AV1_R_OUT		*
								0	0	1	b	P54	A-DAC_L_IN	P49	A-DAC_R_IN					
								0	1	0	c	P54	A-DAC_L_IN	P49	A-DAC_R_IN					
								0	1	1	d	-	MUTE	-	MUTE					
								1	0	0	e	-	MUTE	-	MUTE					
								1	0	1	f	-	PROHIBIT	-	PROHIBIT					
	SA2L/R			0	0	0				a	P56	AV1_L_IN	P51	AV1_R_IN			P59: AV2_L_OUT P58: AV2_R_OUT		*	
				0	0	1				b	-	MUTE	-	MUTE						
				0	1	0				c	P54	A-DAC_L_IN	P49	A-DAC_R_IN						
				0	1	1				d	-	MUTE	-	MUTE						
				1	0	0				e	-	MUTE	-	MUTE						
				1	0	1				and after	-	-	PROHIBIT	-	PROHIBIT					
	N/A			0	0					a	-	N/A	-	N/A						
				0	1					b	-	N/A	-	N/A						
				1	0					c	-	N/A	-	N/A					*	
				1	1					d	-	N/A	-	N/A						

ADDRESS		8	7	6	5	4	3	2	1	Symbol	Input				Output	Remarks	
Group 6 0000 0110	N/A								0	0	0	a	-	N/A			
									0	0	1	b	-	N/A			*
									0	1	0	c	-	N/A			
									0	1	1	d	-	N/A			
									1	0	0	e	-	N/A			
									1	0	1	-	-	PROHIBIT	-	PROHIBIT	
	N/A					0				a	-	N/A					*
						1				b	-	N/A					
	N/A			0	0					a	-	N/A					
				0	1					b	-	N/A					*
				1	0					c	-	N/A					
				1	1					-	-	PROHIBIT					
	N/A			0	0					a	-	N/A					
				0	1					b	-	N/A					*
				1	0					c	-	N/A					
				1	1					-	-	PROHIBIT					

ADDRESS		8	7	6	5	4	3	2	1	Symbol	Input				Output	Remarks	
Group 7 0000 0111	N/A			0	0	0	0	0	0	-	-	N/A					
				0	0	1	1	0	0	-	-	N/A					
				1	1	1	1	1	1	-	-	N/A					*
				Other than above						-	-	PROHIBIT					
	EXT-CTL1			0						-	-	L			P26: EXT_CTL1	General purpose OUT1	*
				1						-	-	H					
	Changeover of VIDEO input BIAS/CLAMP	-	-	-	-	-	-	-	-	P42	ENC_R_IN	P44	ENC_G_IN	P46	ENC_B_IN	Input changeover	
		0								-		BIAS input				CLAMP input	Component
		1								-		CLAMP input				CLAMP input	RGB

ADDRESS		8	7	6	5	4	3	2	1	Symbol	Input				Output	Remarks	
Group 8 0000 1000	N/A			0	0	0	0	0	0	-	-	N/A					
				0	0	1	1	0	0	-	-	N/A					
				1	1	1	1	1	1	-	-	N/A					*
				Other than above						-	-	PROHIBIT					
N/A	N/A	0								-	-	N/A					*
		1								-	-	N/A					
	N/A	0								-	-	N/A					*
		1								-	-	N/A					

Cautions for Use

1. Drive capacity of video driver

Line outputs can drive two systems through capacitive coupling.

Component outputs can drive one systems through capacitive coupling.

Scart output can drive one system only through DC coupling.

2. Audio Mute

This IC incorporates a mute transistor to reduce the POP noise of audio output when power is turned ON/OFF.

Mute control can be made by serial control.

3. Resistor to limit the Audio input

When the large signal is input in the input pin with power OFF, cross-talk between input and output occurs through the protective diode and parasitic elements. Because of the structure of LSI, such cross-talk is difficult to avoid.

If cross-talk at a time of power OFF presents a problem, the cross-talk amount can be reduced by inserting the limiting resistor in the input.

In this case, the input signal level changes depending on the resistance value. Determine the constant while taking both the cross-talk amount and input level into account.

4. Pin treatment when external control is not to be used

When external control pins (Pins 26) are not used, pull-down to GND is recommended.

5. Audio 9V_REG pin external capacitance

Use the Audio 9V_REG pins (pins 52 and 57) external capacitance of 10μF or more and with the equivalent series resistance component of 7Ω or less.

6. Power application and disconnection sequences

The recommended power application sequence to this IC is V_{CC}ALL5V (Pin28) → V_{CC}5V (Pins 5, 9, 13, 24, 30 and 43), V_{CC}12V (Pin29).

(No particular order is established between V_{CC}5V and V_{CC}12V.) It is recommended to reverse the above sequence when power supply is turned OFF.

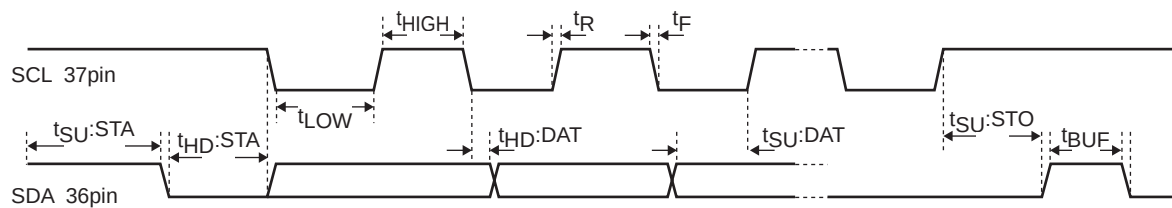
4. INITIALIZE AND OTHERS

SW LSI is initialized as the following mode for circuit protection. Please see “SERIAL CONTROL TABLE”.


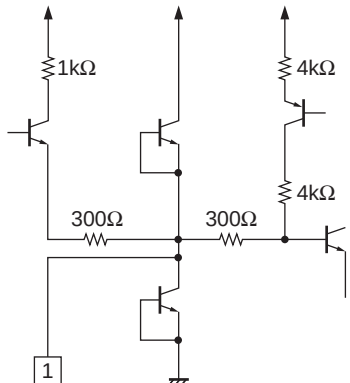
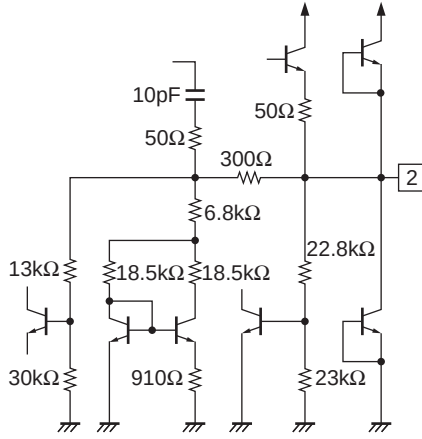

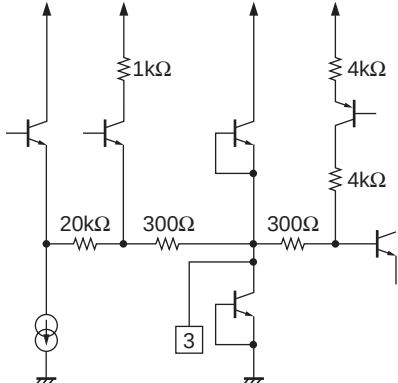


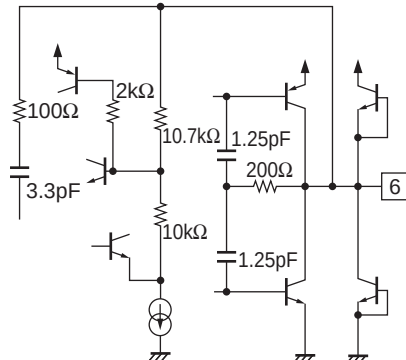
Characteristics of the SDA and SCL I/O stages for SW LSI

Parameter	Symbol	Min	Max	Unit
LOW level input voltage	V_{IL}	0	0.8	V
HIGH level input voltage	V_{IH}	3.0	5.0	V
LOW level output current	I_{OL}		3.0	mA
SCL clock frequency	f_{SCL}		400	kHz
Set-up time for a repeated START condition	$t_{SU} : STA$	0.6		μs
Hold time START condition. After this period, the first clock pulse is generated.	$t_{HD} : STA$	0.6		μs
LOW period of the SCL clock	t_{LOW}	1.3		μs
Rise time of both SDA and SDL signals	t_R	0	0.3	μs
HIGH period of the SCL clock	t_{HIGH}	0.6		μs
Fall time of both SDA and SDL signals	t_F	0	0.3	μs
Data hold time:	$t_{HD} : DAT$	0	0.9	μs
Data set-up time	$t_{SU} : DAT$	100		ns
Set-up time for STOP condition	$t_{SU} : STO$	0.6		μs
BUS fredd time between a STOP and START condition	t_{BUF}	1.3		μs

Fig.2 Definition of timing.





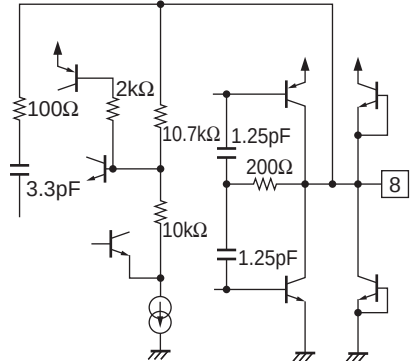

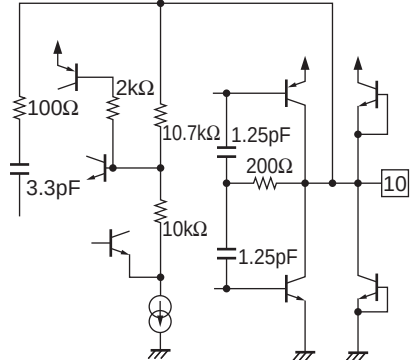


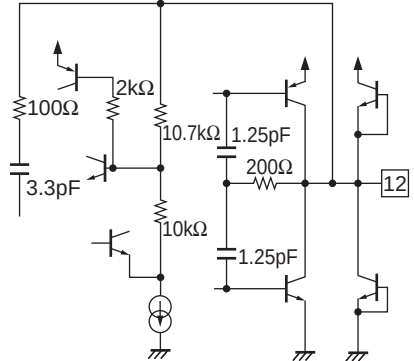
Pin Function

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P1	AV2_G_IN	1.6Vdc +Green			
P2	REG2.5V	2.5Vdc	DC		
P3	AV2_R/C_IN	1.6Vdc +Red			
		2.1Vdc +Chroma			
P4	GND_VC				
P5	VCC5V_VC				
P6	AV1_B_OUT	0.5V +Blue			

Continued on next page.

LV7109E


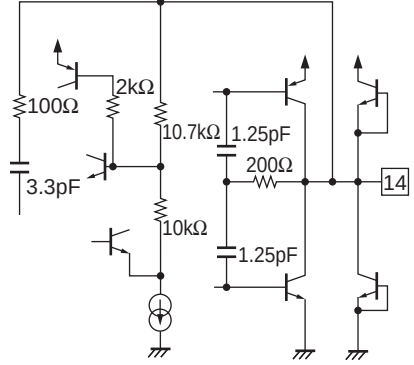

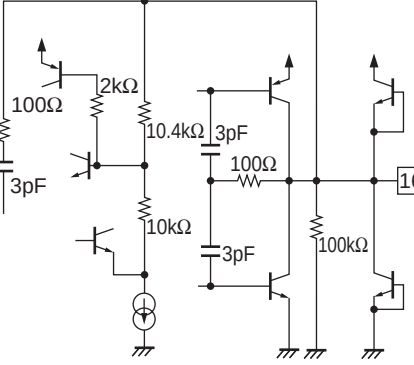

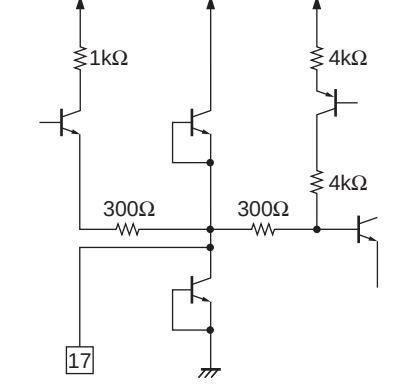

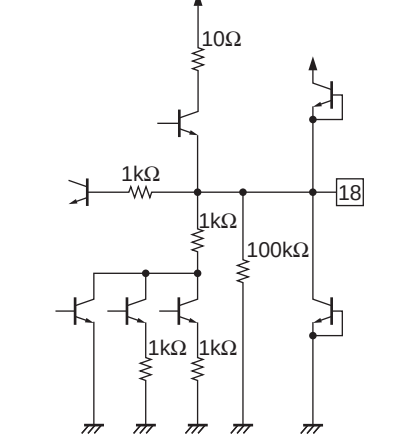
Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P7	AV1_FSS_OUT	Low : 0.5V Mid : 6.0V High : 11.1V	DC		
P8	AV1_G_OUT	0.5Vdc +Green			
P9	VCC_RGB				
P10	AV1_R/C_OUT	0.5Vdc +Red			
		1.7Vdc +Chroma			
P11	GND_RGB				
P12	AV2_V_OUT	0.5Vdc +Video			
P13	VCC5V_VL				

Continued on next page.

LV7109E


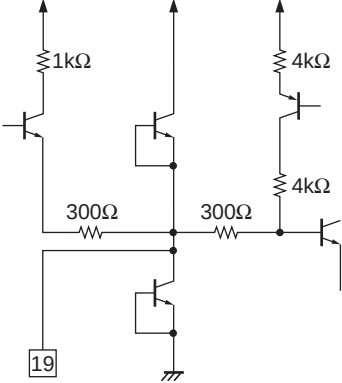




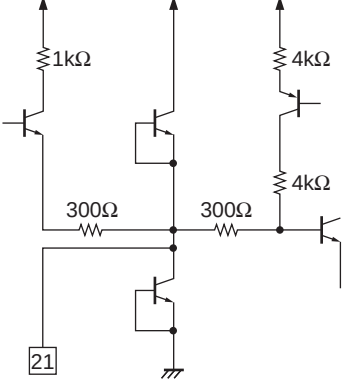

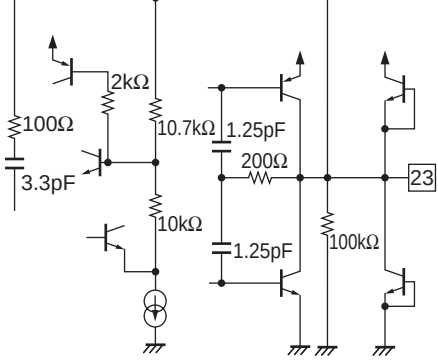
Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P14	AV1_V/Y_OUT	0.5Vdc +Video			
P15	GND_VL				
P16	V_OUT (Line_OUT)	0.7Vdc +CVBS			
P17	AV1_V_IN	1.6Vdc +CVBS			
P18	AV1_FB_OUT	Low : 0V High : 4.0V Through : 0/4.0V			

Continued on next page.

LV7109E


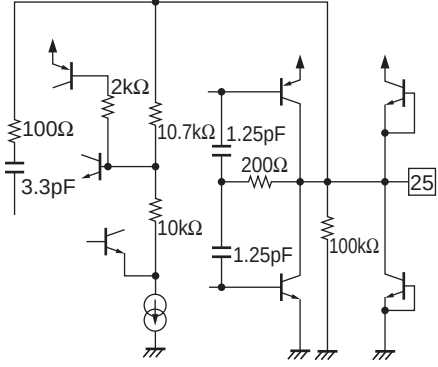



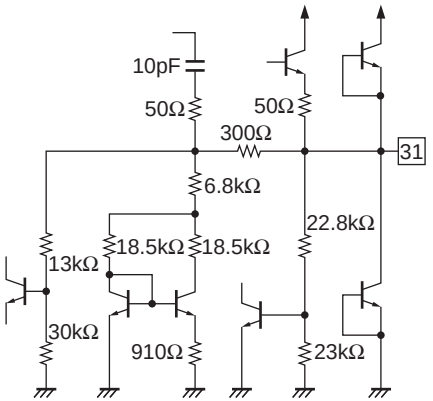

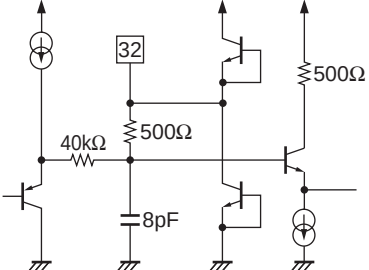
Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P19	AV2_V/Y_IN	1.6Vdc +CVBS			
		1.6Vdc +Y			
P20	AV1_FB_IN	Low : 0V High : 2V			
P21	AV3_V_IN	1.6Vdc +CVBS			
P22	GND_VD				
P23	PB_OUT (Component)	1.7V +Pb			
P24	VCC5V_VD				

Continued on next page.

LV7109E











Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P25	PR_OUT (Component)	1.7V +Pr			
P26	EXT-CTL1 (OUT)	Low : 0V High : 5V			
P27	PY_OUT (Component)	0.7Vdc +Py			
P28	V _{CC} 5V_ALL				
P29	V _{CC} 12V_A				
P30	V _{CC} 5V_LOGIC				
P31	REG2.5V_ALL	2.5Vdc	DC		
P32	SYNC_SEP _FILTER	2.2Vdc +Y			

Continued on next page.

LV7109E


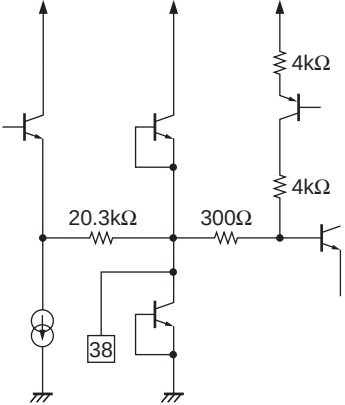

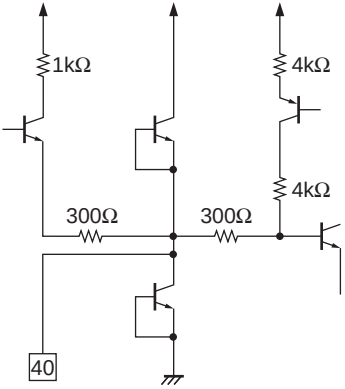

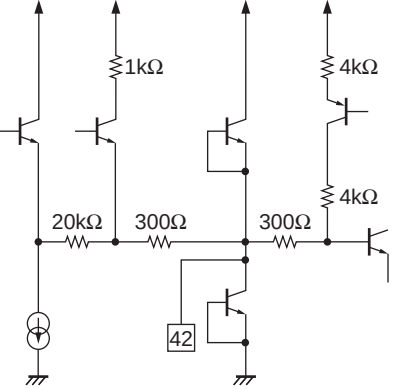


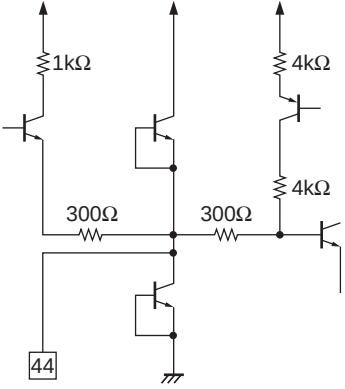

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P33	ADC_C_OUT	2.1Vdc +Chroma			
P34	V_SYNC_OUT	Low : 0.3V High : 4.7V			
P35	ADC_V/Y_OUT	1.0Vdc +CVBS			
		1.0Vdc +Y			
P36	SDA_IN	I ² C DATA			ACK_OUT
P37	SCL_IN	I ² C CLOCK			

Continued on next page.

LV7109E


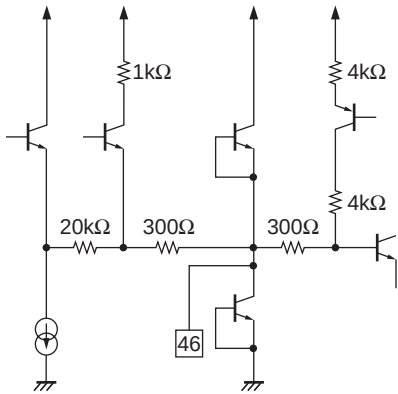


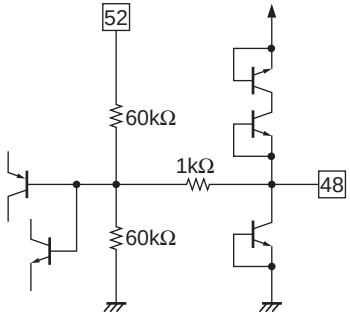

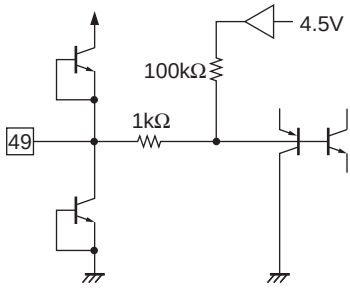

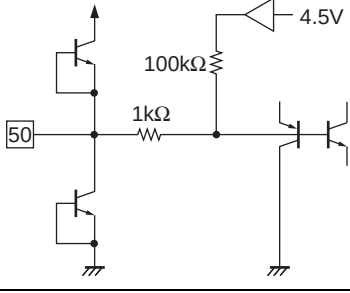
Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P38	ENC_C_IN	2.1Vdc +Chroma			
P39	GNG_LOGIC				
P40	ENC_Y_IN	1.6Vdc +Y			
P41	GND_VSW				
P42	ENC_R/PR_IN	1.6Vdc +Red			
		2.1Vdc +Pr			
P43	VCC5V_SW				
P44	ENC_G/PY_IN	1.6Vdc +Green			
		1.6Vdc +Py			
P45	GNG_REF				

Continued on next page.

LV7109E


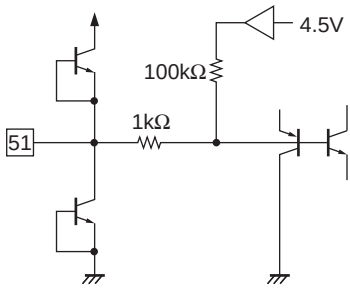
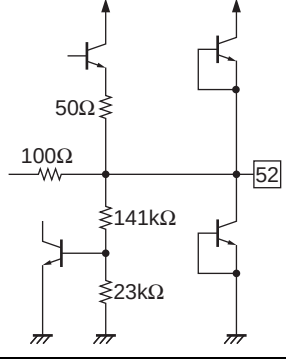

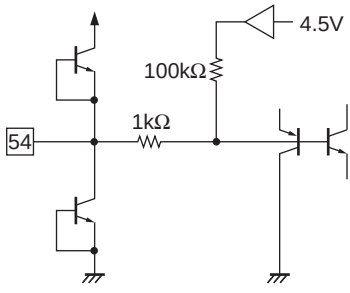

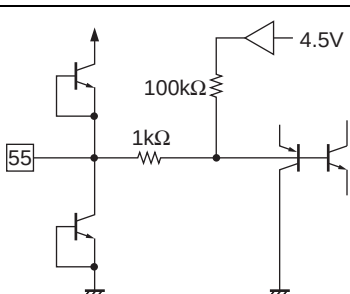

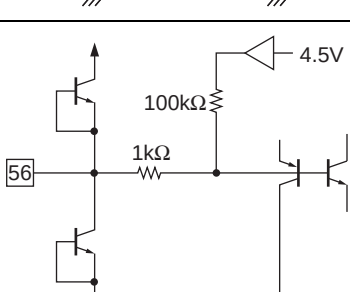
Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P46	ENC_B/PB_IN	1.6Vdc +Blue			
		2.1Vdc +Pb			
P47	Audio_Mute_Filter				
P48	REF4.5V	4.5Vdc	DC		
P49	A-DAC_R_IN	4.5Vdc +Right			
P50	AV2_R_IN	4.5Vdc +Right			

Continued on next page.

LV7109E



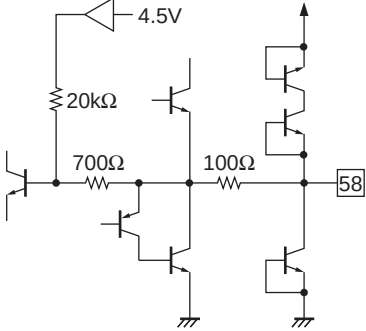

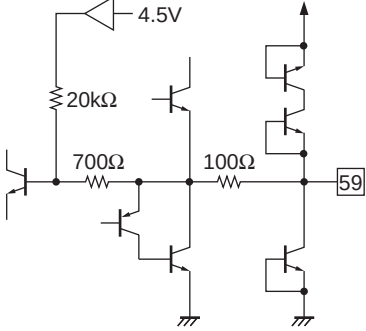

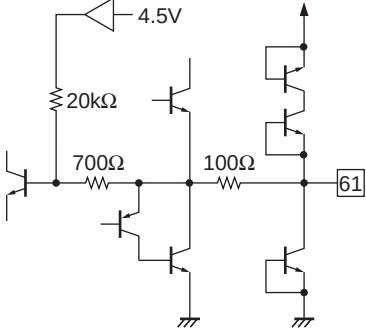

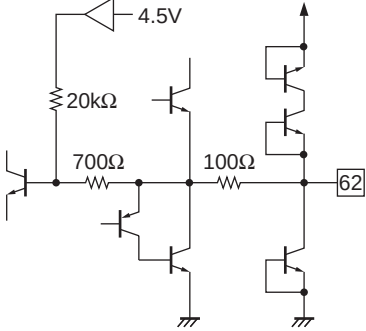
Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P51	AV1_R_IN	4.5Vdc +Right			
P52	REG9V_AR	9Vdc	DC		
P53	GND_REG				
P54	A-DAC_L_IN	4.5Vdc +Left			
P55	AV2_L_IN	4.5Vdc +Left			
P56	AV1_L_IN	4.5Vdc +Left			

Continued on next page.

LV7109E


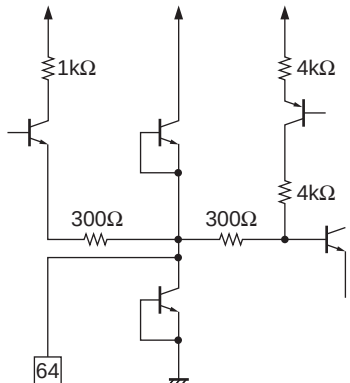
Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P57	REG9V_AL	9Vdc	DC		
P58	AV2_R_OUT	4.5Vdc +Right			
P59	AV2_L_OUT	4.5Vdc +Left			
P60	GND_AR				
P61	AV1_R_OUT	4.5Vdc +Right			
P62	AV1_L_OUT	4.5Vdc +Left			
P63	GND_AL				

Continued on next page.

LV7109E

Continued from preceding page.

Pin No.	Pin name	DC voltage	Signal wave form	Input/Output form	Note
P64	AV2_B_IN	1.6Vdc +Blue			

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of November, 2011. Specifications and information herein are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[LV7109E-B-MPB-E](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.