




---

Qualcomm Technologies International, Ltd.



**Confidential and Proprietary – Qualcomm Technologies International, Ltd.**  
*(formerly known as Cambridge Silicon Radio Ltd.)*

**NO PUBLIC DISCLOSURE PERMITTED:** Please report postings of this document on public servers or websites to:  
[DocCtrlAgent@qualcomm.com](mailto:DocCtrlAgent@qualcomm.com).

**Restricted Distribution:** Not to be distributed to anyone who is not an employee of either Qualcomm Technologies International, Ltd. or its affiliated companies without the express approval of Qualcomm Configuration Management.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of Qualcomm Technologies International, Ltd.

Any software provided with this notice is governed by the Qualcomm Technologies International, Ltd. Terms of Supply or the applicable license agreement at <https://www.csrsupport.com/CSRTermsandConditions>.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. All Qualcomm Incorporated trademarks are used with permission. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

© 2015 Qualcomm Technologies International, Ltd. All rights reserved.


Qualcomm Technologies International, Ltd.  
Churchill House  
Cambridge Business Park  
Cambridge, CB4 0WZ  
United Kingdom

## Features

- Bluetooth® v4.1 specification compliant
- Bluetooth Smart
- 128KB memory: 64KB RAM and 64KB ROM
- Support for Bluetooth v4.1 specification host stack including ATT, GATT, SMP, L2CAP, GAP
- RSSI monitoring for proximity applications
- <900nA current consumption in dormant mode
- 32kHz and 16MHz crystal or system clock
- Switch-mode power supply
- Programmable general purpose PIO controller
- 10-bit ADC
- 12 digital PIOs
- 3 analogue AIOs
- UART
- I<sup>2</sup>C / SPI for EEPROM / flash memory ICs and peripherals
- Debug SPI
- 4 PWM modules
- Wake-up interrupt and watchdog timer
- QFN 32-lead, 5 x 5 x 0.6mm, 0.5mm pitch

## General Description

CSR1010 QFN is a CSR µEnergy platform device. CSR µEnergy are CSR's single-mode Bluetooth low energy products for the Bluetooth Smart market. CSR1010 QFN increases application code and data space for greater application development flexibility. CSR µEnergy enables ultra low-power connectivity and basic data transfer for applications previously limited by the power consumption, size constraints and complexity of other wireless standards. CSR1010 QFN provides everything required to create a Bluetooth low energy product with RF, baseband, MCU, qualified Bluetooth v4.1 specification stack and customer application running on a single IC.

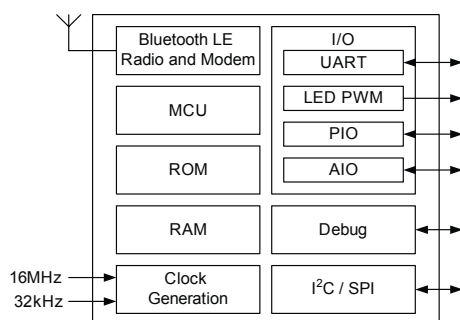

## CSR µEnergy® CSR1010 QFN

### Bluetooth Smart IC

#### Production Information

CSR1010A05

Issue 6



## Applications

- Building an ecosystem using Bluetooth low energy
- CSR is the industry leader for Bluetooth low energy, also known as Bluetooth Smart. Bluetooth Smart enables connectivity and data transfer to leading smartphone, tablet and personal computing devices including Apple iPhone, iPad, iPod and Mac products and leading Android devices.

Bluetooth low energy takes less time to make a connection than conventional Bluetooth wireless technology and can consume approximately 1/20<sup>th</sup> of the power of Bluetooth Basic Rate. CSR1010 QFN supports profiles for health and fitness sensors, watches, keyboards, mice and remote controls.

Typical Bluetooth Smart applications:

- HID: keyboards, mice, touchpads, remote controls
- Sports and fitness sensors: heart rate, runner speed and cadence, cycle speed and cadence
- Health sensors: blood pressure, thermometer and glucose meters
- Mobile accessories: watches, proximity tags, alert tags and camera controls
- Smart home: heating control and lighting control

## Ordering Information

| Device      | Package                  |                              |                 | Order Number      |
|-------------|--------------------------|------------------------------|-----------------|-------------------|
|             | Type                     | Size                         | Shipment Method |                   |
| CSR1010 QFN | QFN-32-lead<br>(Pb free) | 5 x 5 x 0.6mm<br>0.5mm pitch | Tape and reel   | CSR1010A05-IQQM-R |

### Note:

The minimum order quantity is 4kpcs taped and reeled.

**Supply chain:** CSR's manufacturing policy is to multisource volume products. For further details, contact your local sales account manager or representative.

## CSR1010 QFN Development Kit Ordering Information

| Description                                | Order Number        |
|--------------------------------------------|---------------------|
| CSR1010 QFN Development Kit example design | DK-CSR1010-10136-1A |

## Contacts

General information

[www.csr.com](http://www.csr.com)

Information on this product

[sales@csr.com](mailto:sales@csr.com)

Customer support for this product

[www.csrsupport.com](http://www.csrsupport.com)

Details of compliance and standards

[product.compliance@csr.com](mailto:product.compliance@csr.com)

Help with this document

[comments@csr.com](mailto:comments@csr.com)

## Device Details

### Bluetooth Radio

- On-chip balun (50Ω impedance in TX and RX modes)
- No external trimming is required in production
- Bluetooth v4.1 specification compliant

### Bluetooth Transmitter

- 9dBm RF transmit power with level control from integrated 6-bit DAC over a dynamic range >25dB
- No external power amplifier or TX/RX switch required

### Bluetooth Receiver

- -93dBm sensitivity
- Integrated channel filters
- Digital demodulator for improved sensitivity and co-channel rejection
- Fast AGC for enhanced dynamic range

### Bluetooth Stack

CSR's protocol stack runs on the integrated MCU:

- Support for Bluetooth v4.1 specification features:
  - Master and slave operation
  - Including encryption
- Software stack in firmware includes:
  - GAP
  - L2CAP
  - Security manager
  - Attribute protocol
  - Attribute profile
  - Bluetooth low energy profile support

### Synthesiser

- Fully integrated synthesiser requires no external VCO varactor diode, resonator or loop filter

### Baseband and Software

- Hardware MAC for all packet types enables packet handling without the need to involve the MCU

### Physical Interfaces

- SPI master interface
- SPI programming and debug interface
- I<sup>2</sup>C
- 12 digital PIOs
- 3 analogue AIOs
- UART


### Auxiliary Features

- Battery monitor
- Power management features include software shutdown and hardware wake-up
- CSR1010 QFN can run in low power modes from an external 32.768kHz clock signal
- Integrated switch-mode power supply
- Linear regulator (internal use only)
- Power-on-reset cell detects low supply voltage

### Package

- 32-lead 5 x 5 x 0.6mm, 0.5mm pitch QFN

Functional Block Diagram

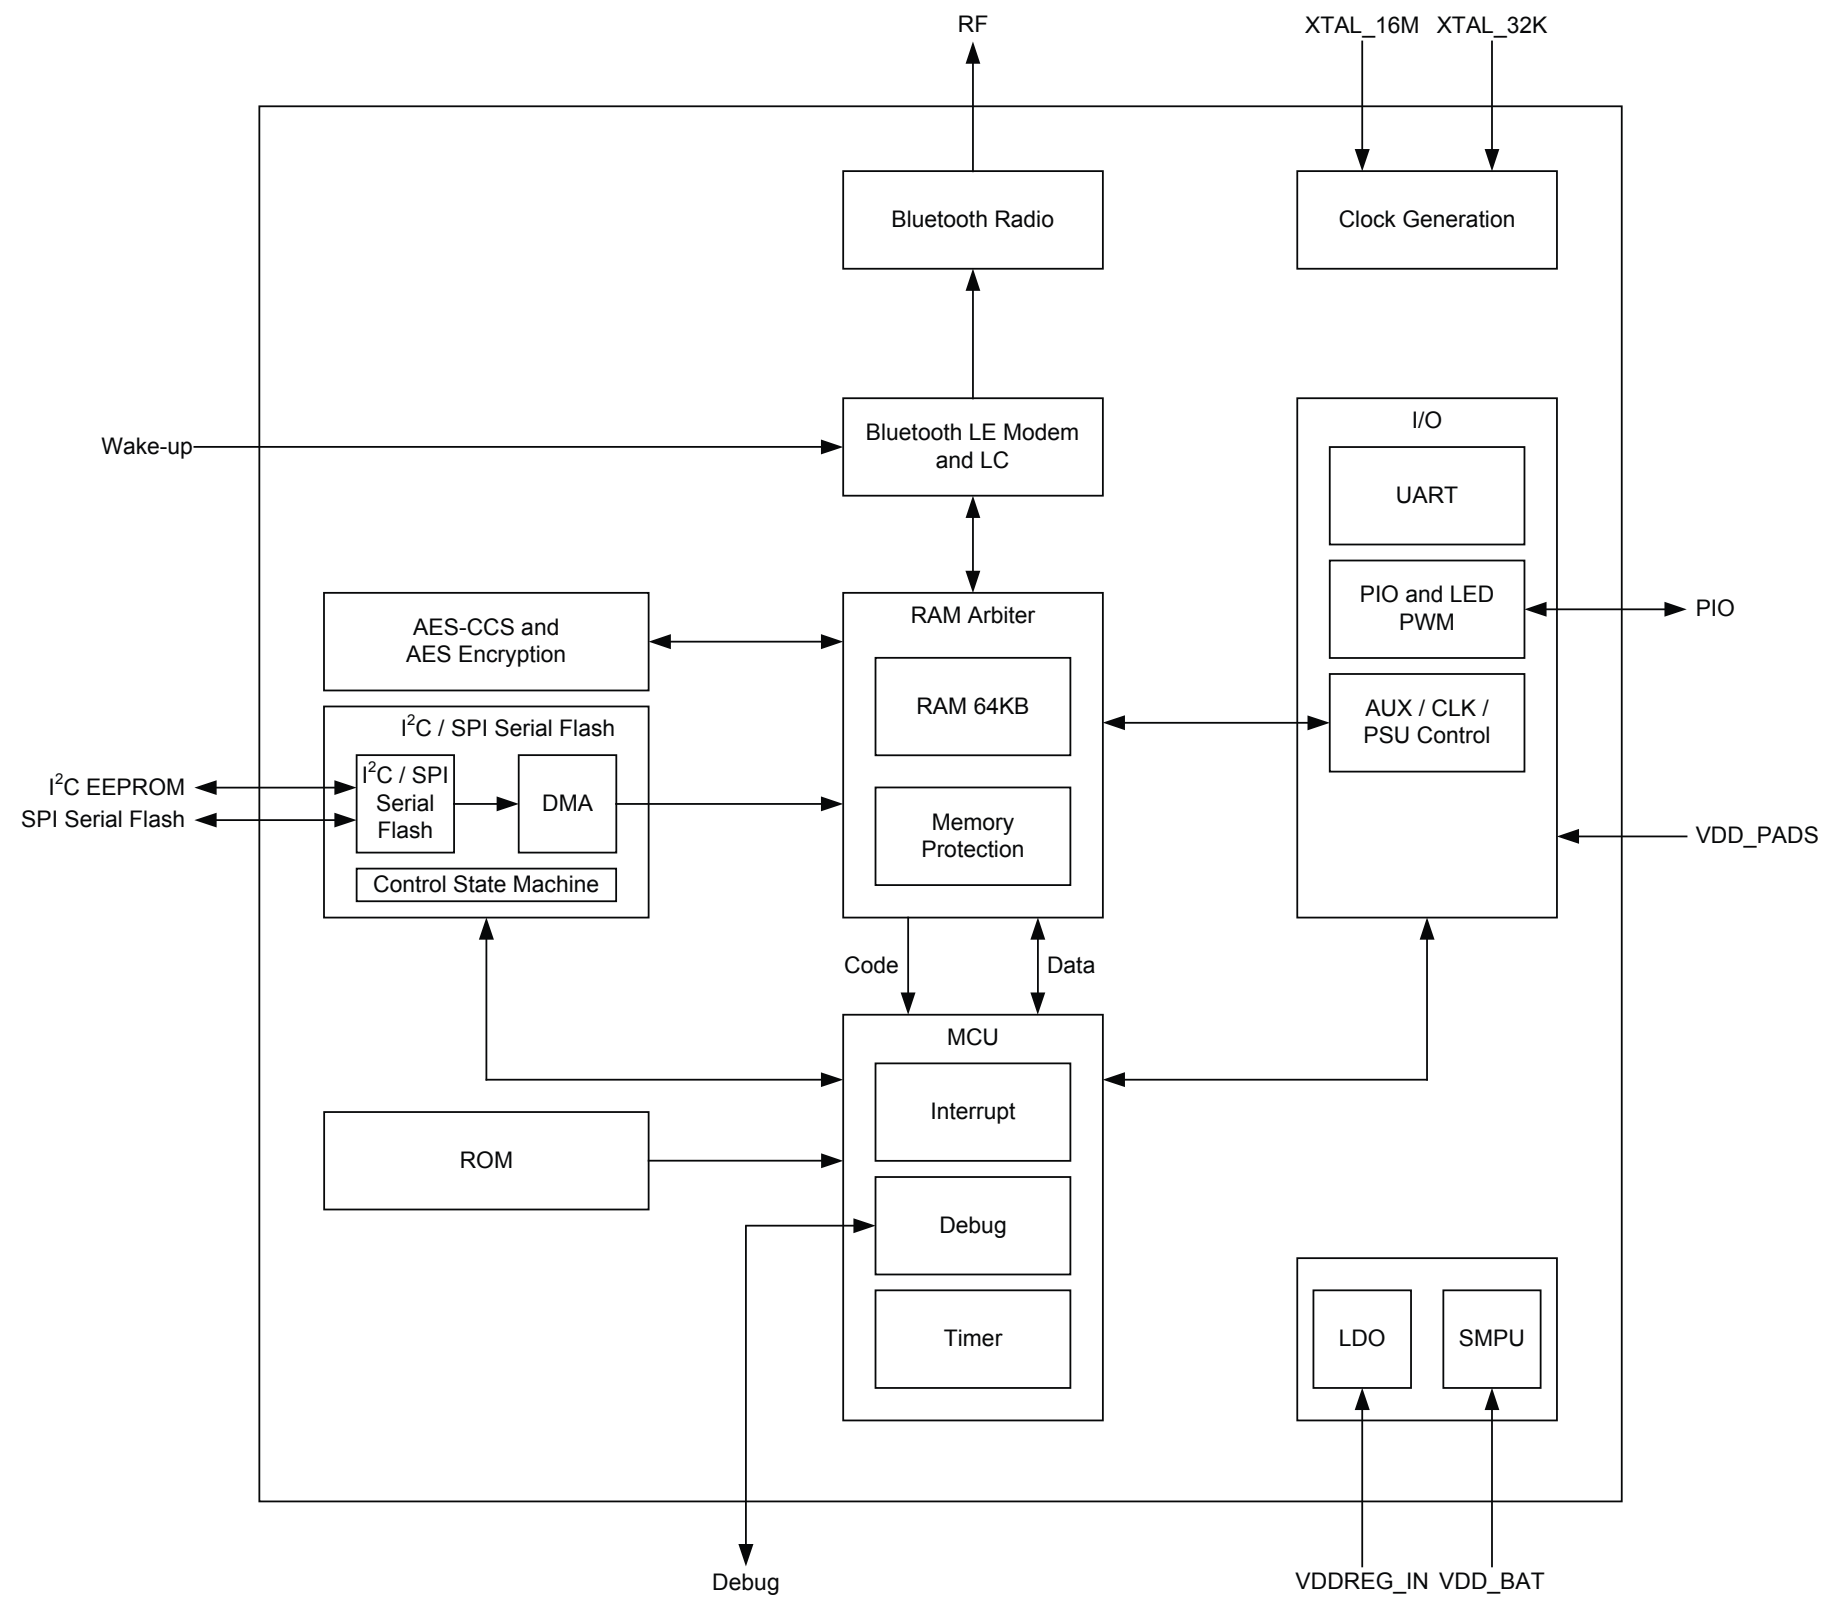

## Document History

| Revision | Date      | Change Reason                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | 21 SEP 12 | Original publication of this document.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 2        | 23 OCT 12 | Updated to Production Information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3        | 20 NOV 12 | Update to CSR $\mu$ Energy <sup>®</sup> branding.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 4        | 08 APR 13 | Updates include: <ul style="list-style-type: none"> <li>■ Removal of NDA statement.</li> <li>■ Dev kit Order Number corrected.</li> <li>■ Temperature sensor added.</li> <li>■ Battery monitor added.</li> <li>■ SPI timing diagram added.</li> <li>■ Change from VDD to VDD_PADS in Digital Terminals.</li> <li>■ Auxiliary ADC and DAC parameters added.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 5        | 04 FEB 14 | Updates include: <ul style="list-style-type: none"> <li>■ New CSR brand added.</li> <li>■ Bluetooth 4.1 specification added.</li> <li>■ Status Information.</li> <li>■ Copyright years.</li> <li>■ 4.3 V operation added, including reference to CSR1010QFN 4.3V Operation Performance Specification.</li> <li>■ UART hardware flow control removed.</li> <li>■ VDD_DIG corrected to VDD_CORE.</li> <li>■ Sleep clock maximum load capacitance.</li> <li>■ Absolute maximum ratings value for battery operation and I/O supply voltage.</li> <li>■ Switch-mode regulator.</li> <li>■ Hibernate current.</li> <li>■ Deep sleep wake-up condition to 2.2ms in Current Consumption.</li> <li>■ Machine Model removed from ESD as it is not required by CSR or the latest JEDEC standards.</li> <li>■ Minor editorial updates.</li> </ul> |
| 6        | 06 JAN 15 | Updates include: <ul style="list-style-type: none"> <li>■ Section 3 Clock Generation</li> <li>■ Section 4 Operating Modes.</li> <li>■ Section 5 Microcontroller, Memory and Baseband Logic.</li> <li>■ Section 6 Serial Interfaces.</li> <li>■ Section 7 Power Control and Regulation.</li> <li>■ Section 8 Example Application Schematic.</li> <li>■ Section 9 Electrical Characteristics.</li> <li>■ Section 10 Current Consumption.</li> <li>■ Section 14 Document References.</li> <li>■ Other minor updates.</li> </ul>                                                                                                                                                                                                                                                                                                          |

## Status Information

The status of this Data Sheet is **Production Information**. CSR Product Data Sheets progress according to the following format:

- **Advance Information:**
  - Information for designers concerning CSR product in development. All values specified are the target values of the design. Minimum and maximum values specified are only given as guidance to the final specification limits and must not be considered as the final values.
- **Engineering Sample:**
  - Information about initial devices. Devices are untested or partially tested prototypes, their status is described in an Engineering Sample Release Note. All values specified are the target values of the design. Minimum and maximum values specified are only given as guidance to the final specification limits and must not be considered as the final values.
  - All detailed specifications including pinouts and electrical specifications may be changed by CSR without notice.
- **Pre-production Information:**
  - Pinout and mechanical dimension specifications finalised. All values specified are the target values of the design. Minimum and maximum values specified are only given as guidance to the final specification limits and must not be considered as the final values.
  - All electrical specifications may be changed by CSR without notice.
- **Production Information:**
  - Final Data Sheet including the guaranteed minimum and maximum limits for the electrical specifications.
  - Production Data Sheets supersede all previous document versions.

### Device Implementation

#### Important Note:

As the feature-set of the CSR1010 QFN is firmware build-specific, see the relevant software release note for the exact implementation of features on the CSR1010 QFN.

### Life Support Policy and Use in Safety-critical Applications

CSR's products are not authorised for use in life-support or safety-critical applications. Use in such applications is done at the sole discretion of the customer. CSR will not warrant the use of its devices in such applications.

### CSR Green Semiconductor Products and RoHS Compliance

CSR1010 QFN devices meet the requirements of Directive 2011/65/EU of the European Parliament and of the Council on the Restriction of Hazardous Substance (RoHS). CSR1010 QFN devices are free from halogenated or antimony trioxide-based flame retardants and other hazardous chemicals. For more information, see CSR's *Environmental Compliance Statement for CSR Green Semiconductor Products*.

### Confidentiality Status

This document is non-confidential. The right to use, copy and disclose this document may be subject to license restrictions in accordance with the terms of the agreement entered into by CSR plc and the party that CSR plc delivered this document to.

### Trademarks, Patents and Licences

Unless otherwise stated, words and logos marked with <sup>™</sup> or <sup>®</sup> are trademarks registered or owned by CSR plc or its affiliates. Bluetooth<sup>®</sup> and the Bluetooth<sup>®</sup> logos are trademarks owned by Bluetooth<sup>®</sup> SIG, Inc. and licensed to CSR. Other products, services and names used in this document may have been trademarked by their respective owners.

The publication of this information does not imply that any license is granted under any patent or other rights owned by CSR plc and/or its affiliates.

CSR reserves the right to make technical changes to its products as part of its development programme.

While every care has been taken to ensure the accuracy of the contents of this document, CSR cannot accept responsibility for any errors.

Refer to [www.csrsupport.com](http://www.csrsupport.com) for compliance and conformance to standards information.

## Contents

|          |                                                   |           |
|----------|---------------------------------------------------|-----------|
|          | <b>Ordering Information</b>                       | <b>2</b>  |
|          | CSR1010 QFN Development Kit Ordering Information  | 2         |
|          | Contacts                                          | 2         |
|          | <b>Device Details</b>                             | <b>3</b>  |
|          | <b>Functional Block Diagram</b>                   | <b>4</b>  |
| <b>1</b> | <b>Package Information</b>                        | <b>10</b> |
| 1.1      | Pinout Diagram                                    | 10        |
| 1.2      | Device Terminal Functions                         | 11        |
| 1.3      | Package Dimensions                                | 14        |
| 1.4      | PCB Design and Assembly Considerations            | 15        |
| 1.5      | Typical Solder Reflow Profile                     | 15        |
| <b>2</b> | <b>Bluetooth Modem</b>                            | <b>16</b> |
| 2.1      | RF Ports                                          | 16        |
| 2.2      | RF Receiver                                       | 16        |
| 2.2.1    | Low Noise Amplifier                               | 16        |
| 2.2.2    | RSSI Analogue to Digital Converter                | 16        |
| 2.3      | RF Transmitter                                    | 16        |
| 2.3.1    | IQ Modulator                                      | 16        |
| 2.3.2    | Power Amplifier                                   | 16        |
| 2.4      | Bluetooth Radio Synthesiser                       | 16        |
| 2.5      | Baseband                                          | 16        |
| 2.5.1    | Physical Layer Hardware Engine                    | 16        |
| <b>3</b> | <b>Clock Generation</b>                           | <b>17</b> |
| 3.1      | Clock Architecture                                | 17        |
| 3.2      | Crystal Oscillator: XTAL_16M_IN and XTAL_16M_OUT  | 17        |
| 3.2.1    | Crystal Specification                             | 17        |
| 3.2.2    | Frequency Trim                                    | 18        |
| 3.3      | Sleep Clock                                       | 18        |
| 3.3.1    | Crystal Specification                             | 18        |
| <b>4</b> | <b>Operating Modes</b>                            | <b>20</b> |
| 4.1      | Run Mode                                          | 20        |
| 4.2      | Idle Mode                                         | 20        |
| 4.3      | Deep Sleep Mode                                   | 20        |
| 4.4      | Hibernate Mode                                    | 20        |
| 4.5      | Dormant Mode                                      | 20        |
| <b>5</b> | <b>Microcontroller, Memory and Baseband Logic</b> | <b>21</b> |
| 5.1      | System RAM                                        | 21        |
| 5.2      | Internal ROM                                      | 21        |
| 5.3      | Microcontroller                                   | 21        |
| 5.4      | Programmable I/O Ports, PIO and AIO               | 21        |
| 5.5      | LED Flasher / PWM Module                          | 22        |
| 5.6      | Temperature Sensor                                | 23        |
| 5.7      | Battery Monitor                                   | 24        |
| <b>6</b> | <b>Serial Interfaces</b>                          | <b>25</b> |
| 6.1      | Application Interface                             | 25        |
| 6.1.1    | UART Interface                                    | 25        |
| 6.2      | I <sup>2</sup> C Interface                        | 25        |
| 6.3      | SPI Master Interface                              | 27        |
| 6.4      | Programming and Debug Interface                   | 29        |



|           |                                                                   |           |
|-----------|-------------------------------------------------------------------|-----------|
| 6.4.1     | Instruction Cycle .....                                           | 29        |
| 6.4.2     | Multi-slave Operation .....                                       | 30        |
| <b>7</b>  | <b>Power Control and Regulation .....</b>                         | <b>31</b> |
| 7.1       | Switch-mode Regulator .....                                       | 31        |
| 7.2       | Low-voltage VDD_CORE Linear Regulator .....                       | 31        |
| 7.3       | Reset .....                                                       | 31        |
| 7.3.1     | Digital Pin States on Reset .....                                 | 31        |
| 7.3.2     | Power-on Reset .....                                              | 32        |
| <b>8</b>  | <b>Example Application Schematic .....</b>                        | <b>33</b> |
| <b>9</b>  | <b>Electrical Characteristics .....</b>                           | <b>34</b> |
| 9.1       | Absolute Maximum Ratings .....                                    | 34        |
| 9.2       | Recommended Operating Conditions .....                            | 34        |
| 9.3       | Input/Output Terminal Characteristics .....                       | 35        |
| 9.3.1     | Switch-mode Regulator .....                                       | 35        |
| 9.3.2     | Low-voltage Linear Regulator .....                                | 35        |
| 9.3.3     | Digital Terminals .....                                           | 35        |
| 9.3.4     | AIO .....                                                         | 36        |
| 9.4       | Junction Temperature .....                                        | 38        |
| 9.5       | ESD Protection .....                                              | 38        |
| <b>10</b> | <b>Current Consumption .....</b>                                  | <b>39</b> |
| <b>11</b> | <b>CSR Green Semiconductor Products and RoHS Compliance .....</b> | <b>40</b> |
| <b>12</b> | <b>CSR1010 QFN Software Stack .....</b>                           | <b>41</b> |
| <b>13</b> | <b>Tape and Reel Information .....</b>                            | <b>42</b> |
| 13.1      | Tape Orientation .....                                            | 42        |
| 13.2      | Tape Dimensions .....                                             | 43        |
| 13.3      | Reel Information .....                                            | 44        |
| 13.4      | Moisture Sensitivity Level .....                                  | 44        |
| <b>14</b> | <b>Document References .....</b>                                  | <b>45</b> |
|           | <b>Terms and Definitions .....</b>                                | <b>46</b> |

## List of Figures

|             |                                                                                               |    |
|-------------|-----------------------------------------------------------------------------------------------|----|
| Figure 1.1  | Pinout Diagram .....                                                                          | 10 |
| Figure 3.1  | Clock Architecture .....                                                                      | 17 |
| Figure 3.2  | Crystal Driver Circuit .....                                                                  | 17 |
| Figure 3.3  | Sleep Clock Crystal Driver Circuit .....                                                      | 18 |
| Figure 5.1  | Baseband Digits Block Diagram .....                                                           | 21 |
| Figure 5.2  | Typical PWM Signal on a PIO .....                                                             | 23 |
| Figure 6.1  | Example of an I <sup>2</sup> C Interface EEPROM Connection .....                              | 26 |
| Figure 6.2  | I <sup>2</sup> C Standard Mode 100 kHz Timing Diagram (Top Line: SCL, Bottom Line: SDA) ..... | 26 |
| Figure 6.3  | I <sup>2</sup> C Fast Mode 400 kHz Timing Diagram (Top Line: SCL, Bottom Line: SDA) .....     | 27 |
| Figure 6.4  | SPI Timing Diagram .....                                                                      | 28 |
| Figure 6.5  | Memory Boot-up Sequence .....                                                                 | 29 |
| Figure 7.1  | Voltage Regulator Configuration .....                                                         | 31 |
| Figure 12.1 | Software Architecture .....                                                                   | 41 |
| Figure 13.1 | Tape Orientation .....                                                                        | 42 |
| Figure 13.2 | Tape Dimensions .....                                                                         | 43 |
| Figure 13.3 | Reel Dimensions .....                                                                         | 44 |

## List of Tables

|            |                                                                    |    |
|------------|--------------------------------------------------------------------|----|
| Table 3.1  | Crystal Specification .....                                        | 18 |
| Table 3.2  | Sleep Clock Specification .....                                    | 19 |
| Table 5.1  | Wake Options for Sleep Modes .....                                 | 22 |
| Table 5.2  | Alternative PIO Functions .....                                    | 22 |
| Table 5.3  | PWM Operating Range .....                                          | 23 |
| Table 6.1  | Possible UART Settings .....                                       | 25 |
| Table 6.2  | I <sup>2</sup> C Standard Mode 100 kHz Timing Definition .....     | 26 |
| Table 6.3  | I <sup>2</sup> C Fast Mode 400 kHz Timing Definition .....         | 27 |
| Table 6.4  | SPI Master Serial Flash Memory Interface .....                     | 28 |
| Table 6.5  | Instruction Cycle for a SPI Transaction .....                      | 30 |
| Table 7.1  | Pin States on Reset .....                                          | 32 |
| Table 7.2  | Power-on Reset .....                                               | 32 |
| Table 9.1  | Junction Temperature within Recommended Operating Conditions ..... | 38 |
| Table 9.2  | ESD Handling Ratings .....                                         | 38 |
| Table 10.1 | Current Consumption .....                                          | 39 |

## 1 Package Information

### 1.1 Pinout Diagram

Orientation from Top of Device

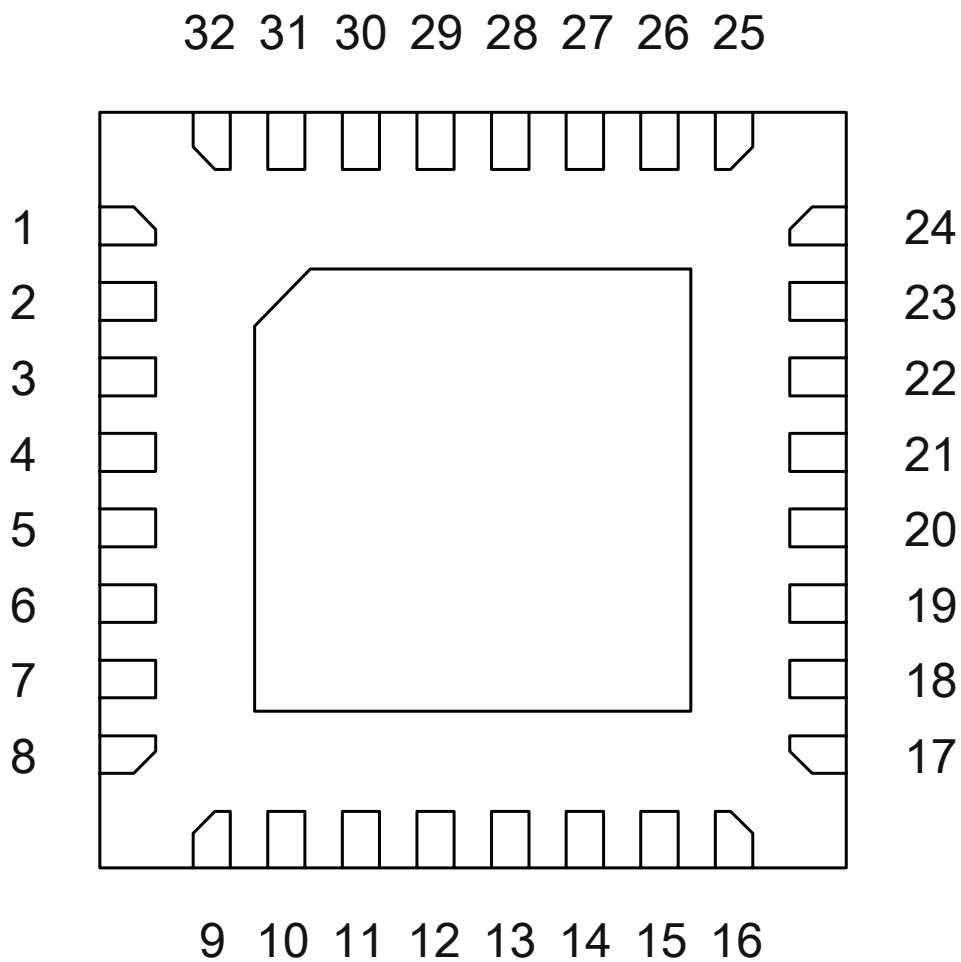


Figure 1.1: Pinout Diagram

## 1.2 Device Terminal Functions

| Radio | Lead | Pad Type | Supply Domain            | Description                       |
|-------|------|----------|--------------------------|-----------------------------------|
| RF    | 7    | RF       | VDD_RADIO <sup>(a)</sup> | Bluetooth transmitter / receiver. |

<sup>(a)</sup> The VDD\_RADIO domain is generated from VDD\_REG\_IN, see Figure 7.1.

| Synthesiser and Oscillator | Lead | Pad Type | Supply Domain          | Description                    |
|----------------------------|------|----------|------------------------|--------------------------------|
| XTAL_32K_OUT               | 2    | Analogue | VDD_BAT                | Drive for sleep clock crystal. |
| XTAL_32K_IN                | 3    | Analogue | VDD_BAT                | 32.768kHz sleep clock input.   |
| XTAL_16M_OUT               | 9    | Analogue | VDD_ANA <sup>(b)</sup> | Drive for crystal.             |
| XTAL_16M_IN                | 10   | Analogue | VDD_ANA                | Reference clock input.         |

<sup>(b)</sup> The VDD\_ANA domain is generated from VDD\_REG\_IN, see Figure 7.1.

| I <sup>2</sup> C Interface | Lead | Pad Type                                            | Supply Domain | Description                                                                                                                                                                     |
|----------------------------|------|-----------------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I2C_SDA                    | 29   | Bidirectional, tristate, with weak internal pull-up | VDD_PADS      | I <sup>2</sup> C data input / output or SPI serial flash data output (SF_DOUT). If connecting to SPI serial flash, connect this pin to SO on the serial flash. See Section 6.3. |
| I2C_SCL                    | 28   | Input with weak internal pull-up                    | VDD_PADS      | I <sup>2</sup> C clock or SPI serial flash clock output (SF_CLK), see Section 6.3.                                                                                              |

| PIO Port               | Lead | Pad Type                                                       | Supply Domain | Description                                                                |
|------------------------|------|----------------------------------------------------------------|---------------|----------------------------------------------------------------------------|
| PIO[11]                | 25   | Bidirectional with programmable strength internal pull-up/down | VDD_PADS      | Programmable I/O line.                                                     |
| PIO[10]                | 24   |                                                                |               |                                                                            |
| PIO[9]                 | 23   |                                                                |               |                                                                            |
| PIO[8] /<br>DEBUG_MISO | 22   | Bidirectional with programmable strength internal pull-up/down | VDD_PADS      | Programmable I/O line or debug SPI MISO selected by SPI_PIO#.              |
| PIO[7] /<br>DEBUG_MOSI | 20   |                                                                |               | Programmable I/O line or debug SPI MOSI selected by SPI_PIO#.              |
| PIO[6] /<br>DEBUG_CS#  | 19   |                                                                |               | Programmable I/O line or debug SPI chip select (CS#) selected by SPI_PIO#. |
| PIO[5] /<br>DEBUG_CLK  | 18   |                                                                |               | Programmable I/O line or debug SPI CLK selected by SPI_PIO#.               |

| PIO Port         | Lead | Pad Type                                                       | Supply Domain          | Description                                                                                                                                                     |
|------------------|------|----------------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PIO[4] / SF_CS#  | 17   | Bidirectional with programmable strength internal pull-up/down | VDD_PADS               | Programmable I/O line or SPI serial flash chip select (SF_CS#), see Section 6.3.                                                                                |
| PIO[3] / SF_DIN  | 16   |                                                                |                        | Programmable I/O line or SPI serial flash data (SF_DIN) input. If connecting to SPI serial flash, this pin connects to SI on the serial flash. See Section 6.3. |
| PIO[2]           | 27   | Bidirectional with programmable strength internal pull-up/down | VDD_PADS               | Programmable I/O line or I <sup>2</sup> C power.                                                                                                                |
| PIO[1] / UART_RX | 15   | Bidirectional with programmable strength internal pull-up/down | VDD_PADS               | Programmable I/O line or UART RX.                                                                                                                               |
| PIO[0] / UART_TX | 14   |                                                                |                        | Programmable I/O line or UART TX.                                                                                                                               |
| AIO[2]           | 11   | Bidirectional analogue                                         | VDD_AUX <sup>(c)</sup> | Analogue programmable I/O line.                                                                                                                                 |
| AIO[1]           | 12   |                                                                |                        |                                                                                                                                                                 |
| AIO[0]           | 13   |                                                                |                        |                                                                                                                                                                 |


<sup>(c)</sup> The VDD\_AUX domain is generated from VDD\_REG\_IN, see Figure 7.1.

| Test and Debug | Lead | Pad Type                             | Supply Domain | Description                    |
|----------------|------|--------------------------------------|---------------|--------------------------------|
| SPI_PIO#       | 26   | Input with strong internal pull-down | VDD_PADS      | Selects SPI debug on PIO[8:5]. |

| Wake-up | Lead | Pad Type                                                            | Supply Domain | Description                                          |
|---------|------|---------------------------------------------------------------------|---------------|------------------------------------------------------|
| WAKE    | 4    | Input has no internal pull-up or pull-down, use external pull-down. | VDD_BAT       | Input to wake CSR1010 QFN from hibernate or dormant. |

| Power Supplies and Control | Lead        | Description                                                       |
|----------------------------|-------------|-------------------------------------------------------------------|
| VDD_BAT                    | 1           | Battery input and regulator enable (active high).                 |
| VDD_BAT_SMPS               | 32          | Input to high-voltage switch-mode regulator.                      |
| SMPS_LX                    | 31          | High-voltage switch-mode regulator output.                        |
| VDD_CORE                   | 5, 30       | Positive supply for digital domain.                               |
| VDD_PADS                   | 21          | Positive supply for all digital I/O ports PIO[11:0].              |
| VDD_REG_IN                 | 6           | Positive supply for Bluetooth radio and digital linear regulator. |
| VDD_XTAL                   | 8           | Decouple with 470nF capacitor to ground.                          |
| VSS                        | Exposed pad | Ground connections.                                               |

1.3 Package Dimensions

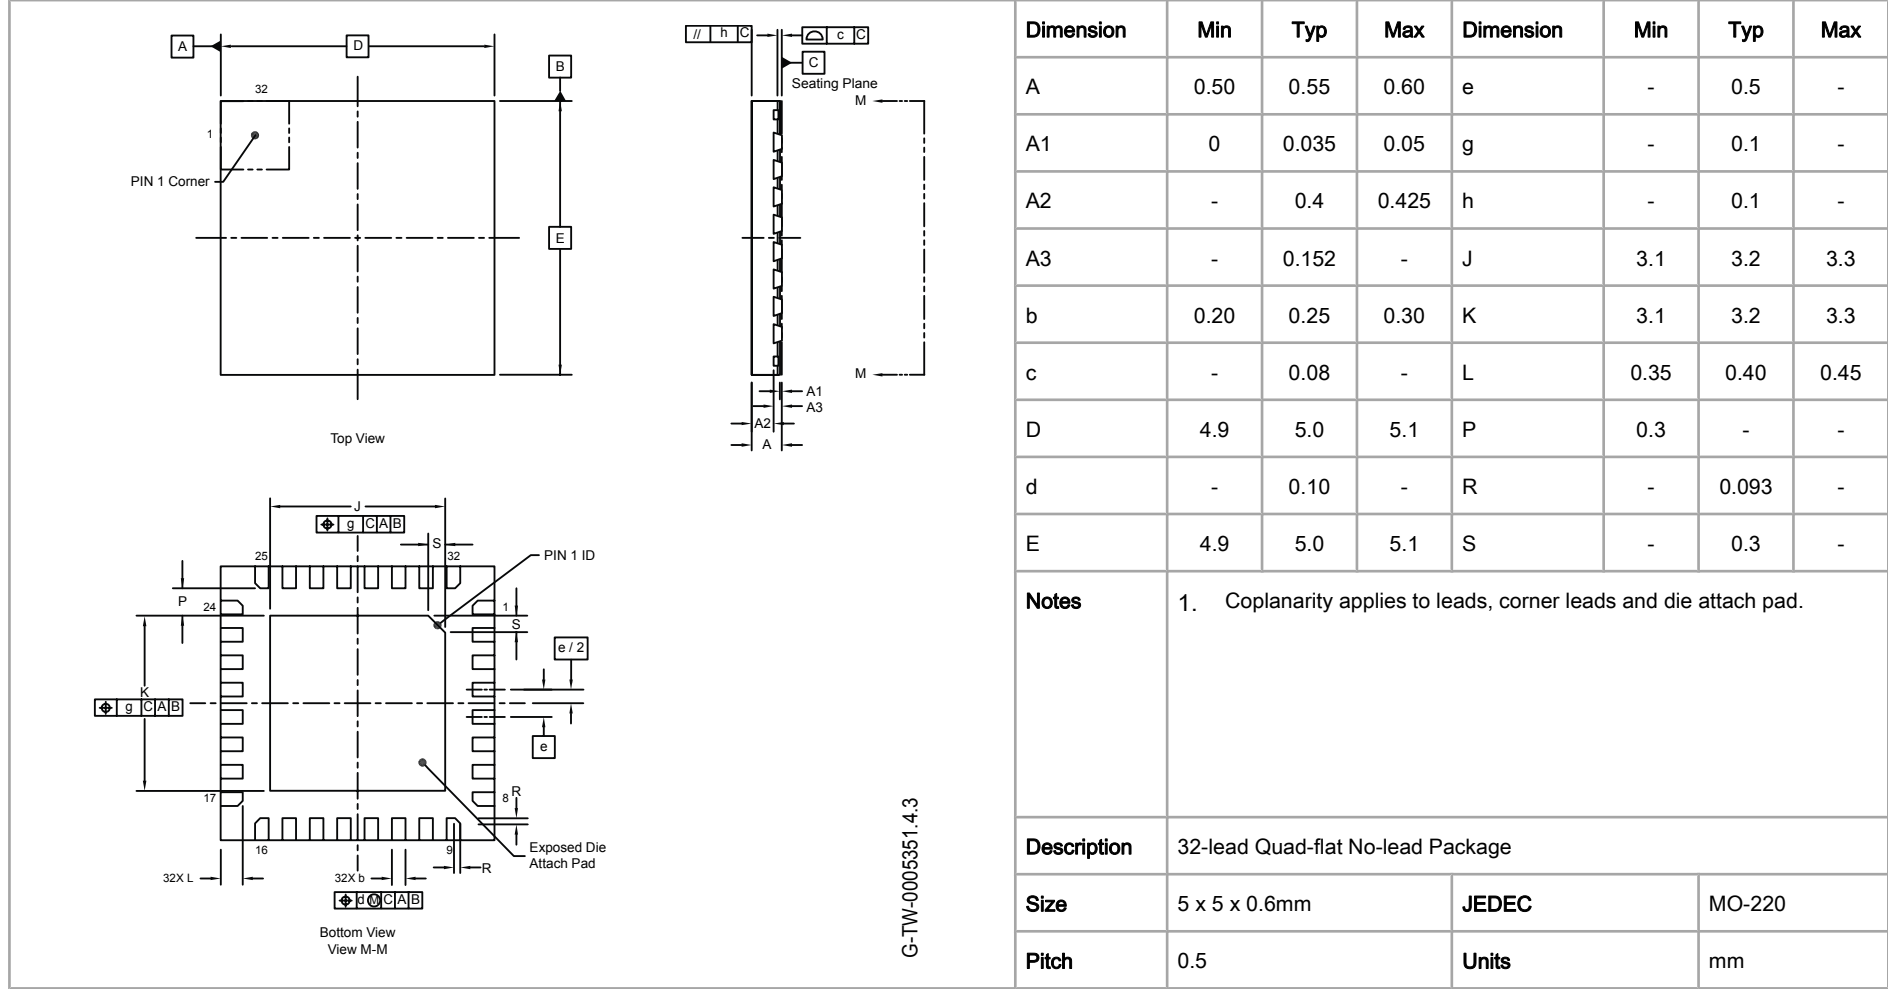

## 1.4 PCB Design and Assembly Considerations

This section lists recommendations to achieve maximum board-level reliability of the 5 x 5 x 0.6mm QFN 32-lead package:

- NSMD lands (lands smaller than the solder mask aperture) are preferred, because of the greater accuracy of the metal definition process compared to the solder mask process. With solder mask defined pads, the overlap of the solder mask on the land creates a step in the solder at the land interface, which can cause stress concentration and act as a point for crack initiation.
- CSR recommends that the PCB land pattern is in accordance with IPC standard IPC-7351.
- Solder paste must be used during the assembly process.

## 1.5 Typical Solder Reflow Profile

For information, see *Typical Solder Reflow Profile for Lead-free Devices Information Note*.



## 2 Bluetooth Modem

### 2.1 RF Ports

CSR1010 QFN contains an integrated balun which provides a single-ended RF TX / RX port pin. No matching components are needed as the receive mode impedance is 50Ω and the transmitter has been optimised to deliver power in to a 50Ω load.

### 2.2 RF Receiver

The receiver features a near-zero IF architecture that allows the channel filters to be integrated onto the die. Sufficient out-of-band blocking specification at the LNA input allows the receiver to be used in close proximity to GSM and W-CDMA cellular phone transmitters without being significantly desensitised.

An ADC digitises the IF received signal.

#### 2.2.1 Low Noise Amplifier

The LNA operates in differential mode and takes its input from the balanced port of the integrated balun.

#### 2.2.2 RSSI Analogue to Digital Converter

The ADC samples the RSSI voltage on a packet-by-packet basis and implements a fast AGC. The front-end LNA gain is changed according to the measured RSSI value, keeping the first mixer input signal within a limited range. This improves the dynamic range of the receiver, improving performance in interference-limited environments.

### 2.3 RF Transmitter

#### 2.3.1 IQ Modulator

The transmitter features a direct IQ modulator to minimise frequency drift during a transmit packet, which results in a controlled modulation index. Digital baseband transmit circuitry provides the required spectral shaping.

#### 2.3.2 Power Amplifier

The internal PA has a maximum 9dBm output power without needing an external RF PA.

### 2.4 Bluetooth Radio Synthesiser

The Bluetooth radio synthesiser is fully integrated onto the die with no requirement for an external VCO screening can, varactor tuning diodes, LC resonators or loop filter. The synthesiser is guaranteed to lock in sufficient time across the guaranteed temperature range to meet the Bluetooth v4.1 specification.

### 2.5 Baseband

#### 2.5.1 Physical Layer Hardware Engine

Dedicated logic performs:


- Cyclic redundancy check
- Encryption
- Data whitening
- Access code correlation

The hardware supports all optional and mandatory features of Bluetooth v4.1 specification.

## 3 Clock Generation

The Bluetooth reference clock for the system is generated from an external 16MHz clock source, see Figure 3.1. All the CSR1010 QFN internal digital clocks are generated using a phase locked loop, which is locked to the frequency of either the external reference clock source or a sleep clock frequency of 32.768kHz, see Figure 3.1.

### 3.1 Clock Architecture

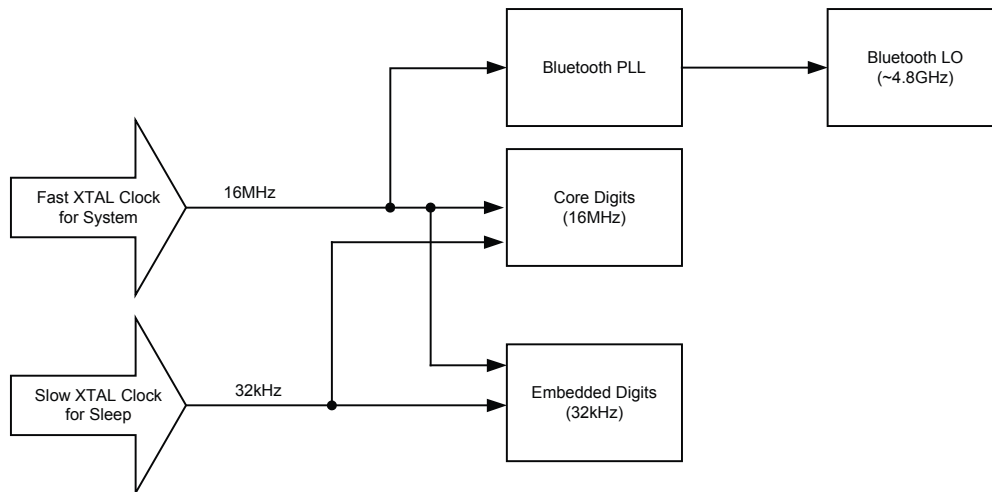


G-TW-0005266.2.2

Figure 3.1: Clock Architecture

### 3.2 Crystal Oscillator: XTAL\_16M\_IN and XTAL\_16M\_OUT

CSR1010 QFN contains crystal driver circuits. This operates with an external crystal and capacitors to form a Pierce oscillator. Figure 3.2 shows the external crystal is connected to pins XTAL\_16M\_IN and XTAL\_16M\_OUT.

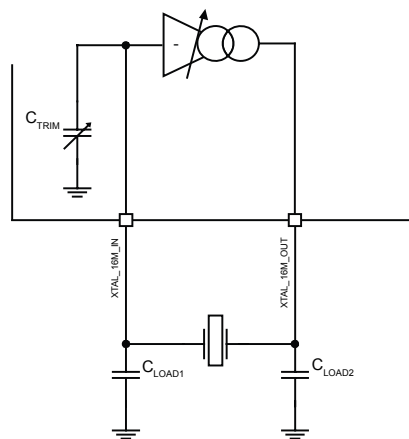

G-TW-0005348.1.1

Figure 3.2: Crystal Driver Circuit

#### Note:

$C_{TRIM}$  is the internal trimmable capacitance in Table 3.1.

$C_{LOAD1}$  and  $C_{LOAD2}$  in combination with  $C_{TRIM}$  and any parasitic capacitance provide the load capacitance required by the crystal.

#### 3.2.1 Crystal Specification

Table 3.1 shows the specification for an external crystal.

| Parameter                                             | Min | Typ | Max | Unit   |
|-------------------------------------------------------|-----|-----|-----|--------|
| Frequency                                             | -   | 16  | -   | MHz    |
| Frequency tolerance (without trimming) <sup>(a)</sup> | -   | -   | ±25 | ppm    |
| Frequency trim range <sup>(b)</sup>                   | -   | ±50 | -   | ppm    |
| Drive level                                           | -   | 0.4 | -   | V      |
| Equivalent series resistance                          | -   | -   | 60  | Ω      |
| Load capacitance                                      | -   | 9   | -   | pF     |
| Pullability                                           | 10  | -   | -   | ppm/pF |

**Table 3.1: Crystal Specification**

<sup>(a)</sup> Use integrated load capacitors to trim initial frequency tolerance in production or to trim frequency over temperature, increasing the allowable frequency tolerance.


<sup>(b)</sup> Frequency trim range is dependent on crystal load capacitor values and crystal pullability.

### 3.2.2 Frequency Trim

CSR1010 QFN contains variable integrated capacitors to allow for fine-tuning of the crystal resonant frequency. This firmware-programmable feature allows accurate trimming of crystals on a per-device basis on the production line. The resulting trim value is stored in non-volatile memory.

### 3.3 Sleep Clock

The sleep clock is an externally provided 32.768kHz clock that is used during deep sleep and in other low-power modes. Figure 3.3 shows the sleep clock crystal driver circuit.

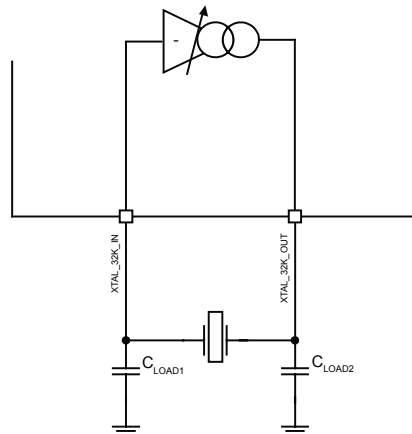

**Figure 3.3: Sleep Clock Crystal Driver Circuit**

**Note:**

$C_{LOAD1}$  and  $C_{LOAD2}$  in combination with any parasitic capacitance provide the load capacitance required by the crystal.

#### 3.3.1 Crystal Specification

Table 3.2 shows the requirements for the sleep clock.

G-TW-0005349.2.2

| Sleep Clock                                       | Min   | Typ    | Max   | Units |
|---------------------------------------------------|-------|--------|-------|-------|
| Frequency                                         | 30    | 32.768 | 35    | kHz   |
| Frequency tolerance <sup>(a)</sup> <sup>(b)</sup> | -     | -      | 250   | ±ppm  |
| Frequency trim range                              | -     | 50     | -     | ±ppm  |
| Drive level                                       | -     | 0.4    | -     | V     |
| Load capacitance                                  | -     | -      | 10    | pF    |
| Equivalent series resistance                      | 40    | -      | 65    | kΩ    |
| Duty cycle                                        | 30:70 | 50:50  | 70:30 | %     |

**Table 3.2: Sleep Clock Specification**

<sup>(a)</sup> The frequency of the slow clock is periodically calibrated against the system clock. As a result the rate of change of the frequency is more important than the maximum deviation. To meet the accuracy requirements the frequency should not drift due to temperature or other effects by more than 80ppm in any 5 minute period.

<sup>(b)</sup> CSR1010 QFN can correct for ±1% by using the fast clock to calibrate the slow clock.

## 4 Operating Modes

CSR1010 QFN has 5 operating modes. 3 of these are sleep modes:

- Running
- Idle
- Sleep modes:
  - Deep Sleep
  - Hibernate
  - Dormant

For current consumption rates in the operating modes, see Section 10.

### 4.1 Run Mode

In Run mode, all functions are on. RX and/or TX are active.

### 4.2 Idle Mode

In Idle mode, the VDD\_PADS and VDD\_BAT domains are powered, the reference clock and the sleep clock are powered, the RAM is powered and the digital circuits are powered. The MCU is idle.

There is a  $<1\mu\text{s}$  wake-up time.

### 4.3 Deep Sleep Mode

In Deep Sleep mode, the VDD\_PADS and VDD\_BAT domains are powered, the sleep clock is on but the reference clock is off, the RAM is on, the digital circuits are on and the SMPS is on (low-power mode). There is a configurable wake-up time.

CSR1010 QFN is woken from Deep Sleep mode by any PIO configured to wake the IC.

### 4.4 Hibernate Mode

In Hibernate mode, the VDD\_PADS and VDD\_BAT domains are powered and the sleep clock is on. The reference clock is off.

CSR1010 QFN is woken from Hibernate mode by a selected level on the WAKE pin or by the watchdog timer.

### 4.5 Dormant Mode

In Dormant mode, all functions are off. CSR1010 QFN is woken from Dormant mode by a selected level on the WAKE pin.

## 5 Microcontroller, Memory and Baseband Logic

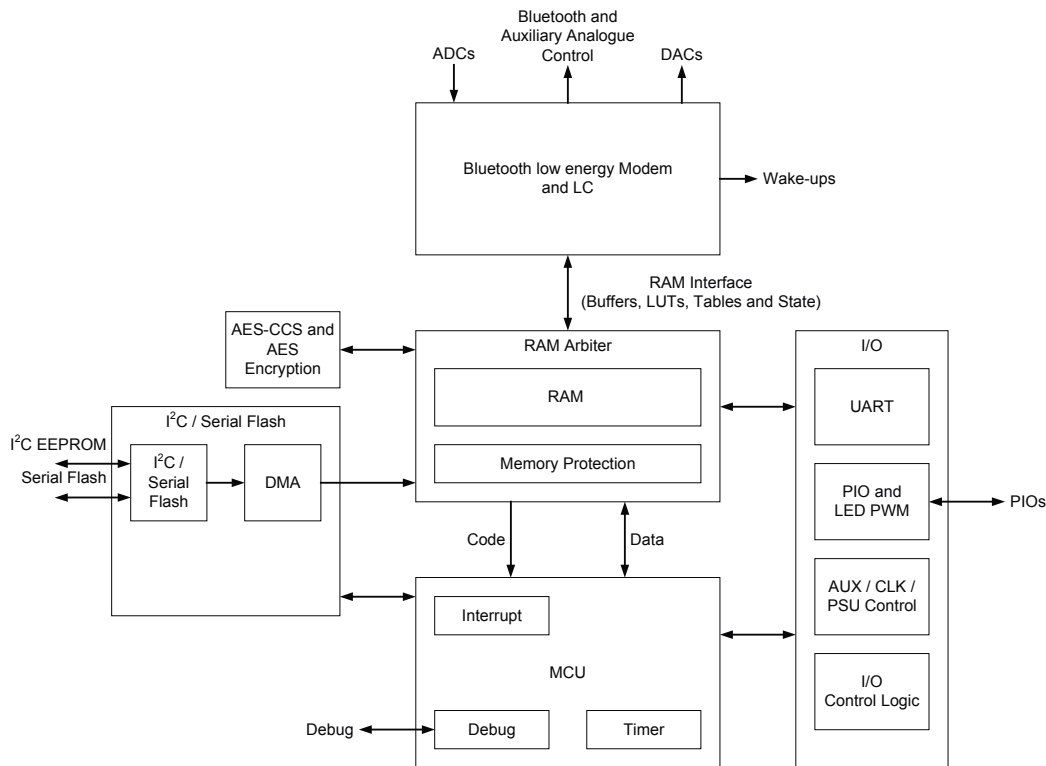


Figure 5.1: Baseband Digits Block Diagram

### 5.1 System RAM

64KB of integrated RAM supports the RISC MCU and is shared between the ring buffers used to hold data for each active connection, general-purpose memory required by the Bluetooth stack and the user application.

### 5.2 Internal ROM

CSR1010 QFN has 64KB of internal ROM. This memory is provided for system firmware implementation. If the internal ROM holds valid program code, on boot-up, this is copied into the program RAM. Code then executes from ROM and RAM.

### 5.3 Microcontroller

The MCU, interrupt controller and event timer run the Bluetooth software stack and control the Bluetooth radio and external interfaces. A 16-bit RISC microcontroller is used for low power consumption and efficient use of memory.

### 5.4 Programmable I/O Ports, PIO and AIO

12 lines of programmable bidirectional I/O are provided. They are all powered from VDD\_PADS.

PIO lines are software-configurable as weak pull-up, weak pull-down, strong pull-up or strong pull-down.

#### Note:

At reset all PIO lines are inputs with weak pull-downs.

Any of the PIO lines can be configured as interrupt request lines or to wake the IC from deep sleep mode. Table 5.1 lists the options for waking the IC from the sleep modes.

| Sleep Mode | Wake-up Options                                        |
|------------|--------------------------------------------------------|
| Dormant    | Can only be woken by the WAKE pin.                     |
| Hibernate  | Can be woken by the WAKE pin or by the watchdog timer. |
| Deep Sleep | Can be woken by any PIO configured to wake the IC.     |

**Table 5.1: Wake Options for Sleep Modes**

The CSR1010 QFN supports alternative functions on the PIO lines, for example:

- SPI interface, see Section 1.2 and Section 6.4
- UART, see Section 1.2 and Section 6.1.1
- LED flasher / PWM module, see Section 5.5

Table 5.2 shows the alternative functions on the PIO lines.

| PIO    | Function   |           |         |
|--------|------------|-----------|---------|
|        | Debug SPI  | SPI Flash | UART    |
| PIO[8] | DEBUG_MISO | -         | -       |
| PIO[7] | DEBUG_MOSI | -         | -       |
| PIO[6] | DEBUG_CS#  | -         | -       |
| PIO[5] | DEBUG_CLK  | -         | -       |
| PIO[4] | -          | SF_CS#    | -       |
| PIO[3] | -          | SF_DIN    | -       |
| PIO[2] | -          | -         | -       |
| PIO[1] | -          | -         | UART_RX |
| PIO[0] | -          | -         | UART_TX |

**Table 5.2: Alternative PIO Functions**

**Note:**

CSR cannot guarantee that the PIO assignments remain as described. Implementation of the PIO lines is firmware build-specific, for more information see the relevant software release note.

CSR1010 QFN has 3 general-purpose analogue interface pins, AIO[2:0].

## 5.5 LED Flasher / PWM Module

CSR1010 QFN contains an LED flasher / PWM module.

**Note:**

The LED flasher functions in Deep Sleep and Active modes only.

The PWM functions in all modes except Hibernate and Dormant.

These functions are controlled by the on-chip firmware.

Figure 5.2 shows a typical PWM signal on a PIO. For more information, see *CSR  $\mu$ Energy Pulse Width Modulation Application Note*.

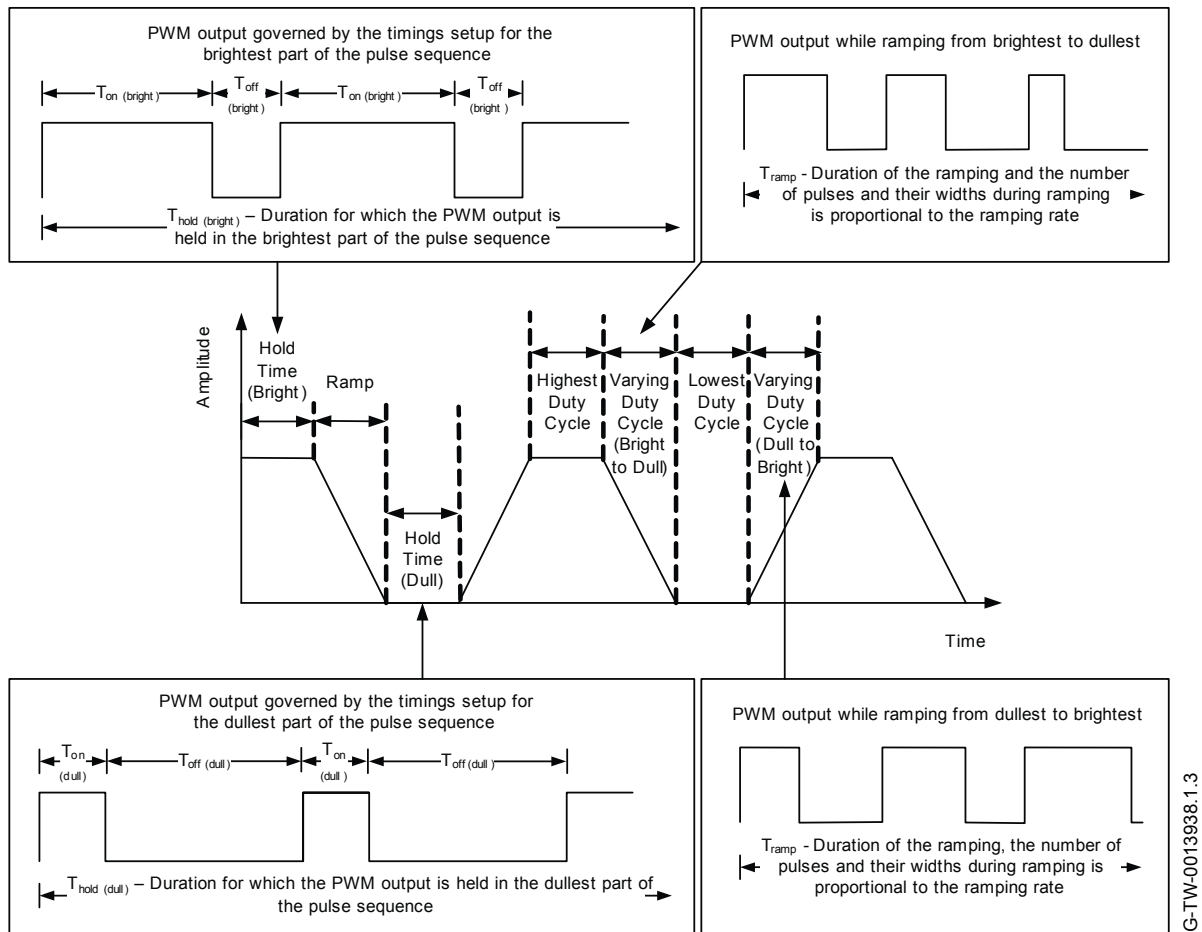


Figure 5.2: Typical PWM Signal on a PIO

Figure 5.2 lists PWM the operating range.

| Parameter                                                  | Min  | Max   | Unit    |
|------------------------------------------------------------|------|-------|---------|
| Off Time ( $T_{off}$ )                                     | 30.5 | 7782  | $\mu$ s |
| On Time ( $T_{on}$ )                                       | 30.5 | 7782  | $\mu$ s |
| Hold Time ( $T_{hold}$ )                                   | 16   | 4080  | ms      |
| Duty Cycle = On Time ( $T_{on}$ ) + Off Time ( $T_{off}$ ) | 61   | 15564 | $\mu$ s |
| Frequency = 1 / Duty Cycle                                 | 64.3 | 16320 | Hz      |

Table 5.3: PWM Operating Range

## 5.6 Temperature Sensor

CSR1010 QFN contains a temperature sensor that measures the temperature of the die to an accuracy of  $\pm 1$   $^{\circ}$ C.



## 5.7 Battery Monitor

CSR1010 QFN contains an internal battery monitor that reports the battery voltage to the software.

## 6 Serial Interfaces

### 6.1 Application Interface

#### 6.1.1 UART Interface

The CSR1010 QFN UART interface provides a simple mechanism for communicating with other serial devices using the RS232 protocol.

2 signals implement the UART function, UART\_TX and UART\_RX. When CSR1010 QFN is connected to another digital device, UART\_RX and UART\_TX transfer data between the 2 devices.

UART configuration parameters, e.g. baud rate and data format, are set using CSR1010 QFN firmware.

When selected in firmware PIO[0] is assigned to a UART\_TX output and PIO[1] is assigned to a UART\_RX input, see Section 1.2.

**Note:**

To communicate with the UART at its maximum data rate using a standard PC, the PC requires an accelerated serial port adapter card.

Table 6.1 shows the possible UART settings for the CSR1010 QFN.

| Parameter           |         | Possible Values                 |
|---------------------|---------|---------------------------------|
| Baud rate           | Minimum | 2400 baud ( $\leq 2\%$ Error)   |
|                     |         | 9600 baud ( $\leq 2\%$ Error)   |
|                     | Maximum | 3.69Mbaud ( $\leq 0.1\%$ Error) |
| Parity              |         | None, Odd or Even               |
| Number of stop bits |         | 1 or 2                          |
| Bits per byte       |         | 8                               |

**Table 6.1: Possible UART Settings**

#### 6.1.1.1 UART Configuration While in Deep Sleep

The maximum baud rate is 2400 baud during deep sleep.

### 6.2 I<sup>2</sup>C Interface

The I<sup>2</sup>C interface communicates to EEPROM, external peripherals or sensors. An external EEPROM connection can hold the program code externally to the CSR1010 QFN.

Figure 6.1 shows an example of an EEPROM connected to the I<sup>2</sup>C interface where I2C\_SCL, I2C\_SDA and PIO[2] are connected to the external EEPROM. The PIO[2] pin supplies the power to the EEPROM supply pin, e.g. VDD. At boot-up, if there is no valid ROM image in the CSR1010 QFN ROM area the CSR1010 QFN tries to boot from the I<sup>2</sup>C interface, see Figure 6.5. This involves reading the code from the external EEPROM and loading it into the internal CSR1010 QFN RAM.

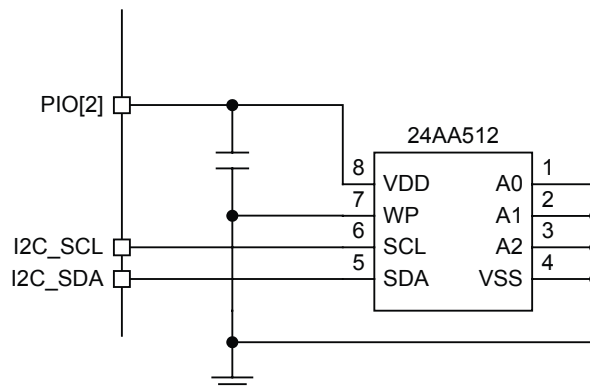


Figure 6.1: Example of an I²C Interface EEPROM Connection

#### Standard Mode 100 kHz

Figure 6.2 shows I²C standard mode 100 kHz timing diagram.

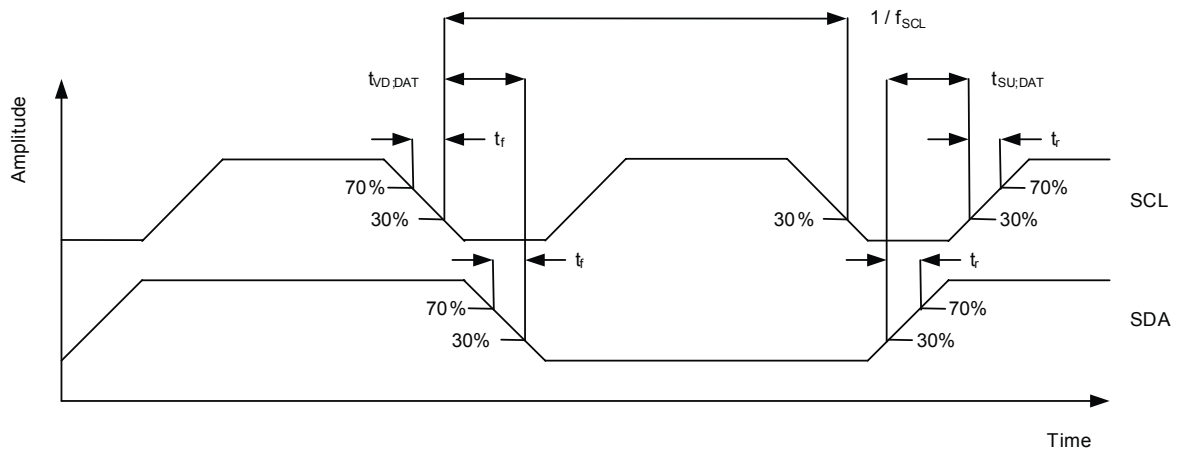


Figure 6.2: I²C Standard Mode 100 kHz Timing Diagram (Top Line: SCL, Bottom Line: SDA)


Table 6.2 lists I²C standard mode 100 kHz timing definition.

| Parameter                   | Symbol       | Min  | Max  | Unit    |
|-----------------------------|--------------|------|------|---------|
| Clock Rate                  | $f_{SCL}$    | -    | 100  | kHz     |
| SCL: Rise-time (30% to 70%) | $t_r$        | -    | 50.3 | ns      |
| SCL: Fall-time (70% to 30%) | $t_f$        | -    | 0.9  | ns      |
| SDA: Rise-time (30% to 70%) | $t_r$        | -    | 55.3 | ns      |
| SDA: Fall-time (70% to 30%) | $t_f$        | -    | 0.7  | ns      |
| Data set-up time            | $t_{SU,DAT}$ | 2511 | -    | ns      |
| Data valid time             | $t_{VD,DAT}$ | -    | 2.5  | $\mu$ s |

Table 6.2: I²C Standard Mode 100 kHz Timing Definition

## Fast Mode 400 kHz

Figure 6.3 shows I<sup>2</sup>C fast mode 400 kHz timing diagram.

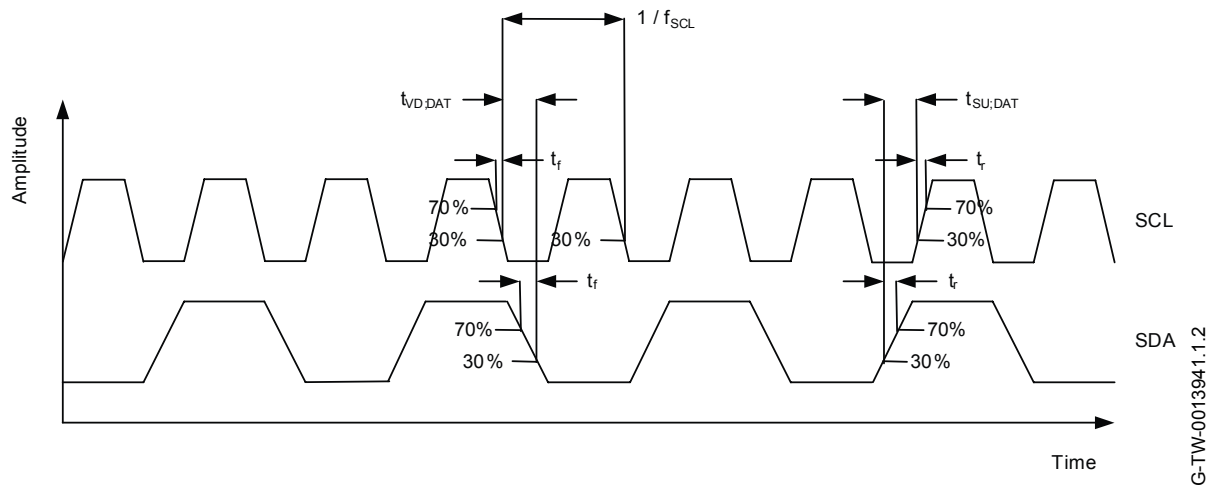

**Figure 6.3: I<sup>2</sup>C Fast Mode 400 kHz Timing Diagram (Top Line: SCL, Bottom Line: SDA)**

Table 6.3 lists I<sup>2</sup>C fast mode 400 kHz timing definition.

| Parameter                   | Symbol       | Min  | Max  | Unit    |
|-----------------------------|--------------|------|------|---------|
| Clock Rate                  | $f_{SCL}$    | -    | 400  | kHz     |
| SCL: Rise-time (30% to 70%) | $t_r$        | 41.4 | 50.6 | ns      |
| SCL: Fall-time (70% to 30%) | $t_f$        | 0.7  | 0.9  | ns      |
| SDA: Rise-time (30% to 70%) | $t_r$        | 46.0 | 55.9 | ns      |
| SDA: Fall-time (70% to 30%) | $t_f$        | 0.5  | 0.7  | ns      |
| Data set-up time            | $t_{SU,DAT}$ | 573  | -    | ns      |
| Data valid time             | $t_{VD,DAT}$ | -    | 0.56 | $\mu$ s |

**Table 6.3: I<sup>2</sup>C Fast Mode 400 kHz Timing Definition**

## 6.3 SPI Master Interface

The SPI master memory interface in the CSR1010 QFN is overlaid on the I<sup>2</sup>C interface and uses a further 3 PIOs for the extra pins, see Table 6.4.


| SPI Flash Interface | Pin     |
|---------------------|---------|
| Flash_VDD           | PIO[2]  |
| SF_DIN              | PIO[3]  |
| SF_CS#              | PIO[4]  |
| SF_CLK              | I2C_SCL |
| SF_DOUT             | I2C_SDA |

**Table 6.4: SPI Master Serial Flash Memory Interface**

**Note:**


If an application using CSR1010 QFN is designed to boot from SPI serial flash, it is possible for the firmware to map the I<sup>2</sup>C interface to alternative PIOs.

Figure 6.4 shows simple SPI timing diagram.

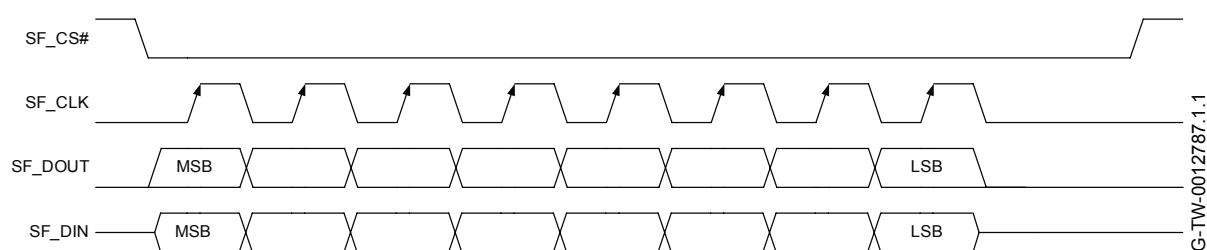

**Figure 6.4: SPI Timing Diagram**

The boot-up sequence for CSR1010 QFN is controlled by hardware and firmware. Figure 6.5 shows the sequence of loading RAM with content from RAM, EEPROM and SPI serial flash.

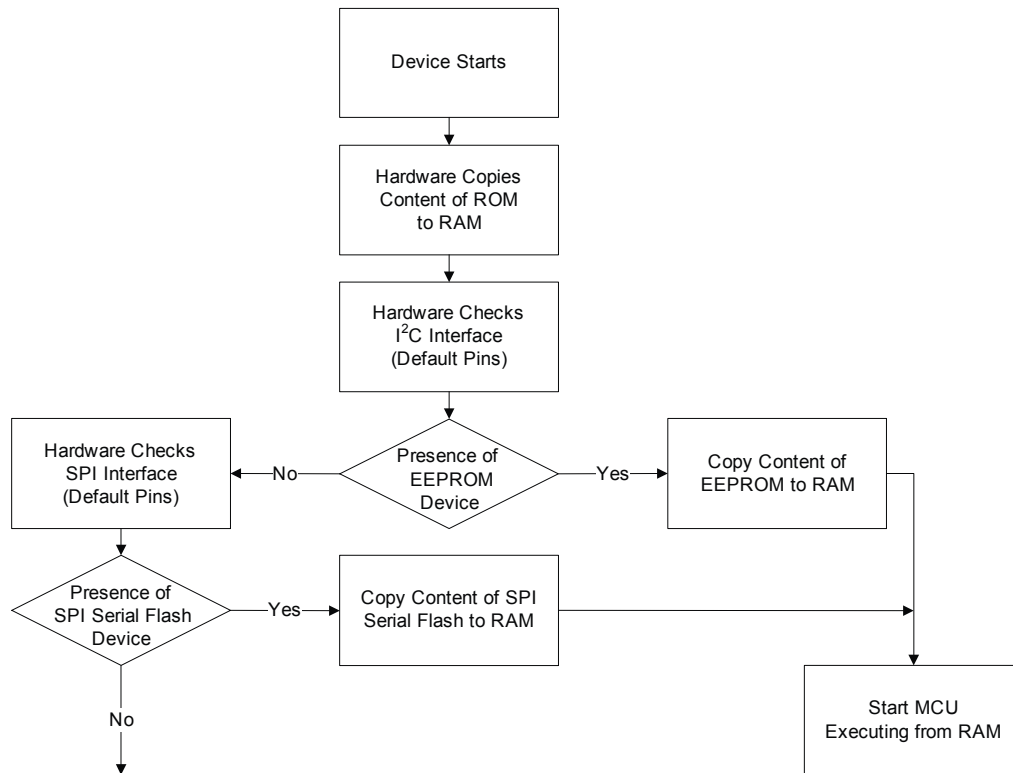

G-TW-0005552.3.2

**Figure 6.5: Memory Boot-up Sequence**

## 6.4 Programming and Debug Interface

### Important Note:

The CSR1010 QFN debug SPI interface is available in SPI slave mode to enable an external MCU to program and control the CSR1010 QFN, generally via libraries or tools supplied by CSR. The protocol of this interface is proprietary. The 4 SPI debug lines directly support this function.

The SPI programs, configures and debugs the CSR1010 QFN. It is required in production. Ensure the 4 SPI signals are brought out to either test points or a header.

Take SPI\_PIO#\_SEL high to enable the SPI debug feature on PIO[8:5].

CSR1010 QFN uses a 16-bit data and 16-bit address programming and debug interface. Transactions occur when the internal processor is running or is stopped.

Data is written or read one word at a time. Alternatively, the auto-increment feature is available for block access.

### 6.4.1 Instruction Cycle

The CSR1010 QFN is the slave and receives commands on DEBUG\_MOSI and outputs data on DEBUG\_MISO. Table 6.5 shows the instruction cycle for a SPI transaction.

|   |                          |                                                   |
|---|--------------------------|---------------------------------------------------|
| 1 | Reset the SPI interface  | Hold DEBUG_CS# high for 2 DEBUG_CLK cycles        |
| 2 | Write the command word   | Take DEBUG_CS# low and clock in the 8-bit command |
| 3 | Write the address        | Clock in the 16-bit address word                  |
| 4 | Write or read data words | Clock in or out 16-bit data word(s)               |
| 5 | Termination              | Take DEBUG_CS# high                               |

**Table 6.5: Instruction Cycle for a SPI Transaction**

With the exception of reset, DEBUG\_CS# must be held low during the transaction. Data on DEBUG\_MOSI is clocked into the CSR1010 QFN on the rising edge of the clock line DEBUG\_CLK. When reading, CSR1010 QFN replies to the master on DEBUG\_MISO with the data changing on the falling edge of the DEBUG\_CLK. The master provides the clock on DEBUG\_CLK. The transaction is terminated by taking DEBUG\_CS# high.

The auto increment operation on the CSR1010 QFN cuts down on the overhead of sending a command word and the address of a register for each read or write, especially when large amounts of data are to be transferred. The auto increment offers increased data transfer efficiency on the CSR1010 QFN. To invoke auto increment, DEBUG\_CS# is kept low, which auto increments the address, while providing an extra 16 clock cycles for each extra word written or read.

## 6.4.2 Multi-slave Operation

Do not connect the CSR1010 QFN in a multi-slave arrangement by simple parallel connection of slave MISO lines. When CSR1010 QFN is deselected (DEBUG\_CS# = 1), the DEBUG\_MISO line does not float. Instead, CSR1010 QFN outputs 0 if the processor is running or 1 if it is stopped.

## 7 Power Control and Regulation

CSR1010 QFN contains 2 regulators:

- 1 switch-mode regulator, which generates the main supply rail from the battery
- 1 low-voltage linear regulator

Figure 7.1 shows the configuration for the power control and regulation with the CSR1010 QFN.

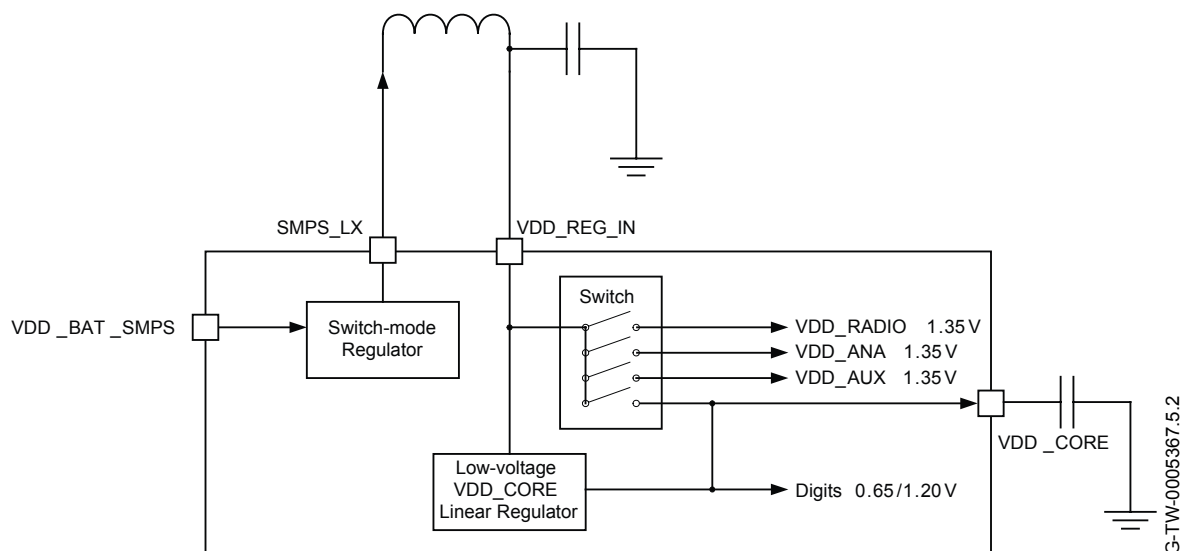


Figure 7.1: Voltage Regulator Configuration

### 7.1 Switch-mode Regulator

The switch-mode regulator generates the main rail from the battery supply, VDD\_BAT\_SMPS. The main rail supplies the lower regulated voltage to a further digital linear regulator and also to the analogue sections of the CSR1010 QFN.

The switch-mode regulator generates typically 1.35V.

### 7.2 Low-voltage VDD\_CORE Linear Regulator

The integrated low-voltage VDD\_CORE linear regulator powers the CSR1010 QFN digital circuits. The input voltage range is 0.65V to 1.35V. It can supply programmable voltages of 0.65V to 1.20V to the digital area of the CSR1010 QFN. The maximum output current for this regulator is 30mA.

Connect a minimum 470nF low ESR capacitor, e.g. MLC, to the VDD\_CORE output pin. Software controls the output voltage.

#### Important Note:

This regulator is only for CSR internal use. Section 8 shows CSR's recommended circuit connection.

### 7.3 Reset

CSR1010 QFN is reset by:

- Power-on reset
- Software-configured watchdog timer

#### 7.3.1 Digital Pin States on Reset

Table 7.1 shows the pin states of CSR1010 QFN on reset. PU and PD default to weak values unless specified otherwise.



| Pin Name / Group | On Reset  |
|------------------|-----------|
| I2C_SDA          | Strong PU |
| I2C_SCL          | Strong PU |
| PIO[11:0]        | Weak PD   |
| AIO[2:0]         | Weak PU   |

**Table 7.1: Pin States on Reset**


### 7.3.2 Power-on Reset

Table 7.2 shows how the power-on reset occurs.

| Power-on Reset                                | Typ  | Unit |
|-----------------------------------------------|------|------|
| Reset release on VDD_CORE rising              | 1.05 | V    |
| Reset assert on VDD_CORE falling              | 1.00 |      |
| Reset assert on VDD_CORE falling (Sleep mode) | 0.60 |      |
| Hysteresis                                    | 50   | mV   |

**Table 7.2: Power-on Reset**

8 Example Application Schematic

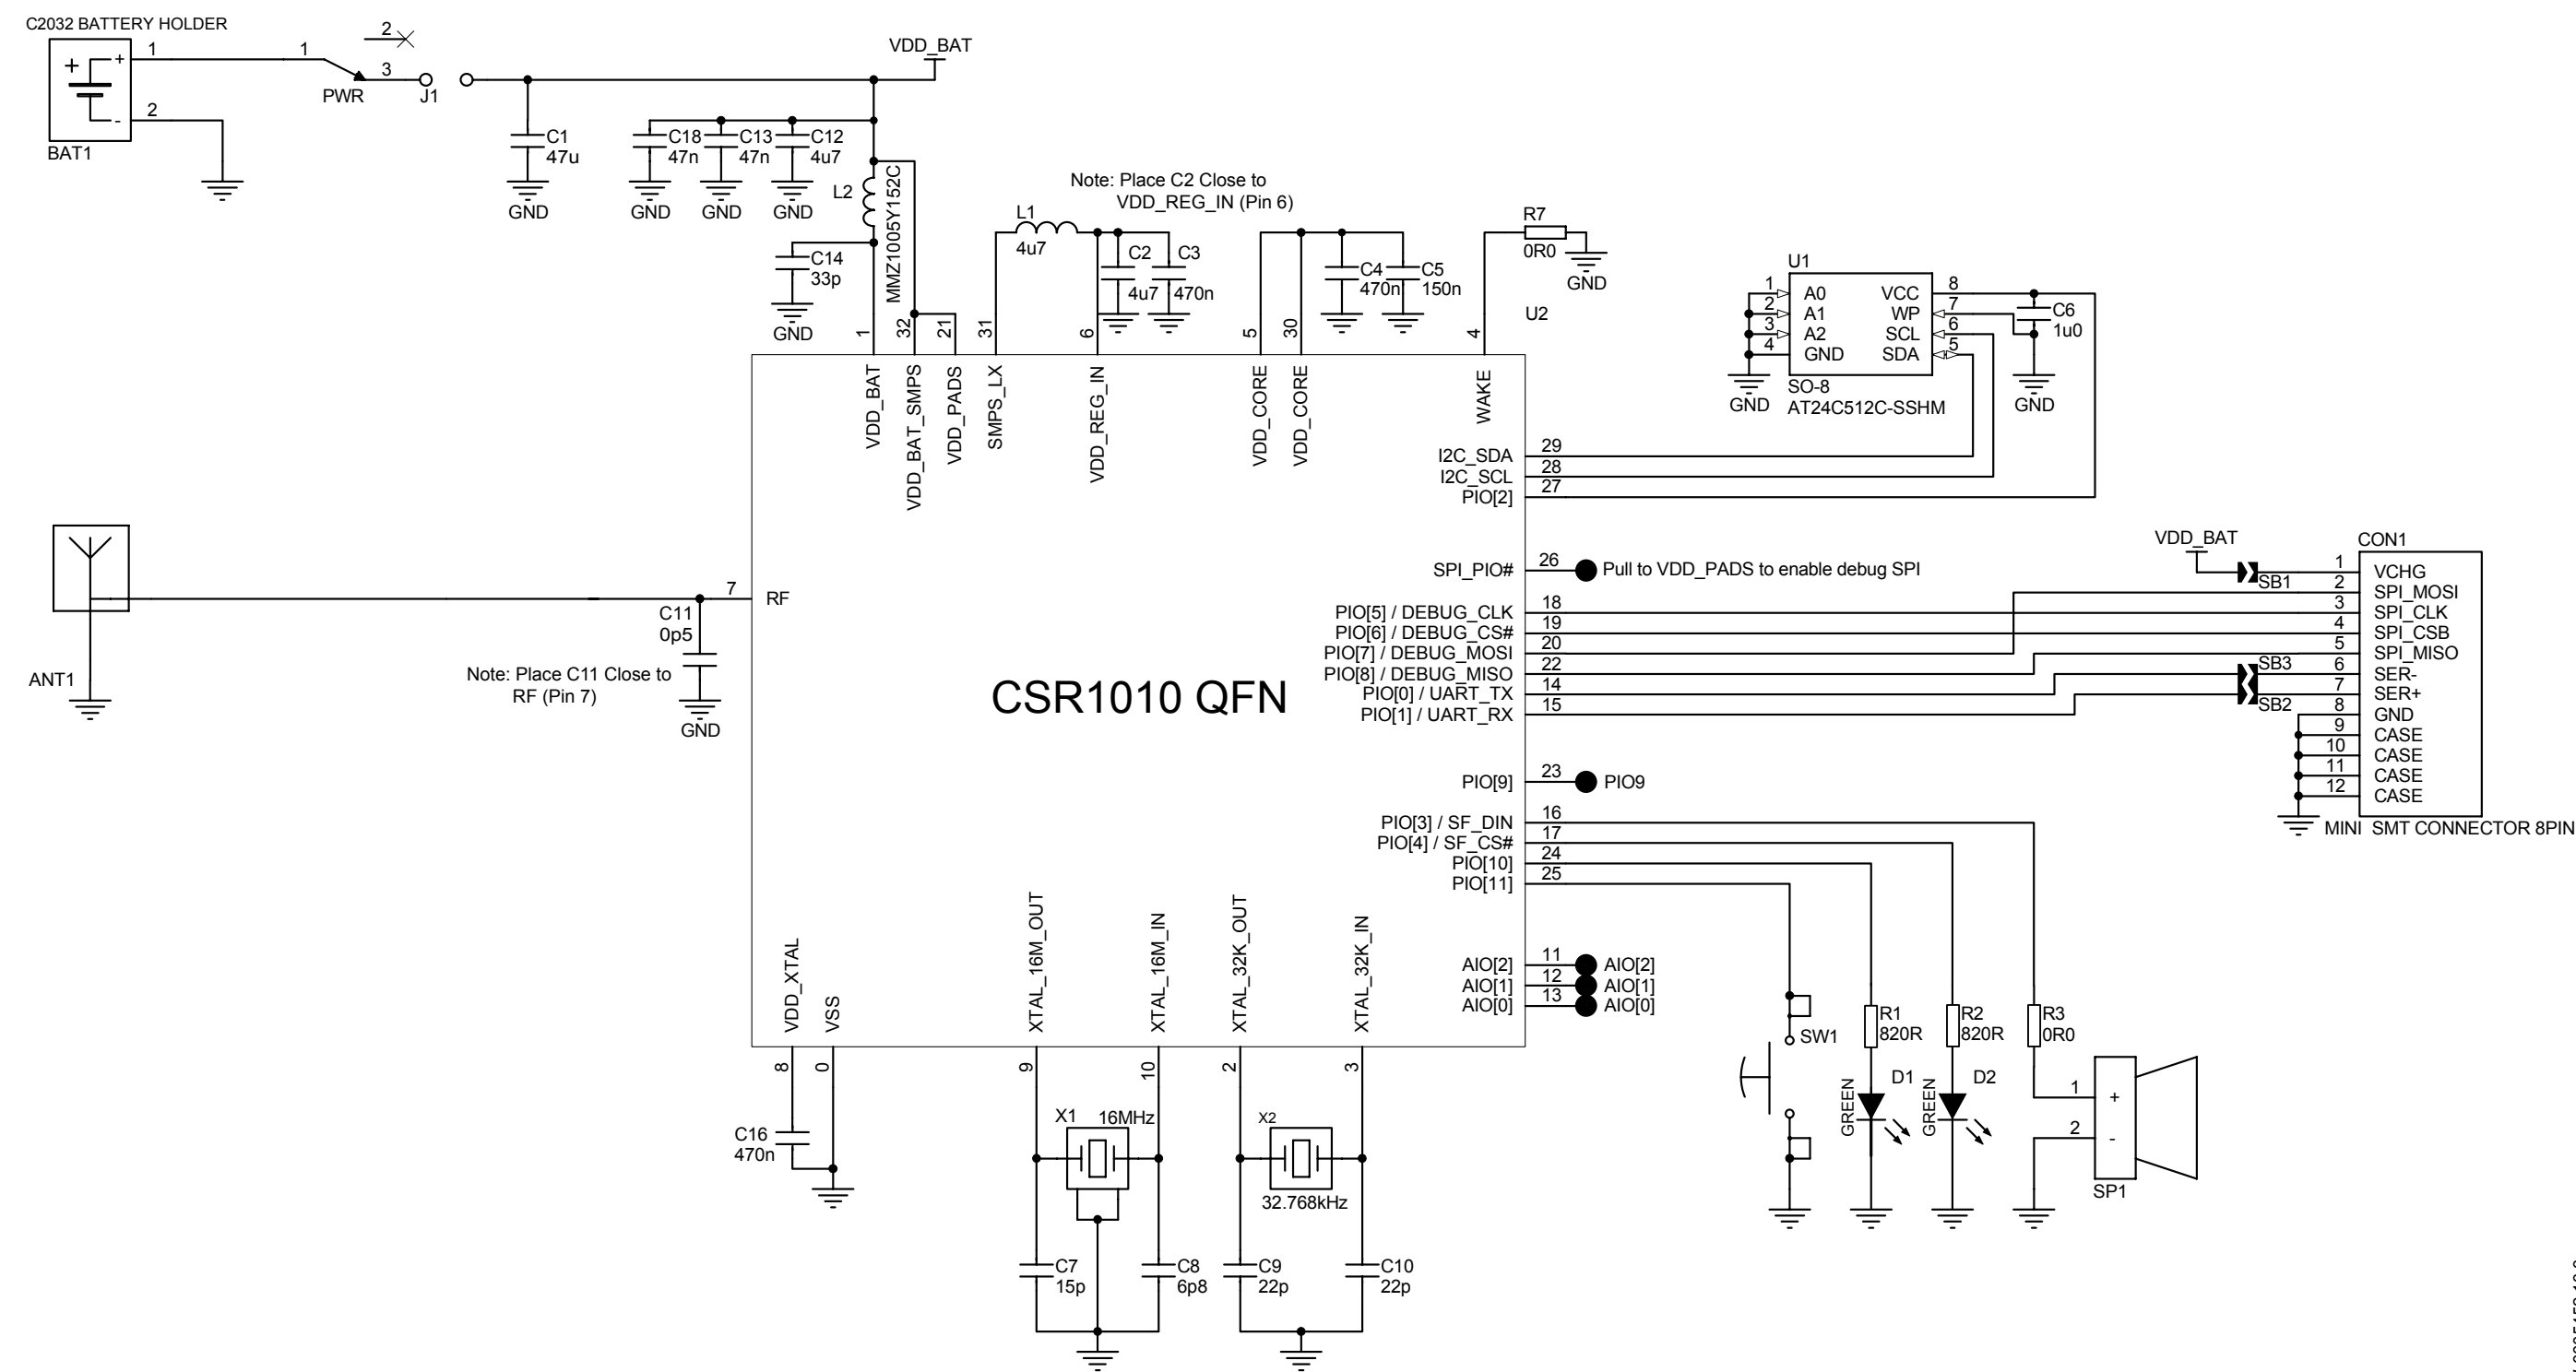

## 9 Electrical Characteristics

### 9.1 Absolute Maximum Ratings

| Rating                                 | Min       | Max       | Unit |
|----------------------------------------|-----------|-----------|------|
| Storage temperature                    | -40       | 85        | °C   |
| Battery (VDD_BAT) operation            | 1.8       | 4.4       | V    |
| I/O supply voltage                     | -0.4      | 4.4       | V    |
| Other terminal voltages <sup>(a)</sup> | VSS - 0.4 | VDD + 0.4 | V    |

<sup>(a)</sup> VDD = Terminal Supply Domain

### 9.2 Recommended Operating Conditions

| Operating Condition                            | Min | Typ | Max | Unit |
|------------------------------------------------|-----|-----|-----|------|
| Operating temperature range                    | -30 | -   | 85  | °C   |
| Battery (VDD_BAT) operation <sup>(a) (b)</sup> | 1.8 | -   | 3.6 | V    |
| I/O supply voltage (VDD_PADS) <sup>(c)</sup>   | 1.2 | -   | 3.6 | V    |

<sup>(a)</sup> CSR1010 QFN is reliable and qualifiable to 4.3V (idle, active and deep sleep modes) and 3.8V (all modes), but there are minor deviations in performance relative to published performance values for 1.8V to 3.6V. For layout guidelines for 4.3V operation, see *CSR1010 Hardware Design Review Template*.

<sup>(b)</sup> For hibernate and dormant mode, see *Customer Advisory: Use of CSR101x at Operating Voltages Above 3.6V*.

<sup>(c)</sup> Safe to 4.3V if VDD\_BAT = 4.3V.

## 9.3 Input/Output Terminal Characteristics

### 9.3.1 Switch-mode Regulator

| Switch-mode Regulator                                               | Min  | Typ  | Max | Unit   |
|---------------------------------------------------------------------|------|------|-----|--------|
| Input voltage <sup>(a)</sup>                                        | 1.8  | -    | 3.6 | V      |
| Output voltage <sup>(b)</sup>                                       | -    | 1.35 | -   | V      |
| Temperature coefficient                                             | -200 | -    | 200 | ppm/°C |
| <b>Normal Operation</b>                                             |      |      |     |        |
| Output noise, frequency range 100Hz to 100kHz                       | -    | -    | 0.4 | mV rms |
| Settling time, settling to within 10% of final value                | -    | -    | 30  | µs     |
| Output current ( $I_{\max}$ )                                       | -    | -    | 50  | mA     |
| Quiescent current (excluding load, $I_{\text{load}} < 1\text{mA}$ ) | -    | -    | 20  | µA     |
| <b>Ultra Low-power Mode</b>                                         |      |      |     |        |
| Output current ( $I_{\max}$ )                                       | -    | -    | 100 | µA     |
| Quiescent current                                                   | -    | -    | 1   | µA     |

<sup>(a)</sup> CSR1010 QFN is reliable and qualifiable to 4.3V (idle, active and deep sleep modes) and 3.8V (all modes), but there are minor deviations in performance relative to published performance values for 1.8V to 3.6V. For layout guidelines for 4.3V operation, see *CSR1010 Hardware Design Review Template*.

<sup>(b)</sup> During Run mode, see Section 4.1.

### 9.3.2 Low-voltage Linear Regulator

| Normal Operation | Min  | Typ | Max  | Unit |
|------------------|------|-----|------|------|
| Input voltage    | 0.65 | -   | 1.35 | V    |
| Output voltage   | 0.65 | -   | 1.20 | V    |

#### Important Note:

This regulator is only for CSR internal use. Section 8 shows CSR's recommended circuit connection.

### 9.3.3 Digital Terminals

| Input Voltage Levels                   | Min                              | Typ | Max                              | Unit |
|----------------------------------------|----------------------------------|-----|----------------------------------|------|
| $V_{\text{IL}}$ input logic level low  | -0.4                             | -   | $0.3 \times V_{\text{DD\_PADS}}$ | V    |
| $V_{\text{IH}}$ input logic level high | $0.7 \times V_{\text{DD\_PADS}}$ | -   | $V_{\text{DD\_PADS}} + 0.4$      | V    |
| $T_{\text{r}}/T_{\text{f}}$            | -                                | -   | 25                               | ns   |

| Output Voltage Levels                                      | Min                        | Typ | Max | Unit |
|------------------------------------------------------------|----------------------------|-----|-----|------|
| $V_{OL}$ output logic level low, $I_{OL} = 4.0\text{mA}$   | -                          | -   | 0.4 | V    |
| $V_{OH}$ output logic level high, $I_{OH} = -4.0\text{mA}$ | $0.75 \times V_{DD\_PADS}$ | -   | -   | V    |
| $T_r/T_f$                                                  | -                          | -   | 5   | ns   |

| Input, Output and Tristate Currents <sup>(a)</sup> | Min  | Typ  | Max   | Unit          |
|----------------------------------------------------|------|------|-------|---------------|
| $I_{OL}$ output current low, $V_{OL}$ max          | -    | 8    | 10    | mA            |
| $I_{OH}$ output current high, $V_{OH}$ min         | -    | 8    | 10    | mA            |
| With strong pull-up                                | -150 | -40  | -10   | $\mu\text{A}$ |
| I <sup>2</sup> C with strong pull-up               | -250 | -    | -     | $\mu\text{A}$ |
| With strong pull-down                              | 10   | 40   | 150   | $\mu\text{A}$ |
| With weak pull-up                                  | -5.0 | -1.0 | -0.33 | $\mu\text{A}$ |
| With weak pull-down                                | 0.33 | 1.0  | 5.0   | $\mu\text{A}$ |
| $C_I$ input capacitance                            | 1.0  | -    | 5.0   | pF            |

<sup>(a)</sup> Maximum current draw from  $V_{DD\_PADS}$  is less than 30mA depending on board design.

## 9.3.4 AIO

| Input/Output Voltage Levels | Min | Typ | Max           | Unit |
|-----------------------------|-----|-----|---------------|------|
| Input voltage               | 0   | -   | $V_{DD\_AUX}$ | V    |
| Output voltage              | 0   | -   | $V_{DD\_AUX}$ | V    |
| Output drive strength       | -   | 4   | -             | mA   |

### 9.3.4.1 Auxiliary ADC

| Auxiliary ADC                      |     | Min | Typ | Max           | Unit |
|------------------------------------|-----|-----|-----|---------------|------|
| Resolution                         |     | -   | -   | 10            | Bits |
| Input voltage range <sup>(a)</sup> |     | 0   | -   | $V_{DD\_AUX}$ | V    |
| Accuracy                           | INL | -3  | -   | 3             | LSB  |
|                                    | DNL | -3  | -   | 3             | LSB  |

| Auxiliary ADC                             | Min  | Typ | Max   | Unit      |
|-------------------------------------------|------|-----|-------|-----------|
| Offset                                    | -1   | -   | 1     | LSB       |
| Gain error                                | -0.8 | -   | 0.8   | %         |
| Input bandwidth                           | -    | 100 | -     | kHz       |
| Conversion time (measured at application) | -    | 46  | -     | μs        |
| Sample rate <sup>(b)</sup>                | -    | -   | 21000 | Samples/s |
| ADC block conversion current              | -    | 410 | -     | μA        |

<sup>(a)</sup> LSB size = VDD\_AUX/1023

<sup>(b)</sup> The auxiliary ADC is accessed through the firmware API. The sample rate given is achieved as part of this function.

### 9.3.4.2 Auxiliary DAC

| Auxiliary DAC             | Min   | Typ  | Max     | Unit |
|---------------------------|-------|------|---------|------|
| Resolution                | -     | -    | 10      | Bits |
| Supply voltage, VDD_ANA   | 1.30  | 1.35 | 1.40    | V    |
| Output voltage range      | 0     | -    | VDD_AUX | V    |
| Full-scale output voltage | 1.30  | 1.35 | 1.40    | V    |
| LSB size                  | 0     | 1.32 | 2.64    | mV   |
| Offset                    | -1.32 | 0    | 1.32    | mV   |
| Integral non-linearity    | -3    | 0    | 3       | LSB  |
| Settling time             | -     | -    | 250     | ns   |

#### Important Note:

Access to the auxiliary DAC is firmware-dependent, for more information about its availability contact CSR.

## 9.4 Junction Temperature

Table 9.1 lists the junction temperature when the device is operating within recommended operating conditions.

| Parameter            | Min | Typ | Max | Unit |
|----------------------|-----|-----|-----|------|
| Junction temperature | -   | -   | 125 | °C   |

**Table 9.1: Junction Temperature within Recommended Operating Conditions**

## 9.5 ESD Protection

Apply ESD static handling precautions during manufacturing.

Table 9.2 shows the ESD handling maximum ratings.

| Condition                                                        | Class | Max Rating       |
|------------------------------------------------------------------|-------|------------------|
| Human Body Model Contact Discharge per JEDEC EIA/JESD22-A114     | 2     | 2000V (all pins) |
| Charged Device Model Contact Discharge per JEDEC EIA/JESD22-C101 | III   | 500V (all pins)  |

**Table 9.2: ESD Handling Ratings**

## 10 Current Consumption

Table 10.1 shows CSR1010 QFN total typical current consumption measured at the battery.

| Mode       | Description                                                                                                                               | Total Typical Current at 3.0V |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Dormant    | All functions are shut down. To wake them up, toggle the WAKE pin.                                                                        | <900nA                        |
| Hibernate  | VDD_PADS = OFF, REFCLK = OFF, SLEEPCLK = ON, VDD_BAT = ON                                                                                 | <1.9μA                        |
| Deep sleep | VDD_PADS = ON, REFCLK = OFF, SLEEPCLK = ON, VDD_BAT = ON, RAM = ON, digital circuits = ON, SMPS = ON (low-power mode), 2.2ms wake-up time | <5μA                          |
| Idle       | VDD_PADS = ON, REFCLK = ON, SLEEPCLK = ON, VDD_BAT = ON, RAM = ON, digital circuits = ON, MCU = IDLE, <1μs wake-up time                   | ~1mA                          |
| RX active  | -                                                                                                                                         | ~20mA @ 3.0V peak current     |
| TX active  | -                                                                                                                                         | ~18mA @ 3.0V peak current     |

**Table 10.1: Current Consumption**

**Note:**

Current consumption measurements were made:

- At 20°C and with 3.0V VBAT.
- For the whole chip: including radio, microcontroller and necessary peripherals.
- Using SDK 2.4.3.



## 11 CSR Green Semiconductor Products and RoHS Compliance

CSR confirms that CSR Green semiconductor products comply with the following regulatory requirements:

- Restriction of Hazardous Substances directive guidelines in the EU RoHS Directive 2011/65/EU<sup>1</sup>.
- EU REACH, Regulation (EC) No 1907/2006<sup>1</sup>:
  - List of substances subject to authorisation (Annex XIV)
  - Restrictions on the manufacture, placing on the market and use of certain dangerous substances, preparations and articles (Annex XVII). This Annex now includes requirements that were contained within EU Directive, 76/769/EEC. There are many substance restrictions within this Annex, including, but not limited to, the control of use of Perfluorooctane sulfonates (PFOS).
  - When requested by customers, notification of substances identified on the Candidate List as Substances of Very High Concern (SVHC)<sup>1</sup>.
- POP regulation (EC) No 850/2004<sup>1</sup>
- EU Packaging and Packaging Waste, Directive 94/62/EC<sup>1</sup>
- Montreal Protocol on substances that deplete the ozone layer.
- Conflict minerals, Section 1502, Dodd-Frank Wall Street Reform and Consumer Protection act, which affects columbite-tantalite (coltan / tantalum), cassiterite (tin), gold, wolframite (tungsten) or their derivatives. CSR is a fabless semiconductor company: all manufacturing is performed by key suppliers. CSR have mandated that the suppliers shall not use materials that are sourced from "conflict zone mines" but understand that this requires accurate data from the EICC programme. CSR shall provide a complete EICC / GeSI template upon request.

CSR has defined the "CSR Green" standard based on current regulatory and customer requirements including free from bromine, chlorine and antimony trioxide.


Products and shipment packaging are marked and labelled with applicable environmental marking symbols in accordance with relevant regulatory requirements.

This identifies the main environmental compliance regulatory restrictions CSR specify. For more information on the full "CSR Green" standard, contact [product.compliance@csr.com](mailto:product.compliance@csr.com).

<sup>1</sup> Including applicable amendments to EU law which are published in the EU Official Journal, or SVHC Candidate List updates published by the European Chemicals Agency (ECHA).

12 CSR1010 QFN Software Stack

CSR1010 QFN is supplied with Bluetooth v4.1 specification compliant stack firmware. Figure 12.1 shows that the CSR1010 QFN software architecture enables the Bluetooth processing and the application program to run on the internal RISC MCU.

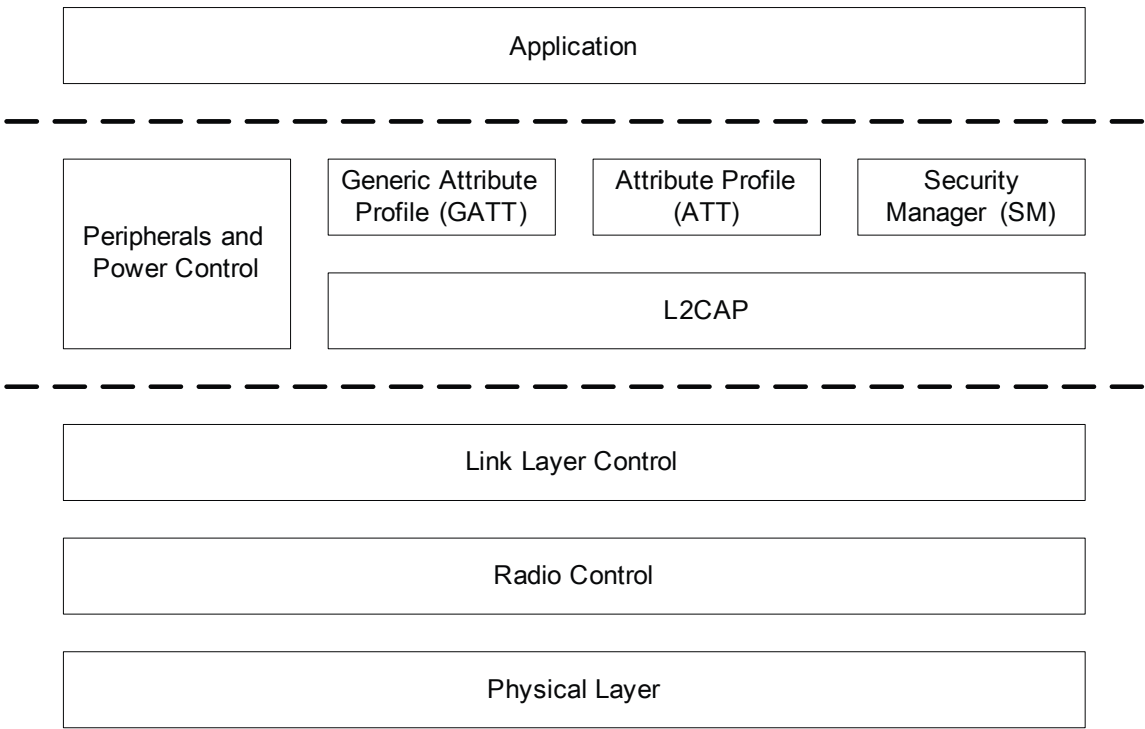

G-TW-0005570.2.2


Figure 12.1: Software Architecture

## 13 Tape and Reel Information

For tape and reel packing and labelling see *IC Packing and Labelling Specification*.

### 13.1 Tape Orientation

Figure 13.1 shows the CSR1010 QFN packing tape orientation.

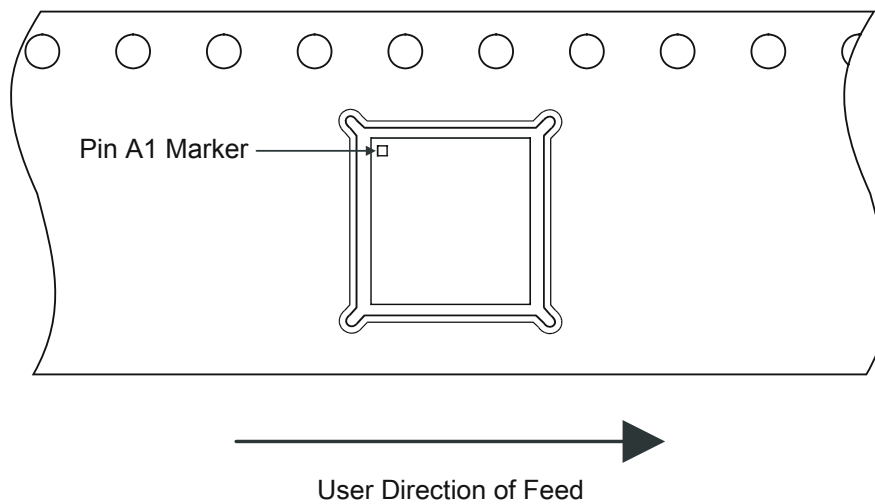


**Figure 13.1: Tape Orientation**

G-TW-0013430.1.2

## 13.2 Tape Dimensions

Figure 13.2 shows the dimensions of the tape for the CSR1010 QFN.

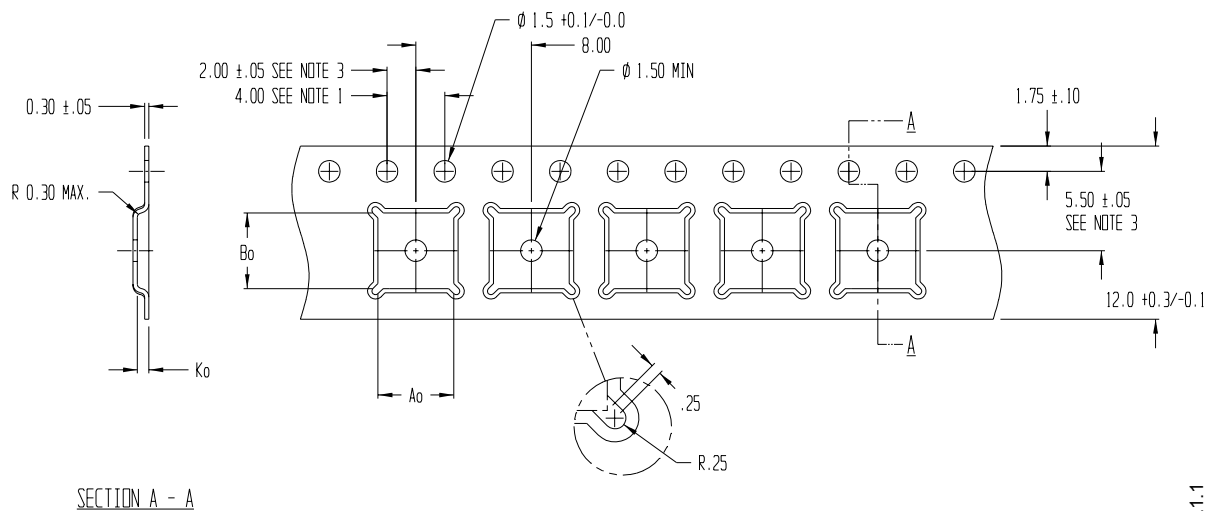

G-TW-0005504.1.1

CSR1010 QFN Data Sheet

Figure 13.2: Tape Dimensions

| $A_0$ | $B_0$ | $K_0$ | Unit | Notes                                                                                                                                                                                                                                                                                                                                                                                               |
|-------|-------|-------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5.25  | 5.25  | 0.80  | mm   | <ol style="list-style-type: none"> <li>10 sprocket hole pitch cumulative tolerance <math>\pm 0.2</math>.</li> <li>Camber in compliance with EIA 481.</li> <li>Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.</li> <li><math>A_0</math> and <math>B_0</math> are calculated on a plane at a distance "R" above the bottom of the pocket.</li> </ol> |

13.3 Reel Information

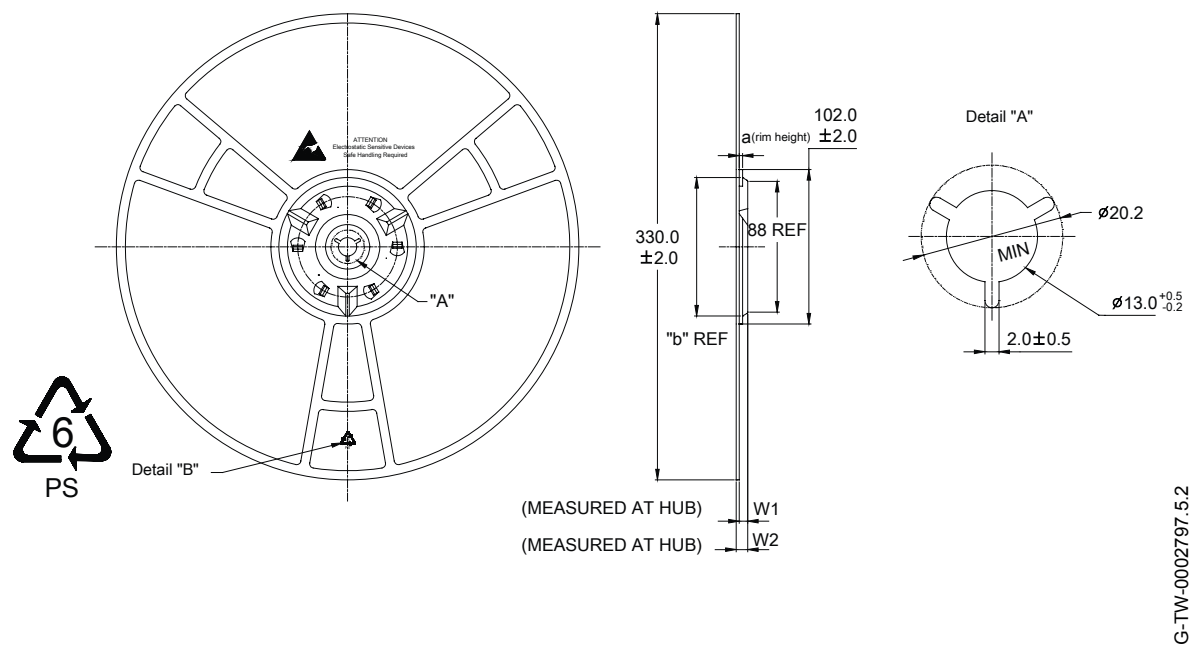


Figure 13.3: Reel Dimensions

| Package Type      | Nominal Hub Width (Tape Width) | a   | b    | W1              | W2 Max | Units |
|-------------------|--------------------------------|-----|------|-----------------|--------|-------|
| 5 x 5 x 0.6mm QFN | 12                             | 4.5 | 98.0 | 12.4 (2.0/-0.0) | 18.4   | mm    |

13.4 Moisture Sensitivity Level

CSR1010 QFN is qualified to moisture sensitivity level MSL3 in accordance with JEDEC J-STD-020.

## 14 Document References

| Document                                                                                               | Reference, Date                                       |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| <i>Core Specification of the Bluetooth System.</i>                                                     | Bluetooth Specification Version 4.1, 03 December 2013 |
| <i>CSR1010 Hardware Design Review Template.</i>                                                        | CS-218270-DD                                          |
| <i>CSR1010 QFN A05 Performance Specification.</i>                                                      | CS-233372-SP                                          |
| <i>CSR1010 QFN 4.3V Operation Performance Specification.</i>                                           | CS-305811-SP                                          |
| <i>Customer Advisory: Use of CSR101x at Operating Voltages Above 3.6V</i>                              | CS-306155-AN                                          |
| <i>Electrostatic Discharge (ESD) Sensitivity Testing Human Body Model (HBM).</i>                       | JESD22-A114                                           |
| <i>Environmental Compliance Statement for CSR Green Semiconductor Products.</i>                        | CB-001036-ST                                          |
| <i>IC Packing and Labelling Specification.</i>                                                         | CS-112584-SP                                          |
| <i>Moisture / Reflow Sensitivity Classification for Nonhermitic Solid State Surface Mount Devices.</i> | IPC / JEDEC J-STD-020                                 |
| <i>Typical Solder Reflow Profile for Lead-free Devices.</i>                                            | CS-116434-AN                                          |

## Terms and Definitions

| Term       | Definition                                                                                                  |
|------------|-------------------------------------------------------------------------------------------------------------|
| AC         | Alternating Current                                                                                         |
| ADC        | Analogue to Digital Converter                                                                               |
| AGC        | Automatic Gain Control                                                                                      |
| AIO        | Analogue Input/Output                                                                                       |
| ATT        | ATtribute protocol                                                                                          |
| balun      | balanced/unbalanced interface or device that changes a balanced output to an unbalanced input or vice versa |
| Bluetooth® | Set of technologies providing audio and data transfer over short-range radio connections                    |
| CSR        | Cambridge Silicon Radio                                                                                     |
| dBm        | Decibels relative to 1 mW                                                                                   |
| DC         | Direct Current                                                                                              |
| DNL        | Differential Non Linearity (ADC accuracy parameter)                                                         |
| e.g.       | <i>exempli gratia</i> , for example                                                                         |
| EDR        | Enhanced Data Rate                                                                                          |
| EEPROM     | Electrically Erasable Programmable Read Only Memory                                                         |
| EIA        | Electronic Industries Alliance                                                                              |
| ESD        | Electrostatic Discharge                                                                                     |
| ESR        | Equivalent Series Resistance                                                                                |
| GAP        | Generic Access Profile                                                                                      |
| GATT       | Generic ATtribute protocol                                                                                  |
| GSM        | Global System for Mobile communications                                                                     |
| HID        | Human Interface Device                                                                                      |
| I²C        | Inter-Integrated Circuit Interface                                                                          |
| I/O        | Input/Output                                                                                                |
| IC         | Integrated Circuit                                                                                          |
| IF         | Intermediate Frequency                                                                                      |
| INL        | Integral Non-Linearity (ADC accuracy parameter)                                                             |
| IPC        | See <a href="http://www.ipc.org">www.ipc.org</a>                                                            |
| IQ         | In-Phase and Quadrature                                                                                     |
| JEDEC      | Joint Electron Device Engineering Council (now the JEDEC Solid State Technology Association)                |
| KB         | Kilobyte                                                                                                    |
| L2CAP      | Logical Link Control and Adaptation Protocol                                                                |

| Term | Definition                                                                                        |
|------|---------------------------------------------------------------------------------------------------|
| LC   | An inductor (L) and capacitor (C) network                                                         |
| LED  | Light-Emitting Diode                                                                              |
| LNA  | Low Noise Amplifier                                                                               |
| LSB  | Least Significant Bit (or Byte)                                                                   |
| MAC  | Medium Access Control                                                                             |
| MCU  | MicroController Unit                                                                              |
| MISO | Master In Slave Out                                                                               |
| MLC  | MultiLayer Ceramic                                                                                |
| MOSI | Master Out Slave In                                                                               |
| NSMD | Non-Solder Mask Defined                                                                           |
| PA   | Power Amplifier                                                                                   |
| PC   | Personal Computer                                                                                 |
| PCB  | Printed Circuit Board                                                                             |
| PD   | Pull-Down                                                                                         |
| PIO  | Parallel Input/Output                                                                             |
| PIO  | Programmable Input/Output, also known as general purpose I/O                                      |
| plc  | public limited company                                                                            |
| ppm  | parts per million                                                                                 |
| PU   | Pull-Up                                                                                           |
| PWM  | Pulse Width Modulation                                                                            |
| QFN  | Quad-Flat No-lead                                                                                 |
| RAM  | Random Access Memory                                                                              |
| RF   | Radio Frequency                                                                                   |
| RISC | Reduced Instruction Set Computer                                                                  |
| RoHS | Restriction of Hazardous Substances in Electrical and Electronic Equipment Directive (2002/95/EC) |
| ROM  | Read Only Memory                                                                                  |
| RSSI | Received Signal Strength Indication                                                               |
| RX   | Receive or Receiver                                                                               |
| SIG  | (Bluetooth) Special Interest Group                                                                |
| SMP  | Security Manager Protocol                                                                         |
| SMPS | Switch-Mode Power Supply                                                                          |



| Term   | Definition                                  |
|--------|---------------------------------------------|
| SPI    | Serial Peripheral Interface                 |
| TCXO   | Temperature Compensated crystal Oscillator  |
| TX     | Transmit or Transmitter                     |
| UART   | Universal Asynchronous Receiver Transmitter |
| VCO    | Voltage Controlled Oscillator               |
| W-CDMA | Wideband Code Division Multiple Access      |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.