

TLE7188F

3-Phase Bridge Driver IC

Automotive Power



Never stop thinking

Table of Contents

| | | |
|----------|--|----|
| | Table of Contents | 2 |
| 1 | Overview | 3 |
| 2 | Block Diagram | 4 |
| 3 | Pin Configuration | 5 |
| 3.1 | Pin Assignment TLE7188F | 5 |
| 3.2 | Pin Definitions and Functions | 6 |
| 4 | General Product Characteristics | 8 |
| 4.1 | Absolute Maximum Ratings | 8 |
| 4.2 | Functional Range | 9 |
| 4.3 | Default State of Inputs | 10 |
| 5 | Description and Electrical Characteristics | 11 |
| 5.1 | MOSFET Driver | 11 |
| 5.1.1 | Output Stages | 11 |
| 5.1.2 | Operation at $V_s < 12V$ - Integrated Charge Pumps | 12 |
| 5.1.3 | Sleep Mode | 12 |
| 5.1.4 | Electrical Characteristics | 13 |
| 5.2 | Protection and Diagnostic Functions | 16 |
| 5.2.1 | Short Circuit Protection | 16 |
| 5.2.2 | Over current Warning | 16 |
| 5.2.3 | Dead Time and Shoot Through Protection | 16 |
| 5.2.4 | Under voltage Shut Down | 16 |
| 5.2.5 | Over voltage Shut Down | 17 |
| 5.2.6 | Over temperature Warning | 17 |
| 5.2.7 | VCC1 Check | 17 |
| 5.2.8 | ERR Pins | 17 |
| 5.2.9 | Electrical Characteristics | 18 |
| 5.3 | Shunt Signal Conditioning | 21 |
| 5.3.1 | Electrical Characteristics | 22 |
| 6 | Application Description | 24 |
| 6.1 | Layout Guide Lines | 25 |
| 6.2 | Further Application Information | 25 |
| 7 | Package Outlines | 26 |
| 8 | Revision History | 27 |



1 Overview

Features

- Compatible to very low ohmic normal level input N-Channel MOSFETs
- Separate input for each MOSFET
- PWM frequency up to 25kHz
- Fulfils specification down to 5.5V supply voltage
- Low EMC sensitivity and emission
- VQFN-48 package with exposed heat slug
- Control inputs with TTL characteristics
- Separate source connection for each MOSFET
- Integrated minimum dead time
- Shoot through protection
- Short circuit protection with fixed detection level
- Disable function and sleep mode
- Detailed diagnosis
- Thermal overload warning for driver IC
- Integrated over current warning
- Integrated current sense amplifier
- 0 to 100% duty cycle
- Green Product (RoHS compliant)
- AEC Qualified



VQFN-48

Description

The TLE7188F is a driver IC dedicated to control the 6 to 12 external MOSFETs forming the converter for high current 3 phase motor drives in the automotive sector. It incorporates features like short circuit detection, diagnosis and high output performance and combines it with typical automotive specific requirements like full functionality even at low battery voltages. Its 3 high side and 3 low side output stages are powerful enough to drive MOSFETs with 400nC gate charge with approx. 150 ns fall and rise times.

Typical applications are cooling fan, water pump, electro-hydraulic and electric power steering. The TLE7188F is designed for 12 V power net.

| Type | Package | Marking |
|----------|---------|----------|
| TLE7188F | VQFN-48 | TLE7188F |

2 Block Diagram

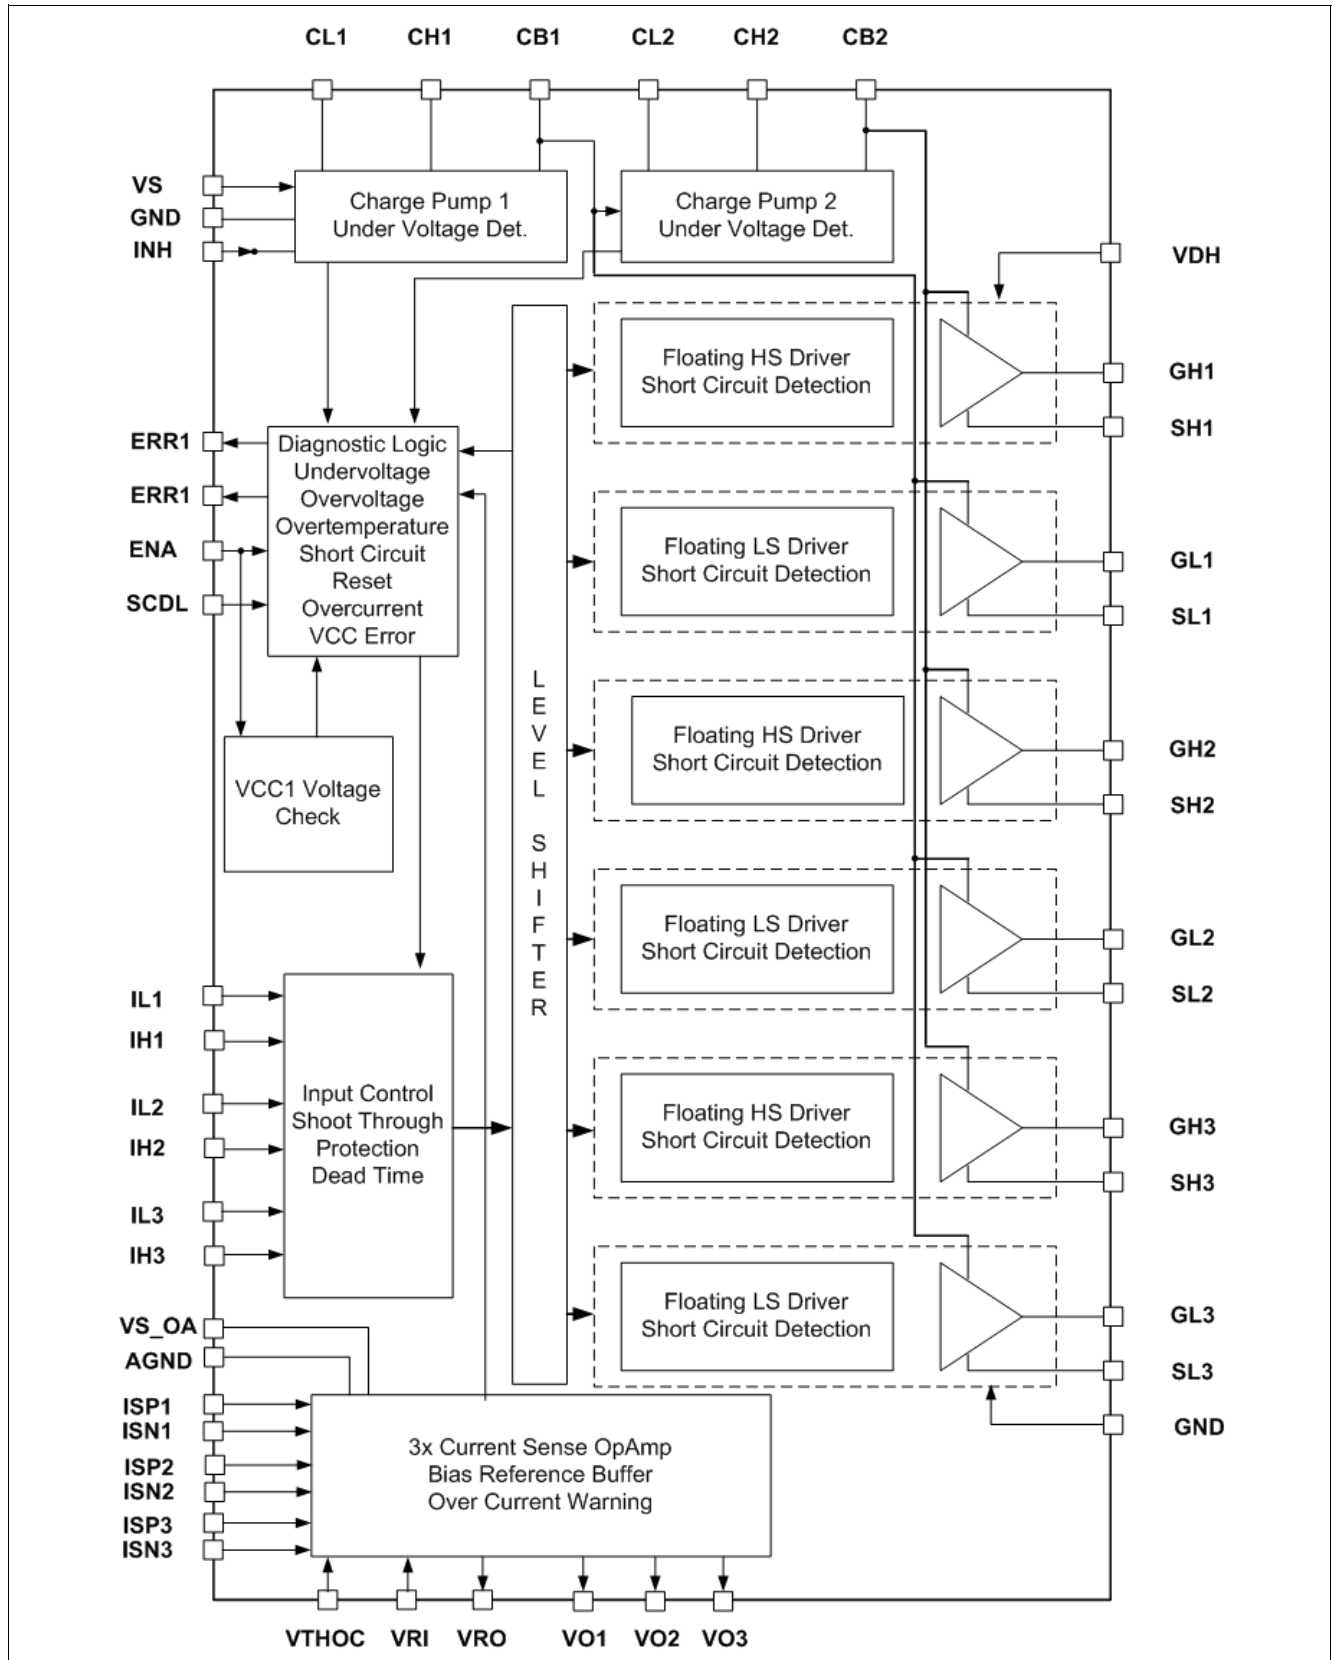


Figure 1 Block Diagram

3 Pin Configuration

3.1 Pin Assignment TLE7188F

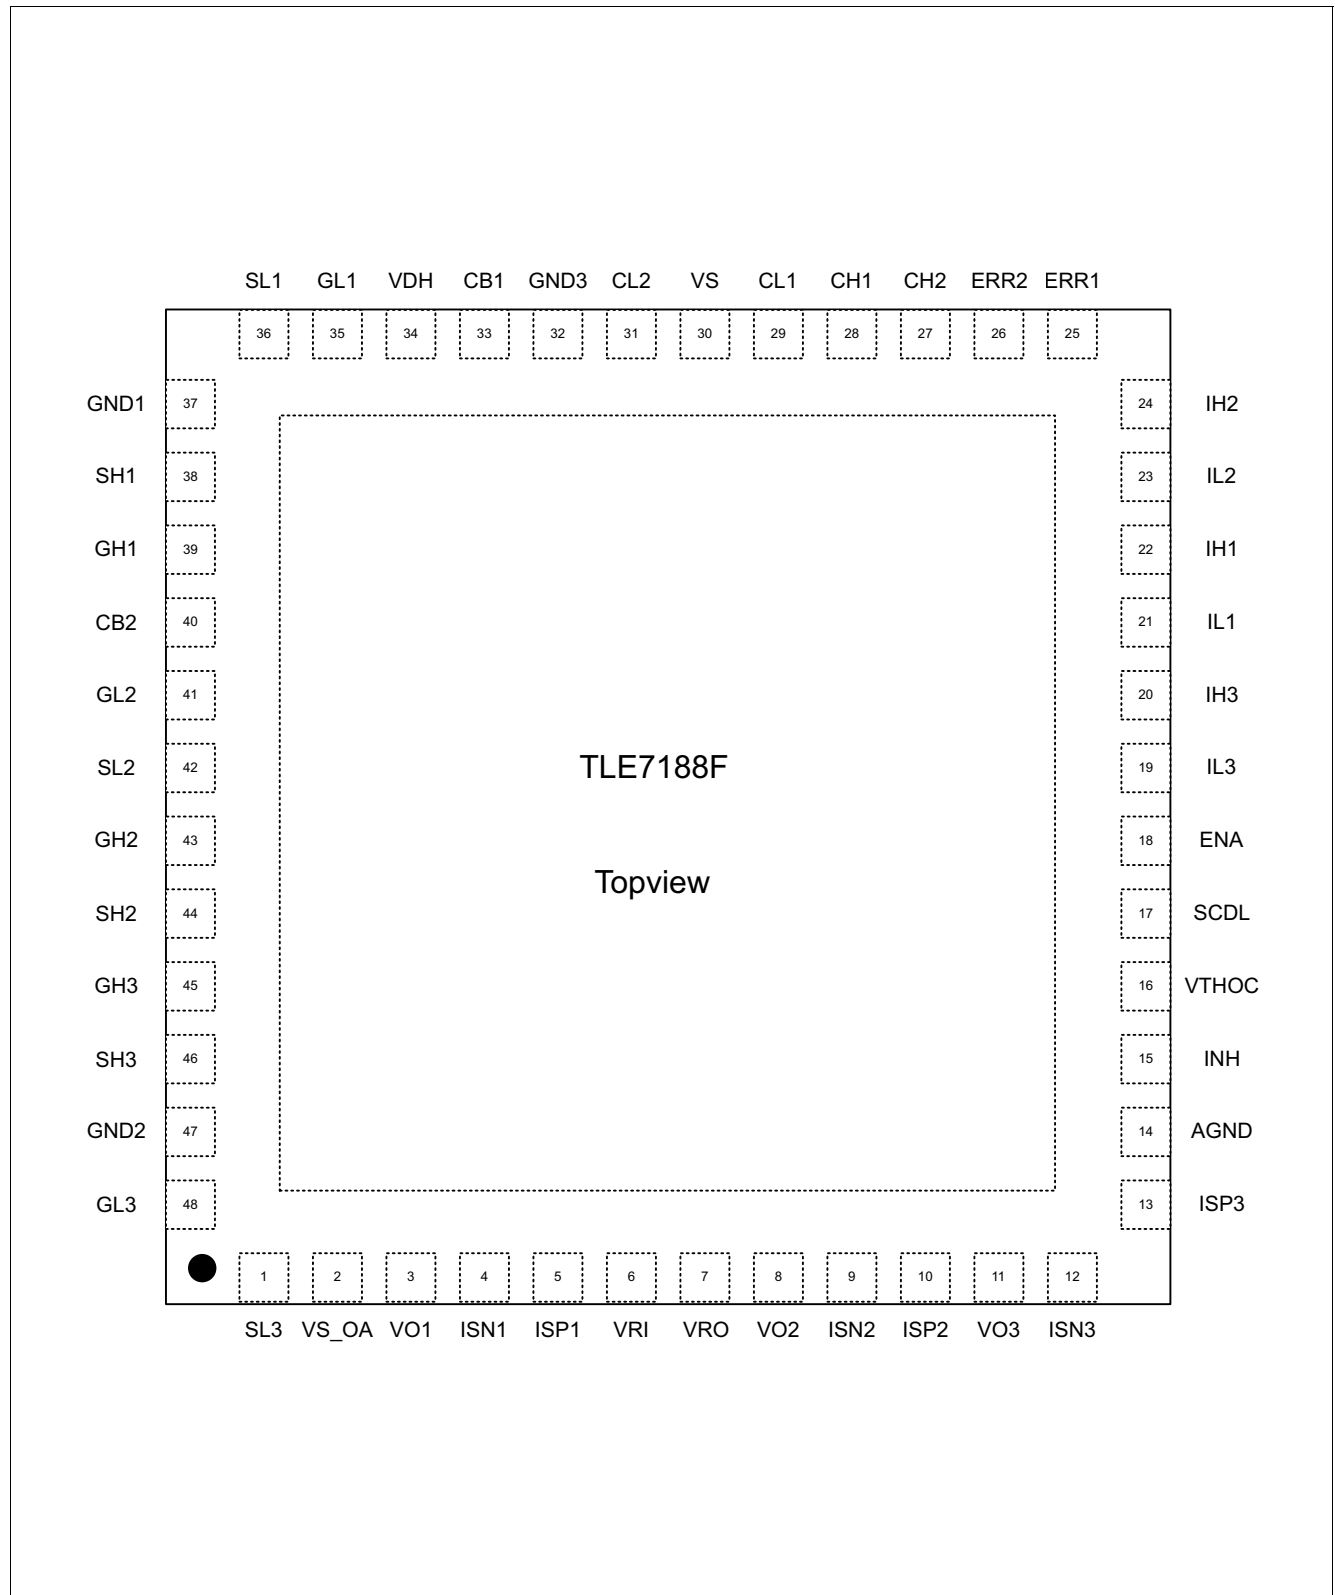


Figure 2 Pin Configuration

3.2 Pin Definitions and Functions

| Pin | Symbol | Function |
|-----|--------|---|
| 1 | SL3 | Connection to source low side switch 3 |
| 2 | VS_OA | Voltage supply I-DC Link OpAmps and voltage reference buffer |
| 3 | VO1 | Output of OpAmp 1 for shunt signal amplification |
| 4 | ISN1 | - Input of OpAmp 1 for shunt signal amplification |
| 5 | ISP1 | + Input of OpAmp 1 for shunt signal amplification |
| 6 | VRI | Input of bias reference amplifier |
| 7 | VRO | Output of bias reference amplifier |
| 8 | VO2 | Output of OpAmp 2 for shunt signal amplification |
| 9 | ISN2 | - Input of OpAmp 2 for shunt signal amplification |
| 10 | ISP2 | + Input of OpAmp 2 for shunt signal amplification |
| 11 | VO3 | Output of OpAmp 3 for shunt signal amplification |
| 12 | ISN3 | - Input of OpAmp 3 for shunt signal amplification |
| 13 | ISP3 | + Input of OpAmp 3 for shunt signal amplification |
| 14 | AGND | Analog ground especially for the current sense OpAmps |
| 15 | INH | Inhibit pin (active low) |
| 16 | VTHOC | Threshold voltage for overcurrent detection |
| 17 | SCDL | Input pin to adjust short circuit detection level |
| 18 | ENA | Enable pin (active high) |
| 19 | IL3 | Input for low side switch 3 (active high) |
| 20 | IH3 | Input for high side switch 3 (active low) |
| 21 | IL1 | Input for low side switch 1 (active high) |
| 22 | IH1 | Input for high side switch 1 (active low) |
| 23 | IL2 | Input for low side switch 2 (active high) |
| 24 | IH2 | Input for high side switch 2 (active low) |
| 25 | ERR1 | Error signal 1 |
| 26 | ERR2 | Error signal 2 |
| 27 | CH2 | + terminal for pump capacitor of charge pump 2 |
| 28 | CH1 | + terminal for pump capacitor of charge pump 1 |
| 29 | CL1 | - terminal for pump capacitor of charge pump 1 |
| 30 | VS | Voltage supply |
| 31 | CL2 | - terminal for pump capacitor of charge pump 2 |
| 32 | GND3 | Logic and power ground |
| 33 | CB1 | Buffer capacitor for charge pump 1 |
| 34 | VDH | Connection to drain of high side switches for short circuit detection |
| 35 | GL1 | Output to gate low side switch 1 |
| 36 | SL1 | Connection to source low side switch 1 |
| 37 | GND1 | Logic and power ground |
| 38 | SH1 | Connection to source high side switch 1 |
| 39 | GH1 | Output to gate high side switch 1 |
| 40 | CB2 | Buffer capacitor for charge pump 2 |

Pin Configuration

| Pin | Symbol | Function |
|-----|--------|---|
| 41 | GL2 | Output to gate low side switch 2 |
| 42 | SL2 | Connection to source low side switch 2 |
| 43 | GH2 | Output to gate high side switch 2 |
| 44 | SH2 | Connection to source high side switch 2 |
| 45 | GH3 | Output to gate high side switch 3 |
| 46 | SH3 | Connection to source high side switch 3 |
| 47 | GND2 | Logic and power ground |
| 48 | GL3 | Output to gate low side switch 3 |

4 General Product Characteristics

4.1 Absolute Maximum Ratings

Absolute Maximum Ratings ¹⁾

-40 °C ≤ T_j ≤ 150 °C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | Unit | Conditions |
|----------|--|--------------------|--------------|------|------|---|
| | | | Min. | Max. | | |
| Voltages | | | | | | |
| 4.1.1 | Supply voltage | V_S | -4.0 | 45 | V | with 10Ohm and 1μF |
| 4.1.2 | Supply voltage | V_S | -0.3 | 45 | V | – |
| 4.1.3 | Supply voltage | V_S | -0.3 | 47 | V | t_p <200ms |
| 4.1.4 | Voltage range at IHx,ILx,ERRx, VOx, VTHOC, ENA, VRI, VRO, SCDL | V_{DP} | -0.3 | 6.0 | V | – |
| 4.1.5 | Voltage range at INH | V_{INH} | -0.3 | 18.0 | V | – |
| 4.1.6 | Voltage range at VS_OA | V_{VS_OA} | -0.3 | 18.0 | V | – |
| 4.1.7 | Voltage range at SLx | V_{SL} | -7 | 7 | V | – |
| 4.1.8 | Voltage range at SHx | V_{SH} | -7 | 45 | V | – |
| 4.1.9 | Voltage range at GLx | V_{GL} | -7 | 18 | V | – |
| 4.1.10 | Voltage range at GHx | V_{GH} | -7 | 55 | V | – |
| 4.1.11 | Voltage difference Gxx-Sxx | V_{GS} | -0.3 | 15 | V | – |
| 4.1.12 | Voltage range at VDH | V_{VDH} | -0.3 | 55 | V | V_{INH} =high |
| 4.1.13 | Voltage range at VDH | V_{VDH} | -4.0 | 55 | V | V_{INH} =high; with R_{VDH} >70Ω; 200ms, 5x |
| 4.1.14 | Voltage range at VDH | V_{VDH} | -0.3 | 28 | V | V_{INH} =low |
| 4.1.15 | Voltage range at VDH | V_{VDH} | -4.0 | 28 | V | V_{INH} =low; with R_{VDH} >70Ω, 200ms, 5x |
| 4.1.16 | Voltage range at CL1 | V_{CL1} | -0.3 | 25 | V | – |
| 4.1.17 | Voltage range at CH1, CB1 | V_{CH1}, V_{CB1} | -0.3 | 25 | V | – |
| 4.1.18 | Voltage difference CH1-CL1 | V_{DC1} | -0.3 | 25 | V | – |
| 4.1.19 | Voltage range at CL2 | V_{CL2} | -0.3 | 25 | V | – |
| 4.1.20 | Voltage range at CH2, CB2 | V_{CH2}, V_{CB2} | -0.3 | 55 | V | – |
| 4.1.21 | Voltage difference CH2-CL2 | V_{CP2} | -0.3 | 25 | V | – |
| 4.1.22 | Voltage range at ISPx, ISNx | V_{ISI} | -5 | 5 | V | – |
| 4.1.23 | Output current range at VOx | I_{VOx} | -10 | 10 | mA | – |
| 4.1.24 | Gate resistor | R_{Gate} | 2 | – | Ω | – |

Temperatures

| | | | | | | |
|--------|----------------------|-----------|-----|-----|----|---|
| 4.1.25 | Junction temperature | T_j | -40 | 150 | °C | – |
| 4.1.26 | Storage temperature | T_{stg} | -55 | 150 | °C | – |

Thermal Resistance

General Product Characteristics

Absolute Maximum Ratings (cont'd)¹⁾

-40 °C ≤ T_j ≤ 150 °C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | Unit | Conditions |
|--------|------------------|-------------------|--------------|------|------|------------|
| | | | Min. | Max. | | |
| 4.1.27 | Junction to case | R _{thJC} | – | 5 | K/W | – |

Power Dissipation

| | | | | | | |
|--------|--------------------------------------|------------------|---|---|---|---|
| 4.1.28 | Power Dissipation (DC) @ TCASE=125°C | P _{tot} | – | 2 | W | – |
|--------|--------------------------------------|------------------|---|---|---|---|

ESD Susceptibility

| | | | | | | |
|--------|---|------------------|---|-----|----|--------------|
| 4.1.29 | ESD Resistivity ²⁾ | V _{ESD} | – | 2 | kV | Gxx excluded |
| 4.1.30 | | V _{ESD} | – | 1 | kV | |
| 4.1.31 | ESD Resistivity (charge device model) ³⁾ | V _{ESD} | – | 750 | V | |

1) Not subject to production test, specified by design.

2) ESD susceptibility HBM according to EIA/JESD 22-A 114B

3) ESD susceptibility CDM according to EIA/JESD 22-C 101

Note: Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note: Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as “outside” normal operating range. Protection functions are not designed for continuous repetitive operation.

4.2 Functional Range

| Pos. | Parameter | Symbol | Limit Values | | Unit | Conditions |
|--------|---|----------------------|------------------|------------------------|------|--|
| | | | Min. | Max. | | |
| 4.2.1 | Supply voltage ^{1) 2)} | V _S | 5.5 5.5 | 20 28 | V | DC T _A =25°C; t<1min |
| 4.2.2 | Duty cycle ³⁾ | D | 0 | 100 | % | – |
| 4.2.3 | PWM frequency | f _{PWM} | 0 | 25 | kHz | Total gate charge 400nC |
| 4.2.4 | Quiescent current ⁴⁾ | I _Q | – | 30 | µA | V _S , V _{DH} <20 V |
| 4.2.5 | Quiescent current into VDH | I _{Q_VDH} | – | 30 | µA | V _{DH} <20V; V _S pin open |
| 4.2.6 | Supply current at Vs | I _{Vs} | – – – – | 110 110 90 90 | mA | f _{PWM} =20kHz Q _G =170nC: V _S = 5.5V V _S = 14V V _S = 18V V _S = 20V |
| 4.2.7 | Supply current at Vs (device disabled by ENA) | I _{Vs(o)} | – – | 60 50 | mA | V _S =5.5V ... 18V V _S =18V ... 20V |
| 4.2.8 | Supply current at VS_OA | I _{Vs_OA} | – | 30 | mA | V _{S_OA} =5.5 ... 6.5V |
| 4.2.9 | Voltage difference CB2-VDH | V _{CB2-VDH} | -0.3 | 20 | V | Operation mode |
| 4.2.10 | Junction temperature | T _j | -40 | 150 | °C | |

1) max ratings for T_j has to be considered as well

General Product Characteristics

- 2) For proper start up minimum $V_s=6.5V$ is required
- 3) Duty cycle is referred to the high side input command (IHx); The duty cycles can be driven continuously and fully operational
- 4) total current consumption from power net (V_s and VDH)

Note: Within the functional range the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the related electrical characteristics table.

Note: If the voltage difference between CB2 and SHx is smaller than 2V during normal operation, there is a risk that the high side output can switch on and off without a corresponding input signal. As soon as this supply voltage recovers and the input signal changes, the output stage is automatically aligned to the input again.

4.3 Default State of Inputs

Table 1 Default State of Inputs

| Characteristic | State | Remark |
|---|--------------------------------------|------------------------------|
| Default state of ILx (if ILx left open) | Low | Low side MOSFETs off |
| Default state of IHx (if IHx left open) | High | High side MOSFETs off |
| Default state of ENA (if ENA left open) | Low | Device/outputs disabled |
| Default state of INH (if INH left open) | Low | Sleep mode, $I_Q < 30 \mu A$ |
| Default State of sense amplifier output V_{OX} (ISP _x =ISN _x =0V) | Zero ampere equivalent | – |
| Status of the device and the outputs when ENA=INH='1' | Device active and outputs functional | $V_s=5.5 \dots 28V$ |
| Pull up or pull down integrated resistors Ixx, ENA | 30k Ω +/-40% | – |
| Pull down integrated resistor INH | 45k Ω +/-40% | – |

Note: The load condition "C=22nF; $R_{Load}=1\Omega$ " in the paragraph "Electrical characteristics / Dynamic characteristic" means that R_{Load} is connected between the output Gxx and the positive terminal of the C. The negative terminal of the C is connected to GND and the corresponding Sxx. The voltage is measured at the positive terminal of the C

5 Description and Electrical Characteristics

5.1 MOSFET Driver

5.1.1 Output Stages

The 3 low side and 3 high side powerful push-pull output stages of the TLE7188F are all floating blocks, each with its own source pin. This allows the direct connection of the output stage to the source of each single MOSFET, allowing a perfect control of each gate-source voltage even when 200A are driven in the bridge with rise and fall times clearly below 1 μ s.

All 6 output stages have the same output power and thanks to the used charge pump principle they can be switched all up to 25kHz.

Its output stages are powerful enough to drive 6 MOSFETs with 400nC gate charge each or even to run 12 MOSFETs with 200nC each.

Maximum allowed power dissipation, max. junction temperature and the capabilities of the charge pump limit the use for higher frequencies.

Each output stage has its own short circuit detection block. For more details about short circuit detection see [Chapter 5.2.1](#).

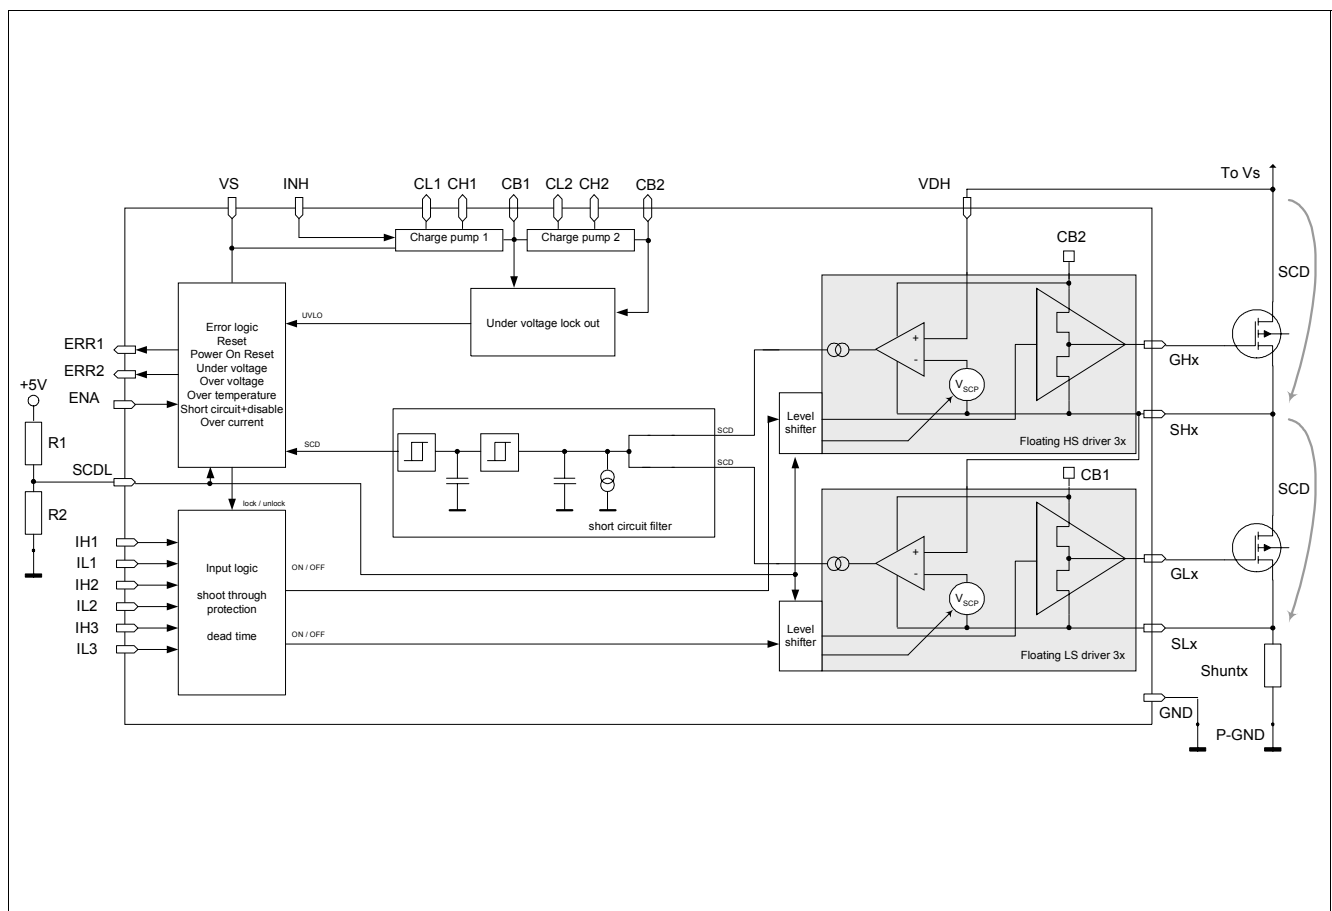


Figure 3 Block Diagram of Driver Stages including Short Circuit Detection

5.1.2 Operation at $V_s < 12V$ - Integrated Charge Pumps

The TLE7188F provides a feature tailored to the requirements in 12V automotive applications. Often the operation of an application has to be assured even at 9V supply voltage or lower. Normally bridge driver ICs provide in such conditions clearly less than 9V to the gate of the external MOSFETs, increasing their R_{DSon} and the associated power dissipation.

The TLE7188F has two charge pump circuitries for external capacitors.

The operation of the charge pumps is independent upon the pulse pattern of the MOSFETs.

The output of the charge pumps are regulated. The first charge pump doubles the supply voltage as long as it is below 8V. At 8V supply voltage and above, charge pump 1 regulates its output to 15V typically. Above 15V supply voltage, the output voltage of charge pump 1 will increase linearly. Yet, the output will not exceed 25V.

Charge pump 2 is regulated as well but it is pumped to the voltage on V_s . Normally VDH and V_s are in the same voltage range. The driver is not designed to have significant higher voltages at VDH compared to V_s . This would lead to reduced supply voltages for the high side output stages.

Charge pump 1 supplies the low side MOSFETs and output stages for the low side MOSFETs with sufficient voltage to assure 10V at the MOSFETs' gate even if the supply voltage is below 10V. Charge pump 2 supplies the output stages for the high side MOSFETs with sufficient voltage to assure 10V at the MOSFETs' gate. In addition, the charge pump 1 supplies most of the internal circuits of the driver IC, including charge pump 2. Output of charge pump 1 is the buffer capacitor CB1 which is referenced to GND.

Charge pump 2 supplies the high side MOSFETs and the output stages for the high side MOSFETs with sufficient voltage to assure 10V at the high side MOSFET gate. Output of charge pump 2 is buffer capacitor CB2 which is referenced to VDH .

This concept allows to drive all external MOSFETs in the complete duty cycle range of 0 to 100% without taking care about recharging of any bootstrap capacitors.

This simplifies the use in all applications especially in motor drives with block wise commutation.

The charge pumps are only deactivated when the device is put into sleep mode via INH.

During Start Up of the TLE7188F the external MOSFETs should be kept off until the charge pumps have ramped up to their final values. Hence, following procedure is recommended for Start Up:

- keep ENA = low (output stages disabled, all MOSFETs off, signals on IHx and ILx don't care) or ENA = high (output stages enabled) and IHx = high and ILx = low (all MOSFETs off)
- apply the supply voltage to the TLE7188F and pull INH = high (the order does not matter)
- wait until the charge pump capacitors are fully charged (pls. see "Wake up time")
- the TLE7188F is now ready for normal operation (pull ENA = high and apply the PWM patterns to IHx and ILx)

The size of the charge pump capacitors (pump capacitors CPx as well as buffer capacitors CBx) can be varied between 1 μF and 4.7 μF . Yet, larger capacitor values result in higher charge pump voltages and less voltage ripple on the charge pump buffer capacitors CBx (which supply the internal circuits as well as the external MOSFETs, pls. see above). Besides the capacitance values the ESR of the buffer capacitors CBx determines the voltage ripple as well. It is recommended to use buffer capacitors CBx that have small ESR.

Pls. see also [Chapter 5.1.3](#) for capacitor selection.

5.1.3 Sleep Mode

When the INH pin is set to low, the driver will be set to sleep mode. The INH pin switches off the complete supply structure of the device and leads finally to an intervillage shut down of the complete driver. Enabling the device with the INH pin means to switch on the supply structure. The device will run through power on reset during wake up. It is recommended to perform a Reset by ENA after Wake up to remove possible ERR signals; Reset is performed by keeping ENA pin low until the charge pump voltages have ramped up.

Enabling and disabling with the INH pin is not very fast. For fast enable / disable the ENA pin is recommended.

Description and Electrical Characteristics

When the TLE7188F is in INH mode (INH is low) or when the supply voltage is not available on the Vs pin, then the driver IC is not supplied, the charge pumps are inactive and the charge pump capacitors are discharged. Pin CB2 (+ terminal of buffer capacitor 2) will decay to GND. When the battery voltage is still applied to VDH (- terminal of buffer capacitor 2) the buffer capacitor 2 will slowly charged to battery voltage, yet with reversed polarity compared to the polarity during regular operation. Hence, it is important to use a buffer capacitor 2 (CB2) that can withstand both, +25 V during operation mode and $-V_{BAT}$ during INH mode, e.g. a ceramic capacitor. In case of load dump during INH mode, the negative voltage across CB2 will be clamped to -31 V (CB2 referenced to VDH).

5.1.4 Electrical Characteristics

Electrical Characteristics MOSFET drivers - DC Characteristics

$V_S = 5.5$ to $20V$, $T_j = -40$ to $+150^\circ C$, $f_{PWM} < 25kHz$, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | | Unit | Conditions |
|--------|---|--------------|--------------|-------------|------------------------|------|--|
| | | | Min. | Typ. | Max. | | |
| 5.1.1 | Low level output voltage | V_{G_LL} | – | – | 0.2 | V | $I = 30mA$ |
| 5.1.2 | High level output voltage, Low Side | V_{G_HL} | 7.5 | – | 13 | V | $V_S = 5.5..8V$; $I = -2mA$ |
| 5.1.3 | High level output voltage, High Side | V_{G_HL} | 6.5 | – | 13 | V | $V_S = 5.5..8V$; $I = -2mA$ |
| 5.1.4 | High level output voltage | V_{G_HL} | 9 | – | 13 | V | $V_S = 8..20V$; $I = -2mA$ |
| 5.1.5 | High level output voltage difference | d_{VG_H} | – | – | 1.0 | V | $I = -100mA$; $V_S = 20V$ |
| 5.1.6 | Gate drive output voltage | V_{GS1_D} | – | – | 0.2 | V | Disabled; $5.5V < V_S < 28V$; $I = 10mA$ |
| 5.1.7 | Gate drive output voltage $T_j = -40^\circ C$ $T_j = 25^\circ C$ $T_j = 150^\circ C$ | V_{GS2_5} | – – – | – – – | 1.4 1.2 1.0 | V | UVLO; $V_S \leq 5.5V$ |
| 5.1.8 | Gate drive output voltage high side $T_j = -40^\circ C$ $T_j = 25^\circ C$ $T_j = 150^\circ C$ | V_{GS3_5} | – – – | – – – | – 1.4 1.2 1.0 | V | Over voltage |
| 5.1.9 | Gate drive output voltage low side | V_{GS_5} | – | – | 0.2 | V | Over voltage |
| 5.1.10 | Low level input voltage of Ixx, ENA | V_{I_LL} | – | – | 1.0 | V | – |
| 5.1.11 | High level input voltage of Ixx, ENA | V_{I_HL} | 2.0 | – | – | V | – |
| 5.1.12 | Low level input voltage of INH | V_{I_LL} | – | – | 0.75 | V | – |
| 5.1.13 | High level input voltage of INH | V_{I_HL} | 2.1 | – | – | V | – |
| 5.1.14 | Input hysteresis of IHx, ILx, ENA | d_{VI} | 50 | – | – | mV | $V_S = 5.5..8V$ |
| 5.1.15 | Input hysteresis of IHx, ILx, ENA | d_{VI} | 100 | 200 | – | mV | $V_S = 8..20V$ |
| 5.1.16 | Output bias current SHx | I_{SHx} | -1.6 | -1.0 | -0.3 | mA | $V_S = 5.5..20V$; $V_{SHx} = 0..(V_S + 1)$; $V_{ILx} = \text{low}$; $V_{IHx} = \text{high}$ |
| 5.1.17 | Output bias current SLx | I_{SLx} | -1.6 | -1.0 | -0.3 | mA | $V_S = 5.5..20V$; $V_{SLx} = 0..7V$; $V_{ILx} = \text{low}$; $V_{IHx} = \text{high}$ |

Description and Electrical Characteristics

Electrical Characteristics MOSFET drivers - Dynamic Characteristics

$V_S = 5.5$ to $20V$, $T_j = -40$ to $+150^\circ C$, $F_{PWM} < 25kHz$, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | | Unit | Conditions |
|--------|--|----------------|--------------|------|-------------------|------|---|
| | | | Min. | Typ. | Max. | | |
| 5.1.18 | Fixed internal dead time | t_{DT} | 50 | – | 200 | ns | – |
| 5.1.19 | Turn on current, peak | $I_{G(on)}$ | – | -0.8 | – | A | $V_{Gxx}-V_{Sxx}=0V$; $V_S=5.5..8V$; $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.20 | Turn on current, peak | $I_{G(on)}$ | – | -1.5 | – | A | $V_{Gxx}-V_{Sxx}=0V$; $V_S=8..20V$; $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.21 | Turn off current, peak | $I_{G(off)}$ | – | 1.5 | – | A | $V_{Gxx}-V_{Sxx}=10V$; $V_S=8..20V$; $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.22 | Rise time (20-80%) $T_j = -40^\circ C$ $T_j = 25^\circ C$ $T_j = 150^\circ C$ | t_{G_rise} | – | 150 | 400 400 700 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.23 | Fall time (20-80%) $T_j = -40^\circ C$ $T_j = 25^\circ C$ $T_j = 150^\circ C$ | t_{G_fall} | – | 150 | 230 230 500 | ns | $C=22nF$; $R_{Load}=1\Omega$; |
| 5.1.24 | Input propagation time (low on) | $t_{P(ILN)}$ | 90 | 190 | 290 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.25 | Input propagation time (low off) | $t_{P(ILF)}$ | 0 | 100 | 200 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.26 | Input propagation time (high on) | $t_{P(IHN)}$ | 90 | 190 | 290 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.27 | Input propagation time (high off) | $t_{P(IHF)}$ | 0 | 100 | 200 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.28 | Absolute input propagation time difference (all channels turn on) | $t_{P(an)}$ | – | – | 70 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.29 | Absolute input propagation time difference (all channels turn off) | $t_{P(af)}$ | – | – | 50 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.30 | Absolute input propagation time difference (1channel high off - low on) | $t_{P(1hfln)}$ | – | – | 180 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.31 | Absolute input propagation time difference (1channel low off - high on) | $t_{P(1lfnh)}$ | – | – | 180 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.32 | Absolute input propagation time difference (all channel high off - low on) | $t_{P(ahfln)}$ | – | – | 180 | ns | $C=22nF$; $R_{Load}=1\Omega$ |
| 5.1.33 | Absolute input propagation time difference (all channel low off - high on) | $t_{P(alfnh)}$ | – | – | 180 | ns | $C=22nF$; $R_{Load}=1\Omega$ |

Description and Electrical Characteristics

Electrical Characteristics MOSFET drivers - Dynamic Characteristics

$V_S = 5.5$ to $20V$, $T_j = -40$ to $+150^\circ C$, $F_{PWM} < 25kHz$, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | | Unit | Conditions |
|--------|--|----------------|--------------|------|------|---------|---|
| | | | Min. | Typ. | Max. | | |
| 5.1.34 | Wake up time; INH low to high | t_{INH_Pen} | – | – | 20 | ms | Driver fully functional; $V_S=6.5..8V$; $V_{ENAX}=low$; $CPx=CBx=4,7\mu F$ |
| 5.1.35 | Wake up time; INH low to high | t_{INH_Pen} | – | – | 10 | ms | Driver fully functional; $V_S=8..20V$; $V_{ENAX}=low$; $CPx=CBx=4,7\mu F$ |
| 5.1.36 | Wake up time logic functions; INH low to high | t_{INH_log} | – | – | 10 | ms | Driver fully functional; $V_S=6.5..8V$; $V_{ENAX}=low$; $CPx=CBx=4,7\mu F$ |
| 5.1.37 | Wake up time logic functions; INH low to high | t_{INH_log} | – | – | 5 | ms | Driver fully functional; $V_S=8..20V$; $V_{ENAX}=low$; $CPx=CBx=4,7\mu F$ |
| 5.1.38 | INH propagation time to disable the output stages | t_{INH_Pdi} | – | – | 10 | μs | $V_S=5.5..8V$ |
| 5.1.39 | INH propagation time to disable the output stages | t_{INH_Pdi} | – | – | 8 | μs | $V_S=8..20V$ |
| 5.1.40 | INH propagation time to disable the entire driver IC | t_{INH_Pdi} | – | – | 300 | μs | – |
| 5.1.41 | Supply voltage V_S for Wake up | V_{VsWU} | 6.5 | – | – | V | diagnostic, OpAmp working |
| 5.1.42 | Charge pump frequency | f_{CP} | 38 | 55 | 72 | kHz | – |

5.2 Protection and Diagnostic Functions

5.2.1 Short Circuit Protection

The TLE7188F provides a short circuit protection for the external MOSFETs. It is a monitoring of the drain-source voltage of the external MOSFETs. As soon as this voltage is higher than the short circuit detection limit, a capacitor will be charged. The high side and the low side output stage of the same half bridge use the same capacitor (see [Figure 3](#)). This capacitor is discharged permanently with a current which is smaller than the charging current. This charge and discharge ratio is specified by means of duty cycles at which a short circuit is detected or not detected.

After a delay of about 12 μs all external MOSFETs will be switched off until the driver is reset by the ENA pin. The error flag is set.

The drain-source voltage monitoring of the short circuit detection for a certain external MOSFET is active as soon as the corresponding input is set to "on" and the dead time is expired.

The short circuit detection level is adjustable in an analogue manner by the voltage setting at the SCDL pin. There is a 1:1 translation between the voltage applied to the SCDL pin and the drain-source voltage limit. For instance to trigger the SCD circuit at 1 V drain-source voltage, the SCDL pin must be set to 1 V as well. The drain-source voltage limit can be chosen between 0.5 ... 2.5 V.

A setting of 5 V at the SCDL pin will disable the short circuit protection function. Disabling the short circuit protection function has no impact on the overcurrent warning (see next chapter).

5.2.2 Over current Warning

The TLE7188F offers the possibility to shut down the output stages if a current threshold is reached (see [Figure 4](#)). The output of the current sense OpAmp is connected to an integrated comparator, comparing the amplified current sense signal with an external adjustable threshold value. After the comparator a blanking time (1.5 μs typ.) is implemented to avoid false triggering caused by overswing of the current sense signal.

If the overcurrent situation is detected, only an error signal is given. During overcurrent the driver IC works normally. The error signal disappears as soon as the current decreases below the overcurrent limit set on the VTHOC pin. The error signal disappears as well when the current commutates from the low side MOSFET to the associated high side MOSFET (no current through the shunt resistor).

It is the decision of the user to react on the over current signal by modifying the Ixx patterns to lower the current. The overcurrent warning can be disabled by connecting the overcurrent threshold pin to GND ($V_{\text{THOC}} = 0 \text{ V}$).

5.2.3 Dead Time and Shoot Through Protection

In bridge applications it has to be assured that the external high side and low side MOSFETs are not "on" at the same time, connecting directly the battery voltage to GND. The dead time generated in the TLE7188F is fixed to a minimum value. This function assures a minimum dead time if the input signals coming from the μC are faulty. The exact dead time of the bridge is usually controlled by the PWM generation unit of the μC .

In addition to this dead time, the TLE7188F provides a locking mechanism, avoiding that both external MOSFETs of one half bridge can be switched on at the same time. This functionality is called shoot through protection.

If the command to switch on both high and low side switches in the same half bridge is given at the input pins, the command will be ignored.

5.2.4 Under voltage Shut Down

The TLE7188F has an integrated under voltage shut down, to assure that the behavior of the device is predictable in all voltage ranges.

If the voltage of a charge pump buffer capacitors CBx reaches the under voltage shut down level for a minimum specified filter time, the gate-source voltage of all external MOSFETs will be actively pulled to low. In this situation the short circuit detection of this output stage is deactivated to avoid a latching shut down of the driver.

As soon as the charge pump buffer voltage recovers, the output stage condition will be aligned to the input patterns automatically. This allows to continue operation of the motor in case of under voltage shut down without a reset by the μC .

Under voltage shut down will not occur when $V_S > 6\text{ V}$, $Q_G < 250\text{ nC}$, $f_{\text{PWM}} < 25\text{ kHz}$, and the charge pump capacitors $C_{xx} = 4.7\text{ }\mu\text{F}$.

5.2.5 Over voltage Shut Down

The TLE7188F has an integrated over voltage shut down to avoid destruction of the IC at high supply voltages. The voltage is measured at the Vs and the VDH pin. When one of them or all of them exceed the over voltage shut down level for more than the specified filter time then the external MOSFETs are switched off. In addition, over voltage will shut down the charge pumps and will discharge the charge pump capacitors. This results in an under voltage condition which will be indicated on the ERRx pins. During over voltage shut down the external MOSFETs and the charge pumps remain off until a reset is performed.

5.2.6 Over temperature Warning

If the junction temperature is exceeding $\text{typ. } 170^\circ\text{C}$ an error signal is given as warning. The driver IC will continue to operate in order not to disturb the application.

The warning is removed automatically when the junction temperature is cooling down.

It is in the responsibility of the user to protect the device against over temperature destruction.

5.2.7 VCC1 Check

To assure a high level of system safety, the TLE7188F provides an VCC1 check.

The 5.0V supply for the I/O of the μC is checked by internally monitoring the voltage applied to the ENA pin.

The VCC1 check is active when the signal on the ENA pin is high and is triggered by the ENA signal going high. The VCC1 check is inactive when no ENA signal is applied or the ENA signal is low (= driver IC disabled). As the ENA pin is a digital input, a low pass filter ($< 1\text{ MHz}$) is integrated to avoid faulty triggering. The filtered ENA signal is then supervised in terms of under voltage and over voltage as a measure of the VCC1 voltage.

In case of under- or over voltage at VCC1, the driver IC is disabled and latched. To restart the output stages, a reset has to be performed with the ENA pin.

5.2.8 ERR Pins

The TLE7188F has two status pins to provide diagnostic feedback to the μC . The outputs of these pins are 5V push pull stages, they are either High or Low.

Table 2 Overview of error conditions

| ERR1 | ERR2 | Driver conditions |
|------|------|---|
| Low | Low | Under voltage or VCC1 check error |
| Low | High | Over temperature or over voltage |
| High | Low | Short circuit detection or over current |
| High | High | No errors |

Table 3 Behaviour at different error conditions

| Error condition | restart behavior | Shuts down... |
|--------------------------|---|-----------------------------|
| Short circuit detection | Latch, reset must be performed at ENA pin | All external Power -MOSFETs |
| Over current warning | Self clearing | Nothing |
| Under voltage | Auto restart | All external Power -MOSFETs |
| Over voltage | Latch, reset must be performed at ENA pin | All external Power -MOSFETs |
| Over temperature warning | Self clearing | Nothing |
| VCC1 check | Latch, reset must be performed at ENA pin | All external Power -MOSFETs |

Note: All errors do NOT lead to sleep mode. Sleep mode is only initiated with the INH pin. The latch and restart behaviour allows to distinguish between the different error types combined at the ERR signals.

Table 4 Prioritization of Errors

| Priority | Error |
|----------|----------------------------------|
| 1 | VCC1 check |
| 2 | Short circuit detection |
| 3 | Under voltage detection |
| 4 | Over voltage detection |
| 5 | Over temperature Over current |

Reset of ERROR registers and Disable

The TLE7188F can be reset with the help of the enable pin ENA. If the ENA pin is pulled to low for a specified minimum time, the error registers are cleared and the external MOSFETs are switched off actively.

During disable only the errors under voltage shut down and over temperature warning are shown. Other errors are not displayed.

5.2.9 Electrical Characteristics

Electrical Characteristics - Protection and diagnostic functions

$V_S = 5.5$ to $20V$, $T_j = -40$ to $+150^{\circ}C$, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | | Unit | Conditions |
|----------------------|---|--------------|--------------|------|------|------|------------|
| | | | Min. | Typ. | Max. | | |
| Over temperature | | | | | | | |
| 5.2.1 | Over temperature warning ¹⁾ | $T_{J(OW)}$ | 150 | 170 | 190 | °C | |
| 5.2.2 | Hysteresis for over temperature warning ¹⁾ | $d_{TJ(OW)}$ | – | 20 | – | °C | |
| Over current warning | | | | | | | |
| 5.2.3 | Over current threshold | V_{THOC} | 2 | – | 4.5 | V | Vs=5.5..8V |
| 5.2.4 | Over current threshold | V_{THOC} | 2 | – | 4.8 | V | Vs=8..20V |
| 5.2.5 | Over current disabled | V_{THOC} | – | – | 1 | V | – |

Protection and Diagnostic Functions

Electrical Characteristics - Protection and diagnostic functions (cont'd)

$V_S = 5.5$ to $20V$, $T_j = -40$ to $+150^\circ C$, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | | Unit | Conditions |
|--------|---|----------------|--------------|------|------|------|---------------|
| | | | Min. | Typ. | Max. | | |
| 5.2.6 | Input offset voltage of OC Comp | V_{IO} | -50 | – | 50 | mV | – |
| 5.2.7 | Input offset voltage temperature drift of OC Comp ¹⁾ | V_{IO} | -50 | – | 5 | mV | – |
| 5.2.8 | Over current threshold hysteresis | $d_{V_{THOC}}$ | 25 | – | – | mV | $V_S=5.5..8V$ |
| 5.2.9 | Over current threshold hysteresis | $d_{V_{THOC}}$ | 50 | 80 | – | mV | $V_S=8..20V$ |
| 5.2.10 | Blanking time of overcurrent | t_{btOC} | 1.0 | 1.5 | 3.0 | µs | – |

Short circuit detection

| | | | | | | | |
|--------|---|-----------------|------|-----|------|----|--|
| 5.2.11 | Filter time of short circuit protection | $t_{SCP(off)}$ | – | 6.8 | – | µs | On request |
| 5.2.12 | Filter time of short circuit protection | $t_{SCP(off)}$ | 8 | 12 | 16 | µs | Default |
| 5.2.13 | Maximum duty cycle for no SCD ²⁾ | $D_{ySCDmax}$ | – | – | 6 | % | $f_{PWM}=20kHz$ at IHx or ILx and at static applied SC |
| 5.2.14 | Minimum duty cycle for periodic SCD ²⁾ | $D_{ySCDmin}$ | 13 | – | – | % | $f_{PWM}=20kHz$ at IHx or ILx and at static applied SC |
| 5.2.15 | Voltage range on VSCD pin to adjust the Vds limit | $V_{SCDL(off)}$ | 0.5 | – | 2.5 | V | Short circuit detection is active |
| 5.2.16 | Short circuit disable voltage at VSCD pin | $V_{SCDL(dis)}$ | 4.5 | – | 5.5 | V | Short circuit detection is disabled |
| 5.2.17 | Accuracy of SCD ($V_{SCDL}/V_{DS(off)}$) | $A_{SC(off)}$ | 0.85 | – | 1.15 | – | $V_{SCDL(off)}$ set to 1..2.5V |
| 5.2.18 | Accuracy of SCD ($V_{SCDL}/V_{DS(off)}$) | $A_{SC(off)}$ | 0.7 | – | 1.3 | – | $V_{SCDL(off)}$ set to 0.5..1V |

ERR pins

| | | | | | | | |
|--------|-----------------------------------|-------------|------|---|-----|---|--------------|
| 5.2.19 | High level output voltage of ERRx | V_{OHERR} | 4.0 | – | 5.2 | V | $I = -0.2mA$ |
| 5.2.20 | Low level output voltage of ERRx | V_{OLERR} | -0.1 | – | 0.4 | V | $I = 0.2mA$ |

Over- and under voltage

| | | | | | | | |
|--------|--|---------------|-----|-----|-----|----|------------|
| 5.2.21 | Over voltage shut down | $V_{OV(off)}$ | 28 | – | 33 | V | – |
| 5.2.22 | Over voltage filter time | t_{OV} | 30 | – | 65 | µs | – |
| 5.2.23 | Under voltage shut down CB1 | V_{UV1} | 7.4 | 8.2 | 9.0 | V | CB1 to GND |
| 5.2.24 | Under voltage shut down CB2 | V_{UV2} | 4.2 | – | 6.2 | V | CB2 to VDH |
| 5.2.25 | Hysteresis of under voltage shut down on CB1 and CB2 | $V_{HUV1,2}$ | – | 1.0 | – | V | – |

Enable and reset

| | | | | | | | |
|--------|-----------------------------------|------------|-----|---|---|----|---|
| 5.2.26 | Reset time to clear ERR registers | t_{Res1} | 2.0 | – | – | µs | – |
|--------|-----------------------------------|------------|-----|---|---|----|---|

Protection and Diagnostic Functions

Electrical Characteristics - Protection and diagnostic functions (cont'd)

$V_S = 5.5$ to $20V$, $T_j = -40$ to $+150^{\circ}C$, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | | Unit | Conditions |
|--------|---|------------|--------------|------|------|---------|------------|
| | | | Min. | Typ. | Max. | | |
| 5.2.27 | Low time of ENA signal without reset | t_{Res0} | – | – | 0.5 | μs | – |
| 5.2.28 | ENA propagation time (for enable / disable) | t_{PENa} | – | – | 1.0 | μs | – |
| 5.2.29 | Return time to normal operation at auto-restart | t_{AR} | – | – | 1.0 | μs | – |

VCC1 Check

| | | | | | | | |
|--------|--|--------------|-----|---|------|---------|--------------------------------|
| 5.2.30 | Under voltage detection level | V_{VCU} | 4.0 | – | 4.5 | V | – |
| 5.2.31 | Over voltage detection level | V_{VCO} | 5.5 | – | 6.0 | V | – |
| 5.2.32 | Under voltage filter time | t_{VC} | – | – | 0.1 | μs | Voltage drop at ENA to 3.5V |
| 5.2.33 | Over voltage filter time | t_{VC} | – | – | 0.15 | μs | Voltage overshoot at ENA to 6V |
| 5.2.34 | Rise time on ENA (to avoid Vcc1 check error) | t_{ENA_r} | – | – | 2 | μs | $V_{ENA}=1..4.5V$ |

- 1) Not subject to production test; specified by design
- 2) Parameters describe the behaviour of the internal SCD circuit. Therefore only internal delay times are considered. In application dead-/ delay times determined by application circuit (switching times of MOSFETs, adjusted dead time) have to be considered as well.

5.3.1 Electrical Characteristics

Electrical Characteristics - Current sense signal conditioning

$V_S = 5.5$ to $20V$, $T_J = -40$ to $+150^\circ C$, $F_{PWM} < 25kHz$, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | | Unit | Conditions |
|--------|---|--------------|----------------|--------------|----------------|------------|--|
| | | | Min. | Typ. | Max. | | |
| 5.3.1 | Series resistors | R_S | 100 | 500 | 1000 | Ω | – |
| 5.3.2 | Feedback resistor Limited by the output voltage dynamic range | R_{fb} | 2000 | 7500 | – | Ω | – |
| 5.3.3 | Resistor ratio (gain ratio) | R_{fb}/R_S | 5 | – | 15 | – | – |
| 5.3.4 | Steady state differential input voltage range across $V_{IN}^{(1)}$ | $V_{IN(ss)}$ | -400 | – | 400 | mV | – |
| 5.3.5 | Input differential voltage (ISP _x - ISN _x) | V_{IDR} | -800 | – | 800 | mV | – |
| 5.3.6 | Input voltage (Both Inputs - GND) (ISP - GND) or (ISN -GND) | V_{LL} | -800 | – | 2000 | mV | – |
| 5.3.7 | Input voltage (Both Inputs - GND) (ISP - GND) or (ISN -GND) | V_{LL} | -800 | – | 1500 | mV | $V_S=5.5V$ |
| 5.3.8 | Absolute input offset voltage of the I-DC link OpAmp, including drift over temperature range | V_{IO} | – | – | 2 | mV | $R_S=500\Omega$; $V_{CM}=0V$; $V_O=1.65V$; $V_{RI}=1.65V$ |
| 5.3.9 | Input offset voltage difference of the I-DC link OpAmps, including drift over temperature range | V_{IO} | – | – | +/-1 | mV | $R_S=500\Omega$; $V_{CM}=0V$; $V_O=1.65V$; $V_{RI}=1.65V$ |
| 5.3.10 | Absolute input offset voltage of reference buffer | V_{IO} | – | – | 3 | mV | – |
| 5.3.11 | VRI input range | V_{RI} | 1.2 | – | 2.8 | V | – |
| 5.3.12 | Input bias current | I_{IB} | -300 | – | – | μA | $V_{CM}=0V$; $V_O=open$ |
| 5.3.13 | High level output voltage of VO _x | V_{OH} | 4.8 | – | 5.2 | V | $I_{OH}=-2mA$; $V_S=6V$ |
| 5.3.14 | Low level output voltage of VO _x | V_{OL} | -0.1 | – | 0.2 | V | $I_{OH}=3mA$ |
| 5.3.15 | Output voltage of VO _x $V_{RI}=2.5V$, $V_{RI}=1.65V$, | V_{OR} | 2.467 1.617 | 2.50 1.65 | 2.533 1.683 | V | $V_{IN(ss)}=0V$; Gain=15; $T_J=25^\circ C$ |
| 5.3.16 | Output short circuit current | I_{SC} | 5 | – | – | mA | – |
| 5.3.17 | Differential input resistance ⁽²⁾ | R_I | 100 | – | – | k Ω | – |
| 5.3.18 | Common mode input capacitance ⁽²⁾ | I_{SC} | – | – | 10 | pF | 10kHz |
| 5.3.19 | Common mode rejection ratio at DC CMRR = $20 \cdot \log((V_{out_diff}/V_{in_diff}) \cdot (V_{in_CM}/V_{out_CM}))$ | C_{MRR} | 80 | – | – | db | – |

Electrical Characteristics - Current sense signal conditioning (cont'd)

$V_S = 5.5$ to $20V$, $T_j = -40$ to $+150^\circ C$, $F_{PWM} < 25kHz$, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

| Pos. | Parameter | Symbol | Limit Values | | | Unit | Conditions |
|--------|--|------------|--------------|------|------|------------|--|
| | | | Min. | Typ. | Max. | | |
| 5.3.20 | Common mode suppression ³⁾ with CMS = $20 \cdot \log(V_{out_CM}/V_{in_CM})$ Freq = 100kHz Freq = 1MHz Freq = 10MHz | C_{MS} | – | 62 | – | db | $V_{IN}=360mV \cdot \sin(2 \cdot \pi \cdot freq \cdot t)$; $R_s=500\Omega$; $R_{fb}=7500\Omega$; $V_{RI}=1.65, 2.5V$ |
| 5.3.21 | Slew rate | I_{SC} | – | 10 | – | V/ μs | Gain ≥ 5 ; $R_L=1.0k\Omega$; $C_L=500pF$ |
| 5.3.22 | Large signal open loop voltage gain (DC) | A_{OL} | 80 | 100 | – | dB | – |
| 5.3.23 | Unity gain bandwidth | GBW | 10 | 20 | – | MHz | $R_L=1k\Omega$; $C_L=100pF$ |
| 5.3.24 | Phase margin ²⁾ | F_M | – | 50 | – | ° | Gain ≥ 5 ; $R_L=1k\Omega$; $C_L=100pF$ |
| 5.3.25 | Gain margin ²⁾ | A_M | – | 12 | – | db | $R_L=1k\Omega$; $C_L=100pF$ |
| 5.3.26 | Bandwidth | B_{WG} | 1.6 | – | – | MHz | Gain=15; $R_L=1k\Omega$; $C_L=500pF$; $R_s=500\Omega$ |
| 5.3.27 | Output settle time to 98% ¹⁾ | t_{set} | – | 1 | 1.8 | μs | Gain=15; $R_L=1k\Omega$; $C_L=500pF$; $0.3 < V_O < 4.8V$; $V_S > 6V$; $R_s=500\Omega$ |
| 5.3.28 | Output rise time 10% to 90% ¹⁾ | t_{rise} | – | – | 1 | μs | Gain=15; $R_L=1k\Omega$; $C_L=500pF$; $0.3 < V_O < 4.8V$; $V_S > 6V$; $R_s=500\Omega$ |
| 5.3.29 | Output fall time 90% to 10% ¹⁾ | t_{fall} | – | – | 1 | μs | Gain=15; $R_L=1k\Omega$; $C_L=500pF$; $0.3 < V_O < 4.8V$; $V_S > 6V$; $R_s=500\Omega$; |

1) Input current and output amplifier characteristics:

"Output signal must be amplified and available at $2\mu s$ after input signal change (Gain 5...15)

2) Not subject to production test; specified by design

3) Without considering any offsets such as input offset voltage, internal miss match and assuming no tolerance error in external resistors.

6 Application Description

In the automotive sector there are more and more applications requiring high performance motor drives, such as electro-hydraulic or electric power steering. In these applications 3 phase motors, synchronous and asynchronous, are used, combining high output performance, low space requirements and high reliability.

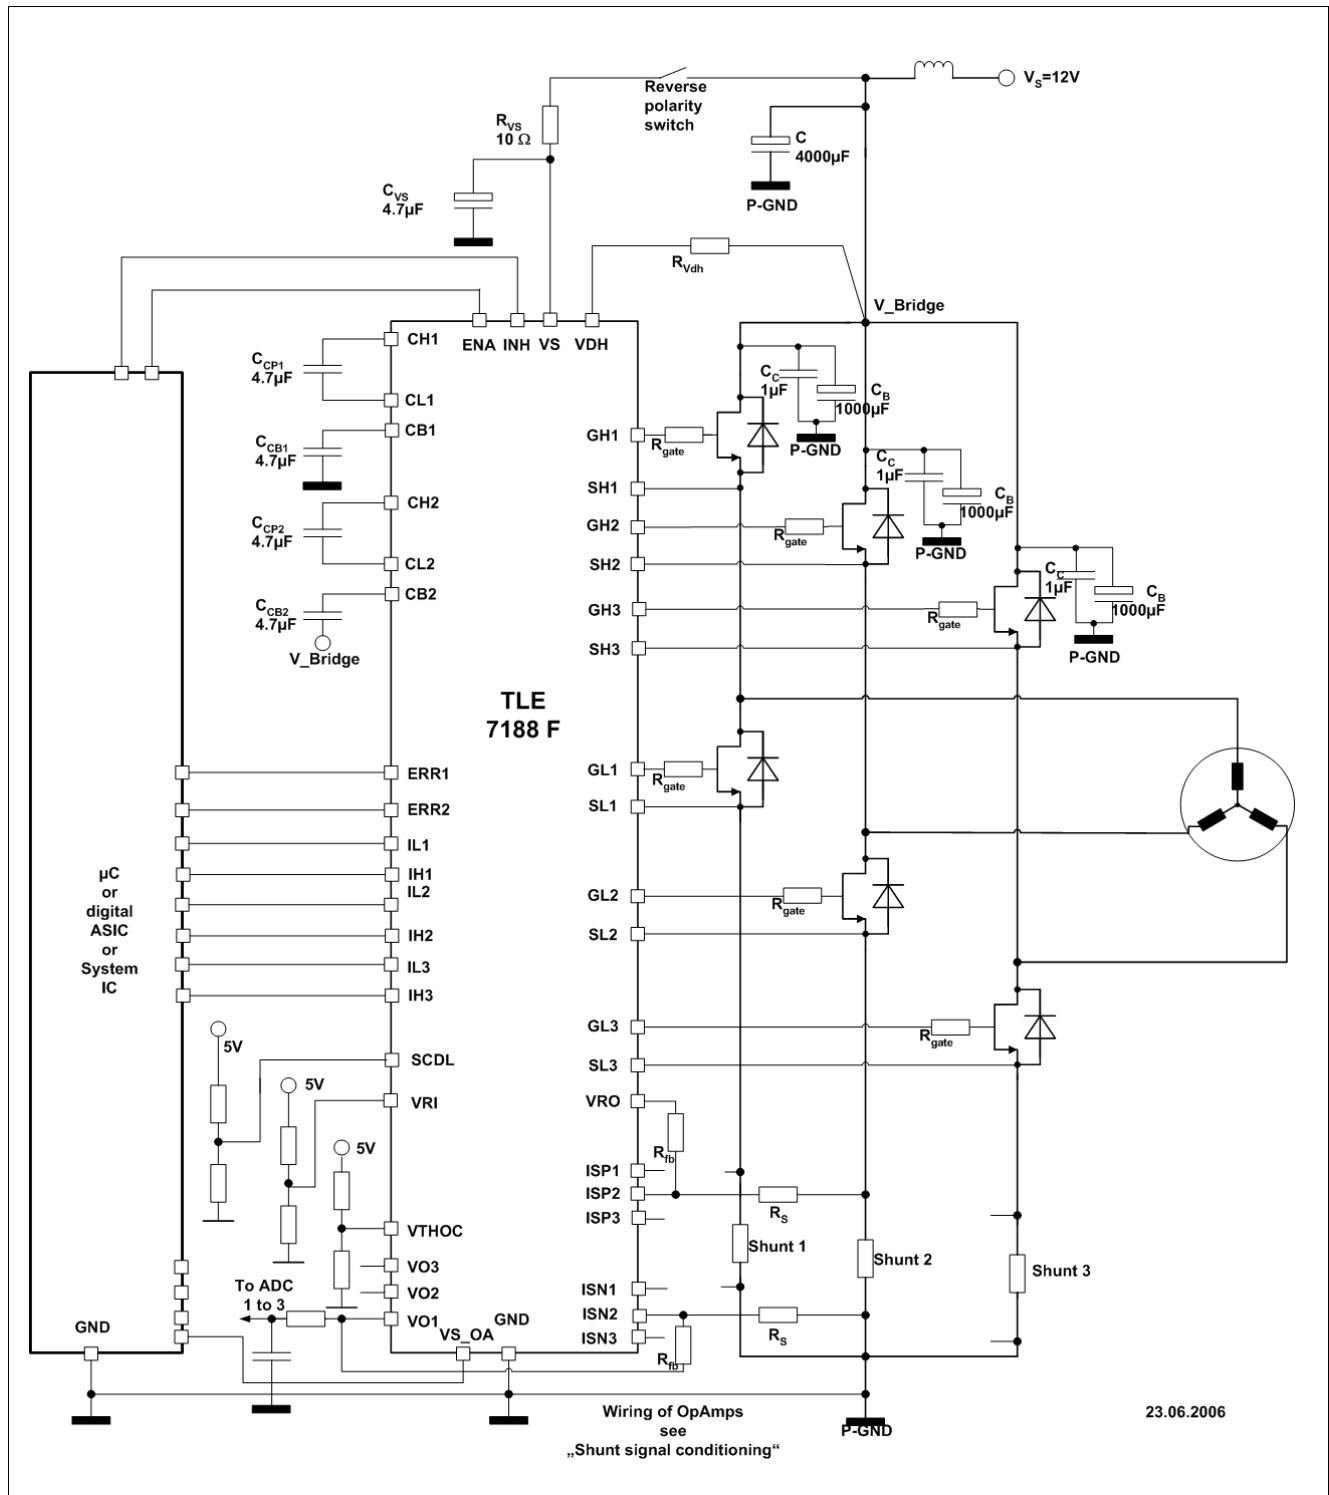


Figure 5 Application Circuit - TLE7188F

Note: This is a very simplified example of an application circuit. The function must be verified in the real application.

6.1 Layout Guide Lines

Please refer also to the simplified application example.

- Three separated bulk capacitors C_B should be used - one per half bridge
- Three separated ceramic capacitors C_C should be used - one per half bridge
- Each of the 3 bulk capacitors C_B and each of the 3 ceramic capacitors C_C should be assigned to one of the half bridges and should be placed very close to it
- The components within one half bridge should be placed close to each other: high side MOSFET, low side MOSFET, bulk capacitor C_B and ceramic capacitor C_C (C_B and C_C are in parallel) and the shunt resistor form a loop that should be as small and tight as possible. The traces should be short and wide
- The three half bridges can be separated; yet, when there is one common GND referenced shunt resistor for the three half bridges the sources of the three low side MOSFETs should be close to each other and close to the common shunt resistor
- VDH is the sense pin used for short circuit detection; VDH should be routed (via Rvdh) to the common point of the drains of the high side MOSFETs to sense the voltage present on drain high side
- CB2 is the buffer capacitor of charge pump 2; its negative terminal should be routed to the common point of the drains of the high side MOSFETs as well - this connection should be low inductive / resistive
- Additional R-C snubber circuits (R and C in series) can be placed to attenuate/suppress oscillations during switching of the MOSFETs, there may be one or two snubber circuits per half bridge, R (several Ohm) and C (several nF) must be low inductive in terms of routing and packaging (ceramic capacitors)
- the exposed pad on the backside of the VQFN is recommended to connect to GND

6.2 Further Application Information

- For further information you may contact <http://www.infineon.com/>

7 Package Outlines

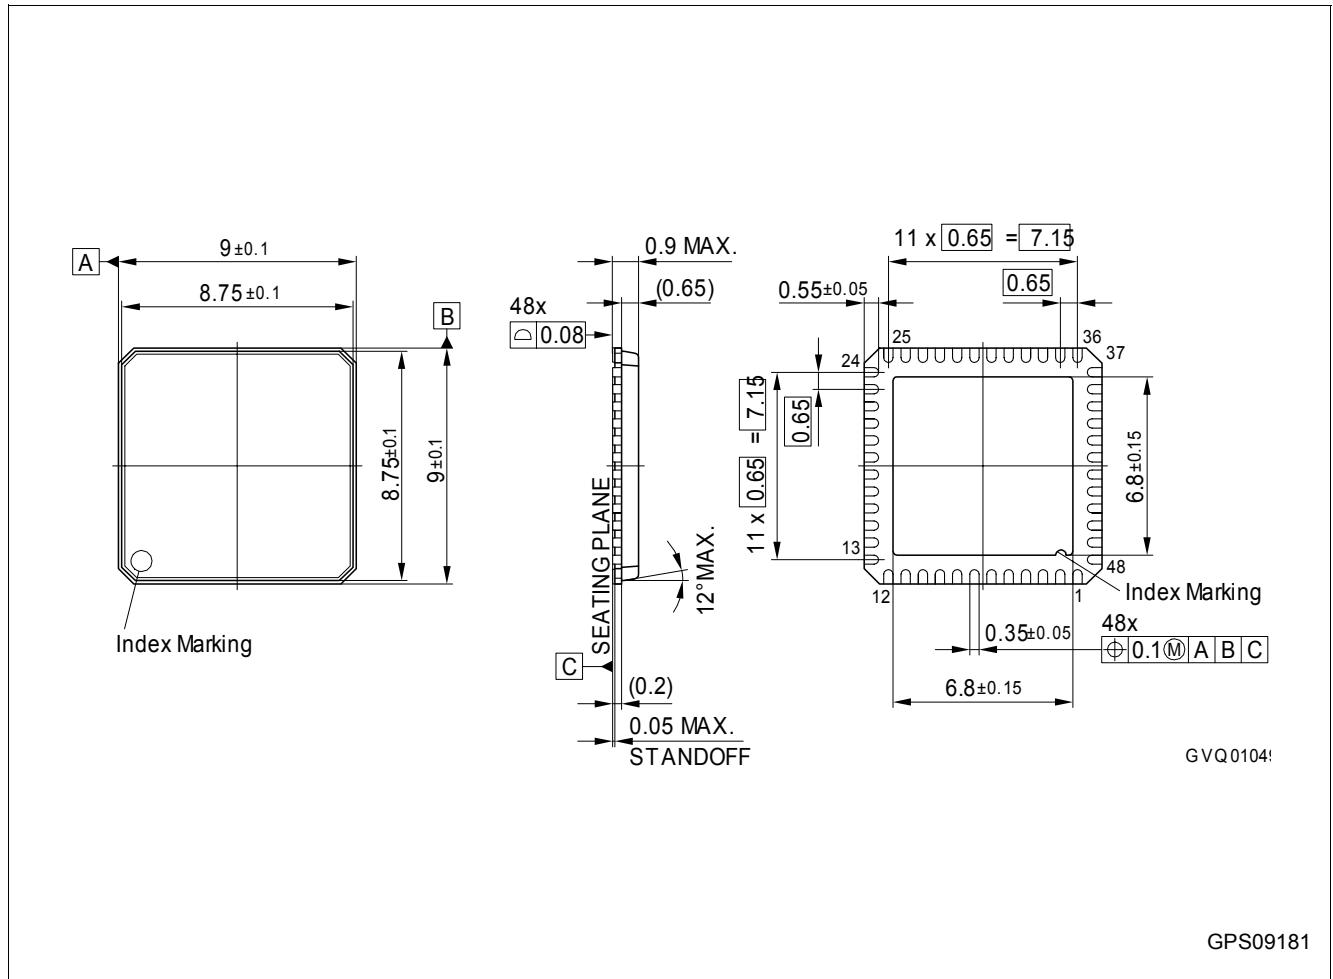


Figure 6 VQFN-48

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e. Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

8 Revision History

| Version | Date | Changes |
|---------|------------|---|
| V2.1 | 2007-06-20 | Description and Electrical Characteristics - MOSFET driver, Output Stages: Start up described in more detail |
| | | Electrical characteristics - MOSFET drivers: Turn on current, peak, specified as negative current (going out of the pin GHx and GLx) |
| | | Electrical characteristics - Current sense signal conditioning: Input bias current specified as negative current (going out of the pin ISNx and ISPx) |

Edition 2007-06-20

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2007 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.