

60V, Low IQ High Voltage, Negative Output Monolithic Synchronous Regulator

DESCRIPTION

Demonstration circuit 2354A is a high input voltage, high efficiency synchronous monolithic step-down converter with negative output featuring the [LTC7149](#). The DC2354A has wide input voltage range from 3.5V up to 55V. The output voltage of the DC2354A can be set as to $-3.3V$ or $-5V$ and “User Select” option of DC2354A allows output voltage to be in a range from 0V to $-60V$. However voltage difference between user-selected negative output voltage ($-V_{OUT}$) and maximum input voltage (V_{IN}), should not exceed 60V. $| -V_{OUT} | + V_{IN} < 60V$. DC2354A is capable of delivering up to 4A of output current, nevertheless at lower input voltage load current should be reduced in accordance to enclosed derating curves. DC2354A supports three operation modes: Fixed-frequency modulation, Burst Mode™ operation and user can synchronize it with external clock also. Fixed-frequency mode of operation maximizes the output current, reduces output voltage ripple, and yields a low noise switching spectrum. Burst Mode operation employs a variable frequency switching algorithm that minimizes the no-load input quiescent current and improves efficiency at light loads.

The DC2354A consumes less than $15\mu A$ of quiescent current during shutdown and it consumes less than $600\mu A$ at no-load conditions in Burst Mode of operation. The DC2354A has a standard operating frequency of 500kHz, but can be adjusted in a range between 300kHz and as high as 3MHz. LTC7149, which is used in DC2354A, integrates top and bottom N-Channel MOSFETs, significantly reducing overall circuit footprint. DC2354A was designed to support multiple footprints of input/output capacitors and inductors to accommodate variety of applications. The data sheet of LTC7149 gives a complete description functionality of this regulator; also contains operation and application information and must be read in conjunction with this manual for Demonstration circuit 2354A.

Design files for this circuit board are available at
<http://www.linear.com/demo/DC2354A>

LT, LT, LTC, LTM, Linear Technology, the Linear logo and Burst Mode are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY

Specifications are at $T_A = 25^\circ C$

PARAMETER	CONDITIONS/NOTES	VALUE
Minimum Input Voltage		3.5V
Maximum Input Voltage		55V
Output Voltage V_{OUT}^- Regulation	$V_{IN} = 3.5V - 60V$	$-5V \pm 2\%$ or $-3.3V \pm 2\%$
Maximum Continuous Output Current	V_{OUT}^-	4A
Preset Operating Frequency	$R10 = 200\text{k}\Omega$	500kHz
External Clock Sync. Frequency Range		300kHz – 3MHz
Efficiency	$V_{IN} = 12V, V_{OUT}^- = -5V, I_{OUT} = 1A$ $V_{IN} = 12V, V_{OUT}^- = -3.3V, I_{OUT} = 1A$	90% 90%
Typical Output Ripple V_{OUT}^-	$V_{IN} = 12V, V_{OUT}^- = -5V, I_{OUT} = 1A$ (20MHz BW)	$<15\text{mV}_{\text{p-p}}$
Quiescent Current at Shutdown	$V_{IN} = 3.5V - 55V$	$<14\mu A$
Input Current at No-Load	$V_{IN} = 3.5V - 55V$, Burst Mode Operation	$<600\mu A$

QUICK START PROCEDURE

Demonstration circuit 2354A is easy to set up to evaluate the performance of the LTC7149. For proper measurement equipment configuration, set up the circuit according to the diagram in Figure 1. Before proceeding to test, insert shunt into JP2 (RUN) into OFF position, which connects the RUN pin to ground (GND), and thus, shutdown the output. Set jumper JP1 (MODE) into FCC (Forced Counties Conduction Mode) position. Set jumper JP3 (V_{OUT}⁻) into -5.0V position.

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT}⁻ and GND terminals. See Figure 2 for proper scope probe technique.

1. With the DC2354A set up according to the proper measurement and equipment in Figure 1, apply 16V at V_{IN}. Measure V_{OUT}⁻; it should read 0V. If desired, one can measure the shutdown supply current at this point. The supply current will be approximately 14 μ A, or less, in shutdown.
2. Turn on V_{OUT}⁻ of the circuit by inserting the shunt in header JP2 (RUN) into the ON position. The output voltage should be regulating. Measure V_{OUT}⁻ and it should measure -5.0V \pm 2%. Vary the current load, which should not exceed 4A. Vary the input voltage from 3.5V to 55V, the V_{OUT}⁻, it should measure -5.0V \pm 2%. Maximum load current is function of input voltage and should be changed accordance to derating graphs on Figure 3.

3. Set JP2 (RUN) into OFF and then jumper JP3 (V_{OUT}⁻) into -3.3V position.
4. Turn on V_{OUT}⁻ of the circuit by inserting the shunt in header JP2 (RUN) into the ON position. The output voltage should be regulating. Measure V_{OUT}⁻, it should measure -3.3V \pm 2% (do not apply more than the maximum voltage of 55V to the board or the part may be damaged). Vary the current load, which should not exceed 4A. Vary the input voltage from 3.5V to 55V, the V_{OUT}⁻, it should measure -3.3V \pm 2%.
5. Set output current to zero and move jumper JP1 (MODE) into BURST position and measure V_{OUT}⁻, which should be -3.3V \pm 2%.
6. Set output current to zero and move jumper JP1 (MODE) into BURST position and measure V_{OUT}⁻, which should be -5V \pm 2%..

DC2354A supports synchronization to external clock referenced to input GND; use EXT_SYNC terminal for synchronization. PGOOD signal also referenced to input GND, to activate PGOOD functionality connect external voltage source to terminals VLOGIC and GND. DC2354A supports also EXTV_{CC} function, however, EXTV_{CC} is referenced to V_{OUT}⁻. Remove R5 and install optional R33 10 Ω resistor if external EXTV_{CC} voltage source is used.

Note: Do not apply more than the maximum voltage of 55V to the board or the part may be damaged.

QUICK START PROCEDURE

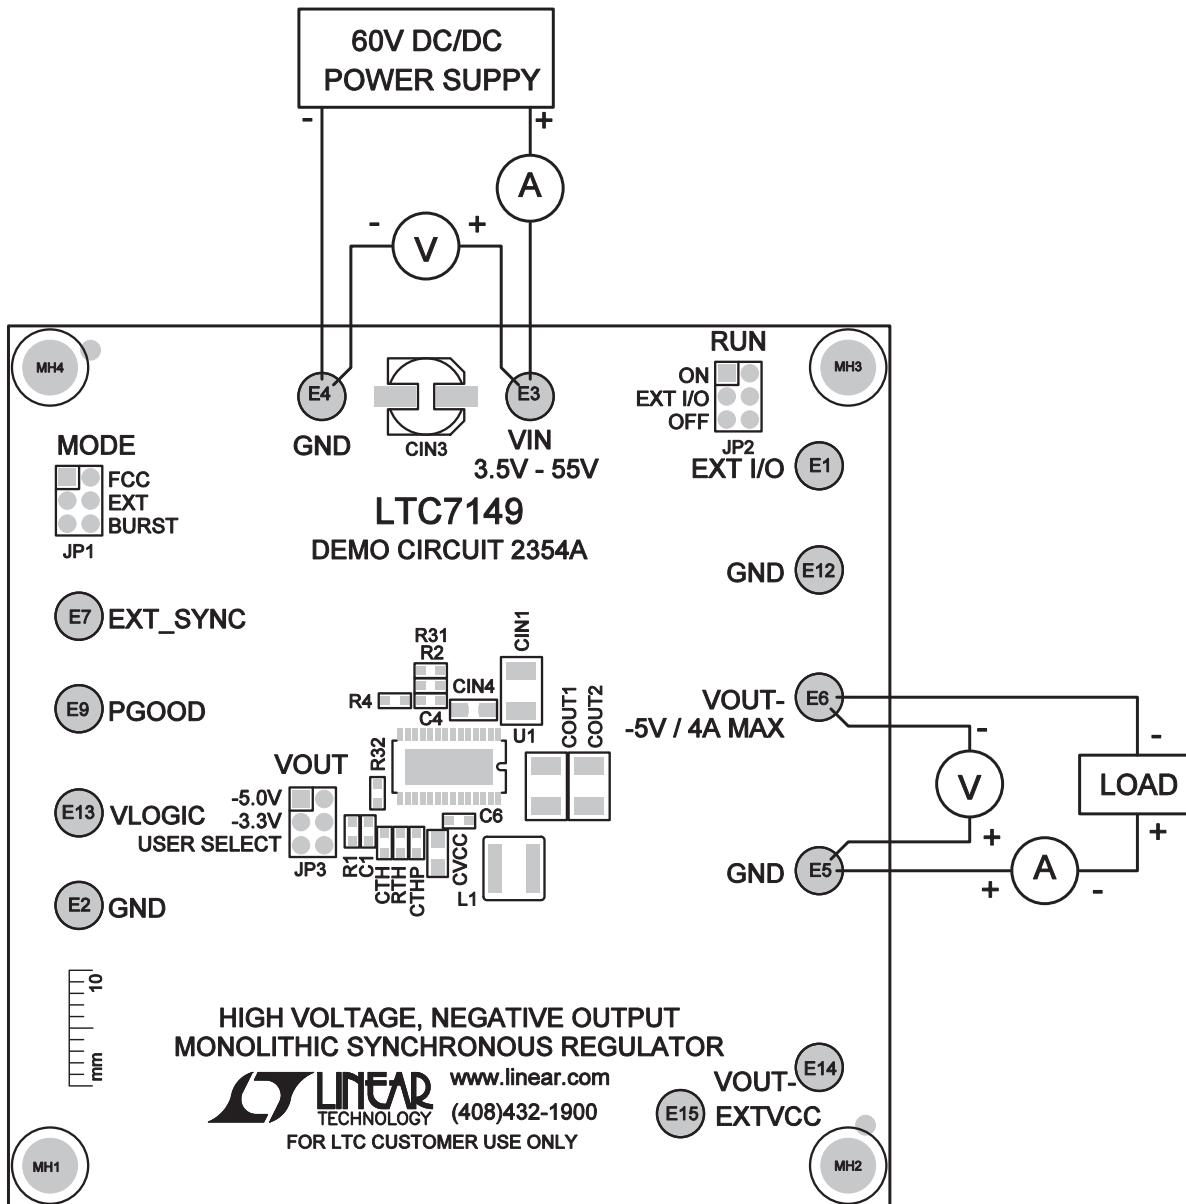


Figure 1. Proper Measurement Equipment Setup

DEMO MANUAL DC2354A

QUICK START PROCEDURE




Figure 2. Measuring Input or Output Ripple

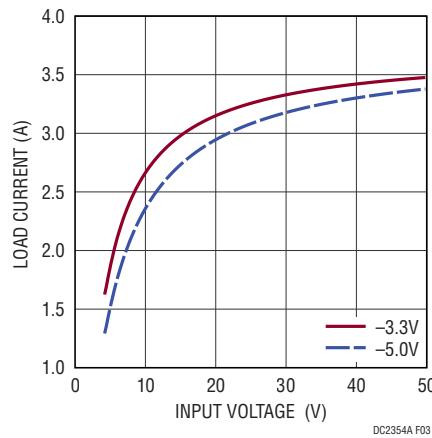


Figure 3. Output Current vs. Input Voltage Derating Charts

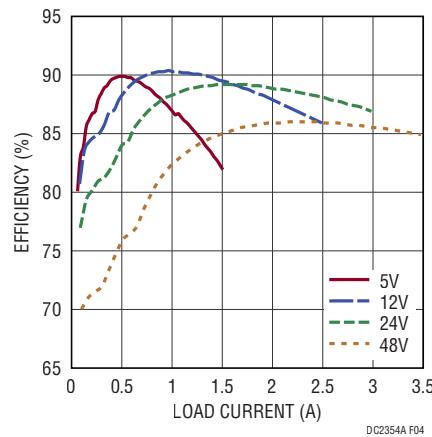


Figure 4. Efficiency vs. Load Current for Different Input Voltages

QUICK START PROCEDURE

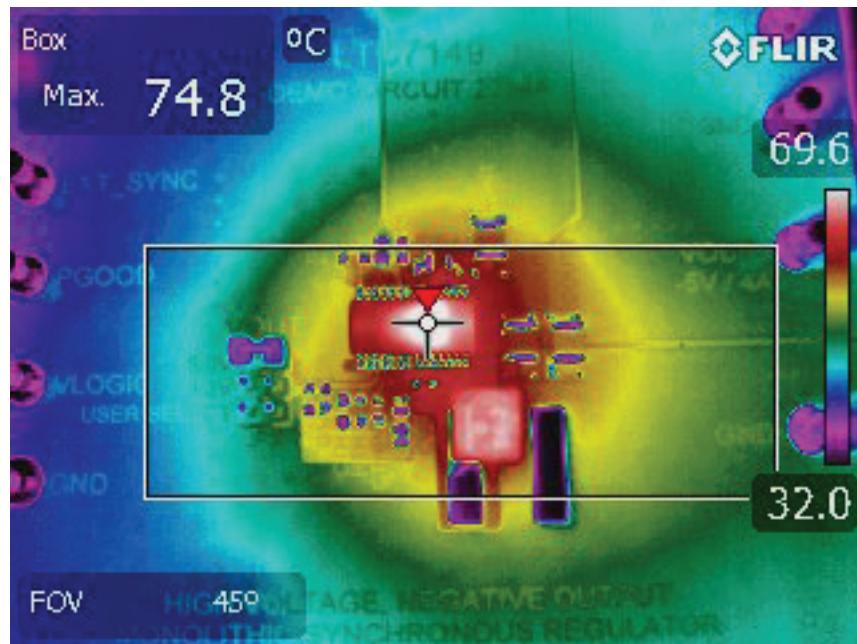


Figure 5. Thermal Map, V_{IN} 48V, V_{OUT}^- is -5V at 3.5A, No Air Flow


DEMO MANUAL DC2354A

PARTS LIST

QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components			
1	CIN1	CAP, 1210 2.2µF 10% 100V X7R	TDK C3225C7R1H225K
1	CIN2	CAP, 1210 10µF 10% 63V X7R	MURATA GRM32ER71J106KA12K
1	CIN3	CAP, 10uF 20% 63V ELEC	PANASONIC EEH-ZA1J100P
1	CIN4	CAP, 0805 1µF 10% 100V X7S	TDK C2012X7S2A105K125AB
2	COUT1, COUT2	CAP, 1210 22µF 10% 25V X7R	MURATA GRM32ER71E226KE15L
1	COUT3	CAP, X7R, 22µF, 25V, 1812	TDK, C4532X7R1E226M250KC
1	CTH	CAP, 0603 10nF 10% 50V X7R	AVX 06035A221KAT
1	CTHP	CAP, 0603, 220pF, 10%, 50V, NPO	AVX 06031A101KAT2A
1	CVCC	CAP, 0805 2.2µF 10% 16V X7R	AVX 0805YC225KAT2A
2	C1, C6	CAP, 0603 0.1µF 10% 50V X7R	TDK C1608X7R1H104K080AA
1	C5	CAP, 0603 1µF 20% 25V X7R	TDK C1608X7R1E105M080AB
1	L1	IND, 5.6µH	COILCRAFT XAL5050-562MEB
1	RTH	RES, 0603 511Ω 1% 1/10W	VISHAY CRCW0603511RFKEA
2	R1, R13	RES, 0603 100kΩ 1% 1/10W	VISHAY CRCW0603100KFKEA
1	R2	RES, 0603 10MΩ 1% 1/10W	VISHAY CRCW060310M0FKEA
1	R5	RES, 0603 10Ω 1% 0.1W	VISHAY CRCW060310RFKEA
2	R3, R4	RES, 0603 0Ω JUMPER	VISHAY CRCW06030000Z0EA
1	R10	RES, 0603 200kΩ 1% 1/10W	VISHAY CRCW0603200KFKEA
1	R18	RES, 0805 1MΩ 1% 1/8W	VISHAY CRCW08051M00FKEA
1	R25	RES, 0603 137kΩ 1% 0.063W	VISHAY CRCW0603137KFKEA
1	R26	RES, 0603 1MΩ 1% 1/10W	VISHAY CRCW06031M00FKEA
1	R29	RES, 0603 196kΩ 1% 1/10W	VISHAY CRCW0603196KFKEA
1	R31	RES, 0603 20Ω 1% 0.1W	VISHAY CRCW060320R0FKEA
1	R32	RES, 0603 100Ω 1% 0.1W	VISHAY CRCW0603100RFKEA
1	U1	IC, NEGATIVE OUTPUT REGULATOR	LINEAR TECH. LTC7149EFE28#PBF
Additional Demo Board Circuit Components			
	R19, R27, R30, R33	RES, 0603 OPTION	OPTION
	C3, C4	CAP, 0603 OPTION	OPTION
	CIN5	CAP, OPTION	OPTION
Hardware			
12	E1, E2, E3, E4, E5, E6, E7, E9, E12, E13, E14, E15	TURRET	MILL MAX 2501-2-00-80-00-00-07-0
3	JP1, JP2, JP3	HEADER, 3-PIN, DBL ROW 2mm	SULLINS, NRPN032PAEN
4	MH1, MH2, MH3, MH4	STANDOFF, SNAP ON	KEYSTONE 8833
3	XJP1, XJP2, XJP3	SHUNT	SAMTEC 2SN-BK-G

DEMO MANUAL DC2354A

SCHEMATIC DIAGRAM

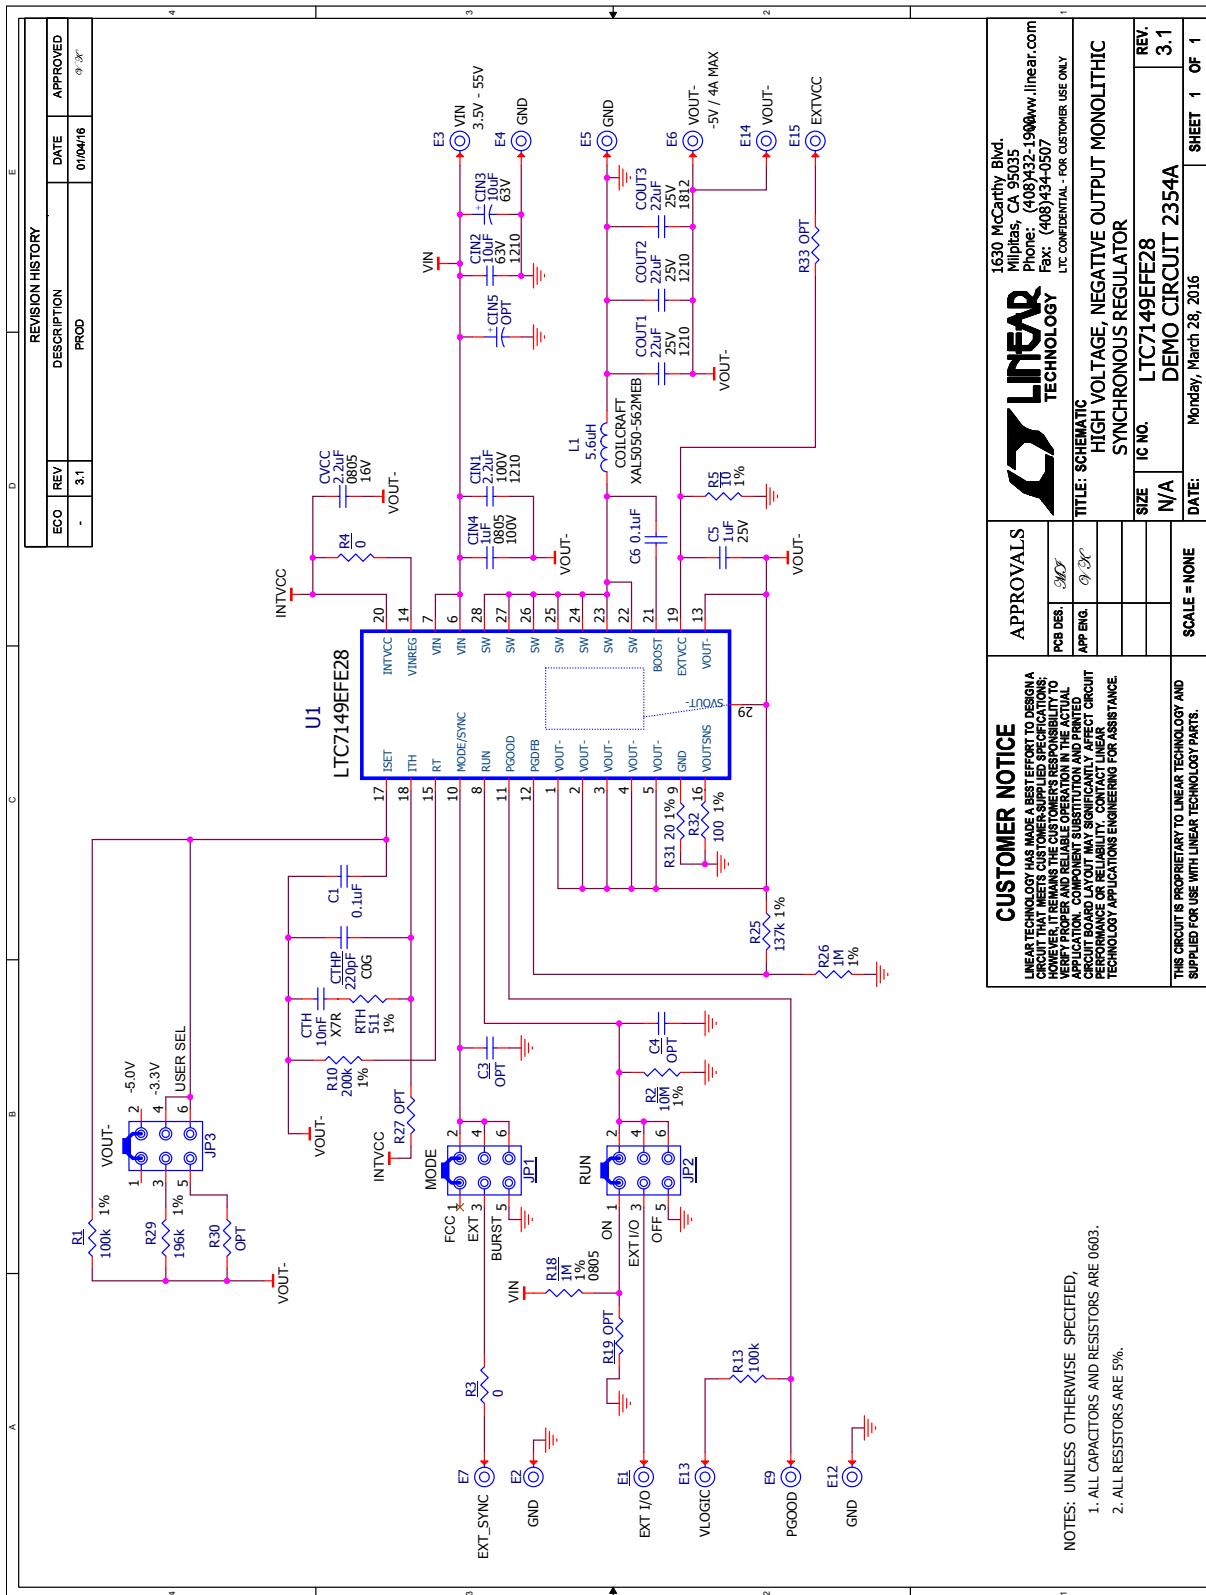

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

DEMO MANUAL DC2354A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No license is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc2354af



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.