DC/DC CONVERTER CONTROL IC
WITH CURRENT SENSE AMPLIFIER

■GENERAL DESCRIPTION

The **NJM2384** is a low voltage operation DC/DC converter control IC featuring high side current protection and soft start functions.

It is suitable for battery charger, power module application and on-board regulators.

■PACKAGE OUTLINE



NJM2384D



NJM2384M



NJM2384V

■FEATURES

- PWM switching control
- Operating Voltage 3.6V to 32V
- Wide Oscillator Range 5kHz to 500 kHz
- Current Sensing Amplifier
- Soft-Start Function
- UVLO (Under Voltage Lockouts)
- Bipolar Technology
- Package Outline DIP14, DMP14, SSOP10

■PIN CONFIGURATION

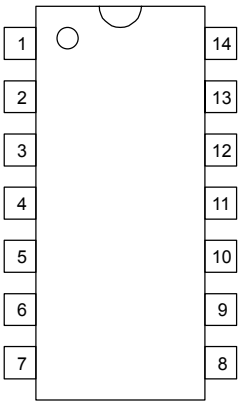

NJM2384D
NJM2384M

PIN FUNCTION

1.NC	8.NC
2.IN^-1	9. V^+
3.IN^-2	10.CS
4.F.B	11.CT
5.GND	12.REF
6.OUT	13.IN^+
7.NC	14.NC



NJM2384V

PIN FUNCTION

1.IN^-1	6. V^+
2.IN^-2	7.CS
3.F.B	8.CT
4.GND	9.REF
5.OUT	10.IN^+

■BLOCK DIAGRAM

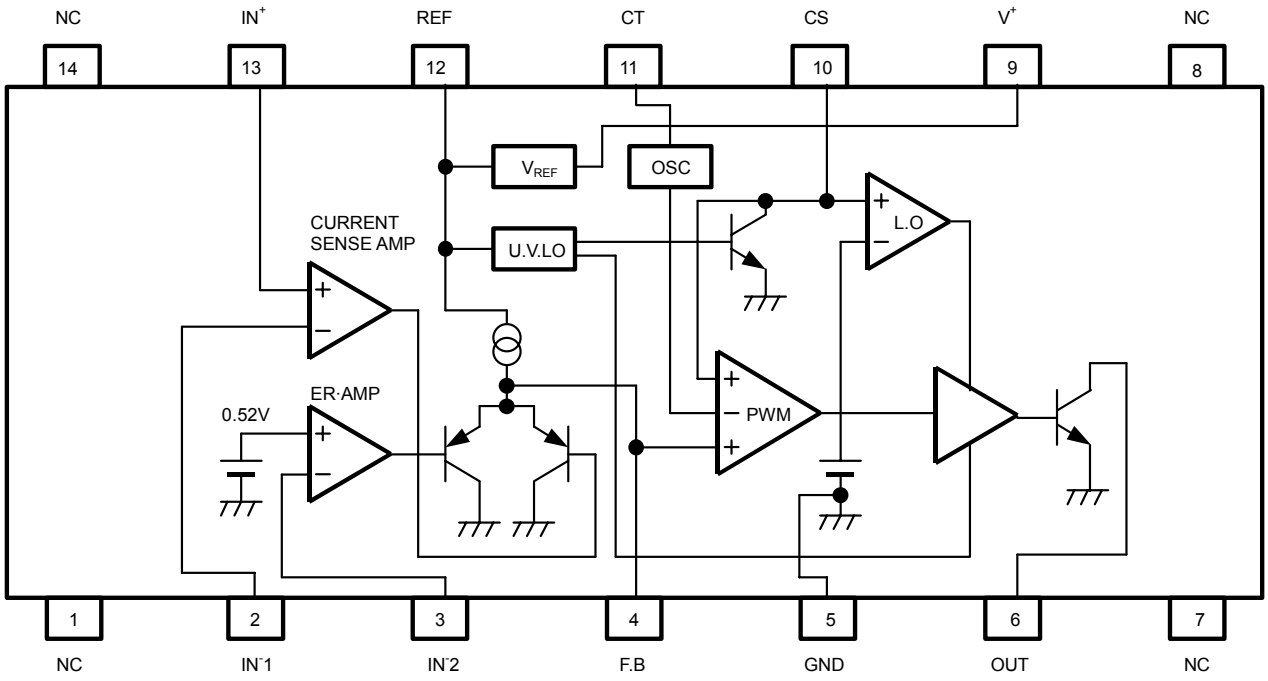

(Package: DIP14, DMP14)

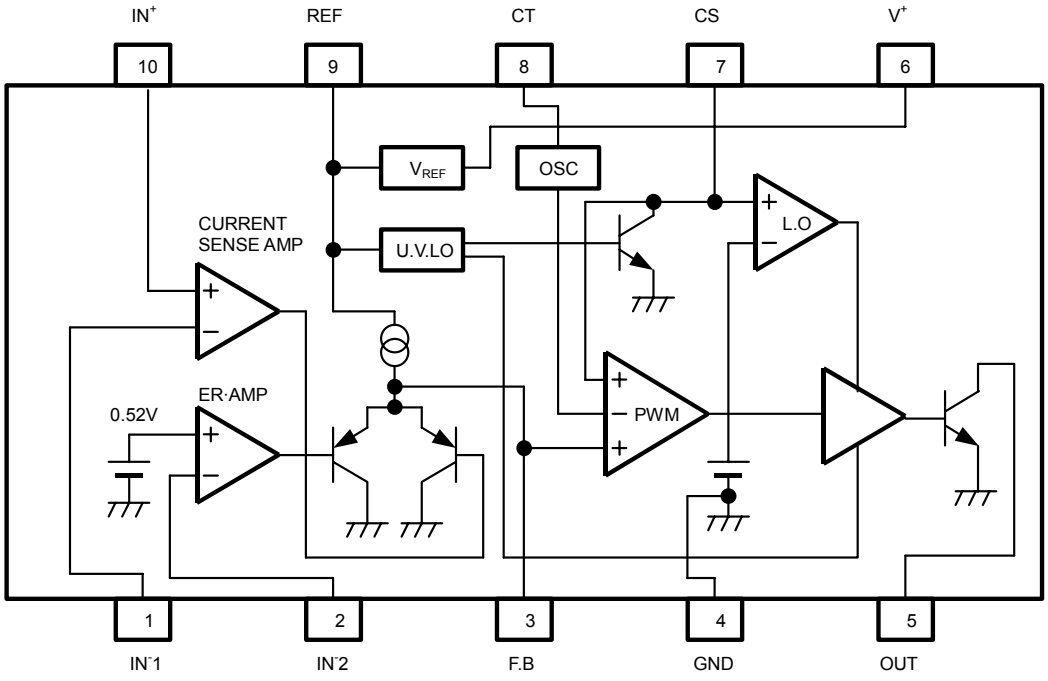

(Package: SSOP10)

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Input Voltage	V^+	36	V
Reference Output Current	I_{OR}	10	mA
Output Sink Current	I_{SINK}	200	mA
Differential Input Voltage	V_{ID}	2.5	V
Common Mode Input Voltage	V_{IC}	-0.3 ~ 2.5	V
Power Dissipation	P_D	(DIP 14) 700 (DMP 14) 300 (SSOP 10) 250	mW
Operating Temperature Range	T_{OPR}	-40 ~ +85	°C
Storage Temperature Range	T_{STG}	-50 ~ +150	°C

■ELECTRICAL CHARACTERISTICS (V^+=6V,R_T=33kΩ,C_T=1000pF,Ta=25°C)

REFERENCE VOLTAGE BLOCK

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{REF}	I_{OR}=1mA	2.45	2.50	2.55	V
Line Regulation	L_{INE}	V^+=3.6 ~ 32V, I_{OR}=1mA	–	6.8	20.7	mV
Load Regulation	L_{OAD}	I_{OR}=0.1 ~ 5.0mA	–	5	30	mV

OSCILLATOR BLOCK

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Oscillation Frequency	f_{OSC}	R_T=33kΩ, C_T=1000pF	85	105	125	kHz
Oscillate Fluctuations1 (Line Fluctuations)	f_{dV}	V^+=3.6 ~ 32V	–	1	–	%
Oscillate Fluctuations2 (Temp Fluctuations)	f_{dT}	Ta=-40°C ~ 85°C	–	5	–	%

CURRENT SENSE AMPLIFIER BLOCK

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage1	V_{IO}1		–	2	7	mV
Input Offset Current1	I_{IO}1		–	5	50	nA
Input Bias Current1	I_B1		–	5	100	nA
Open Loop Gain1	A_V1		–	90	–	dB
Gain Bandwidth Product1	G_B1		–	0.6	–	MHz
Input Common Mode Voltage Ratio1	V_{ICM}1		–	0 ~ V_{REF}-0.8	–	V
Maximum Output Voltage1 (F.B Pin)	V_{OM-}1	R_{NF}=100kΩ	–	–	1	V
Maximum Source Current1 (F.B Pin)	I_{OM+}1	V_{OM}=0.5V	40	85	200	μA

■ELECTRICAL CHARACTERISTICS (V^+=6V,R_T=33kΩ,C_T=1000pF,Ta=25°C)

ERROR AMPLIFIER BLOCK

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reference Voltage2	V_B2		0.51	0.52	0.53	V
Input Bias Current2	I_B2		–	5	100	nA
Open Loop Gain2	A_V2		–	90	–	dB
Gain Bandwidth Product2	G_B2		–	0.6	–	MHz
Maximum Output Voltage2 (F.B Pin)	$V_{OM-}2$	R_{NF}=100kΩ	–	–	1	V
Maximum Source Current2 (F.B Pin)	$I_{OM+}2$	V_{OM}=0.5V	40	85	200	μA

PWM COMPARATE BLOCK

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Threshold Voltage (F.B Pin)	V_{TH0}	duty·cycle=0% (note)	–	1.65	1.75	V
Input Threshold Voltage (F.B Pin)	V_{TH100}	duty·cycle=100% (note)	–	2.10	–	V

SOFT START CIRCUIT BLOCK

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Bias Current (CS Pin)	I_{BCS}	CS Pin=1.8V	–	250	650	nA
Input Threshold Voltage (CS Pin)	V_{THCS0}	duty·cycle=0% (note)	–	0.25	0.35	V
Input Threshold Voltage (CS Pin)	V_{THCS50}	duty·cycle=100% (note)	–	0.7	–	V

UNDER VOLTAGE LOCKOUT BLOCK

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
ON Threshold Voltage	V_{THON}		–	2.70	–	V
OFF Threshold Voltage	V_{THOFF}		–	2.52	–	V
Hysteresis Voltage	V_{HYS}		60	180	–	mV

OUTPUT BLOCK

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
L Output Voltage (OUT Pin)	V_{OL}	Output Sink Current=100mA	–	0.25	0.65	V

GENERAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Latch Mode Threshold Voltage (CS Pin)	V_{THLA}		1.2	1.5	1.8	V
Quiescent Current	I_{CCLA}	Latch Mode	–	1.6	2.2	mA
Average Quiescent Current	I_{CCAV}	RL= ∞ , duty·cycle=50%	–	5.5	10	mA

(note) Duty·Cycle is defined as follows:

Duty·Cycle=0%: IC output transistor is OFF.

Duty·Cycle=100%: IC output transistor is ON.

■ TYPICAL APPLICATIONS

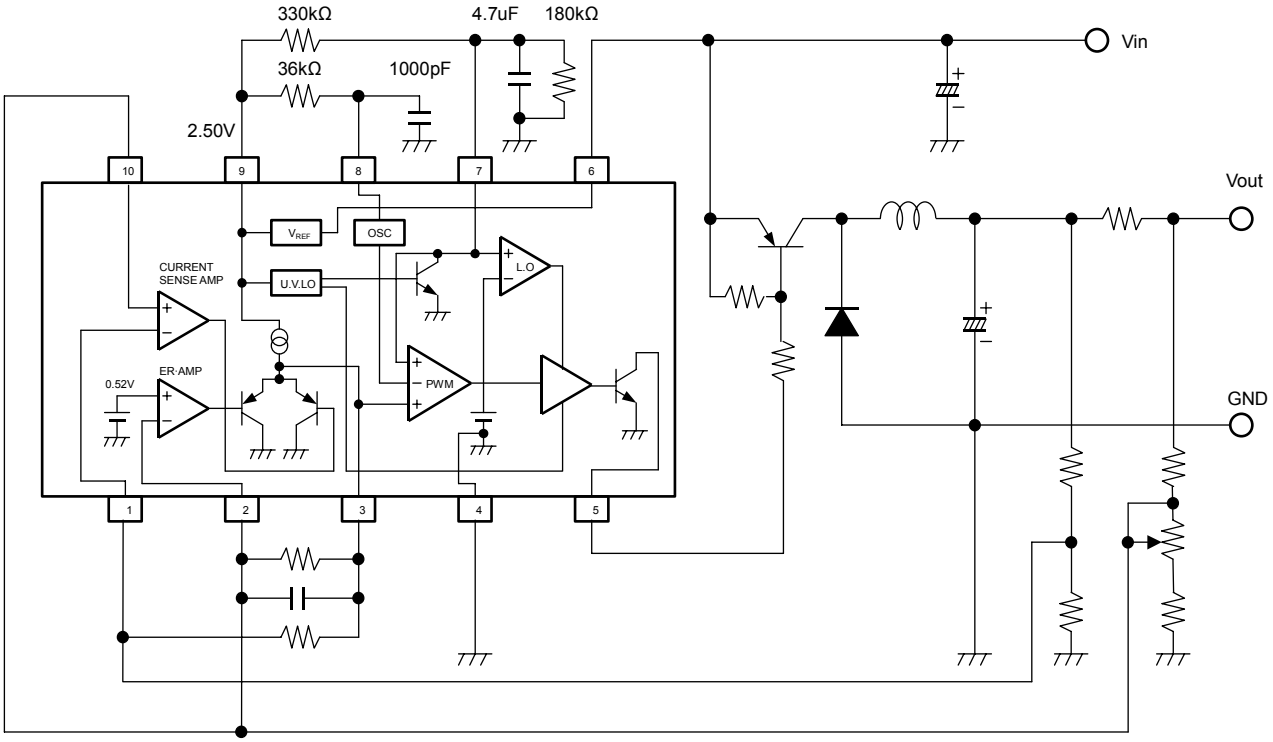

(Package:SSOP10)

■TYPICAL CHARACTERISTICS

L Output Voltage vs. Source Current
(V^+=6V,R_T=33kΩ,C_T=1000pF,Ta=25°C)

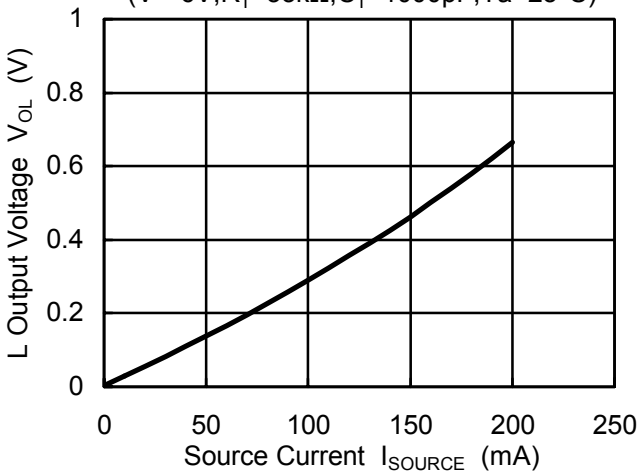

Duty Cycle vs. CS Pin Voltage
(V^+=6V,Ta=25°C)

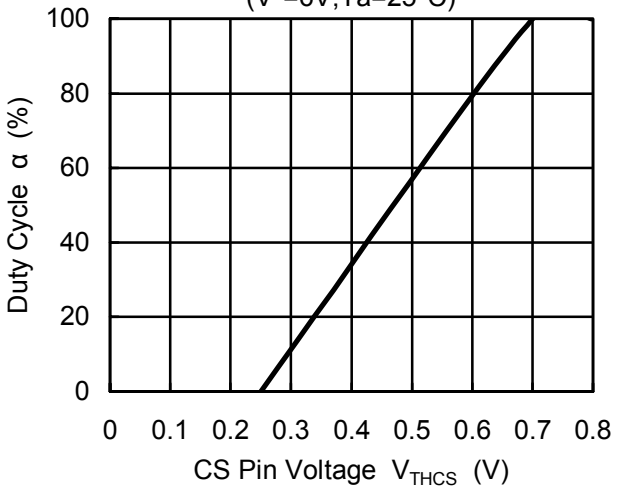

Oscillator Frequency vs. Timing Resistor
(V^+=6V,Ta=25°C)

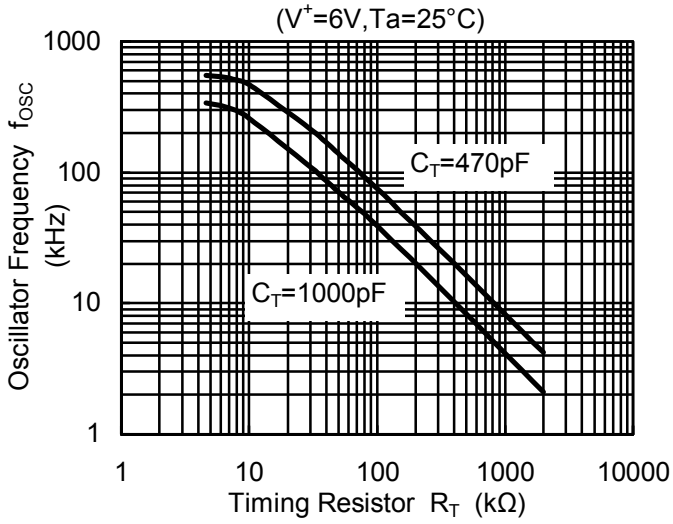

Oscillator Frequency vs. Timing Capacitor
(V^+=6V,Ta=25°C)

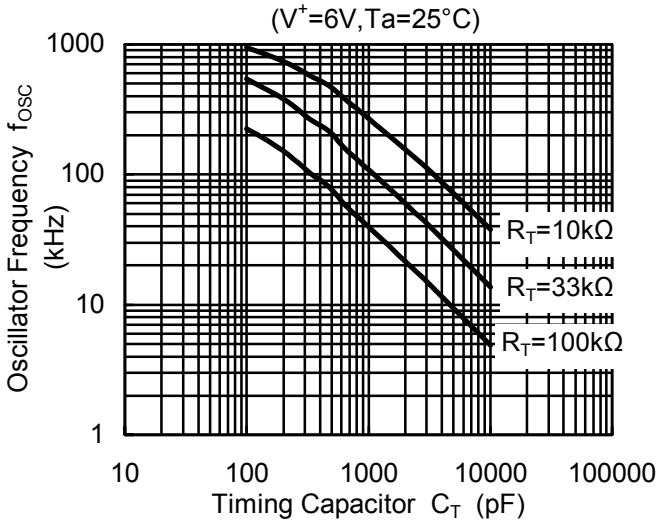

Reference Voltage vs. Operating Voltage
(V^+=6V,Ta=25°C)

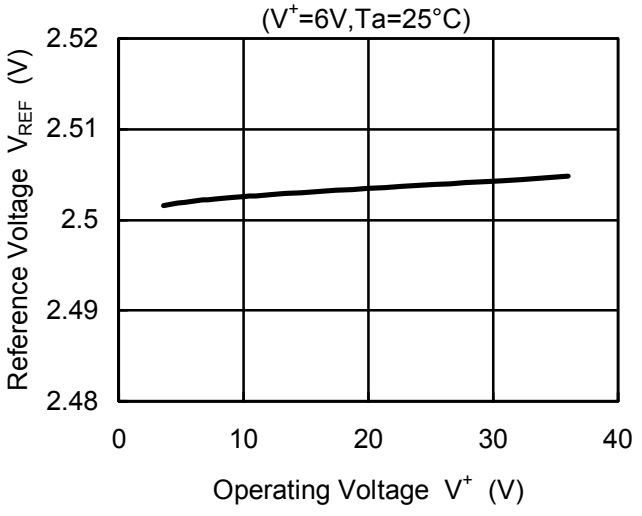

Operating Current vs. Operating Voltage
(Ta=25°C)

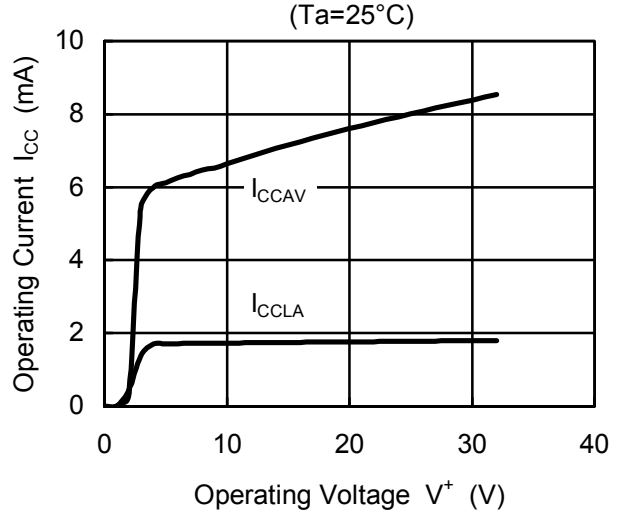

■TYPICAL CHARACTERISTICS

Oscillator Frequency vs. Temperature
(V^+=6V,R_T=33kΩ,C_T=1000pF)

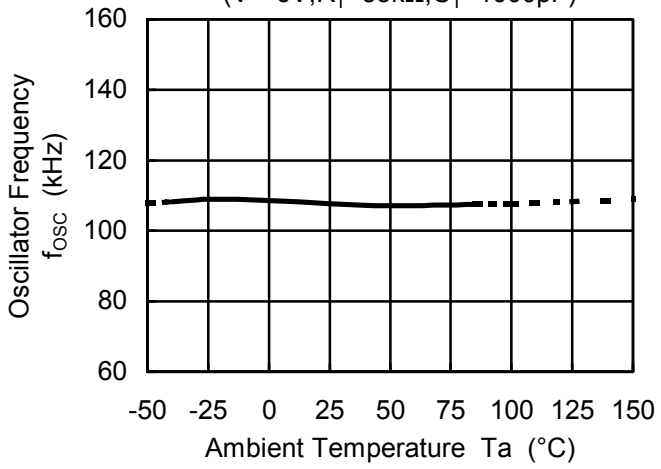

Reference Voltage vs. Temperature
(V^+=6V,I_{OR}=1mA)

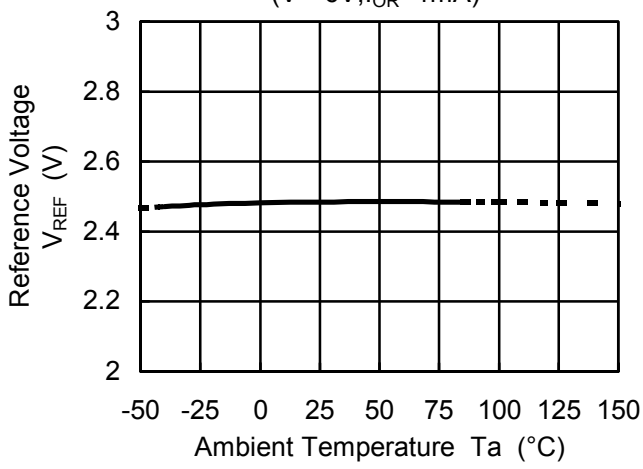

L Output Voltage vs. Temperature
(V^+=6V,I_{SINK}=100mA,R_T=33kΩ,C_T=1000pF)

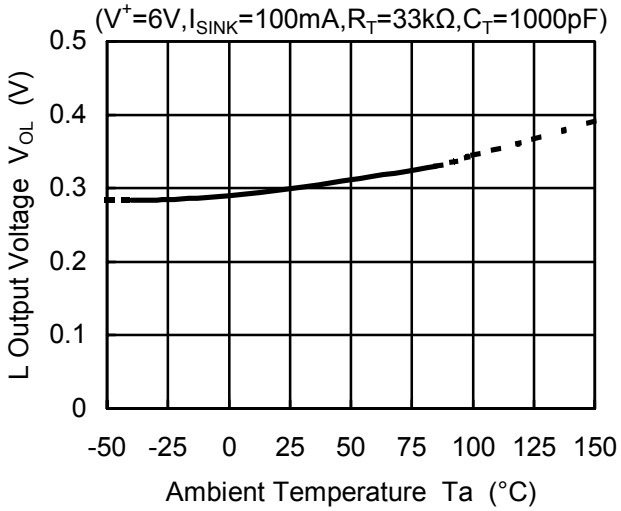

Supply Current vs. Temperature
(V^+=6V,R_T=33kΩ,C_T=1000pF)

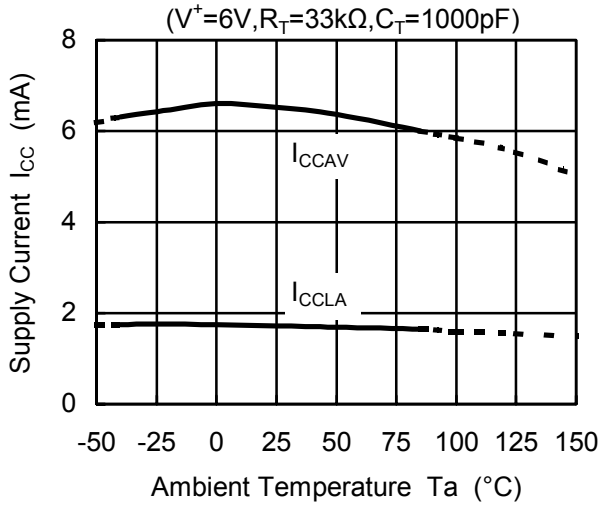

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

NJM2384V-TE2 NJM2384V-TE1 NJM2384M NJM2384D NJM2384M-TE2

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.