

NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output

bel
POWER PRODUCTS

xRPF-20A1A0

RoHS Compliant

Rev.A

- Non-Isolated
- Fixed Frequency (275 kHz)
- High Efficiency
- High Power Density
- Power Good Output Signal (open collector)
- Under-Voltage Lockout (UVLO)
- Wide Trim Range
- Converter Can Sink and Source Current
- OCP/SCP
- Remote On/Off
- Low Cost



Description

The Bel xRPF-20A1A0 is a new high density open frame non-isolated converter series for space sensitive applications. Each model has a wide input range (10.2 Vdc - 13.8 Vdc) and offers a wide range of output voltage (0.9 Vdc - 5.0 Vdc) with a 20 A load. An external resistor adjusts the output voltage from its pre-set value of 0.9 Vdc to any value up to the 5.0 Vdc maximum. Typical efficiency is 92% at $V_o=5$ Vdc, $V_{in}=12$ Vdc at full load. Typical features include remote on/off, under-voltage lockout, over-current protection and short circuit protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Vertical Mount	Model Number Horizontal Mount
0.9 V - 5.0 V	12 V	20 A	100 W	92%	VRPF-20A1A0	0RPF-20A1A0

- Notes:** 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.
3. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	13.8 V	
Output Enable Terminal Voltage	-0.3 V	-	13.8 V	
Ambient Temperature	0 °C	-	80 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	10.2 V	-	13.8 V	
Input Current (Source)				
$V_o=5.0$ V	-	9.1 A	-	
$V_o=2.5$ V	-	4.9 A	-	
$V_o=0.9$ V	-	2.2 A	-	
Input Current (Sink)				
$V_o=2.5$ V	-	-3.44 A	-	Able to sink 20 A output current at any output voltage up to and including 2.5 V.
$V_o=0.9$ V	-	-0.97 A	-	
Input Current (No Load)	-	95 mA	-	
Remote Off Input Current	-	5 mA	10 mA	

NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output



Input Specifications (continued)

Parameter	Min	Typ	Max	Notes
Input Reflected Ripple Current (pk-pk)				Tested with simulated source impedance of 1.5 uH 5Hz to 20 MHz, and 2 × 270 uF/16 V Oscon capacitors (ESR ≤ 20 mΩ) at the input
Vo=5.0 V	-	280 mA	350 mA	
Vo=3.3 V	-	250 mA	320 mA	
Vo=2.5 V	-	200 mA	280 mA	
Vo=0.9 V	-	150 mA	250 mA	
Input Reflected Ripple Current (rms)				
Vo=5.0 V	-	80 mA	120 mA	
Vo=3.3 V	-	70 mA	100 mA	
Vo=2.5 V	-	45 mA	80 mA	
Vo=0.9 V	-	40 mA	60 mA	
External Input Capacitance	-	540 uF	-	
Turn-on Voltage Threshold	8.5 V	9.0 V	9.5 V	
Turn-off Voltage Threshold	7.0 V	7.6 V	8.3 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes	
Output Voltage Set Point	-2.5%Vo,set	-	2.5%Vo,set	Vin=12 V, Io=Iomax, full load	
Output Voltage Set Point	-3.5%Vo,set	-	3.5%Vo,set	Over all operating input voltage, resistive load, and temperature conditions	
Load Regulation				Io=Iomin to Iomax	
Vo=5.0 V	-	-	0.4%Vo,set		
Vo=3.3 V	-	-	0.4%Vo,set		
Vo=2.5 V	-	-	0.5%Vo,set		
Vo=0.9 V	-	-	1%Vo,set		
Line Regulation	-	-	0.5%Vo,set	Vin=Vinmin to Vinmax	
Output Ripple and Noise (pk-pk)				Tested at 0-20 MHz BW, with a 680 uF/6.3 V Oscon capacitor (ESR ≤ 12 mΩ), 10uF/16V Tantalum capacitor, and 10nF ceramic capacitor at the output.	
Vo=5.0 V	-	65 mV	80 mV		
Vo=3.3 V	-	60 mV	75 mV		
Vo=2.5 V	-	55 mV	70 mV		
Vo=0.9 V	-	45 mV	55 mV		
Output Ripple and Noise (rms)					
Vo=5.0 V	-	18 mV	25 mV		
Vo=3.3 V	-	15 mV	25 mV		
Vo=2.5 V	-	15 mV	20 mV		
Vo=0.9 V	-	10 mV	15 mV		
Output Current	0 A	-	20 A		
Current Limit Threshold	25 A	-	40 A		
Short Circuit Surge Transient	-	-	0.1 A ² s		
Turn on Time	-	5 mS	10 mS		
Overshoot at Turn on	-	0%Vo	3%Vo		
Output Capacitance					
Vo=5.0 V	680 uF	-	5080 uF		
Vo=2.5 V	680 uF	-	7840 uF		
Vo=0.9 V	680 uF	-	11000 uF		
Transient Response					
50% ~ 75% Max Load	Vo=0.9 V-5.0 V	-	100 mV	150 mV	di/dt=2.5 A/uS; Vin=12 V; with a 680 uF/6.3 V Oscon capacitor (ESR ≤ 12 mΩ), 10 uF/16 V Tantalum capacitor and 10 nF ceramic capacitor at the output.
Settling Time		-	40 uS	80 uS	
75% ~ 50% Max Load		-	100 mV	150 mV	
Settling Time		-	40 uS	80 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency (Current Source)				Measured at Vin=12 V, full load.
Vo=5.0 V	89%	92%	-	
Vo=3.3 V	86%	89%	-	
Vo=2.5 V	83%	86%	-	
Efficiency (Current Sink)				
Vo=2.5 V	79%	82%	-	
Vo=0.9 V	60%	63%	-	
Switching Frequency	240 kHz	275 kHz	310 kHz	
Output Voltage Trim Range	0.9 V	-	5.0 V	Vo=0.9 V when the Trim pin is open.
MTBF	5,570,000 hours			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C)
Dimensions				VRPF-20A1A0
Inches (L x W x H)	1.2 x 1.1 x 0.457			
Millimeters (L x W x H)	30.48 x 27.94 x 11.6			
Dimensions				ORPF-20A1A0
Inches (L x W x H)	1.2 x 1.1 x 0.508			
Millimeters (L x W x H)	30.48 x 27.94 x 12.91			
Weight	-	15 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.3 V	-	0.8 V	Remote On/Off pin open, unit on.
Signal High (Unit On)	2.4 V	-	13.8 V	
Power Good				
Power Good Delay ¹	-	-	8 mS	


Note: All specifications are typical at 25 °C unless otherwise stated.

- The power good signal is an open collector output. When the output of the module reaches 90% of the nominal set point, the power good pin is set high.

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground. Trim values should not be less than 280Ω.

$$R_{trim} = \frac{1.17}{V_{adj} - 0.9}$$

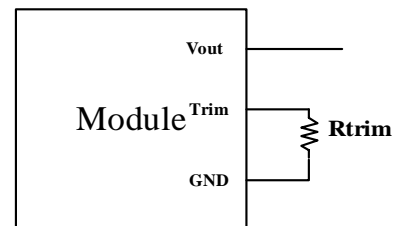

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (Vadj) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$R_t = \frac{R_s \times (1.3V_t - 1.17)}{1.17 - R_s \times (V_{adj} - 0.9)}$$

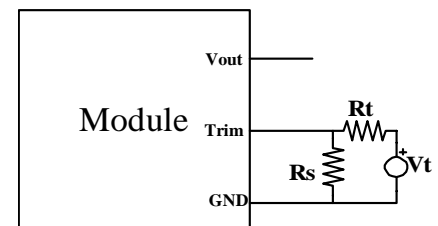




NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output



Efficiency Data

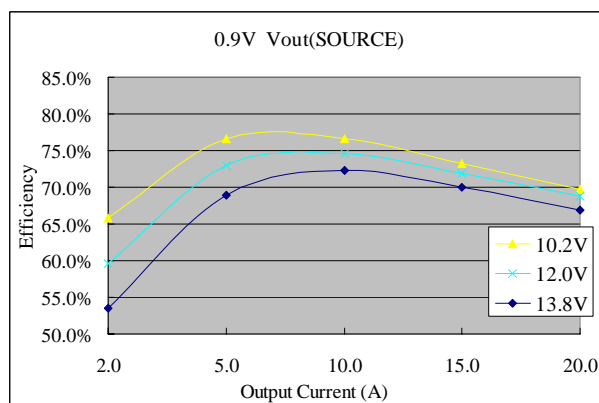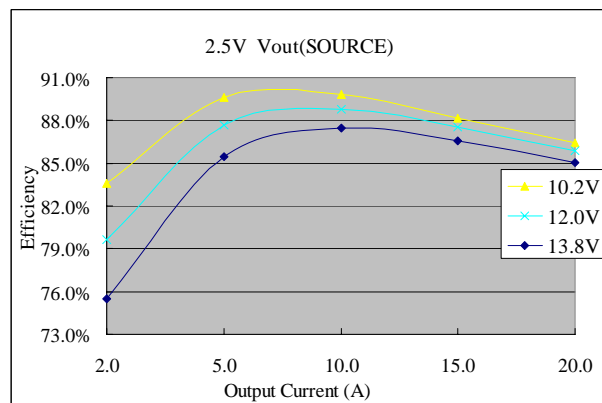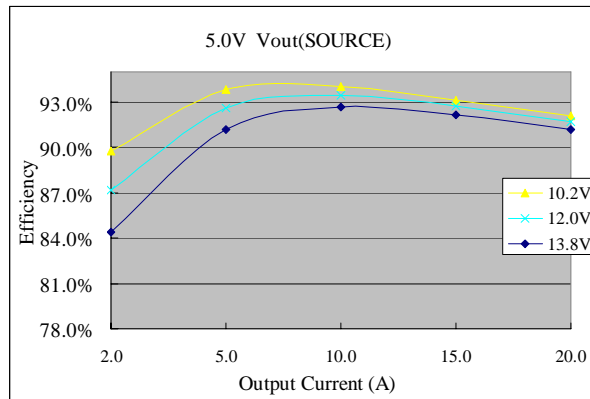


NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input


0.9 Vdc - 5.0 Vdc/20 A Output




Thermal Derating Curves

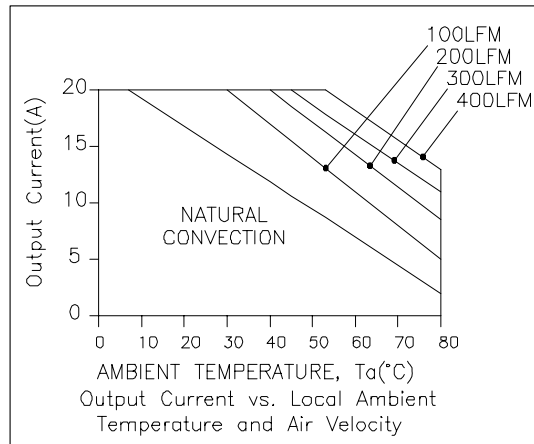

$V_o=5\text{ V}; V_{in}=12\text{ V}$

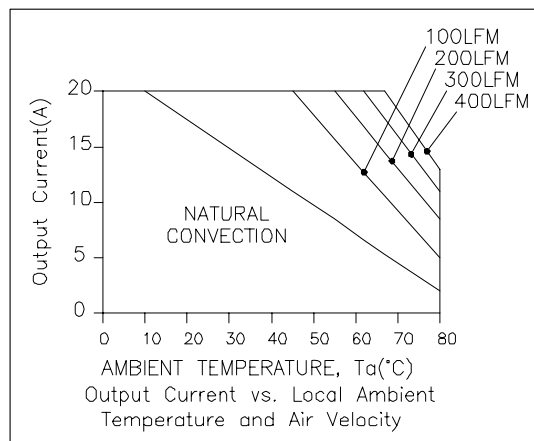

$V_o=2.5\text{ V}; V_{in}=12\text{ V}$

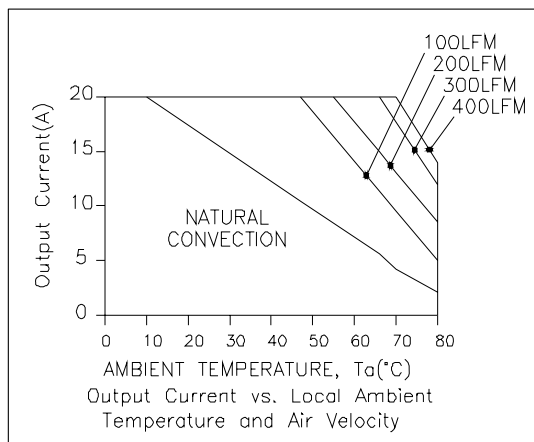

$V_o=0.9\text{ V}; V_{in}=12\text{ V}$


NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input


0.9 Vdc - 5.0 Vdc/20 A Output

bel
POWER PRODUCTS


Ripple and Noise Waveforms

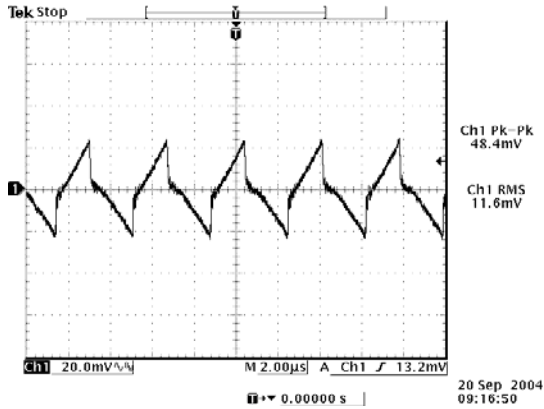

12 V input, 5.0 V output

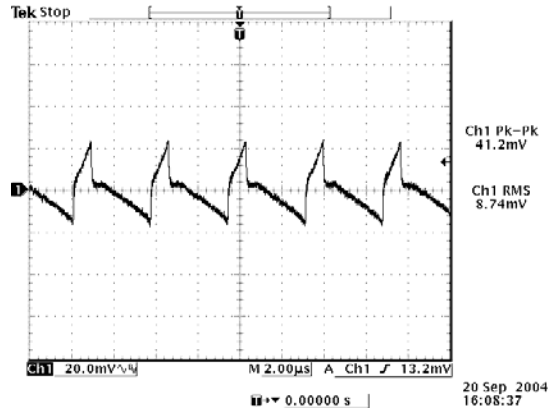

12 V input, 2.5 V output

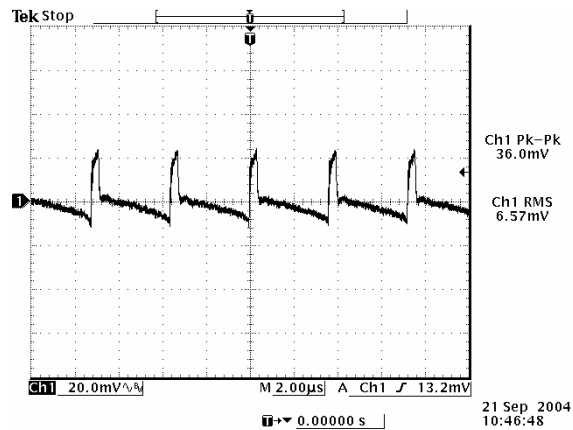

12 V input, 0.9 V output

Note: Ripple and noise at full load, 0-20MHz BW, with 680 uF/6.3 V Oscon cap, 10 uF/16 V Tan cap and 10 nF ceramic cap at the output, $T_a=25$ deg C.


NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input


0.9 Vdc - 5.0 Vdc/20 A Output




Transient Response Waveforms

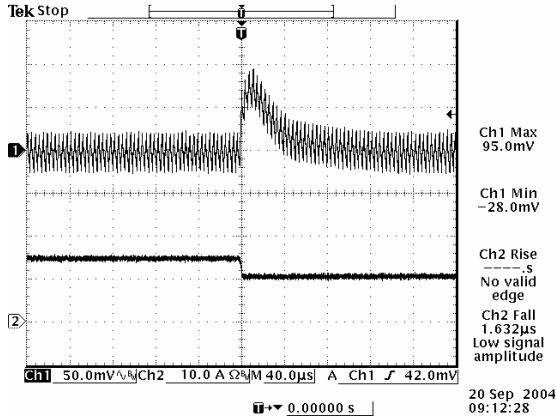


75% to 50% load step, 5.0 Vdc output

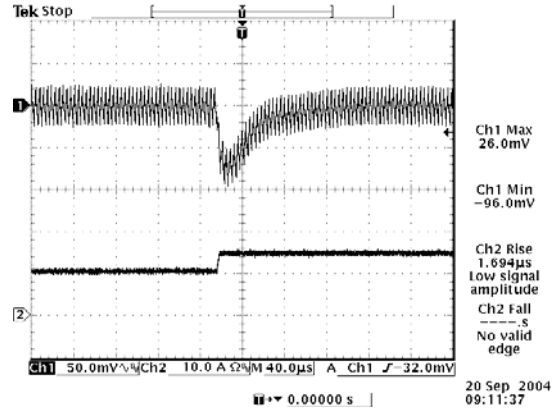


50% to 75% load step, 5.0 Vdc output

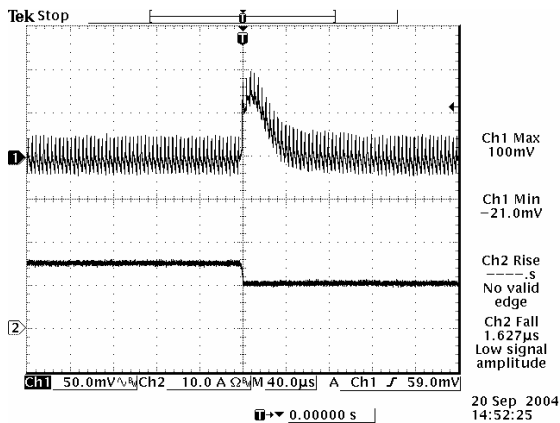


75% to 50% load step, 2.5 Vdc output

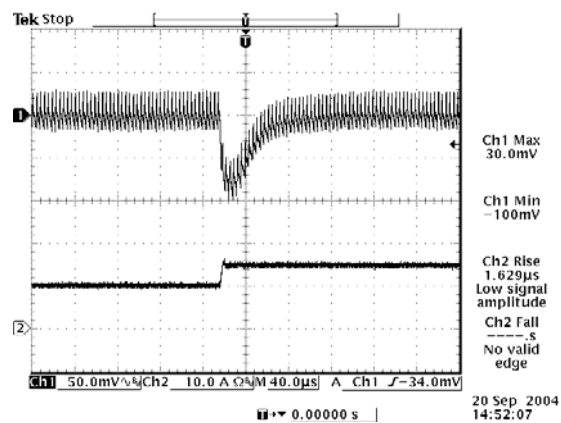

50% to 75% load step, 2.5 Vdc output

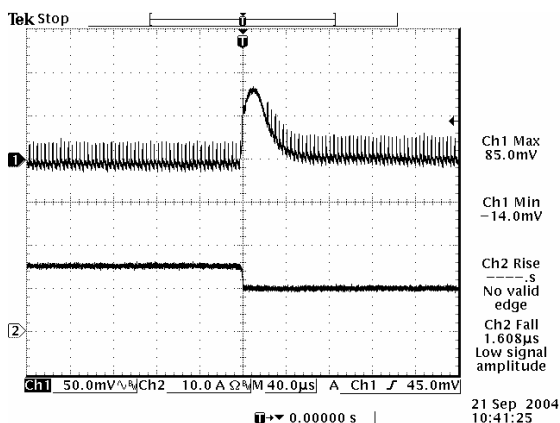

75% to 50% load step, 0.9 Vdc output

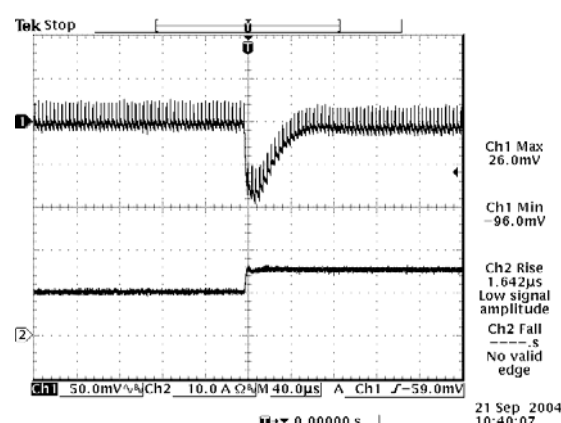

50% to 75% load step, 0.9 Vdc output

Note: Transient response at $di/dt=2.5 \text{ A}/\mu\text{S}$, with a 680 $\mu\text{F}/6.3 \text{ V}$ Oscon cap, a 10 $\mu\text{F}/16 \text{ V}$ Tan cap and a 10 nF ceramic cap at the output, $T_a=25 \text{ deg C}$.

NON-ISOLATED DC/DC CONVERTERS



12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output




Mechanical Outline

VRPF-20A1A0

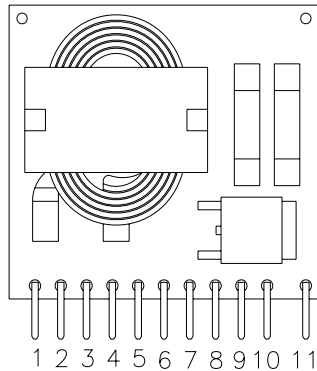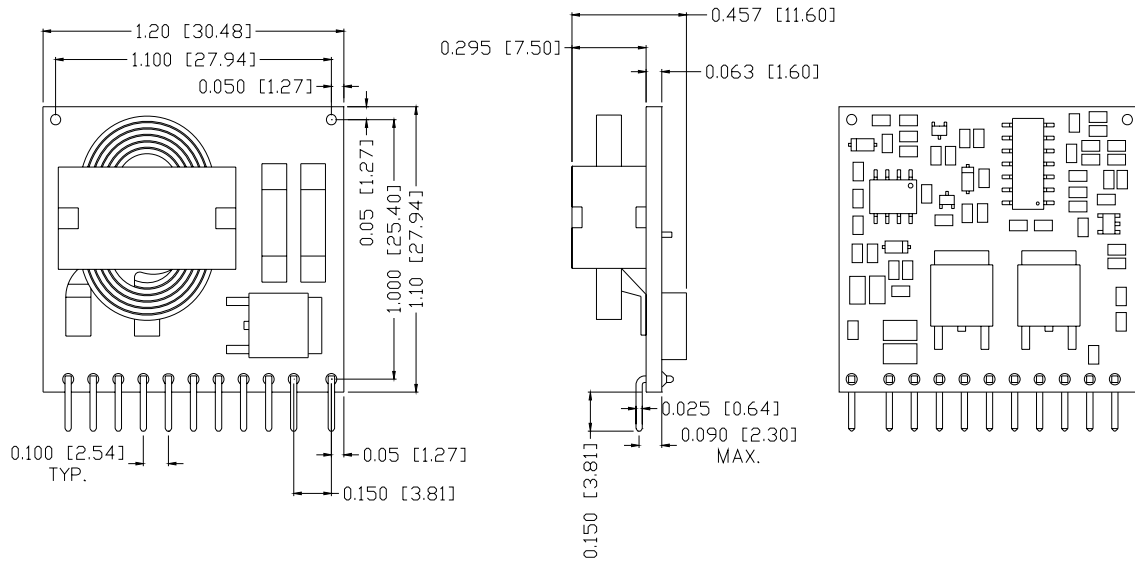

RECOMMENDED PCB LAYOUT

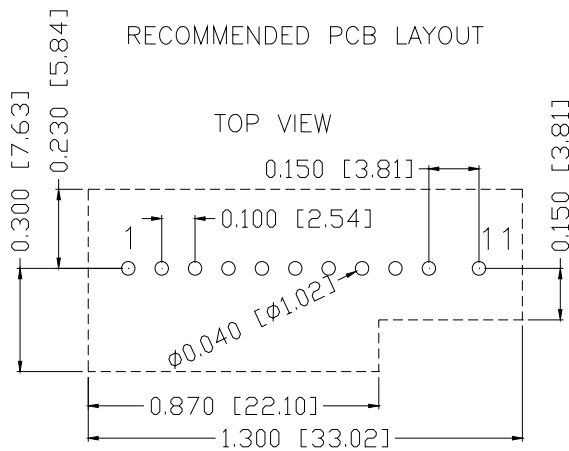

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	Trim
5	Remote On/Off
6	Power Good
7	Ground
8	Ground
9	Reserved
10	Vin
11	Vin

NON-ISOLATED DC/DC CONVERTERS


12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output




Mechanical Outline (continued)

ORPF-20A1A0

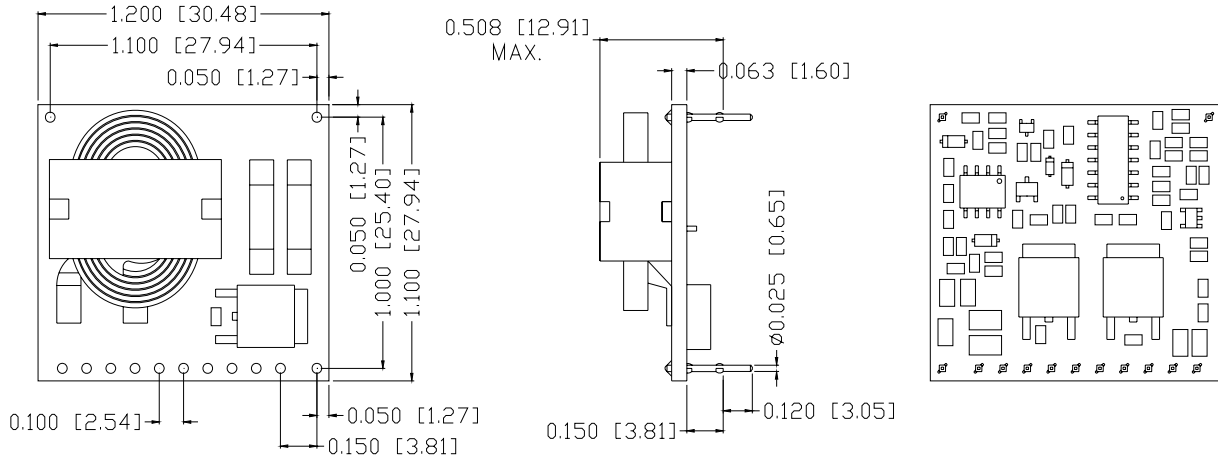

RECOMMENDED PCB LAYOUT

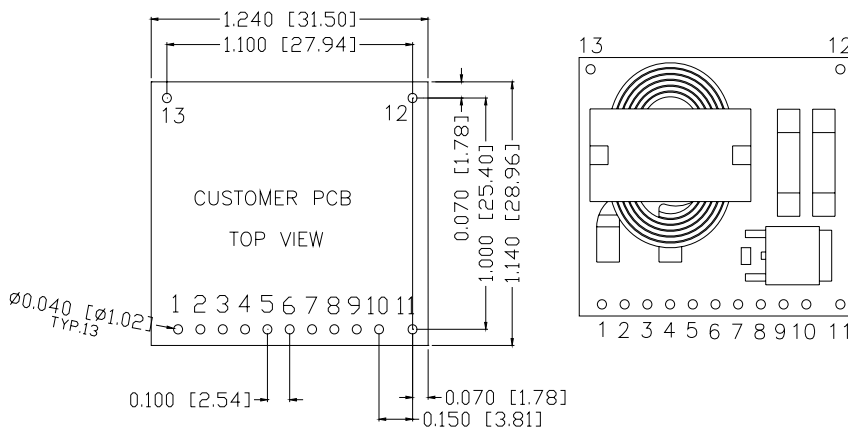

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	Trim
5	Remote On/Off
6	Power Good
7	Ground
8	Ground
9	Pwrgd_set
10	Vin
11	Vin
12	Support Pin
13	Support Pin

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 020507

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.