

RF360 Europe GmbH

A Qualcomm – TDK Joint Venture



SAW Components

SAW RF filter for base stations

Trunked Radio

Series/type: B4232
Ordering code: B39861B4232H410

Date: Apr 05, 2016
Version: 2.1

RF360 products mentioned within this document are offered by RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the “RF360 Subsidiaries”). RF360 Holdings Singapore Pte. Ltd. is a joint venture of Qualcomm Global Trading Pte. Ltd. and EPCOS AG. References in this documentation to EPCOS AG should properly reference, and shall be read to reference, the RF360 Subsidiaries.

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2016 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm and Qualcomm RF360 are trademarks of Qualcomm Incorporated, registered in the United States and other countries. RF360 is a trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

SAW Components

SAW RF filter for base stations

Trunked Radio

Series/type:	B4232
Ordering code:	B39861B4232H410

Date:	Apr 05, 2016
Version:	2.1

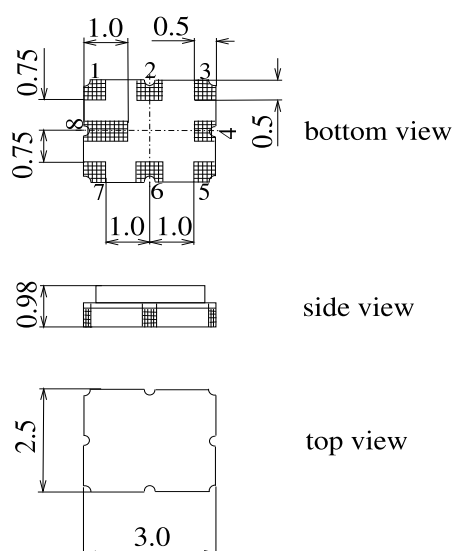
Application

- Low-loss 2-in-1 RF filter for Trunked Radio
- Device with two integrated Rx filters
- Low amplitude ripple
- Usable passband filter 1: 19.0 MHz
- Usable passband filter 2: 14.0 MHz
- No matching required for operation at 50 Ω




Features

- Package size 3.0 x 2.5 x 0.98 mm³
- Package code QCC8E
- RoHS compatible
- Approximate weight 0.027g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitivity Level 1**
- Filter surface passivated



Pin configuration

- 1 Input [Filter 1]
- 7 Output [Filter 1]
- 3 Input [Filter 2]
- 5 Output [Filter 2]
- 2,6 Ground
- 4,8 Case ground



SAW Components
B4232
SAW RF filter
769.0/860.5 MHz
Data sheet

Characteristics filter 1

Temperature range for specification: $T = 25 \pm 2 \text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ. @ 25 °C	max.	
Nominal frequency	f_N	—	860.5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2.1	2.5	dB
851.0 ... 870.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.7	1.1	dB
851.0 ... 870.0 MHz					
Group delay ripple (p-p)	$\Delta\tau$	—	20.0	50.0	ns
851.0 ... 870.0 MHz					
Input return loss		10.0	11.5	—	dB
851.0 ... 870.0 MHz					
Output return loss		10.0	11.5	—	dB
851.0 ... 870.0 MHz					
Absolute attenuation	α_{abs}				
0.1 ... 483.0 MHz		57	60	—	dB
483.0 ... 676.0 MHz		50	60	—	dB
676.0 ... 724.0 MHz		40	64	—	dB
741.4 ... 773.0 MHz		30	59	—	dB
804.0 ... 822.0 MHz		20	42	—	dB
880.0 ... 918.0 MHz		7	11	—	dB
898.0 ... 967.0 MHz		20	40	—	dB
946.0 ... 1070.0 MHz		30	59	—	dB
1040.0 ... 1256.0 MHz		46	54	—	dB
1070.0 ... 2000.0 MHz		43	50	—	dB
1256.0 ... 2000.0 MHz		30	40	—	dB
Temperature coefficient of frequency	TC_f	—	−36	—	ppm/K

SAW Components
B4232
SAW RF filter
769.0/860.5 MHz
Data sheet

Characteristics filter 1

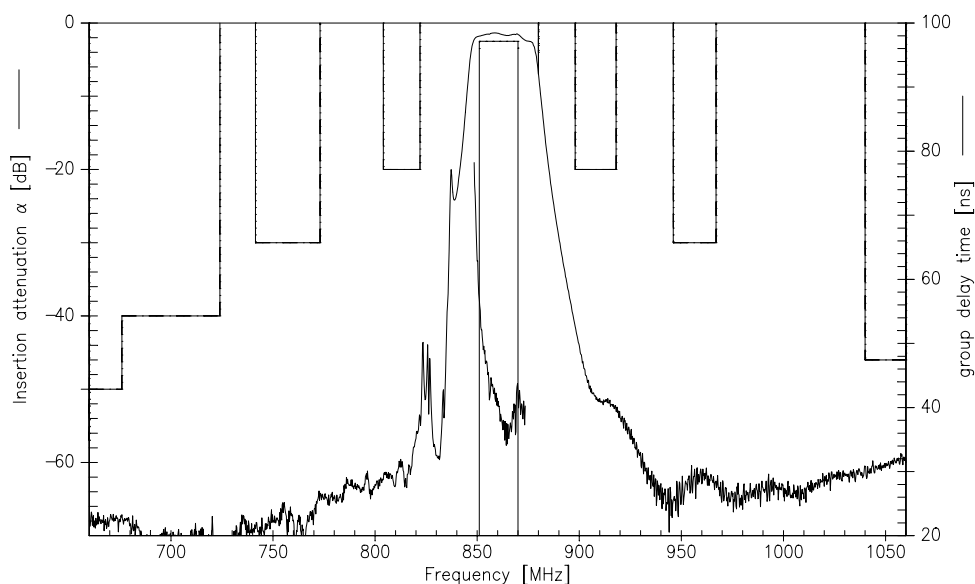
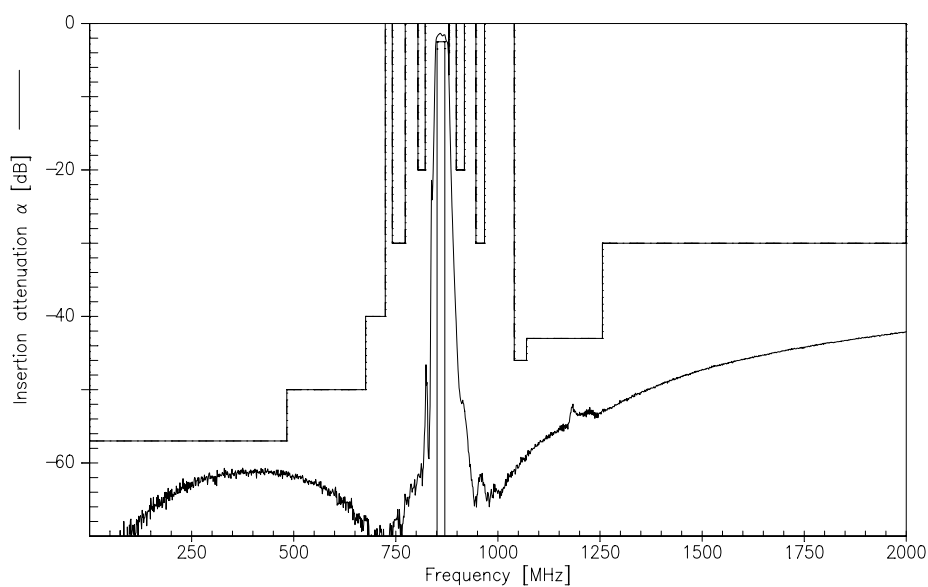
Temperature range for specification: $T = -30$ to $+70$ °C
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

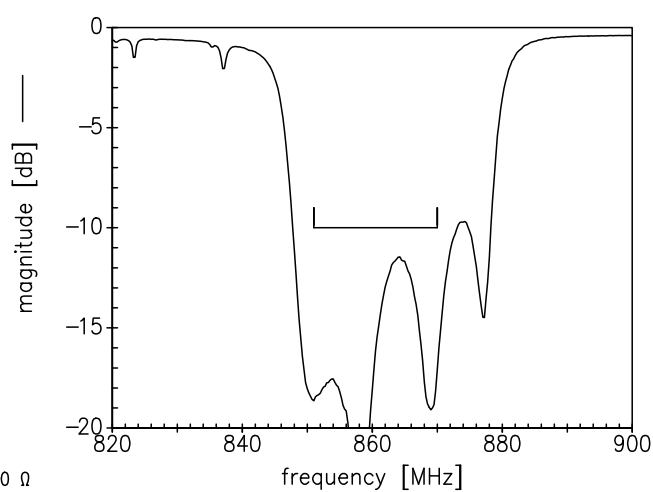
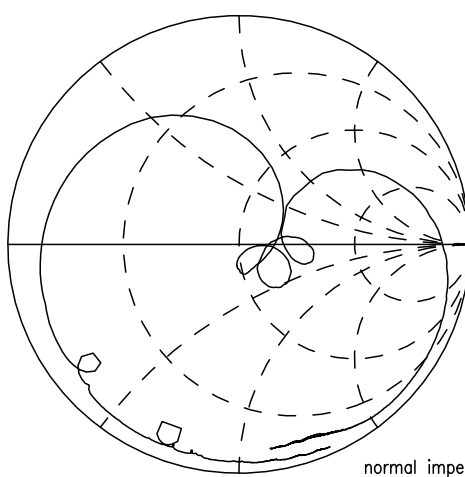
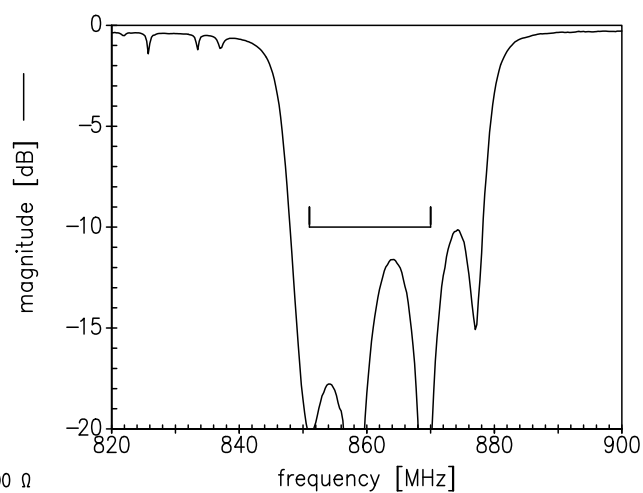
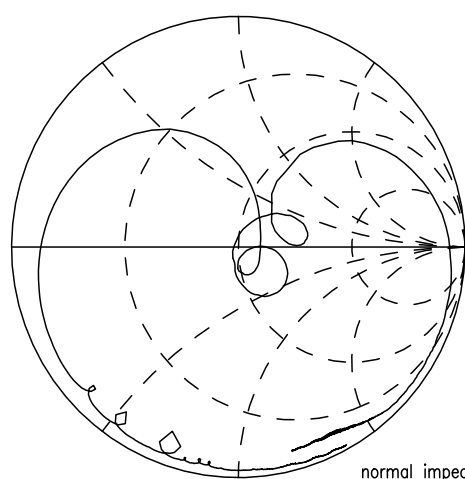
		min.	typ. @ 25 °C	max.	
Nominal frequency	f_N	—	860.5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2.4	2.7	dB
851.0 ... 870.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1.0	1.3	dB
851.0 ... 870.0 MHz					
Group delay ripple (p-p)	$\Delta\tau$	—	30.0	50.0	ns
851.0 ... 870.0 MHz					
Input return loss		10.0	11.0	—	dB
851.0 ... 870.0 MHz					
Output return loss		10.0	11.0	—	dB
851.0 ... 870.0 MHz					
Absolute attenuation	α_{abs}				
0.1 ... 483.0 MHz		57	60	—	dB
483.0 ... 676.0 MHz		50	60	—	dB
676.0 ... 724.0 MHz		40	64	—	dB
741.4 ... 773.0 MHz		30	59	—	dB
804.0 ... 822.0 MHz		20	42	—	dB
880.0 ... 918.0 MHz		4	7	—	dB
898.0 ... 967.0 MHz		20	38	—	dB
946.0 ... 1070.0 MHz		30	59	—	dB
1040.0 ... 1256.0 MHz		46	54	—	dB
1070.0 ... 2000.0 MHz		43	50	—	dB
1256.0 ... 2000.0 MHz		30	40	—	dB
Temperature coefficient of frequency	TC_f	—	−36	—	ppm/K

Maximum ratings

Operable temperature range	T	−40/+85	°C	
Storage temperature range	T _{stg}	−40/+85	°C	
DC voltage	V _{DC}	5	V	
ESD voltage	V _{ESD}	100 ¹⁾	V	Machine Model ,10 pluses
Input power	P _{IN}			
851.0 ... 870.0 MHz		15	dBm	cw,source and load impedance 50 Ω
762.0 ... 776.0 MHz		15	dBm	cw,source and load impedance 50 Ω

¹⁾ acc. to JESD22-A115B (MM - Machine Model), 10 negative & 10 positive pulses

Transfer function filter 1 (S21, narrowband)

Transfer function filter 1 (S21, wideband)




SAW Components
B4232
SAW RF filter
769.0/860.5 MHz
Data sheet

Characteristics filter 2

Temperature range for specification: $T = 25 \pm 2 \text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ }\Omega$
 Terminating load impedance: $Z_L = 50 \text{ }\Omega$

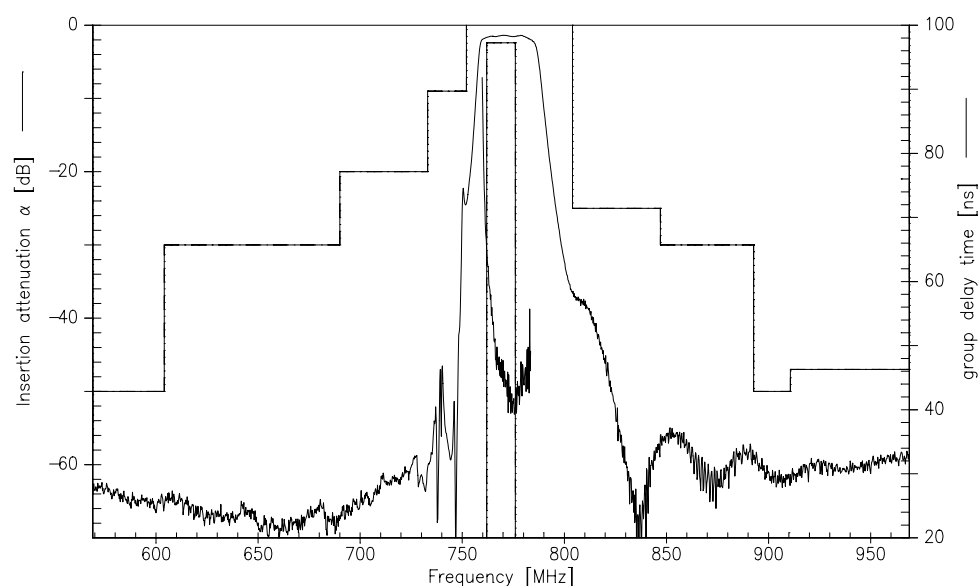
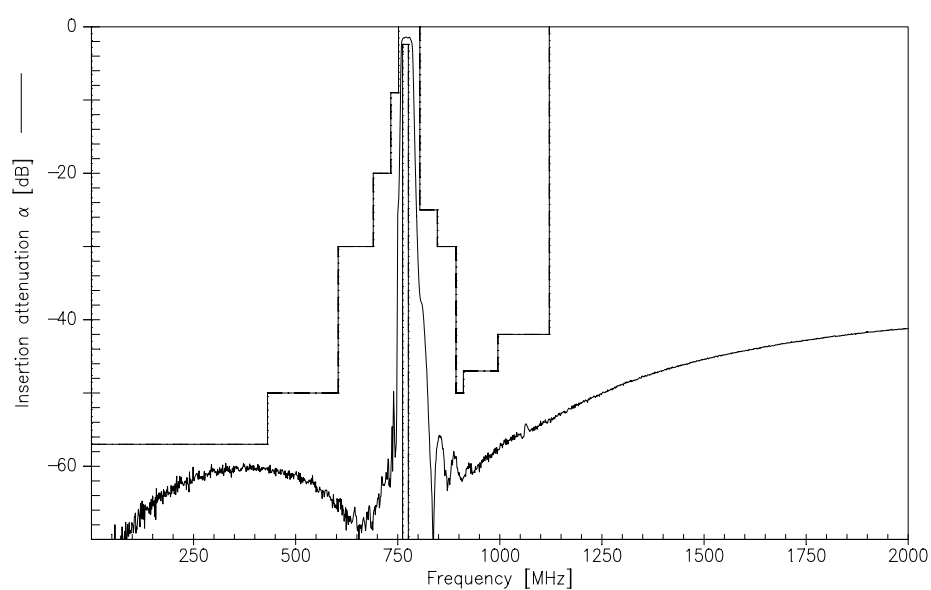
		min.	typ. @ 25 °C	max.	
Nominal frequency	f_N	—	769.0	—	MHz
Maximum insertion attenuation	α_{\max}	—	1.7	2.4	dB
762.0 ... 776.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.4	1.0	dB
762.0 ... 776.0 MHz					
Group delay ripple (p-p)	$\Delta\tau$	—	22.0	50.0	ns
762.0 ... 776.0 MHz					
Input return loss		12.0	13.0	—	dB
762.0 ... 776.0 MHz					
Output return loss		12.0	13.0	—	dB
762.0 ... 776.0 MHz					
Absolute attenuation	α_{abs}				
0.0 ... 431.0 MHz		57	60	—	dB
431.0 ... 604.0 MHz		50	60	—	dB
604.0 ... 690.0 MHz		30	62	—	dB
690.0 ... 733.0 MHz		20	56	—	dB
733.0 ... 752.0 MHz		9	18	—	dB
804.0 ... 847.0 MHz		25	36	—	dB
847.0 ... 892.7 MHz		30	54	—	dB
892.7 ... 910.7 MHz		50	56	—	dB
910.7 ... 995.3 MHz		47	54	—	dB
995.3 ... 1121.0 MHz		42	52	—	dB
Temperature coefficient of frequency	TC_f	—	−36	—	ppm/K

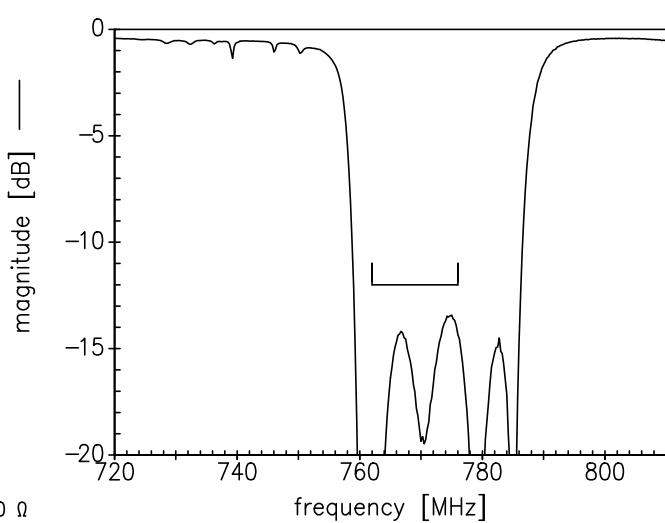
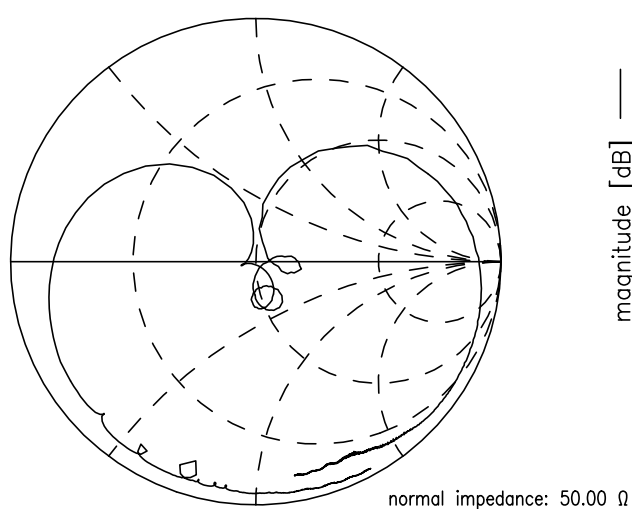
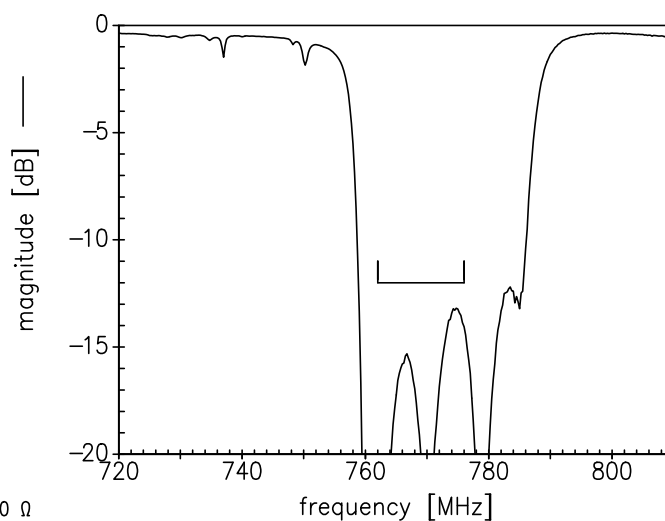
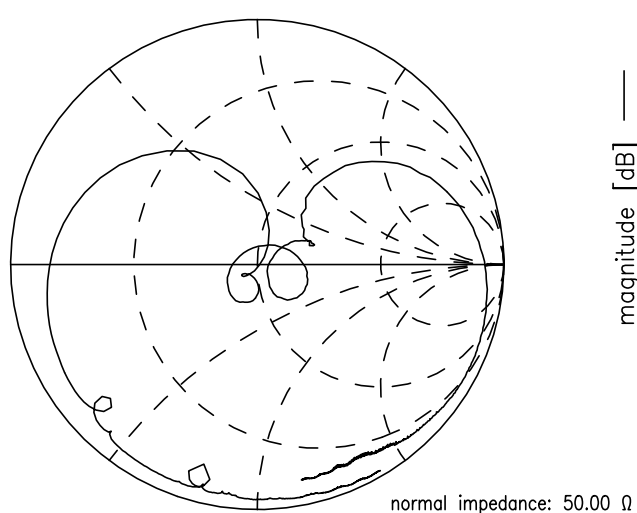
SAW Components
B4232
SAW RF filter
769.0/860.5 MHz
Data sheet

Characteristics filter 2

Temperature range for specification: $T = -30$ to $+70$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ. @ 25 °C	max.	
Nominal frequency	f_N	—	769.0	—	MHz
Maximum insertion attenuation	α_{\max}	—	1.8	2.6	dB
762.0 ... 776.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.5	1.0	dB
762.0 ... 776.0 MHz					
Group delay ripple (p-p)	$\Delta\tau$	—	30.0	50.0	ns
762.0 ... 776.0 MHz					
Input return loss		12.0	13.0	—	dB
762.0 ... 776.0 MHz					
Output return loss		12.0	13.0	—	dB
762.0 ... 776.0 MHz					
Absolute attenuation	α_{abs}				
0.1 ... 431.0 MHz		57	60	—	dB
431.0 ... 604.0 MHz		50	60	—	dB
604.0 ... 690.0 MHz		30	62	—	dB
690.0 ... 733.0 MHz		20	56	—	dB
733.0 ... 752.0 MHz		9	16	—	dB
804.0 ... 847.0 MHz		25	34	—	dB
847.0 ... 892.7 MHz		30	54	—	dB
892.7 ... 910.7 MHz		50	56	—	dB
910.7 ... 995.3 MHz		47	54	—	dB
995.3 ... 1121.0 MHz		42	52	—	dB
Temperature coefficient of frequency	TC_f	—	−36	—	ppm/K

Transfer function filter 2 (S21, narrowband)

Transfer function filter 2 (S21, wideband)




References

Type	B4232
Ordering code	B39861B4232H410
Marking and package	C61157-A7-A92
Packaging	F61074-V8174-Z000
Date codes	L_1126
S-parameters	B4232_LB_NB.s2p , B4232_LB_WB.s2p B4232_UB_NB.s2p , B4232_UB_WB.s2p see file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm for a large variety of matching coils.

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

Published by EPCOS AG

Systems, Acoustics, Waves Business Group

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2016. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, Alu-X, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PQSine, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qualcomm RF360:](#)

[B39861B4232H410](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.