

## SPDT SWITCH GaAs MMIC


### ■ GENERAL DESCRIPTION

The NJG1806K75 is a 1bit control SPDT switch IC suited for switching transmit/receive signals at 802.11 a/b/g/n/ac applications.

The NJG1806K75 features low insertion loss, high isolation, and high handling power down to 1.8V control voltage at high frequency up to 6GHz.

This switch has ESD protection devices to achieve excellent ESD performances. And the ultra small and ultra thin package of DFN6-75 is adopted.

### ■ PACKAGE OUTLINE



NJG1806K75

### ■ APPLICATION


- 802.11 a/b/g/n/ac networks applications
- Transmit / receive switching, antenna switching and others switching applications

### ■ FEATURES

- Low control voltage  $V_{CTL(H)}=1.8V$  typ.
- Voltage operation  $V_{DD}=3.3V$  typ.
- Low insertion loss 0.35dB typ. @f=2.4 to 2.5GHz
- High isolation 0.40dB typ. @f=4.9 to 5.9GHz
- P-1dB 25dB typ. @f=2.4 to 2.5GHz
- Ultra small & ultra thin package 25dB typ. @f=4.9 to 5.9GHz
- RoHS compliant and Halogen Free, MSL1  $P_{-1dB}=31$  dBm typ. @f=2.5GHz
- $P_{-1dB}=31$  dBm typ. @f=5.9GHz
- DFN6-75 (Package Size: 1.0x1.0x0.375mm typ.)

### ■ PIN CONFIGURATION

(Top view)

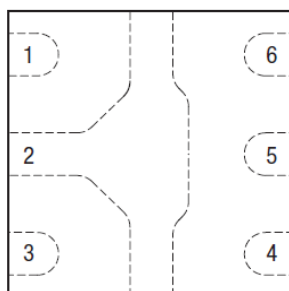

Pin connection

1. P1
2. GND
3. P2
4. VCTL
5. PC
6. VDD

### ■ TRUTH TABLE

“H”= $V_{CTL(H)}$ , “L”= $V_{CTL(L)}$

ON PATH	VCTL
PC-P1	H
PC-P2	L

NOTE: Please note that any data or drawing in this catalog is subject to change.

## ■ ABSOLUTE MAXIMUM RATINGS

$T_a=+25^{\circ}\text{C}$ ,  $Z_s=Z_l=50\Omega$

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNITS
RF Input Power	$P_{IN}$	$V_{DD}=3.3\text{V}$ , ON State Port	31	dBm
Supply Voltage	$V_{DD}$		6.0	V
Control Voltage	$V_{CTL}$		6.0	V
Power Dissipation	$P_D$	4-layer FR4 PCB without through-hole (76.2x114.3mm), $T_j=150^{\circ}\text{C}$	430	mW
Operating Temperature	$T_{opr}$		-40 to +105	$^{\circ}\text{C}$
Storage Temperature	$T_{stg}$		-55 to +150	$^{\circ}\text{C}$

## ■ ELECTRICAL CHARACTERISTICS1 (DC CHARACTERISTICS)

(General conditions:  $T_a=+25^{\circ}\text{C}$ , with application circuit)

PARAMETERS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	$V_{DD}$		2.5	3.3	5.0	V
Operating Current	$I_{DD}$	No RF input, $V_{DD}=3.3\text{V}$	-	15	30	$\mu\text{A}$
Control Voltage (HIGH)	$V_{CTL(H)}$		1.35	1.8	5.0	V
Control Voltage (LOW)	$V_{CTL(L)}$		0	-	0.45	V
Control Current	$I_{CTL}$	$V_{CTL(H)}=1.8\text{V}$	-	3	10	$\mu\text{A}$

## ■ ELECTRICAL CHARACTERISTICS2 (RF CHARACTERISTICS)

(General conditions:  $V_{DD}=3.3V$ ,  $V_{CTL(H)}=1.8V$ ,  $V_{CTL(L)}=0V$ ,  $T_a=+25^{\circ}C$ ,  $Z_S=Z_I=50\Omega$ , with application circuit)

PARAMETERS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Insertion loss1	LOSS1	f=2.4 to 2.5GHz	-	0.35	0.55	dB
Insertion loss2	LOSS2	f=4.9 to 5.9GHz	-	0.40	0.60	dB
Isolation1	ISL1	f=2.4 to 2.5GHz	23	25	-	dB
Isolation2	ISL2	f=4.9 to 5.9GHz	23	25	-	dB
Return loss1	RL1	f=2.4 to 2.5GHz	18	28	-	dB
Return loss2	RL2	f=4.9 to 5.9GHz	15	20	-	dB
Input power at 1dB compression point1	$P_{-1dB1}$	f=2.4 to 2.5GHz	29	31	-	dBm
Input power at 1dB compression point2	$P_{-1dB2}$	f=4.9 to 5.9GHz	28	31	-	dBm
Switching time	$T_{SW}$	50% $V_{CTL}$ to 10%/90% RF	-	150	300	ns


## ■ TERMINAL INFORMATION

No.	SYMBOL	DESCRIPTION
1	P1	RF terminal. An external DC blocking capacitor is required.
2	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.
3	P2	RF terminal. An external DC blocking capacitor is required.
4	VCTL	Control voltage input terminal. This terminal is set to High-Level (+1.35 to +5.0V) or Low-Level (0 to +0.45V).
5	PC	Common RF terminal. An external DC blocking capacitor is required.
6	VDD	Positive voltage supply terminal. The positive voltage (+2.5 to +5.0V) has to be supplied. Please connect a bypass capacitor with GND terminal for excellent RF performance.

## ■ ELECTRICAL CHARACTERISTICS


### Loss, ISL vs Frequency

(PC-P1 ON,  $V_{DD}=3.3V$ ,  $V_{CTL}=1.8V$ )

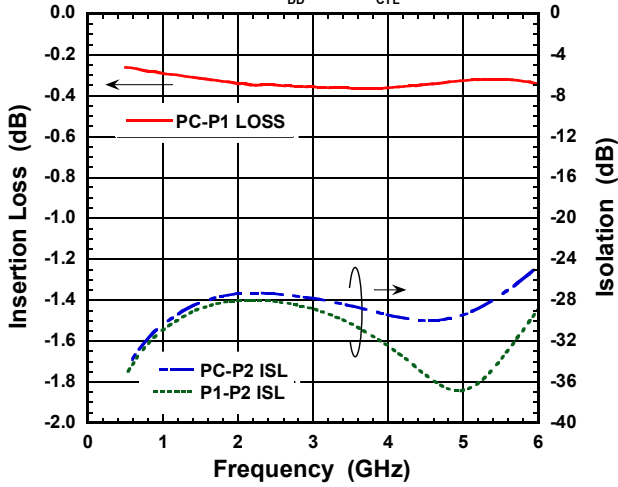


### Loss, ISL vs Frequency

(PC-P2 ON,  $V_{DD}=3.3V$ ,  $V_{CTL}=0V$ )

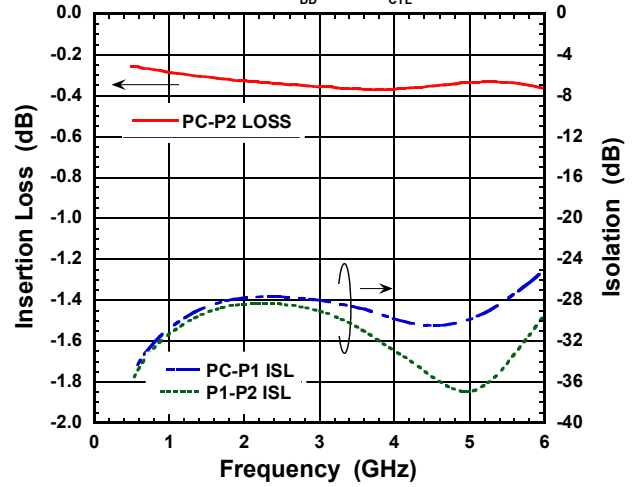


### Return Loss vs Frequency

(PC-P1 ON,  $V_{DD}=3.3V$ ,  $V_{CTL}=1.8V$ )

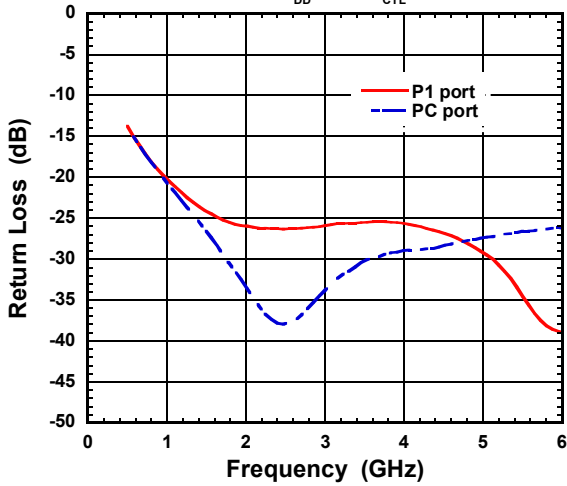


### Return Loss vs Frequency

(PC-P2 ON,  $V_{DD}=3.3V$ ,  $V_{CTL}=0V$ )

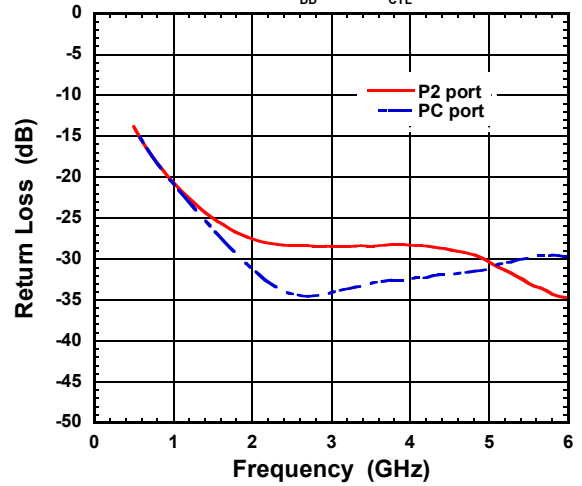

### Switching Time

(PC-P1 path,  $V_{DD}=3.3V$ ,  $V_{CTL(H)}=1.8V$ )

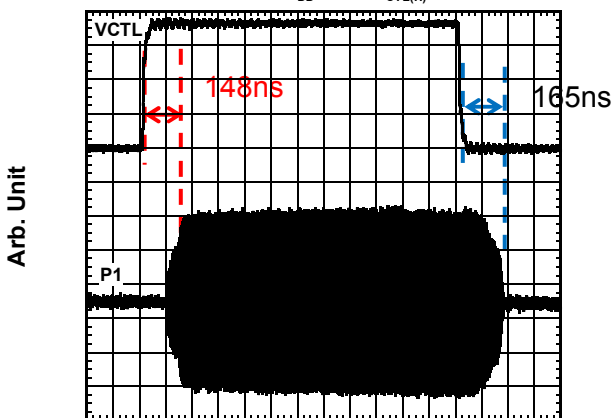


Time (100ns/div)

## ■ ELECTRICAL CHARACTERISTICS


### Output Power, $I_{DD}$ vs Input Power

(PC-P1 ON,  $V_{CTL}=1.8V$ ,  $f=2.5GHz$ )

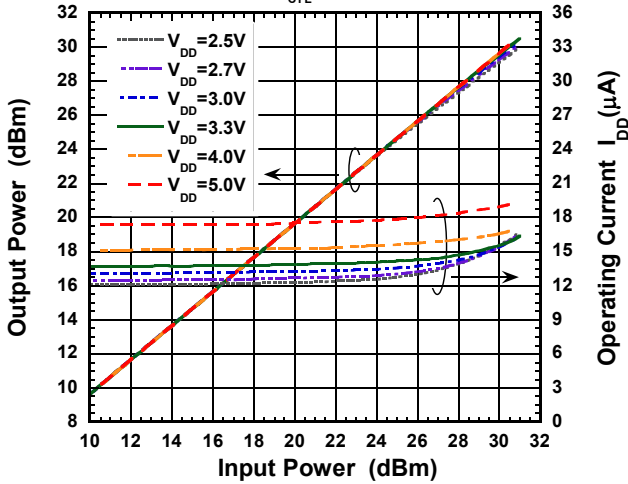


### Output Power, $I_{DD}$ vs Input Power

(PC-P2 ON,  $V_{CTL}=0V$ ,  $f=2.5GHz$ )

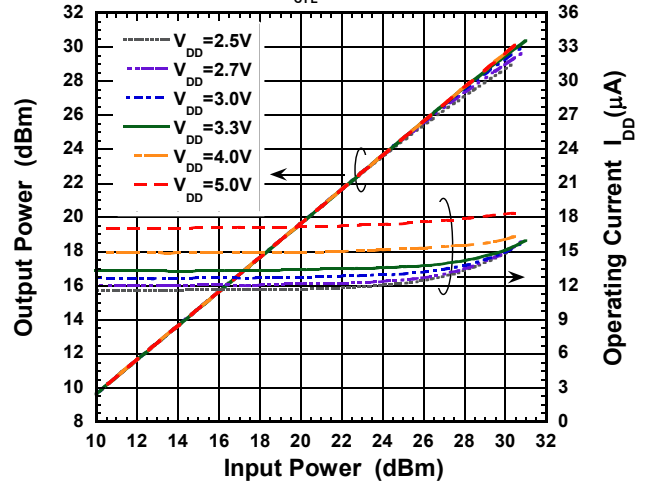


### Loss, ISL vs Input Power

(PC-P1 ON,  $V_{CTL}=1.8V$ ,  $f=2.5GHz$ )

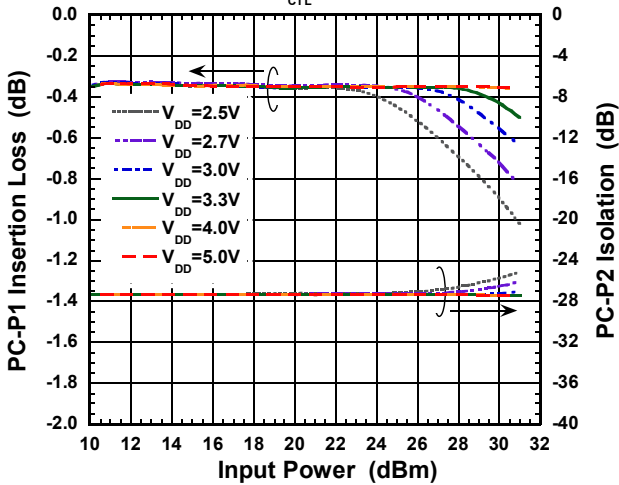


### Loss, ISL vs Input Power

(PC-P2 ON,  $V_{CTL}=0V$ ,  $f=2.5GHz$ )

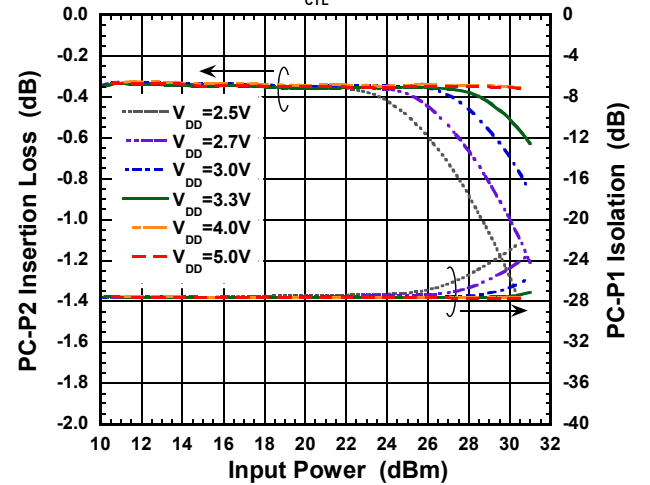


### Output Power, $I_{DD}$ vs Input Power

(PC-P1 ON,  $V_{CTL}=1.8V$ ,  $f=5.9GHz$ )

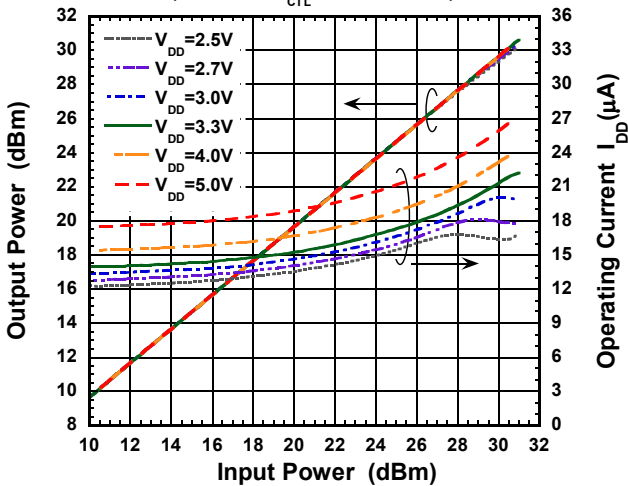


### Output Power, $I_{DD}$ vs Input Power

(PC-P2 ON,  $V_{CTL}=0V$ ,  $f=5.9GHz$ )

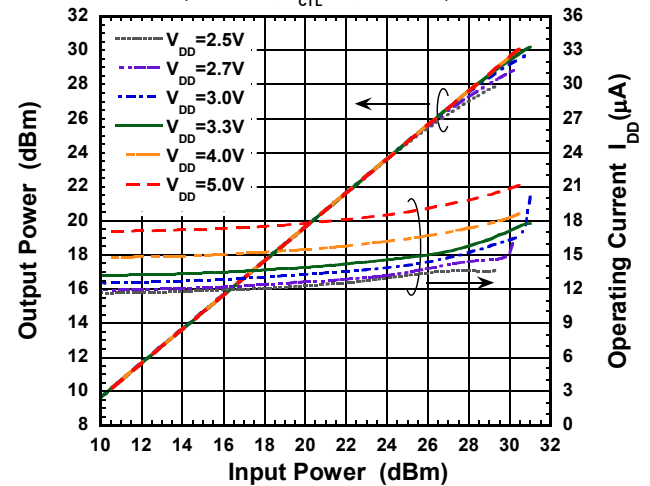


## ■ ELECTRICAL CHARACTERISTICS


### Loss, ISL vs Input Power

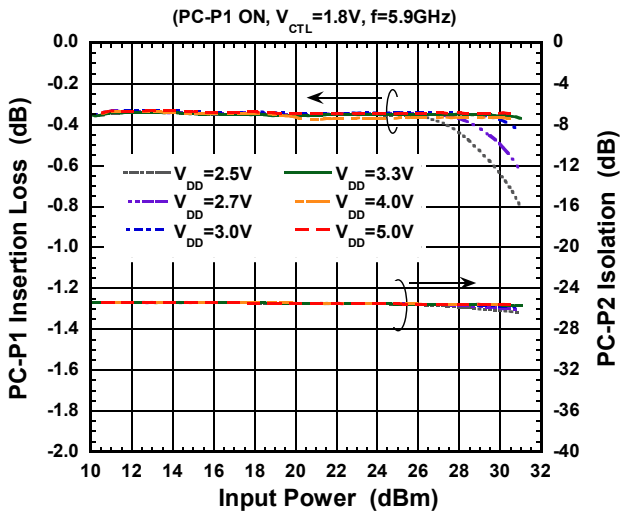


### Loss, ISL vs Input Power

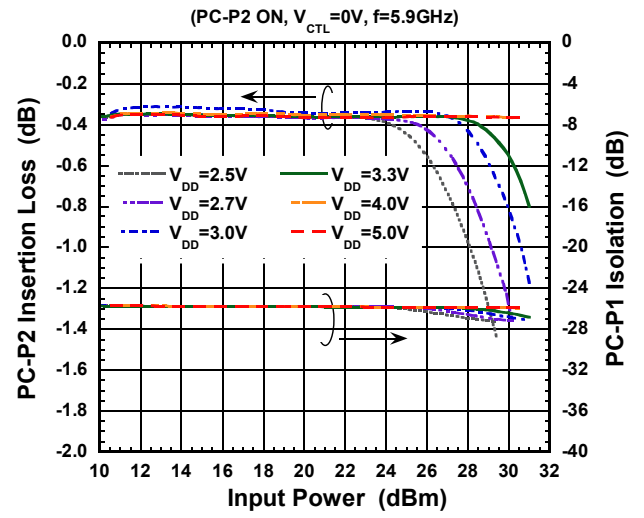

### EVM vs Input Power

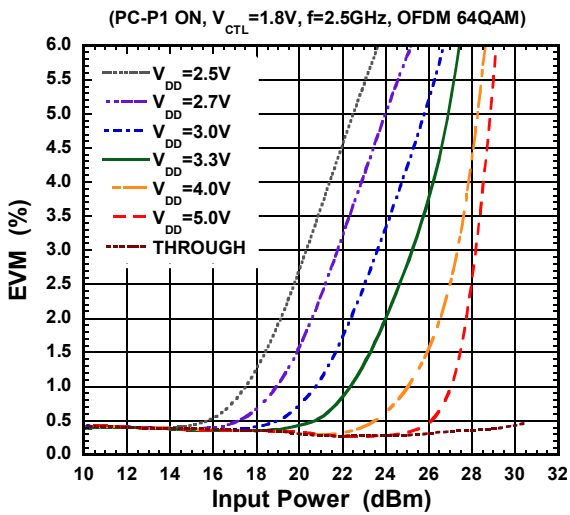


### EVM vs Input Power

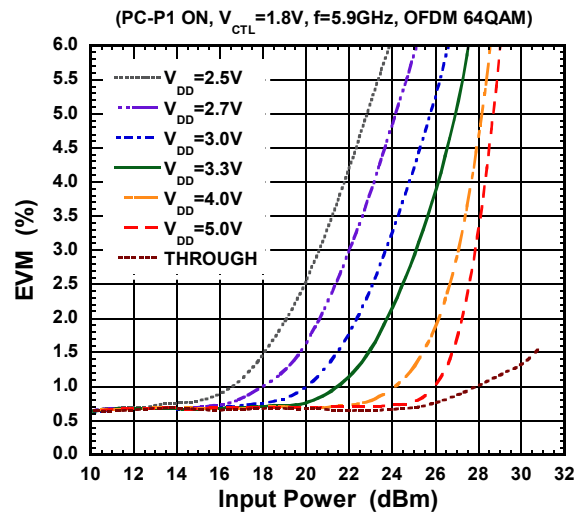


## ■ ELECTRICAL CHARACTERISTICS


### Loss, ISL vs Temperature

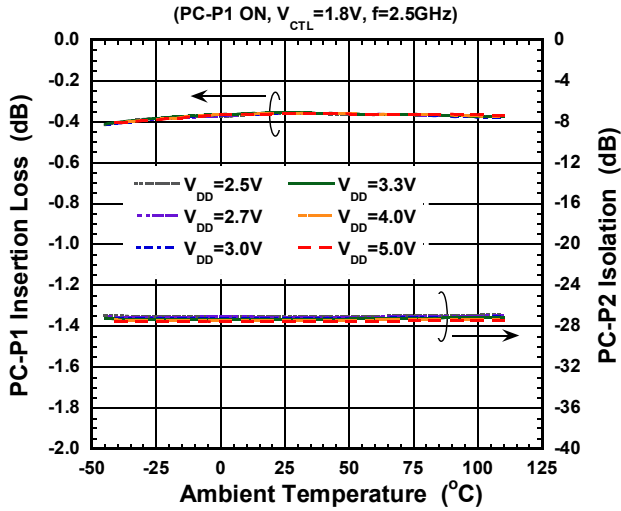


### Loss, ISL vs Temperature

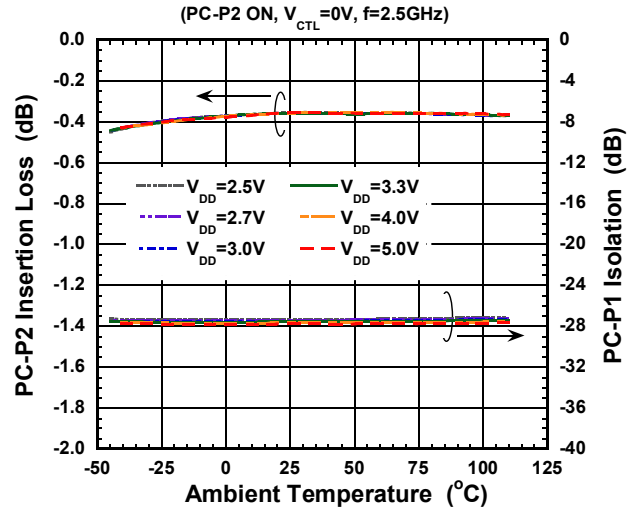


### Loss, ISL vs Temperature

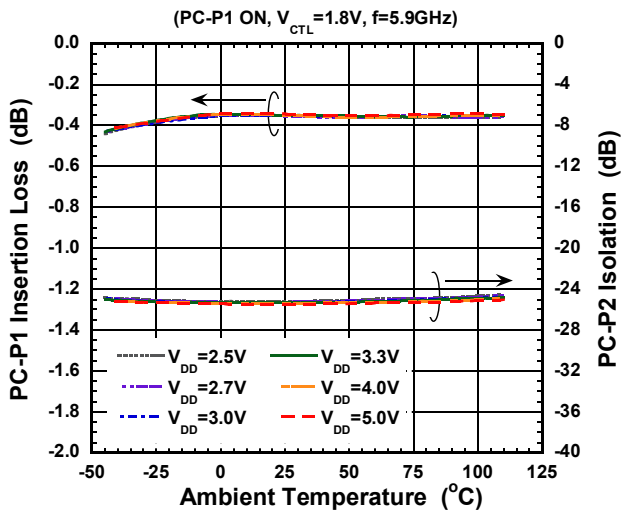


### Loss, ISL vs Temperature

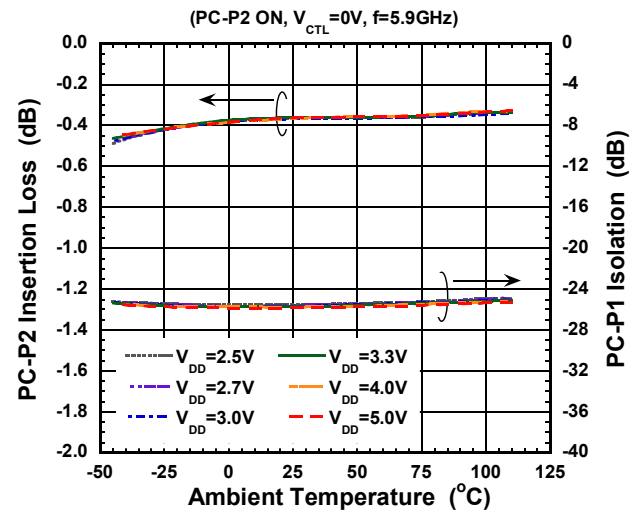

### $P_{-1dB}$ vs Temperature


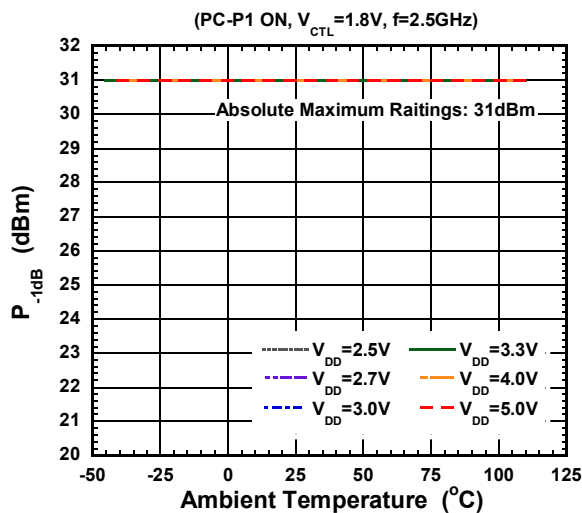


### $P_{-1dB}$ vs Temperature

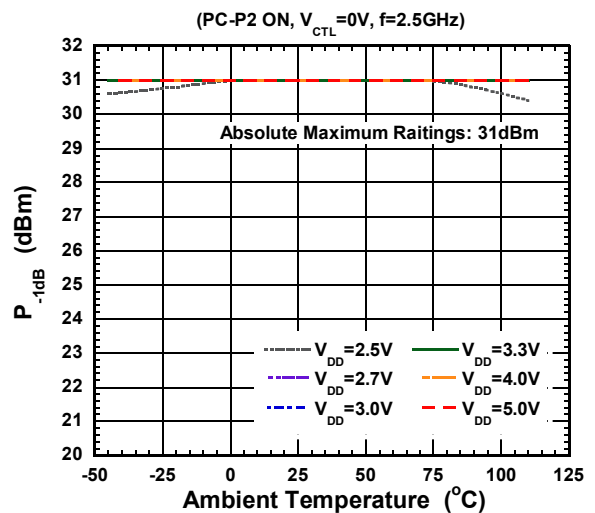




## ■ ELECTRICAL CHARACTERISTICS

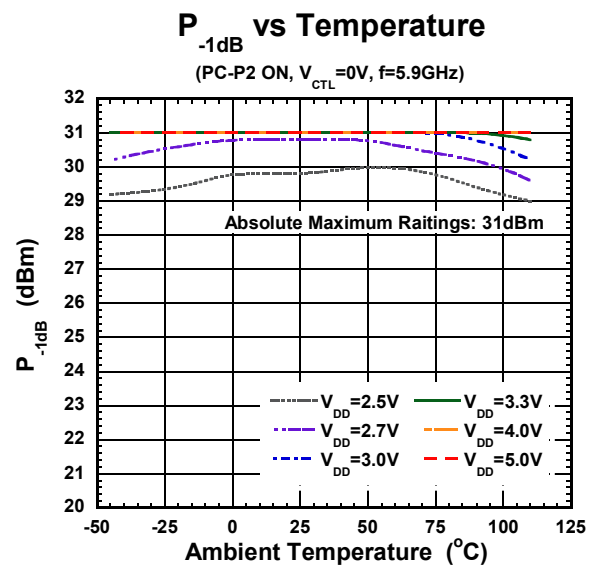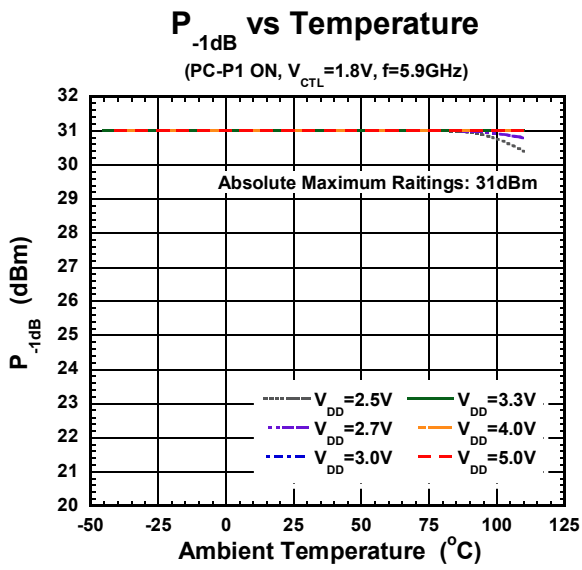


## APPLICATION CIRCUIT

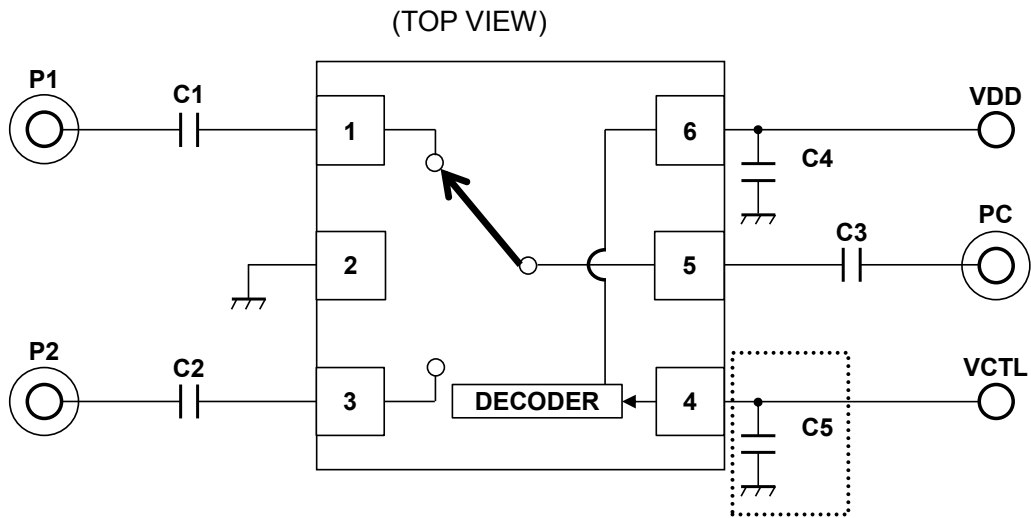

### NOTE:

The bypass capacitor, C5 is optional, and is recommended only when the control line is affected under noisy environment.

## RECOMMENDED PCB DESIGN

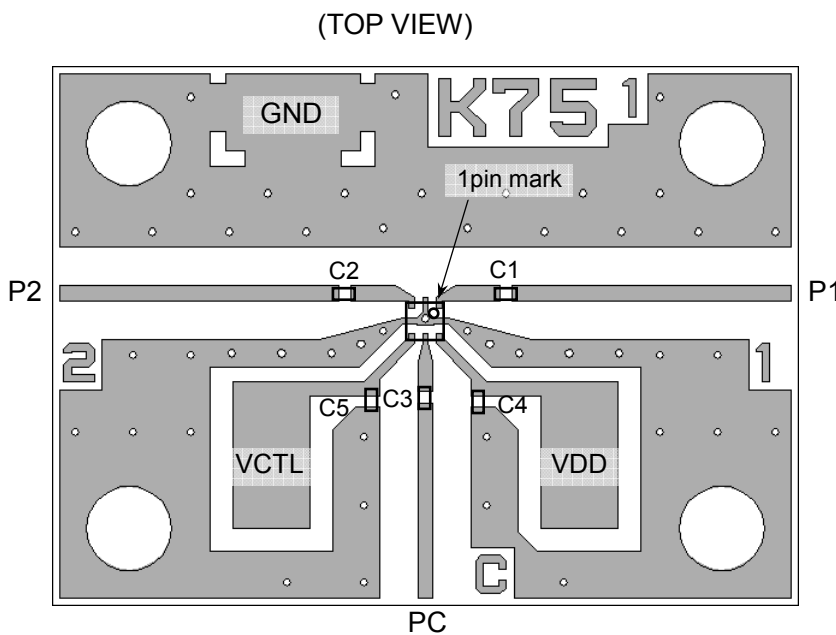

PCB: FR-4, t=0.2mm  
 Capacitor Size: 0603 (0.6 x 0.3 mm)  
 Strip Line Width: 0.4mm  
 PCB Size: 19.4 x 14.0mm  
 Through Hole Diameter: 0.2mm


### Loss of PCB, capacitor and connectors

Frequency (GHz)	Loss (dB)
2.4	0.30
2.5	0.31
4.9	0.59
5.9	0.71

## PARTS LIST

No.	Value	Notes
C1 to C3	27pF	Murata MFG (GRM03 series)
C4	1000pF	
C5	10pF	

## ■ PCB LAYOUT GUIDELINE

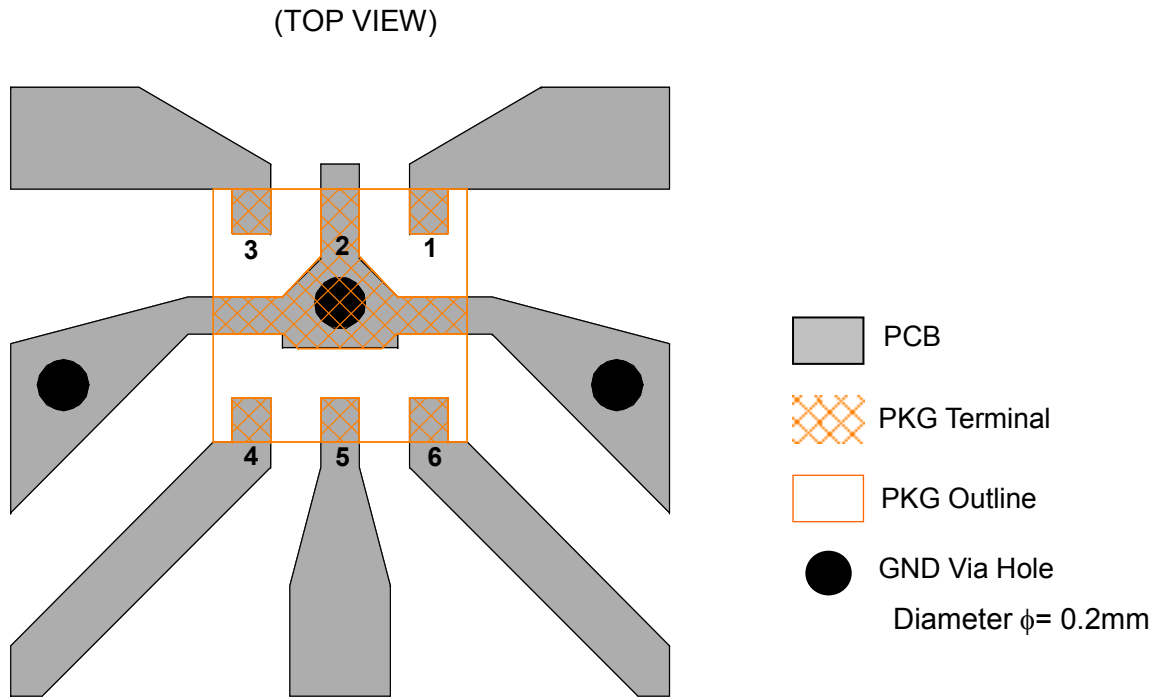

## PRECAUTIONS

- [1] The DC blocking capacitors should be placed at RF terminals. Please choose appropriate capacitance value at the application frequency.
- [2] For good RF performance, exposed pad should be connected to PCB ground plane as close as possible.


## RECOMMENDED FOOTPRINT PATTERN (6pin DFN Package 1.0x1.0mm) <Reference>


Package: 1.0mm x 1.0mm

Pin pitch: 0.35mm


 : Land

 : Mask (Open area) \*Metal mask thickness: 100μm

 : Resist (Open area)

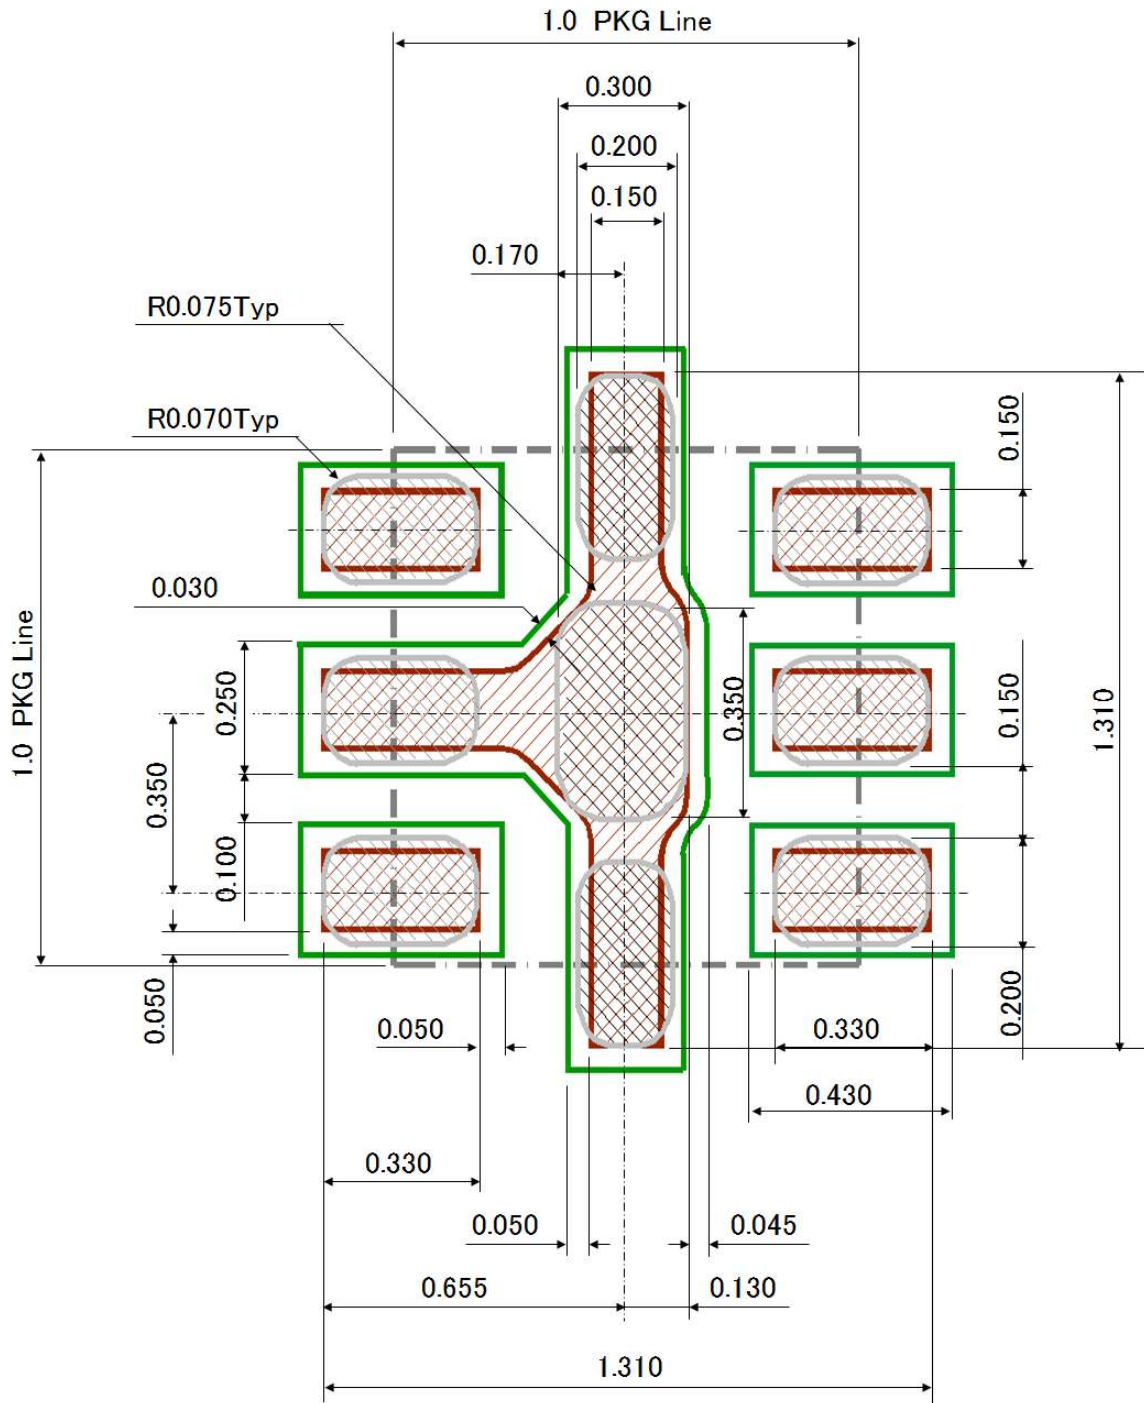

## ■ PACKAGE OUTLINE (DFN6-75)

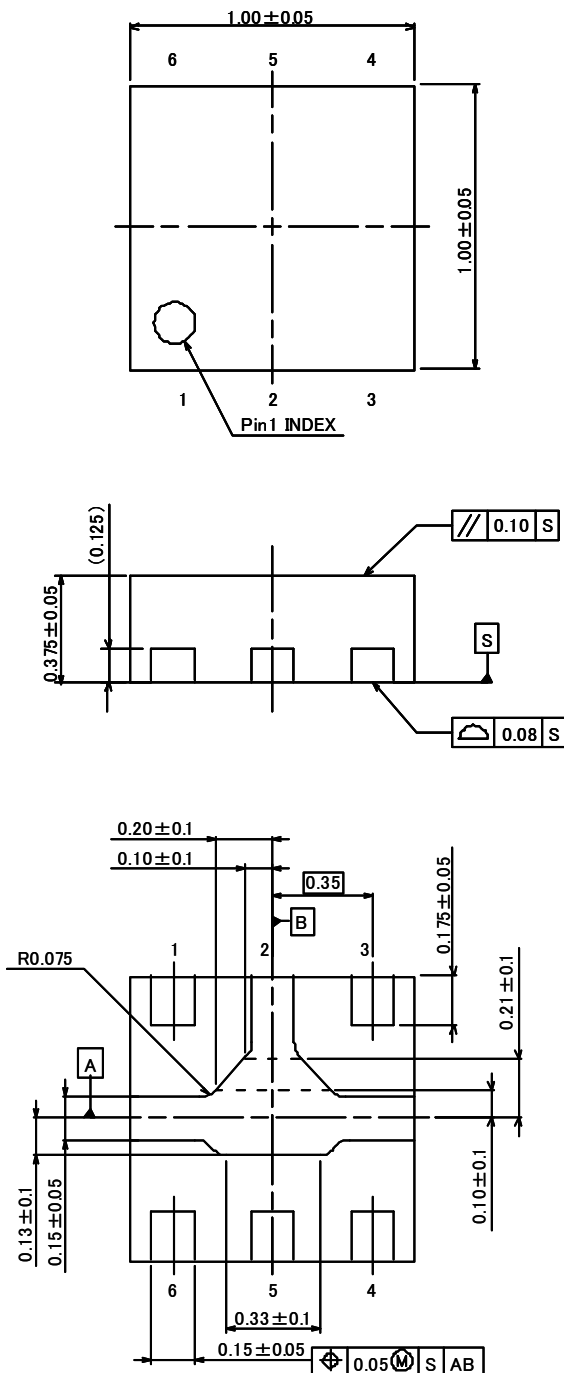

Unit	: mm
Board	: Cu
Terminal Treat	: Ni/Pd/Au
Molding Material	: Epoxy resin
Weight	: 1.2mg

### Cautions on using this product

- This product contains Gallium-Arsenide (GaAs) which is a harmful material.
- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJG1806K75-TE1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.