

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### General Description

The MAX4376/MAX4377/MAX4378 single, dual, and quad precision high-side current-sense amplifiers are available in space-saving packages. They feature buffered voltage outputs that eliminate the need for gain-setting resistors and are ideal for today's notebook computers, cell phones, and other systems where current monitoring is critical. These precision devices are offered in three fixed-gain versions of 20, 50, and 100:

| GAIN | SUFFIX |
|------|--------|
| 20   | T      |
| 50   | F      |
| 100  | H      |

For example, MAX4376TAUK is a single high-side amplifier with a gain of 20.

High-side current monitoring is especially useful in battery-powered systems since it does not interfere with the ground path of the battery charger. The input common-mode range of 0 to +28V is independent of the supply voltage and ensures that the current-sense feedback remains viable even when connected to a battery pack in deep discharge.

The full-scale current reading can be set by choosing the appropriate voltage gain and external-sense resistor. This capability offers a high level of integration and flexibility, resulting in a simple and compact current-sense solution.

The MAX4376/MAX4377/MAX4378 operate over a supply voltage range of +3V to +28V, draw 1mA of supply current per amplifier, and operate over the full automotive temperature range of -40°C to +125°C. These devices have a wide bandwidth of 2MHz, making them suitable for use inside battery-charger control loops. The buffered outputs drive up to 2mA of output current into a ground-referenced load.

The MAX4376 is available in a tiny 5-pin SOT23 package. The MAX4377/MAX4378 are available in space-saving 8-pin  $\mu$ MAX® and 14-pin TSSOP packages, respectively.

### Applications

|                                               |                                  |
|-----------------------------------------------|----------------------------------|
| Notebook Computers                            | Portable/Battery-Powered Systems |
| Current-Limited Power Supplies                | Cell Phones                      |
| Fuel Gauges in PC                             | Smart Battery Packages           |
| General-System/Board-Level Current Monitoring | Automotive Current Detect        |
| Battery Chargers                              | Power Management Systems         |
|                                               | PA Bias Control                  |

$\mu$ MAX is a registered trademark of Maxim Integrated Products, Inc.

### Features

- ◆ Low-Cost, Single/Dual/Quad, High-Side Current-Sense Amplifiers
- ◆  $\pm 0.5\%$  Typical Full-Scale Accuracy
- ◆ +3V to +28V Supply Operation
- ◆ Adjustable Current-Sense Capability with External Sense Resistor
- ◆ Buffered Output Voltage with 2mA Drive
- ◆ 1mA (typ) Supply Current
- ◆ 2.0MHz Bandwidth (Gain = +20V/V)
- ◆ Automotive Temperature Range (-40°C to +125°C)
- ◆ High Accuracy +2V to +28V Common-Mode Range, Functional Down to 0V, Independent of Supply Voltage
- ◆ Three Gain Versions Available
  - +20V/V (MAX437\_T)
  - +50V/V (MAX437\_F)
  - +100V/V (MAX437\_H)
- ◆ Available in Space-Saving 5-Pin SOT23 (Single), 8-Pin  $\mu$ MAX (Dual), and 14-Pin TSSOP (Quad)

### Ordering Information

| PART            | GAIN (+V/V) | TEMP RANGE      | PIN-PACKAGE | TOP MARK |
|-----------------|-------------|-----------------|-------------|----------|
| MAX4376TAUK+T   | 20          | -40°C to +125°C | 5 SOT23     | ADOG     |
| MAX4376TAUK/V+T | 20          | -40°C to +125°C | 5 SOT23     | —        |
| MAX4376FAUK+T   | 50          | -40°C to +125°C | 5 SOT23     | ADOH     |
| MAX4376HAUK+T   | 100         | -40°C to +125°C | 5 SOT23     | ADOI     |
| MAX4376HAUK/V+T | 100         | -40°C to +125°C | 5 SOT23     | AFGO     |
| MAX4376TASA+    | 20          | -40°C to +125°C | 8 SO        | —        |
| MAX4376FASA+    | 50          | -40°C to +125°C | 8 SO        | —        |
| MAX4376HASA+    | 100         | -40°C to +125°C | 8 SO        | —        |


Ordering Information continued at end of data sheet.

+ Denotes a lead(Pb)-free/RoHS-compliant package.

/V denotes an automotive qualified part.

T = Tape and reel.

### Pin Configurations

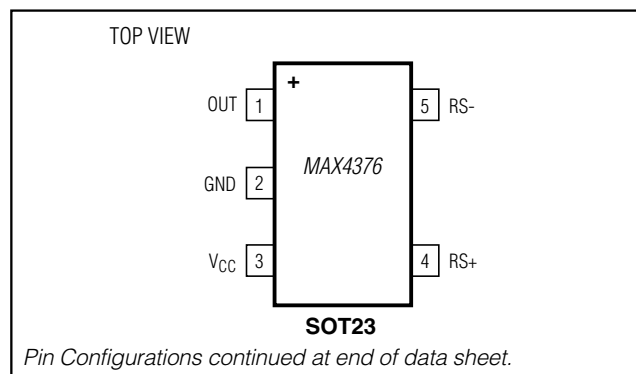

**For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at [www.maximintegrated.com](http://www.maximintegrated.com).**

# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### ABSOLUTE MAXIMUM RATINGS

V<sub>CC</sub>, RS+, RS- to GND .....-0.3V to +30V  
 OUT to GND .....-0.3V to (V<sub>CC</sub> + 0.3V)  
 Differential Input Voltage (V<sub>RS+</sub> - V<sub>RS-</sub>) .....±8V  
 Output Short Circuit to V<sub>CC</sub> .....Continuous  
 Output Short Circuit to GND .....1s  
 Current into Any Pin .....±20mA  
 Continuous Power Dissipation (T<sub>A</sub> = +70°C)  
   5-Pin SOT23 (derate 7.1mW/°C above +70°C) .....571mW  
   8-Pin µMAX (derate 4.5mW/°C above +70°C) .....362mW

8-Pin SO (derate 5.88mW/°C above +70°C) .....471mW  
 14-Pin SO (derate 8.33mW/°C above +70°C) .....667mW  
 14-Pin TSSOP (derate 9.1mW/°C above +70°C) .....727mW  
 Operating Temperature Range .....-40°C to +125°C  
 Junction Temperature .....+150°C  
 Storage Temperature Range .....-65°C to +150°C  
 Lead Temperature (soldering, 10s) .....+300°C  
 Soldering Temperature (reflow) .....+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ELECTRICAL CHARACTERISTICS

(V<sub>RS+</sub> = 0 to 28V, V<sub>SENSE</sub> = (V<sub>RS+</sub> - V<sub>RS-</sub>) = 0V, V<sub>CC</sub> = +3.0V to +28V, R<sub>L</sub> = ∞, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = 25°C.) (Note 1)

| PARAMETER                        | SYMBOL                                | CONDITIONS                                                                                                             |                                                                                                         | MIN  | TYP  | MAX   | UNITS |
|----------------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------|------|-------|-------|
| Operating Voltage Range          | V <sub>CC</sub>                       | Guaranteed by PSR test                                                                                                 |                                                                                                         | 3    |      | 28    | V     |
| Common-Mode Input Range          | V <sub>CM</sub>                       | Guaranteed by total OUT voltage error test                                                                             |                                                                                                         | 0    |      | 28    | V     |
| Common-Mode Rejection            | CMR                                   | 2V ≤ V <sub>RS+</sub> ≤ 28V, V <sub>SENSE</sub> = 100mV                                                                |                                                                                                         |      | 90   |       | dB    |
| Supply Current per Amplifier     | I <sub>CC</sub>                       | V <sub>SENSE</sub> = 5mV, V <sub>RS+</sub> > 2.0V, V <sub>CC</sub> = 12V                                               |                                                                                                         |      | 1    | 2.2   | mA    |
| Leakage Current                  | I <sub>RS+</sub> , I <sub>RS-</sub>   | V <sub>CC</sub> = 0V, V <sub>RS+</sub> = 28V                                                                           |                                                                                                         |      |      | 8     | µA    |
| Input Bias Current               | I <sub>RS+</sub>                      | V <sub>RS+</sub> > 2.0V                                                                                                |                                                                                                         | 0    |      | 60    | µA    |
|                                  |                                       | V <sub>RS+</sub> ≤ 2.0V                                                                                                |                                                                                                         | -400 |      | 60    |       |
|                                  | I <sub>RS-</sub>                      | V <sub>RS+</sub> > 2.0V                                                                                                |                                                                                                         | 0    |      | 120   |       |
|                                  |                                       | V <sub>RS+</sub> ≤ 2.0V                                                                                                |                                                                                                         | -800 |      | 120   |       |
| Full-Scale Sense Voltage         | V <sub>SENSE</sub>                    |                                                                                                                        |                                                                                                         |      | 150  |       | mV    |
| Total OUT Voltage Error (Note 2) |                                       | I <sub>OUT</sub> ≤ 2mA                                                                                                 | V <sub>SENSE</sub> = 100mV,<br>V <sub>CC</sub> = 12V, V <sub>RS+</sub> = 12V                            |      |      | ±6.75 | %     |
|                                  |                                       |                                                                                                                        | V <sub>SENSE</sub> = 100mV,<br>V <sub>CC</sub> = 12V, T <sub>A</sub> = +25°C,<br>V <sub>RS+</sub> = 12V |      | ±0.5 | ±3.25 |       |
|                                  |                                       |                                                                                                                        | V <sub>SENSE</sub> = 100mV,<br>V <sub>CC</sub> = 28V, V <sub>RS+</sub> = 28V                            |      |      | ±11   |       |
|                                  |                                       |                                                                                                                        | V <sub>SENSE</sub> = 100mV,<br>V <sub>CC</sub> = 28V, V <sub>RS+</sub> = 28V,<br>T <sub>A</sub> = +25°C |      | ±0.5 | ±5    |       |
|                                  |                                       |                                                                                                                        | V <sub>SENSE</sub> = 100mV,<br>V <sub>CC</sub> = 12V, V <sub>RS+</sub> = 0.1V                           |      | ±9   | ±32   |       |
|                                  |                                       |                                                                                                                        | V <sub>SENSE</sub> = 6.25mV,<br>V <sub>CC</sub> = 12V, V <sub>RS+</sub> = 12V<br>(Note 3)               |      | ±7   |       |       |
| OUT High Voltage (Note 4)        | (V <sub>CC</sub> - V <sub>OUT</sub> ) | V <sub>CC</sub> = 3V, I <sub>OUT</sub> = 2mA, V <sub>RS+</sub> = 28V                                                   |                                                                                                         |      | 0.9  | 1.2   | V     |
| OUT Low Voltage                  | V <sub>OL</sub>                       | I <sub>OUT</sub> = 200µA, V <sub>CC</sub> = V <sub>RS+</sub> = 12V,<br>V <sub>SENSE</sub> = 0V, T <sub>A</sub> = +25°C |                                                                                                         |      | 25   | 40    | mV    |

# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{RS+} = 0$  to 28V,  $V_{SENSE} = (V_{RS+} - V_{RS-}) = 0V$ ,  $V_{CC} = +3.0V$  to +28V,  $R_L = \infty$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = 25^\circ C$ .) (Note 1)

| PARAMETER                                     | SYMBOL       | CONDITIONS                                                                                        |                                         | MIN | TYP       | MAX       | UNITS      |
|-----------------------------------------------|--------------|---------------------------------------------------------------------------------------------------|-----------------------------------------|-----|-----------|-----------|------------|
| Bandwidth                                     | BW           | $V_{CC} = 12V$<br>$V_{RS+} = 12V$<br>$C_{LOAD} = 15pF$                                            | $V_{SENSE} = 100mV$<br>(gain = +20V/V)  |     | 2         |           | MHz        |
|                                               |              |                                                                                                   | $V_{SENSE} = 100mV$<br>(gain = +50V/V)  |     | 1.7       |           |            |
|                                               |              |                                                                                                   | $V_{SENSE} = 100mV$<br>(gain = +100V/V) |     | 1.2       |           |            |
|                                               |              |                                                                                                   | $V_{SENSE} = 6.25mV$ (Note 3)           |     | 0.5       |           |            |
| Slew Rate                                     | SR           | $V_{SENSE} = 20mV$ to 100mV, $C_{LOAD} = 15pF$                                                    |                                         |     | 10        |           | V/ $\mu s$ |
| Gain                                          | $A_V$        | MAX437_T                                                                                          |                                         |     | +20       |           | V/V        |
|                                               |              | MAX437_F                                                                                          |                                         |     | +50       |           |            |
|                                               |              | MAX437_H                                                                                          |                                         |     | +100      |           |            |
| Gain Accuracy                                 | $\Delta A_V$ | $V_{SENSE} = 10mV$ to 150mV, $V_{CC} = 12V$ , $I_{OUT} = 2mA$ , gain = 20 and 50, $V_{RS+} = 12V$ | $T_A = T_{MIN}$ to $T_{MAX}$            |     |           | $\pm 5.5$ | %          |
|                                               |              |                                                                                                   | $T_A = +25^\circ C$                     |     | $\pm 0.5$ | $\pm 2.5$ |            |
|                                               |              | $V_{SENSE} = 10mV$ to 150mV, $V_{CC} = 20V$ , $I_{OUT} = 2mA$ , gain = 100, $V_{RS+} = 12V$       | $T_A = T_{MIN}$ to $T_{MAX}$            |     |           | 5.5       |            |
|                                               |              |                                                                                                   | $T_A = +25^\circ C$                     |     | $\pm 0.5$ | $\pm 2.5$ |            |
| OUT Setting Time to 1% of Final Value         |              | $V_{CC} = 12V$ , $V_{RS+} = 12V$ , $C_{LOAD} = 15pF$                                              | $V_{SENSE} = 6.25mV$ to 100mV           |     | 400       |           | ns         |
|                                               |              |                                                                                                   | $V_{SENSE} = 100mV$ to 6.25mV           |     | 800       |           |            |
| Maximum Capacitive Load                       | $C_{LOAD}$   | No sustained oscillation                                                                          |                                         |     | 1000      |           | pF         |
| Output Resistance                             | $R_{OUT}$    | $V_{SENSE} = 100mV$                                                                               |                                         |     | 5         |           | $\Omega$   |
| Power-Supply Rejection                        | PSR          | $V_{RS+} > 2V$ , $V_{OUT} = 1.6V$ , $V_{CC} = 3V$ to 28V                                          |                                         | 66  | 90        |           | dB         |
| Power-Up Time to 1% of Final Value            |              | $V_{SENSE} = 100mV$ , $C_{LOAD} = 15pF$                                                           |                                         |     | 2         |           | $\mu s$    |
| Saturation Recovery Time to 1% of Final Value |              | $V_{CC} = 12V$ , $V_{RS+} = 12V$ , $C_{LOAD} = 15pF$ , $V_{SENSE} = 100mV$                        |                                         |     | 1         |           | $\mu s$    |
| Reverse Recovery Time to 1% of Final Value    |              | $V_{CC} = 12V$ , $V_{RS-} = 12V$ , $C_{LOAD} = 15pF$ , $V_{SENSE} = -100mV$ to +100mV             |                                         |     | 1         |           | $\mu s$    |

**Note 1:** All devices are 100% production tested at  $T_A = +25^\circ C$ . All temperature limits are guaranteed by design.

**Note 2:** Total OUT Voltage Error is the sum of gain and offset errors.

**Note 3:** 6.25mV = 1/16 of 100mV full-scale sense voltage.








**Note 4:**  $V_{SENSE}$  such that  $V_{OUT}$  is in saturation.

# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### Typical Operating Characteristics

( $V_{CC} = V_{RS+} = 12V$ ,  $V_{SENSE} = 100mV$ ,  $T_A = +25^{\circ}C$ .)

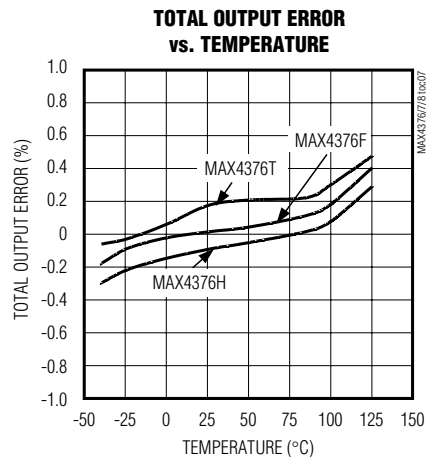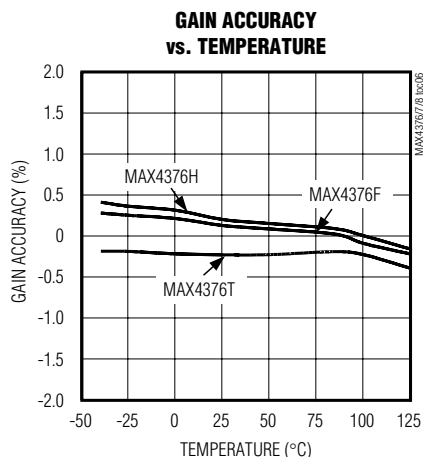
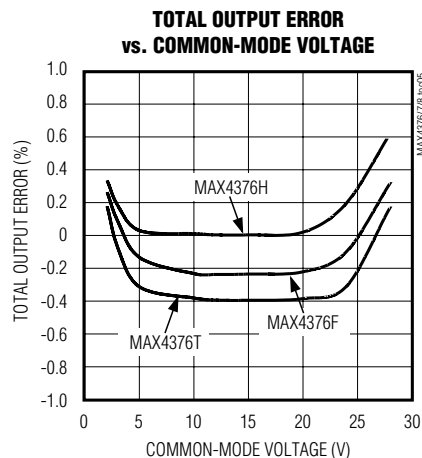
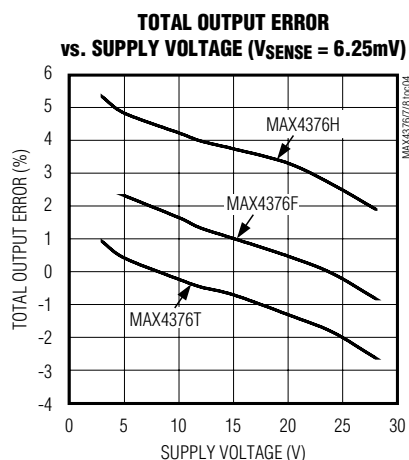
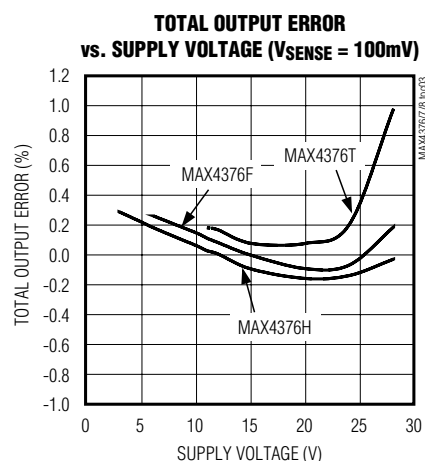
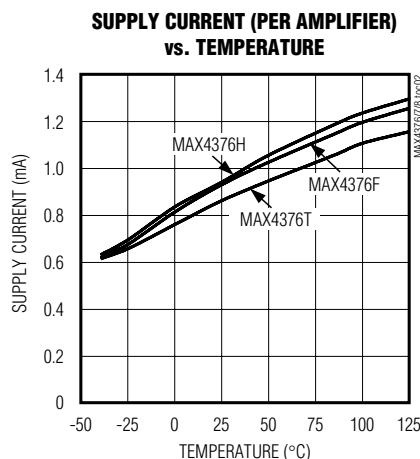
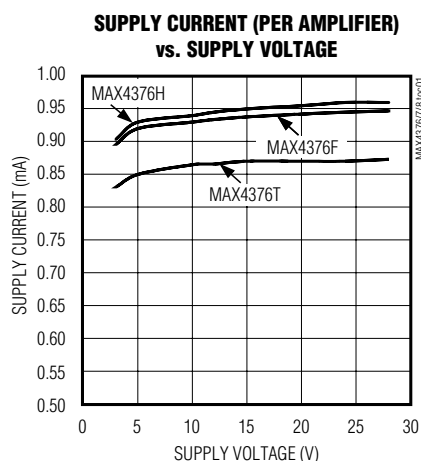


# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### Typical Operating Characteristics (continued)

( $V_{CC} = V_{RS+} = 12V$ ,  $V_{SENSE} = 100mV$ ,  $T_A = +25^{\circ}C$ .)

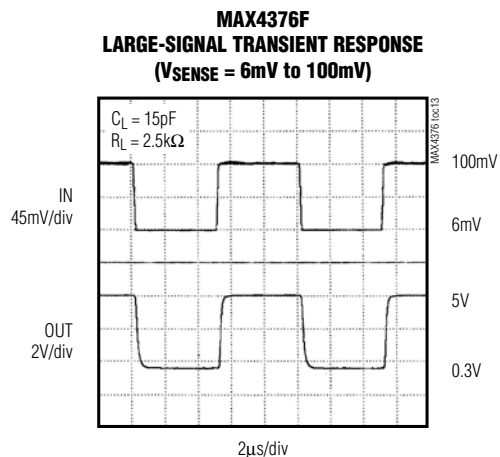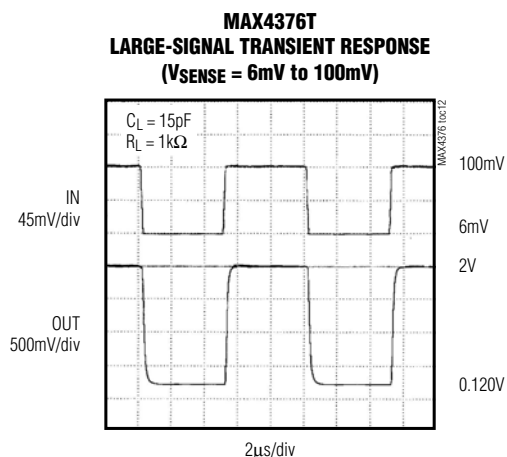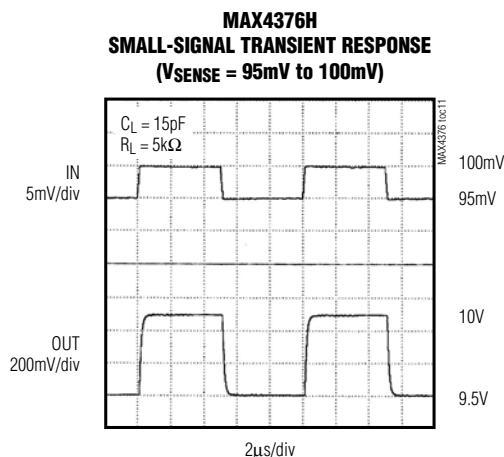
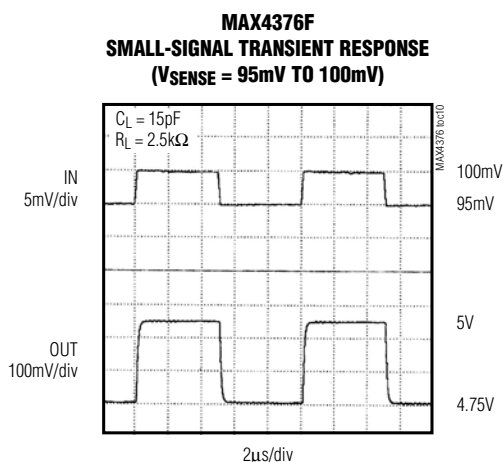
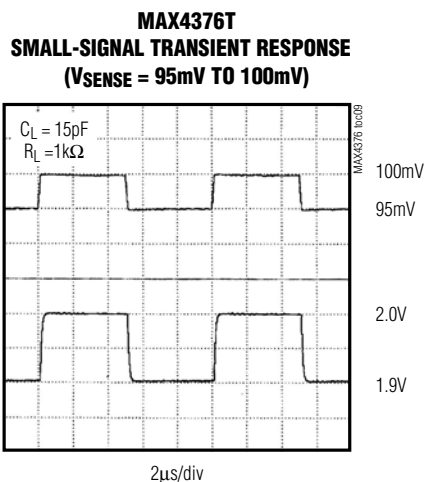
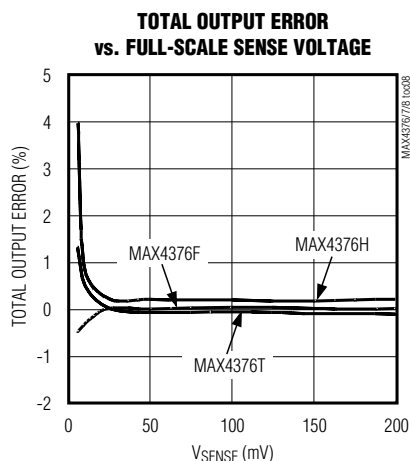


# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### Typical Operating Characteristics (continued)

( $V_{CC} = V_{RS+} = 12V$ ,  $V_{SENSE} = 100mV$ ,  $T_A = +25^{\circ}C$ .)

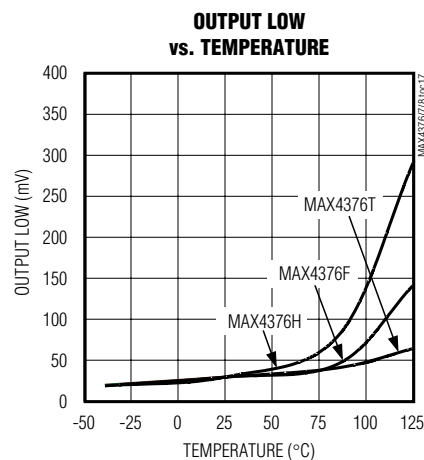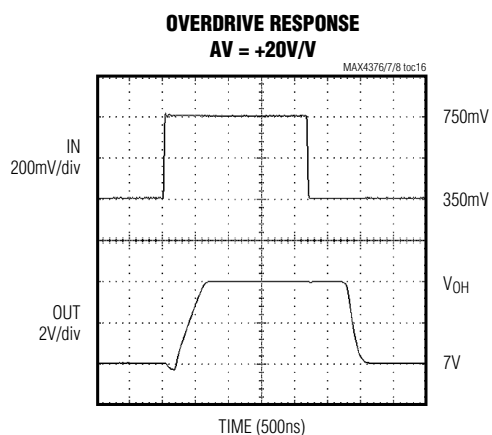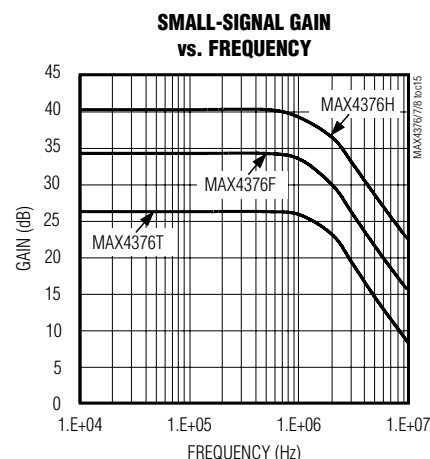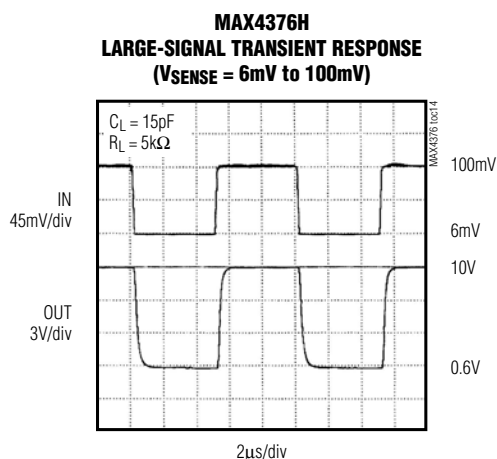

### Pin Description

| PIN     |         |                 |                    | NAME           | FUNCTION                                                                                                                                                                                 |
|---------|---------|-----------------|--------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX4376 | MAX4376 | MAX4377         | MAX4378            |                |                                                                                                                                                                                          |
| SOT23-5 | SO-8    | μMAX-8/<br>SO-8 | SO-14/<br>TSSOP-14 |                |                                                                                                                                                                                          |
| 1       | 4       | 1, 7            | 1, 7, 8, 14        | OUT, OUT_      | Output Voltage. $V_{OUT_}$ is proportional to the magnitude of the sense voltage ( $V_{RS+} - V_{RS-}$ ). $V_{OUT_}$ is approximately zero when $V_{RS-} > V_{RS+}$ (no phase reversal). |
| 2       | 3       | 4               | 11                 | GND            | Ground                                                                                                                                                                                   |
| 3       | 1       | 8               | 4                  | $V_{CC}$       | Supply Voltage                                                                                                                                                                           |
| 4       | 8       | 3, 5            | 3, 5, 10, 12       | $RS+$ , $RS_+$ | Power connection to the external sense resistor                                                                                                                                          |
| 5       | 6       | 2, 6            | 2, 6, 9, 13        | $RS-$ , $RS_-$ | Load-side connection to the external sense resistor                                                                                                                                      |
| —       | 2, 5, 7 | —               | —                  | N.C.           | No Connection. Not internally connected.                                                                                                                                                 |

# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### Detailed Description

The MAX4376/MAX4377/MAX4378 high-side current-sense amplifiers feature a 0 to +28V input common-mode range that is independent of supply voltage. This feature allows the monitoring of current out of a battery in deep discharge and also enables high-side current sensing at voltages greater than the supply voltage ( $V_{CC}$ ).

The MAX4376/MAX4377/MAX4378 operate as follows: current from the source flows through  $R_{SENSE}$  to the load (Figure 1). Since the internal sense amplifier's inverting input has high impedance, negligible current flows through  $R_{G2}$  (neglecting the input bias current). Therefore, the sense amplifier's inverting-input voltage equals  $V_{SOURCE} - (I_{LOAD})(R_{SENSE})$ .

The amplifier's open-loop gain forces its noninverting input to the same voltage as the inverting input. Therefore, the drop across  $R_{G1}$  equals  $(I_{LOAD})(R_{SENSE})$ . Since  $I_{RG1}$  flows through  $R_{G1}$ ,  $I_{RG1} = (I_{LOAD})(R_{SENSE})/R_{G1}$ . The internal current mirror multiplies  $I_{RG1}$  by a current gain factor,  $\beta$ , to give  $I_{RGD} = \beta \times I_{RG1}$ . Solving  $I_{RGD} = \beta \times (I_{LOAD})(R_{SENSE})/R_{G1}$ . Therefore:

$$V_{OUT} = \beta \times (R_{GD}/R_{G1})(R_{SENSE} \times I_{LOAD}) \times \text{amp gain}$$

where amp gain is 2, 5, or 10.

The part's gain equals  $(\beta \times R_{GD} / R_{G1}) \times \text{amp gain}$ .

Therefore:

$$V_{OUT} = (\text{GAIN})(R_{SENSE})(I_{LOAD})$$

where  $\text{GAIN} = 20$  for MAX437\_T.

$\text{GAIN} = 50$  for MAX437\_F.

$\text{GAIN} = 100$  for MAX437\_H.

Set the full-scale output range by selecting  $R_{SENSE}$  and the appropriate gain version of the MAX4376/MAX4377/MAX4378.

### Applications Information

#### Recommended Component Values

The MAX4376/MAX4377/MAX4378 sense a wide variety of currents with different sense resistor values. Table 1 lists common resistor values for typical operation of the MAX4376/MAX4377/MAX4378.

#### Choosing $R_{SENSE}$

To measure lower currents more accurately, use a high value for  $R_{SENSE}$ . The high value develops a higher sense voltage that reduces offset voltage errors of the internal op amp.

In applications monitoring very high currents,  $R_{SENSE}$  must be able to dissipate the  $I^2R$  losses. If the resistor's rated power dissipation is exceeded, its value may drift or it may fail altogether, causing a differential voltage across the terminals in excess of the absolute maximum ratings.

If  $I_{SENSE}$  has a large high-frequency component, minimize the inductance of  $R_{SENSE}$ . Wire-wound resistors have the highest inductance, metal-film resistors are somewhat better, and low-inductance metal-film resistors are best suited for these applications.

#### Bidirectional Current-Sense Amplifier

Systems such as laptop computers and other devices that have internal charge circuitry require a precise bidirectional current-sense amplifier to monitor accurately the battery's current regardless of polarity. Figure 2 shows the MAX4377 used as a bidirectional current monitor. This is useful for implementing either smart battery packs or fuel gauges.

#### Current Source Circuit

Figure 3 shows a block diagram using the MAX4376 with a switching regulator to make a current source.

# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

Table 1. Recommended Component Values

| FULL-SCALE LOAD CURRENT, $I_{LOAD}$ (A) | CURRENT-SENSE RESISTOR, $R_{SENSE}$ (m $\Omega$ ) | GAIN (+V/V) | FULL-SCALE OUTPUT VOLTAGE (FULL-SCALE $V_{SENSE} = 100\text{mV}$ ), $V_{OUT}$ (V) |
|-----------------------------------------|---------------------------------------------------|-------------|-----------------------------------------------------------------------------------|
| 0.1                                     | 1000                                              | 20          | 2.0                                                                               |
|                                         |                                                   | 50          | 5.0                                                                               |
|                                         |                                                   | 100         | 10.0                                                                              |
| 1                                       | 100                                               | 20          | 2.0                                                                               |
|                                         |                                                   | 50          | 5.0                                                                               |
|                                         |                                                   | 100         | 10.0                                                                              |
| 5                                       | 20                                                | 20          | 2.0                                                                               |
|                                         |                                                   | 50          | 5.0                                                                               |
|                                         |                                                   | 100         | 10.0                                                                              |
| 10                                      | 10                                                | 20          | 2.0                                                                               |
|                                         |                                                   | 50          | 5.0                                                                               |
|                                         |                                                   | 100         | 10.0                                                                              |

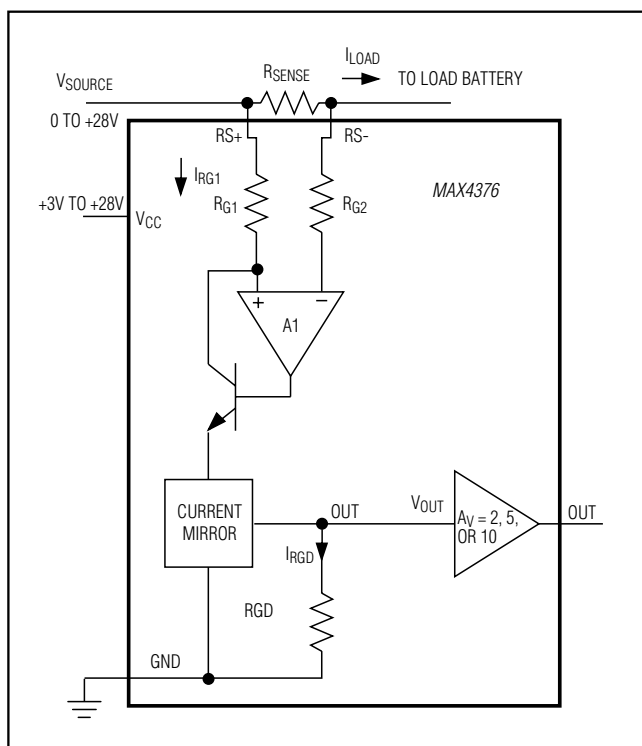


Figure 1. Functional Diagram

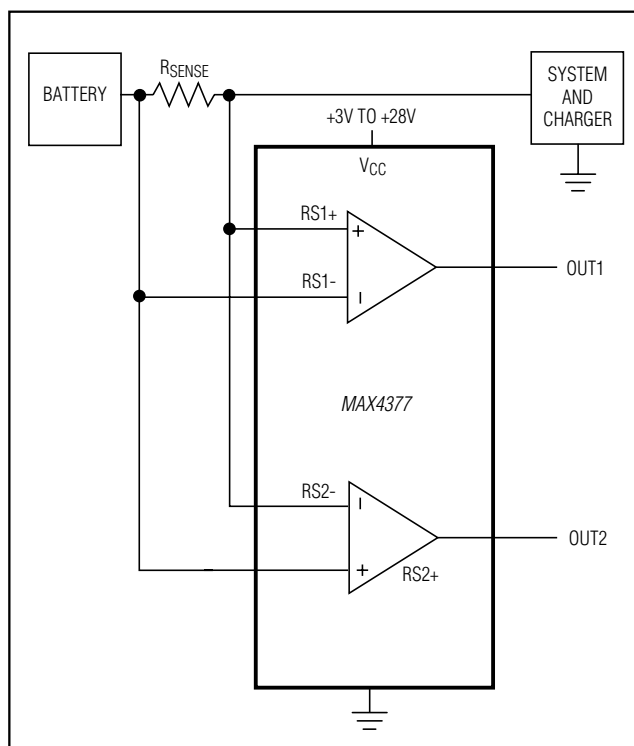


Figure 2. Bidirectional Current Monitor

# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain


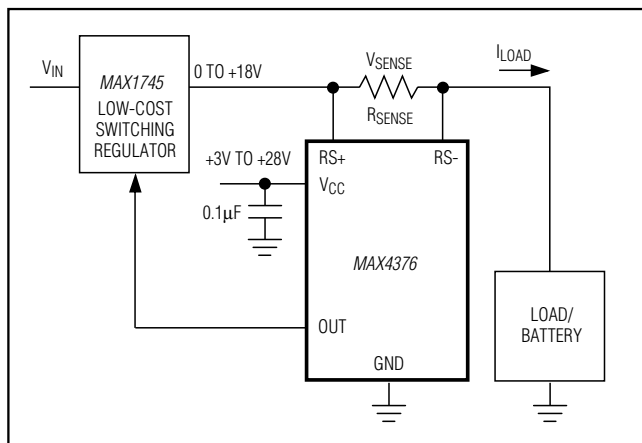


Figure 3. Current Source

### Chip Information

PROCESS: BICMOS

### Pin Configurations (continued)

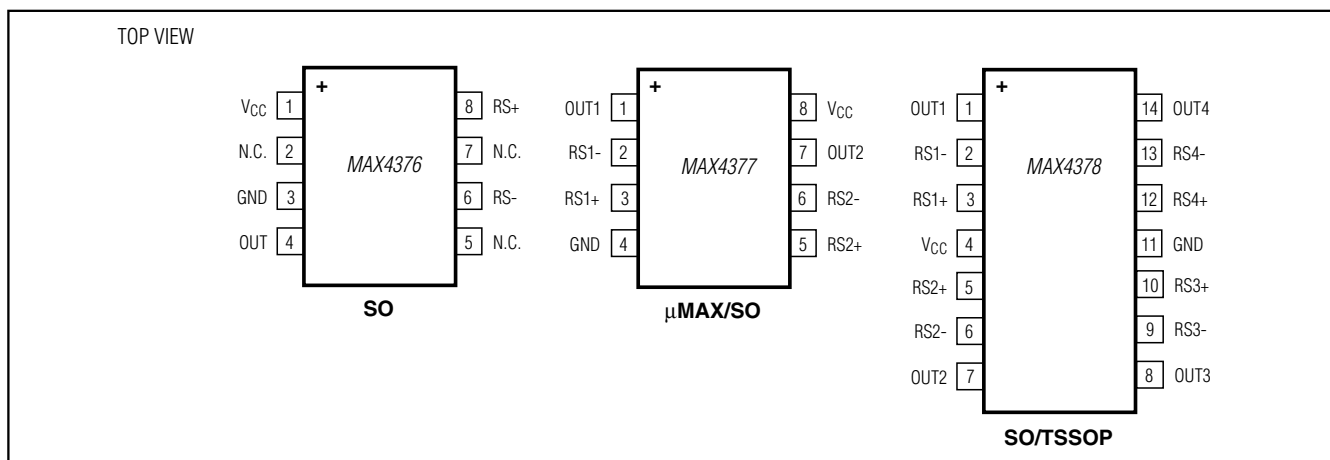


### Ordering Information (continued)

| PART         | GAIN<br>(+V/V) | TEMP<br>RANGE   | PIN-<br>PACKAGE | TOP<br>MARK |
|--------------|----------------|-----------------|-----------------|-------------|
| MAX4377TAUA+ | 20             | -40°C to +125°C | 8 µMAX          | —           |
| MAX4377FAUA+ | 50             | -40°C to +125°C | 8 µMAX          | —           |
| MAX4377HAUA+ | 100            | -40°C to +125°C | 8 µMAX          | —           |
| MAX4377TASA+ | 20             | -40°C to +125°C | 8 SO            | —           |
| MAX4377FASA+ | 50             | -40°C to +125°C | 8 SO            | —           |
| MAX4377HASA+ | 100            | -40°C to +125°C | 8 SO            | —           |
| MAX4378TAUD+ | 20             | -40°C to +125°C | 14 TSSOP        | —           |
| MAX4378FAUD+ | 50             | -40°C to +125°C | 14 TSSOP        | —           |
| MAX4378HAUD+ | 100            | -40°C to +125°C | 14 TSSOP        | —           |
| MAX4378TASD+ | 20             | -40°C to +125°C | 14 SO           | —           |
| MAX4378FASD+ | 50             | -40°C to +125°C | 14 SO           | —           |
| MAX4378HASD+ | 100            | -40°C to +125°C | 14 SO           | —           |

+Denotes a lead(Pb)-free/RoHS-compliant package.

### Typical Operating Circuit

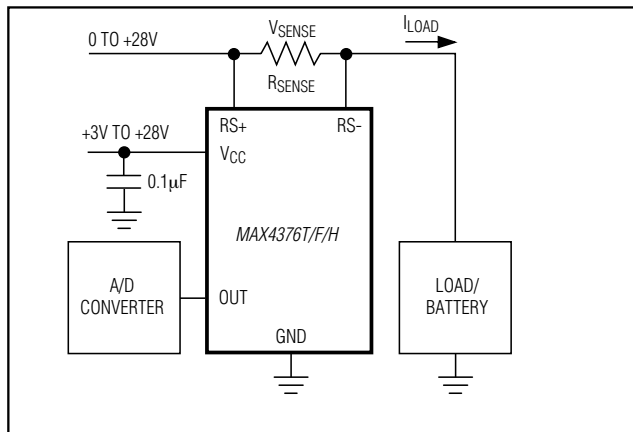

# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 5 SOT        | U5+1         | <a href="#">21-0057</a> | <a href="#">90-0174</a> |
| 8 SOIC       | S8+2         | <a href="#">21-0041</a> | <a href="#">90-0096</a> |
| 8 $\mu$ MAX  | U8+1         | <a href="#">21-0036</a> | <a href="#">90-0092</a> |
| 14 SOIC      | S14+1        | <a href="#">21-0041</a> | <a href="#">90-0096</a> |
| 14 TSSOP     | U14+1        | <a href="#">21-0066</a> | <a href="#">90-0117</a> |

# MAX4376/MAX4377/MAX4378

## Single/Dual/Quad, High-Side Current-Sense Amplifiers with Internal Gain

### Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION                                                                                                                        | PAGES CHANGED |
|-----------------|---------------|------------------------------------------------------------------------------------------------------------------------------------|---------------|
| 4               | 4/09          | Added automotive part number and lead-free designations                                                                            | 1, 9          |
| 5               | 6/10          | Clarified 0V to 2V is not a high-accuracy range for the device, added soldering temperature and <i>Package Information</i> section | 1, 2, 10      |
| 6               | 2/11          | Specified $V_{RS+}$ value                                                                                                          | 2, 3          |
| 7               | 10/12         | Added MAX4376HASA+ and MAX4376TAUK/V+T to <i>Ordering Information</i>                                                              | 1             |



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

**Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000**

11



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.