

24-Bit, 192 kHz Stereo Audio CODEC

D/A Features

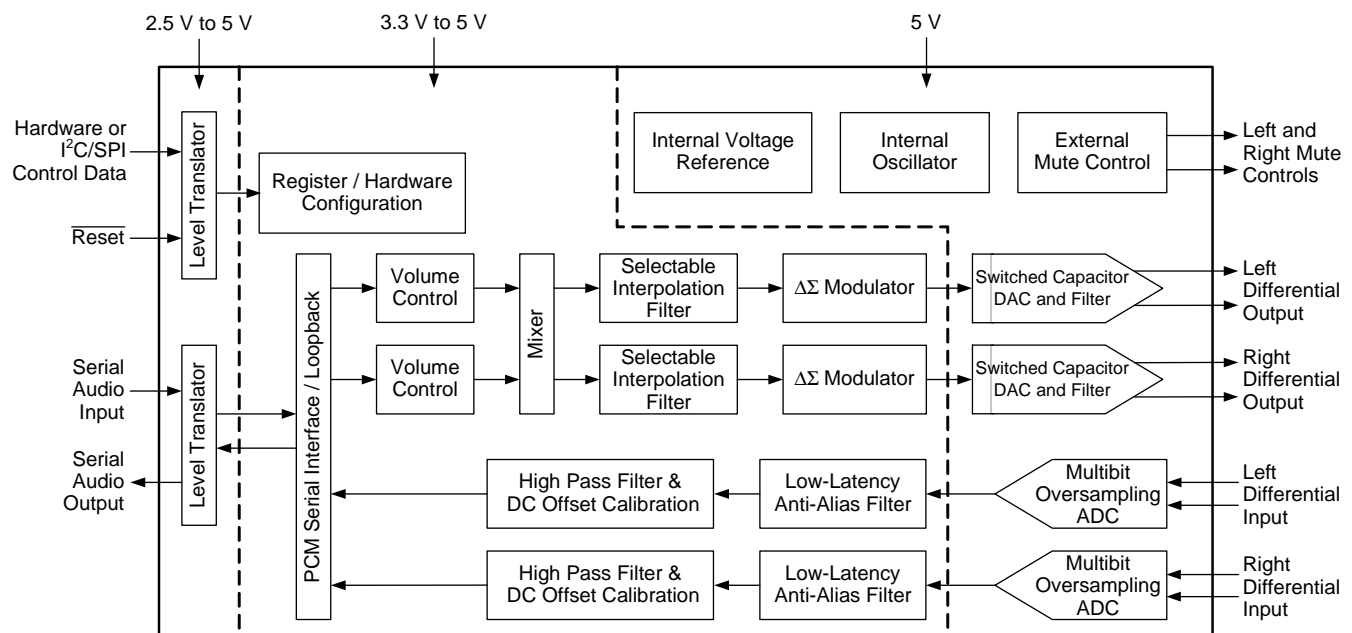
- High Performance
 - 114 dB Dynamic Range
 - -100 dB THD+N
- Up to 192 kHz Sampling Rates
- Differential Analog Architecture
- Volume Control with Soft Ramp
 - 1 dB Step Size
 - Zero Crossing Click-free Transitions
- Selectable Digital Filters
 - Fast and Slow Roll Off
- ATAPI Mixing Functions
- Selectable Serial Audio Interface Formats
 - Left Justified up to 24-bit
 - I²S up to 24-bit
 - Right Justified 16-, 18-, 20-, and 24-Bit
- Control Output for External Muting
- Selectable 50/15 μs De-emphasis

A/D Features

- High Performance
 - 114 dB Dynamic Range
 - -100 dB THD+N
- Up to 192 kHz Sampling Rates
- Differential Analog Architecture
- Multi-bit Delta Sigma Conversion
- High-pass Filter or DC Offset Calibration
- Low-Latency Digital Anti-alias Filtering
- Automatic Dithering of 16-bit Data
- Selectable Serial Audio Interface Formats
 - Left Justified up to 24-bit
 - I²S up to 24-bit

System Features

- Direct Interface with 5V to 2.5V Logic Levels
- Internal Digital Loopback
- On-chip Oscillator
- Stand-Alone or Control Port Functionality



Stand-Alone Mode Feature Set

- System Features
 - Serial Audio Port Master or Slave Operation
 - Internal Oscillator for Master Clock
- D/A Features
 - Auto-mute on Static Samples
 - 44.1 kHz 50/15 μ s De-emphasis Available
 - Selectable Serial Audio Interface Formats
 - ♦ Left Justified up to 24-bit
 - ♦ I²S up to 24-bit
- A/D Features
 - Automatic Dithering for 16-bit Data
 - High-pass Filter
 - Selectable Serial Audio Interface Formats
 - ♦ Left Justified up to 24-bit
 - ♦ I²S up to 24-bit

Software Mode Feature Set

- System Features
 - Serial Audio Port Master or Slave Operation
 - Internal Oscillator for Master Clock
 - Internal Digital Loopback Available
- D/A Features
 - Selectable Auto-mute
 - Selectable Interpolation Filters
 - Selectable 32-, 44.1-, and 48-kHz De-emphasis Filters
 - Configurable ATAPI Mixing Functions
 - Configurable Volume and Muting Controls
 - Selectable Serial Audio Interface Formats
 - ♦ Left Justified up to 24-bit
 - ♦ I²S up to 24-bit
 - ♦ Right Justified 16, 18, 20, and 24-bit
- A/D Features
 - Selectable Dithering for 16-bit Data
 - Selectable High-pass Filter or DC Offset Calibration
 - Selectable Serial Audio Interface Formats
 - ♦ Left Justified up to 24-bit
 - ♦ I²S up to 24-bit

General Description

The CS4272 is a high-performance, integrated audio CODEC. The CS4272 performs stereo analog-to-digital (A/D) and digital-to-analog (D/A) conversion of up to 24-bit serial values at sample rates up to 192 kHz.

The D/A offers a volume control that operates with a 1 dB step size. It incorporates selectable soft ramp and zero crossing transition functions to eliminate clicks and pops.

The D/A's integrated digital mixing functions allow a variety of output configurations ranging from a channel swap to a stereo-to-mono downmix.

Standard 50/15 μ s de-emphasis is available for sampling rates of 32, 44.1, and 48 kHz for compatibility with digital audio programs mastered using the 50/15 μ s pre-emphasis technique.

Integrated level translators allow easy interfacing between the CS4272 and other devices operating over a wide range of logic levels.

An on-chip oscillator eliminates the need for an external crystal oscillator circuit. This can reduce overall design cost and conserve circuit board space. The CS4272 automatically uses the on-chip oscillator in the absence of an applied master clock, making this feature easy to use.

Independently addressable high-pass filters are available for the right and left channel of the A/D. This allows the A/D to be used in a wide variety of applications where one audio channel and one DC measurement channel is desired.

The CS4272's wide dynamic range, negligible distortion, and low noise make it ideal for applications such as A/V receivers, DVD-R, CD-R, digital mixing consoles, effects processors, set-top box systems, and automotive audio systems.

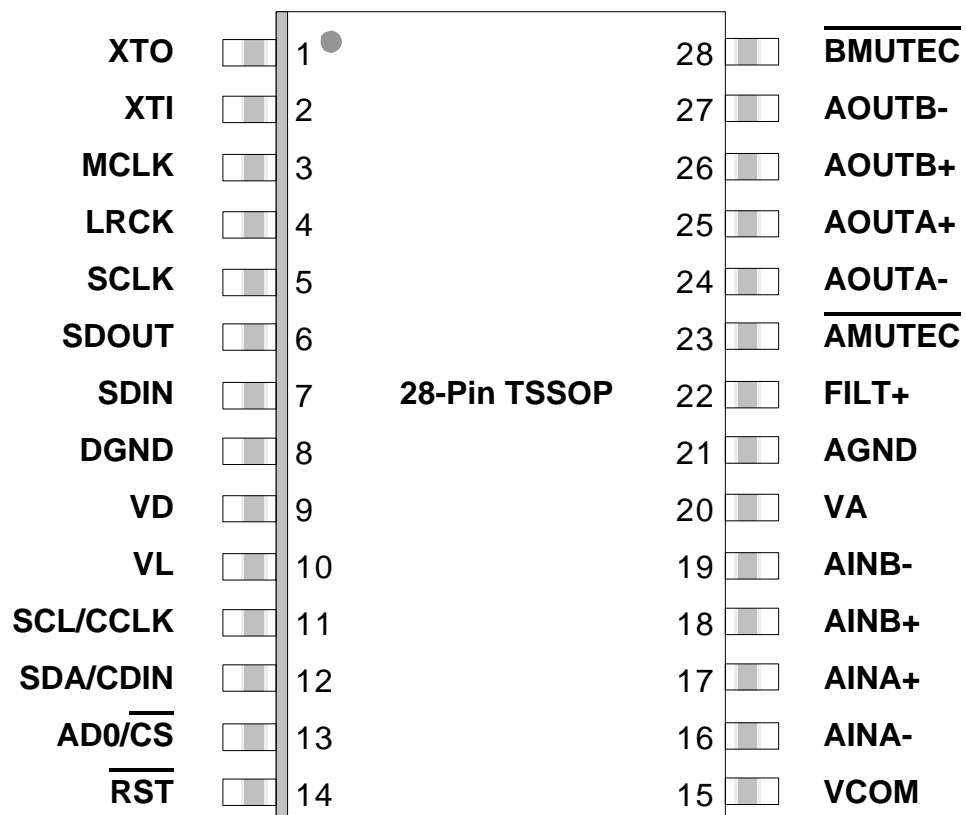
Ordering Information

| Product | Description | Package | Pb-Free | Grade | Temp Range | Container | Order # |
|---------|------------------------------------|--------------|---------|------------|----------------|-------------|-------------|
| CS4272 | 24-Bit, 192 kHz Stereo Audio CODEC | 28-pin TSSOP | YES | Commercial | -10° to +70° C | Tube | CS4272-CZZ |
| | | | | | | Tape & Reel | CS4272-CZZR |
| | | | | Automotive | -40° to +85° C | Tube | CS4272-DZZ |
| | | | | | | Tape & Reel | CS4272-DZZR |
| CDB4272 | CS4272 Evaluation Board | | No | - | - | - | CDB4272 |

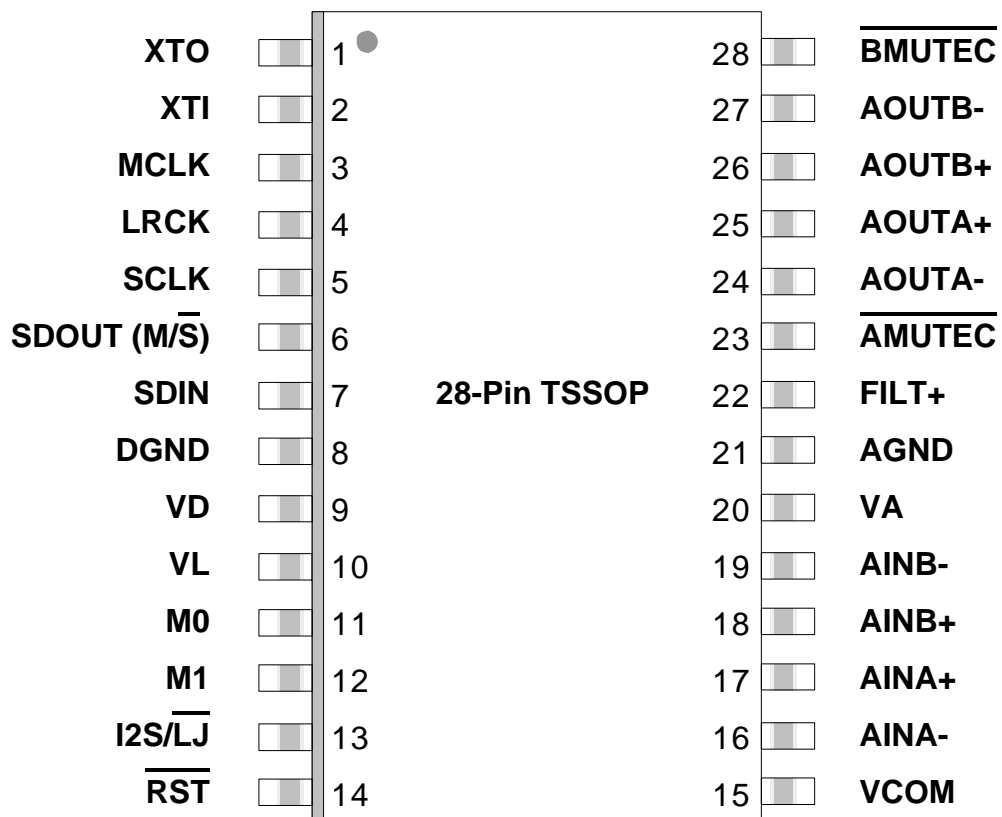
TABLE OF CONTENTS

| | |
|---|-----------|
| 1. PIN DESCRIPTIONS - SOFTWARE MODE | 5 |
| 2. PIN DESCRIPTIONS - STAND-ALONE MODE | 7 |
| 3. CHARACTERISTICS AND SPECIFICATIONS | 9 |
| SPECIFIED OPERATING CONDITIONS | 9 |
| ABSOLUTE MAXIMUM RATINGS | 9 |
| DAC ANALOG CHARACTERISTICS - COMMERCIAL GRADE | 10 |
| DAC ANALOG CHARACTERISTICS - AUTOMOTIVE GRADE | 11 |
| DAC COMBINED INTERPOLATION & ON-CHIP ANALOG FILTER RESPONSE | 12 |
| ADC ANALOG CHARACTERISTICS - COMMERCIAL GRADE | 14 |
| ADC ANALOG CHARACTERISTICS - AUTOMOTIVE GRADE | 15 |
| ADC DIGITAL FILTER CHARACTERISTICS | 16 |
| DC ELECTRICAL CHARACTERISTICS | 17 |
| DIGITAL CHARACTERISTICS | 17 |
| SWITCHING CHARACTERISTICS - SERIAL AUDIO PORT | 18 |
| SWITCHING CHARACTERISTICS - I ² C MODE CONTROL PORT | 21 |
| SWITCHING CHARACTERISTICS - SPI CONTROL PORT | 22 |
| 4. TYPICAL CONNECTION DIAGRAM | 23 |
| 5. APPLICATIONS | 24 |
| 5.1 Stand-Alone Mode | 24 |
| 5.1.1 Recommended Power-Up Sequence | 24 |
| 5.1.2 Master/Slave Mode | 24 |
| 5.1.3 System Clocking | 24 |
| 5.1.3.1 Crystal Applications (XTI/XTO) | 24 |
| 5.1.3.2 Clock Ratio Selection | 25 |
| 5.1.4 16-Bit Auto-Dither | 26 |
| 5.1.5 Auto-Mute | 26 |
| 5.1.6 High Pass Filter | 26 |
| 5.1.7 Interpolation Filter | 26 |
| 5.1.8 Mode Selection & De-Emphasis | 26 |
| 5.1.9 Serial Audio Interface Format Selection | 26 |
| 5.2 Control Port Mode | 27 |
| 5.2.1 Recommended Power-Up Sequence - Access to Control Port Mode | 27 |
| 5.2.2 Master / Slave Mode Selection | 27 |
| 5.2.3 System Clocking | 27 |
| 5.2.3.1 Crystal Applications (XTI/XTO) | 27 |
| 5.2.3.2 Clock Ratio Selection | 28 |
| 5.2.4 Internal Digital Loopback | 30 |
| 5.2.5 Dither for 16-Bit Data | 30 |
| 5.2.6 Auto-Mute | 30 |
| 5.2.7 High Pass Filter and DC Offset Calibration | 30 |
| 5.2.8 Interpolation Filter | 31 |
| 5.2.9 De-Emphasis | 31 |
| 5.2.10 Oversampling Modes | 31 |
| 5.3 De-Emphasis Filter | 31 |
| 5.4 Analog Connections | 32 |
| 5.4.1 Input Connections | 32 |
| 5.4.2 Output Connections | 33 |
| 5.5 Mute Control | 34 |
| 5.6 Synchronization of Multiple Devices | 34 |
| 5.7 Grounding and Power Supply Decoupling | 34 |
| 6. CONTROL PORT INTERFACE | 35 |

| | |
|---|-----------|
| 6.1 SPI Mode | 35 |
| 6.2 I ² C Mode | 36 |
| 7. REGISTER QUICK REFERENCE | 37 |
| 8. REGISTER DESCRIPTION | 38 |
| 8.1 Mode Control 1 - Address 01h | 38 |
| 8.1.1 Functional Mode (Bits 7:6) | 38 |
| 8.1.2 Ratio Select (Bits 5:4) | 38 |
| 8.1.3 Master / Slave Mode (Bit 3) | 38 |
| 8.1.4 DAC Digital Interface Format (Bits 2:0) | 38 |
| 8.2 DAC Control - Address 02h | 39 |
| 8.2.1 Auto-Mute (Bit 7) | 39 |
| 8.2.2 Interpolation Filter Select (Bit 6) | 39 |
| 8.2.3 De-Emphasis Control (Bits 5:4) | 39 |
| 8.2.4 Soft Volume Ramp-Up After Error (Bit 3) | 40 |
| 8.2.5 Soft Ramp-Down Before Filter Mode Change (Bit 2) | 40 |
| 8.2.6 Invert Signal Polarity (Bits 1:0) | 40 |
| 8.3 DAC Volume & Mixing Control - Address 03h | 40 |
| 8.3.1 Channel B Volume = Channel A Volume (Bit 6) | 40 |
| 8.3.2 Soft Ramp or Zero Cross Enable (Bits 5:4) | 40 |
| 8.3.3 ATAPI Channel Mixing and Muting (Bits 3:0) | 41 |
| 8.4 DAC Channel A Volume Control - Address 04h | 42 |
| 8.5 DAC Channel B Volume Control - Address 05h | 42 |
| 8.5.1 Mute (Bit 7) | 42 |
| 8.5.2 Volume Control (Bits 6:0) | 42 |
| 8.6 ADC Control - Address 06h | 43 |
| 8.6.1 Dither for 16-Bit Data (Bit 5) | 43 |
| 8.6.2 ADC Digital Interface Format (Bit 4) | 43 |
| 8.6.3 ADC Channel A & B Mute (Bits 3:2) | 43 |
| 8.6.4 Channel A & B High Pass Filter Disable (Bits 1:0) | 43 |
| 8.7 Mode Control 2 - Address 07h | 43 |
| 8.7.1 Digital Loopback (Bit 4) | 43 |
| 8.7.2 AMUTEC = BMUTEC (Bit 3) | 43 |
| 8.7.3 Freeze (Bit 2) | 44 |
| 8.7.4 Control Port Enable (Bit 1) | 44 |
| 8.7.5 Power Down (Bit 0) | 44 |
| 8.8 Chip ID - Register 08h | 44 |
| 8.8.1 Chip ID (Bits 7:4) | 44 |
| 8.8.2 Chip Revision (Bits 3:0) | 44 |
| 9. PARAMETER DEFINITIONS | 45 |
| 10. PACKAGE DIMENSIONS | 46 |
| 11. APPENDIX | 47 |

1. PIN DESCRIPTIONS - SOFTWARE MODE


| Pin Name | # | Pin Description |
|--------------------------------------|-------------------------|--|
| XTO XTI | 1,2 | Crystal Connections (Input/Output) - I/O pins for an external crystal which may be used to generate MCLK. See “Crystal Applications (XTI/XTO)” on page 24 or “Crystal Applications (XTI/XTO)” on page 27. |
| MCLK | 3 | Master Clock (Input/Output) -Clock source for the delta-sigma modulators. See “Crystal Applications (XTI/XTO)” on page 24 or “Crystal Applications (XTI/XTO)” on page 27. |
| LRCK | 4 | Left Right Clock (Input/Output) - Determines which channel, Left or Right, is currently active on the serial audio data line. |
| SCLK | 5 | Serial Clock (Input/Output) - Serial clock for the serial audio interface. |
| SDOUT | 6 | Serial Audio Data Output (Output) - Output for two’s complement serial audio data. |
| SDIN | 7 | Serial Audio Data Input (Input) - Input for two’s complement serial audio data. |
| DGND | 8 | Digital Ground (Input) - Ground reference for the internal digital section. |
| VD | 9 | Digital Power (Input) - Positive power for the internal digital section. |
| VL | 10 | Logic Power (Input) - Positive power for the digital input/output interface. |
| SCL/CCLK | 11 | Serial Control Port Clock (Input) - Serial clock for the serial control port. |
| SDA/CDIN | 12 | Serial Control Data (Input/Output) - SDA is a data I/O in I ² C mode. CDIN is the input data line for the control port interface in SPI mode. |
| AD0/ $\overline{\text{CS}}$ | 13 | Address Bit 0 (I²C) / Control Port Chip Select (SPI) (Input) - AD0 is a chip address pin in I ² C mode; $\overline{\text{CS}}$ is the chip select signal for SPI format. |
| $\overline{\text{RST}}$ | 14 | Reset (Input) - The device enters a low power mode when this pin is driven low. |
| VCOM | 15 | Common Mode Voltage (Output) - Filter connection for internal common mode voltage. |
| AINA- AINA+ AINB+ AINB- | 16, 17, 18, 19 | Differential Analog Input (Input) - The full scale differential input signals are presented to the delta-sigma modulators. The full scale level is specified in the ADC Analog Characteristics specification table. |
| VA | 20 | Analog Power (Input) - Positive power for the internal analog section. |
| AGND | 21 | Analog Ground (Input) - Ground reference for the internal analog section. |
| FILT+ | 22 | Positive Voltage Reference (Output) - Positive reference voltage for the internal sampling circuits. |
| $\overline{\text{AMUTE C}}$ | 23 | Channel A Mute Control (Output) - This pin is active during power-up initialization, reset, muting, when master clock to left/right clock frequency ratio is incorrect, or power-down. |
| AOUTA- AOUTA+ AOUTB+ AOUTB- | 24, 25, 26, 27 | Differential Analog Audio Output (Output) - The full scale differential output level is specified in the DAC Analog Characteristics specification table. |
| $\overline{\text{BMUTE C}}$ | 28 | Channel B Mute Control (Output) - This pin is active during power-up initialization, reset, muting, when master clock to left/right clock frequency ratio is incorrect, or power-down. |

2. PIN DESCRIPTIONS - STAND-ALONE MODE


| Pin Name | # | Pin Description |
|--------------------------------------|-------------------------|---|
| XTO XTI | 1,2 | Crystal Connections (<i>Input/Output</i>) - I/O pins for an external crystal which may be used to generate the master clock. See “Crystal Applications (XTI/XTO)” on page 24 or “Crystal Applications (XTI/XTO)” on page 27. |
| MCLK | 3 | Master Clock (<i>Input/Output</i>) - Clock source for the delta-sigma modulators. See “Crystal Applications (XTI/XTO)” on page 24 or “Crystal Applications (XTI/XTO)” on page 27. |
| LRCK | 4 | Left Right Clock (<i>Input/Output</i>) - Determines which channel, Left or Right, is currently active on the serial audio data line. |
| SCLK | 5 | Serial Clock (<i>Input/Output</i>) - Serial clock for the serial audio interface. |
| SDOUT (M/S) | 6 | Serial Audio Data Output (<i>Output</i>) - Output for two’s complement serial audio data. This pin must be pulled-up or pulled-down to select Master or Slave Mode. See “Master/Slave Mode” on page 24. |
| SDIN | 7 | Serial Audio Data Input (<i>Input</i>) - Input for two’s complement serial audio data. |
| DGND | 8 | Digital Ground (<i>Input</i>) - Ground reference for the internal digital section. |
| VD | 9 | Digital Power (<i>Input</i>) - Positive power for the internal digital section. |
| VL | 10 | Logic Power (<i>Input</i>) - Positive power for the digital input/output interface. |
| M0 | 11 | Mode Select 0 (<i>Input</i>) - In conjunction with M1, selects operating mode. Functionality is described in the Hardware Mode Speed Configuration table. |
| M1 | 12 | Mode Select 1 (<i>Input</i>) - In conjunction with M0, selects operating mode. Functionality is described in the Hardware Mode Speed Configuration table. |
| I2S/LJ | 13 | Serial Audio Interface Select (<i>Input</i>) - Selects either the left-justified or I ² S format for the Serial Audio Interface. |
| RST | 14 | Reset (<i>Input</i>) - The device enters a low power mode when this pin is driven low. |
| VCOM | 15 | Common Mode Voltage (<i>Output</i>) - Filter connection for internal common mode voltage. |
| AINA- AINA+ AINB+ AINB- | 16, 17, 18, 19 | Differential Analog Input (<i>Input</i>) - The full scale differential input signals are presented to the delta-sigma modulators. The full scale level is specified in the ADC Analog Characteristics specification table. |
| VA | 20 | Analog Power (<i>Input</i>) - Positive power for the internal analog section. |
| AGND | 21 | Analog Ground (<i>Input</i>) - Ground reference for the internal analog section. |
| FILT+ | 22 | Positive Voltage Reference (<i>Output</i>) - Positive reference voltage for the internal sampling circuits. |
| AMUTE $\overline{\text{C}}$ | 23 | Channel A Mute Control (<i>Output</i>) - This pin is active during power-up initialization, reset, muting, when master clock to left/right clock frequency ratio is incorrect, or power-down. |
| AOUTA- AOUTA+ AOUTB+ AOUTB- | 24, 25, 26, 27 | Differential Analog Audio Output (<i>Output</i>) - The full scale differential output level is specified in the Analog Characteristics specification table. |
| BMUTE $\overline{\text{C}}$ | 28 | Channel B Mute Control (<i>Output</i>) - This pin is active during power-up initialization, reset, muting, when master clock to left/right clock frequency ratio is incorrect, or power-down. |

3. CHARACTERISTICS AND SPECIFICATIONS

(All Min/Max characteristics and specifications are guaranteed over the Specified Operating Conditions. Typical performance characteristics and specifications are derived from measurements taken at nominal supply voltages and $T_A = 25^\circ\text{C}$.)

SPECIFIED OPERATING CONDITIONS (AGND = 0 V; all voltages with respect to ground.)

| Parameters | | Symbol | Min | Nom | Max | Units |
|---|------------------|--------|------|-----|------|------------------|
| DC Power Supplies: | Positive Analog | VA | 4.75 | 5.0 | 5.25 | V |
| | Positive Digital | VD | 3.1 | 3.3 | 5.25 | V |
| | Positive Logic | VL | 2.37 | 3.3 | 5.25 | V |
| Ambient Operating Temperature (Power Applied) | | | | | | |
| | Commercial Grade | T_A | -10 | - | +70 | $^\circ\text{C}$ |
| | Automotive Grade | | -40 | - | +85 | $^\circ\text{C}$ |

ABSOLUTE MAXIMUM RATINGS (GND = 0 V, All voltages with respect to ground.) (Note 1)

| Parameter | Symbol | Min | Typ | Max | Units | |
|---|-------------------|---------|------|----------|------------------|---|
| DC Power Supplies: | Analog | VA | -0.3 | - | +6.0 | V |
| | Logic | VL | -0.3 | - | +6.0 | V |
| | Digital | VD | -0.3 | - | +6.0 | V |
| Input Current | (Note 2) I_{in} | - | - | ± 10 | mA | |
| Analog Input Voltage | V_{IN} | GND-0.3 | - | VA+0.3 | V | |
| Digital Input Voltage | V_{IND} | -0.3 | - | VL+0.3 | V | |
| Ambient Operating Temperature (Power Applied) | T_A | -50 | - | +95 | $^\circ\text{C}$ | |
| Storage Temperature | T_{stg} | -65 | - | +150 | $^\circ\text{C}$ | |

- Notes:
- Operation beyond these limits may result in permanent damage to the device. Normal operation is not guaranteed at these extremes.
 - Any pin except supplies. Transient currents of up to ± 100 mA on the analog input pins will not cause SCR latch-up.

DAC ANALOG CHARACTERISTICS - COMMERCIAL GRADE (Notes 3 to 7)

| Parameter | | | Symbol | Min | Typ | Max | Unit |
|---|---------|------------|--------------------|---------|---------|---------|------------|
| Dynamic Performance | | | | | | | |
| Dynamic Range | 24-Bits | A-Weighted | | 108 | 114 | - | dB |
| | | unweighted | | 105 | 111 | - | dB |
| | 16-Bits | unweighted | | - | 94 | - | dB |
| Total Harmonic Distortion + Noise | | 0 dB | THD+N | - | -100 | -94 | dB |
| | | -20 dB | | - | -91 | - | dB |
| | | -60 dB | | - | -51 | -45 | dB |
| Idle Channel Noise / Signal-to-Noise Ratio | | | | - | 114 | - | dB |
| Interchannel Isolation | | | (1 kHz) | - | 100 | - | dB |
| DC Accuracy | | | | | | | |
| Interchannel Gain Mismatch | | | ICGM | - | 0.1 | - | dB |
| Gain Drift | | | | - | 100 | - | ppm/°C |
| Analog Output Characteristics and Specifications | | | | | | | |
| Full Scale Differential Output Voltage | | | V_{FS} | 0.91xVA | 0.96xVA | 1.01xVA | Vpp |
| Output Resistance | | | (note 7) Z_{out} | - | 100 | - | Ω |
| Minimum AC-Load Resistance | | | R_L | - | 3 | - | k Ω |
| Maximum Load Capacitance | | | C_L | - | 100 | - | pF |

- Notes:
- One-half LSB of Triangular PDF dither is added to data.
 - Performance measurements taken with a full-scale 997 Hz sine wave under Test load $R_L = 3\text{ k}\Omega$, $C_L = 10\text{ pF}$
 - Measurement bandwidth is 10 Hz to 20 kHz.
 - Logic "0" = GND = 0V; Logic "1" = VL; VL = VA unless otherwise noted.
 - V_{FS} is tested under load R_L but does not include attenuation due to Z_{OUT}

DAC ANALOG CHARACTERISTICS - AUTOMOTIVE GRADE (Notes 3 to 7)

| Parameter | | Symbol | Min | Typ | Max | Unit | |
|---|---------|-----------------------|---------|---------|---------|-----------------|----|
| Dynamic Performance | | | | | | | |
| Dynamic Range | 24-Bits | A-Weighted | 106 | 114 | - | dB | |
| | | unweighted | 103 | 111 | - | dB | |
| | 16-Bits | unweighted | - | 94 | - | dB | |
| Total Harmonic Distortion + Noise | | 0 dB | THD+N | - | -100 | -92 | dB |
| | | -20 dB | | - | -91 | - | dB |
| | | -60 dB | | - | -51 | -43 | dB |
| Idle Channel Noise / Signal-to-Noise Ratio | | | - | 114 | - | dB | |
| Interchannel Isolation | | (1 kHz) | - | 100 | - | dB | |
| DC Accuracy | | | | | | | |
| Interchannel Gain Mismatch | | ICGM | - | 0.1 | - | dB | |
| Gain Drift | | | - | 100 | - | ppm/°C | |
| Analog Output Characteristics and Specifications | | | | | | | |
| Full Scale Differential Output Voltage | | V_{FS} | 0.91xVA | 0.96xVA | 1.01xVA | V _{pp} | |
| Output Resistance | | (note 7) Z_{out} | - | 100 | - | Ω | |
| Minimum AC-Load Resistance | | R_L | - | 3 | - | k Ω | |
| Maximum Load Capacitance | | C_L | - | 100 | - | pF | |

DAC COMBINED INTERPOLATION & ON-CHIP ANALOG FILTER RESPONSE

(Note 12)

| Parameter | Fast Roll-Off | | | Unit | |
|---|--------------------|--------|-------|-------|----|
| | Min | Typ | Max | | |
| Single Speed Mode - 48 kHz | | | | | |
| Passband (Note 9) | to -0.01 dB corner | 0 | - | .454 | Fs |
| | to -3 dB corner | 0 | - | .499 | Fs |
| Frequency Response 10 Hz to 20 kHz | -0.01 | - | +0.01 | dB | |
| StopBand | .547 | - | - | Fs | |
| StopBand Attenuation (Note 10) | 90 | - | - | dB | |
| Group Delay | - | 12/Fs | - | s | |
| De-emphasis Error (Note 11) (Relative to 1kHz) | Fs = 32 kHz | - | - | ±0.23 | dB |
| | Fs = 44.1 kHz | - | - | ±0.14 | dB |
| | Fs = 48 kHz | - | - | ±0.09 | dB |
| Double Speed Mode - 96 kHz | | | | | |
| Passband (Note 9) | to -0.01 dB corner | 0 | - | .430 | Fs |
| | to -3 dB corner | 0 | - | .499 | Fs |
| Frequency Response 10 Hz to 20 kHz | -0.01 | - | 0.01 | dB | |
| StopBand | .583 | - | - | Fs | |
| StopBand Attenuation (Note 10) | 80 | - | - | dB | |
| Group Delay | - | 4.6/Fs | - | s | |
| Quad Speed Mode - 192 kHz | | | | | |
| Passband (Note 9) | to -0.01 dB corner | 0 | - | .105 | Fs |
| | to -3 dB corner | 0 | - | .490 | Fs |
| Frequency Response 10 Hz to 20 kHz | -0.01 | - | 0.01 | dB | |
| StopBand | .635 | - | - | Fs | |
| StopBand Attenuation (Note 10) | 90 | - | - | dB | |
| Group Delay | - | 4.7/Fs | - | s | |

DAC COMBINED INTERPOLATION & ON-CHIP ANALOG FILTER RESPONSE

(cont) (Note 12)

| Parameter | Slow Roll-Off (Note 8) | | | Unit | |
|--|------------------------|--------|-------|-------|----|
| | Min | Typ | Max | | |
| Single Speed Mode - 48 kHz | | | | | |
| Passband (Note 9) | to -0.01 dB corner | 0 | - | 0.417 | Fs |
| | to -3 dB corner | 0 | - | 0.499 | Fs |
| Frequency Response 10 Hz to 20 kHz | -0.01 | - | +0.01 | dB | |
| StopBand | .583 | - | - | Fs | |
| StopBand Attenuation (Note 10) | 64 | - | - | dB | |
| Group Delay | - | 6.5/Fs | - | s | |
| De-emphasis Error (Note 11) (Relative to 1 kHz) | Fs = 32 kHz | - | - | ±0.23 | dB |
| | Fs = 44.1 kHz | - | - | ±0.14 | dB |
| | Fs = 48 kHz | - | - | ±0.09 | dB |
| Double Speed Mode - 96 kHz | | | | | |
| Passband (Note 9) | to -0.01 dB corner | 0 | - | .296 | Fs |
| | to -3 dB corner | 0 | - | .499 | Fs |
| Frequency Response 10 Hz to 20 kHz | -0.01 | - | 0.01 | dB | |
| StopBand | .792 | - | - | Fs | |
| StopBand Attenuation (Note 10) | 70 | - | - | dB | |
| Group Delay | - | 3.9/Fs | - | s | |
| Quad Speed Mode - 192 kHz | | | | | |
| Passband (Note 9) | to -0.01 dB corner | 0 | - | .104 | Fs |
| | to -3 dB corner | 0 | - | .481 | Fs |
| Frequency Response 10 Hz to 20 kHz | -0.01 | - | 0.01 | dB | |
| StopBand | .868 | - | - | Fs | |
| StopBand Attenuation (Note 10) | 75 | - | - | dB | |
| Group Delay | - | 4.2/Fs | - | s | |

- Notes:
8. Slow Roll-Off interpolation filter is only available in control port mode.
 9. Response is clock dependent and will scale with Fs. Note that the response plots (Figures 21 to 44) have been normalized to Fs and can be de-normalized by multiplying the X-axis scale by Fs.
 10. Single and Double Speed Mode Measurement Bandwidth is from stopband to 3 Fs.
Quad Speed Mode Measurement Bandwidth is from stopband to 1.34 Fs.
 11. De-emphasis is available only in Single Speed Mode; Only 44.1 kHz De-emphasis is available in Stand-Alone Mode.
 12. Plots of this data are contained in the "Appendix" on page 47. See Figure 21 through Figure 44.

ADC ANALOG CHARACTERISTICS - COMMERCIAL GRADE

Measurement Bandwidth is 10 Hz to 20 kHz unless otherwise specified. Input is 1 kHz sine wave.

| Parameter | Symbol | Min | Typ | Max | Unit |
|--|-----------------------------|---------|---------|---------|--------|
| Single Speed Mode Fs = 48 kHz | | | | | |
| Dynamic Range | A-weighted | 108 | 114 | - | dB |
| | unweighted | 105 | 111 | - | dB |
| Total Harmonic Distortion + Noise (Note 13) | THD+N | - | -100 | -94 | dB |
| | -1 dB | - | -91 | - | dB |
| | -20 dB | - | -51 | - | dB |
| | -60 dB | - | - | - | dB |
| Double Speed Mode Fs = 96 kHz | | | | | |
| Dynamic Range | A-weighted | 108 | 114 | - | dB |
| | unweighted | 105 | 111 | - | dB |
| | 40 kHz bandwidth unweighted | - | 108 | - | dB |
| Total Harmonic Distortion + Noise (Note 13) | THD+N | - | -100 | -94 | dB |
| | -1 dB | - | -91 | - | dB |
| | -20 dB | - | -51 | - | dB |
| | -60 dB | - | - | - | dB |
| | 40 kHz bandwidth -1 dB | - | -97 | - | dB |
| Quad Speed Mode Fs = 192 kHz | | | | | |
| Dynamic Range | A-weighted | 108 | 114 | - | dB |
| | unweighted | 105 | 111 | - | dB |
| | 40 kHz bandwidth unweighted | - | 108 | - | dB |
| Total Harmonic Distortion + Noise (Note 13) | THD+N | - | -100 | -94 | dB |
| | -1 dB | - | -91 | - | dB |
| | -20 dB | - | -51 | - | dB |
| | -60 dB | - | - | - | dB |
| | 40 kHz bandwidth -1 dB | - | -97 | - | dB |
| Dynamic Performance for All Modes | | | | | |
| Interchannel Isolation | | - | 110 | - | dB |
| Interchannel Phase Deviation | | - | 0.0001 | - | Degree |
| DC Accuracy | | | | | |
| Interchannel Gain Mismatch | | - | 0.1 | - | dB |
| Gain Error | | | - | ±5 | % |
| Gain Drift | | - | ±100 | - | ppm/°C |
| Offset Error | HPF enabled | - | 0 | - | LSB |
| | HPF disabled | - | 100 | - | LSB |
| Analog Input Characteristics | | | | | |
| Full-scale Input Voltage | | 1.07xVA | 1.13xVA | 1.19xVA | Vpp |
| Input Impedance (Differential) | (Note 14) | 37 | - | - | kΩ |
| Common Mode Rejection Ratio | CMRR | - | 82 | - | dB |

Notes: 13. Referred to the typical full-scale input voltage.

Notes: 14. Measured between AIN+ and AIN-

ADC ANALOG CHARACTERISTICS - AUTOMOTIVE GRADE

Measurement Bandwidth is 10 Hz to 20 kHz unless otherwise specified. Input is 1 kHz sine wave.)

| Parameter | Symbol | Min | Typ | Max | Unit | | | | |
|---|-----------------------------|---------|---------|---------|--------|-------|------|-----|----|
| Single Speed Mode Fs = 48 kHz | | | | | | | | | |
| Dynamic Range | A-weighted | 106 | 114 | - | dB | | | | |
| | unweighted | 103 | 111 | - | dB | | | | |
| Total Harmonic Distortion + Noise | (Note 15) | THD+N | | | | | | | |
| | -1 dB | | | | | - | -100 | -92 | dB |
| | -20 dB | | | | | - | -91 | - | dB |
| | -60 dB | | | | | - | -51 | - | dB |
| Double Speed Mode Fs = 96 kHz | | | | | | | | | |
| Dynamic Range | A-weighted | 106 | 114 | - | dB | | | | |
| | unweighted | 103 | 111 | - | dB | | | | |
| | 40 kHz bandwidth unweighted | - | 108 | - | dB | | | | |
| Total Harmonic Distortion + Noise | (Note 15) | THD+N | | | | | | | |
| | -1 dB | | | | | - | -100 | -92 | dB |
| | -20 dB | | | | | - | -91 | - | dB |
| | -60 dB | | | | | - | -51 | - | dB |
| | 40 kHz bandwidth | | | | | -1 dB | - | -97 | - |
| Quad Speed Mode Fs = 192 kHz | | | | | | | | | |
| Dynamic Range | A-weighted | 106 | 114 | - | dB | | | | |
| | unweighted | 103 | 111 | - | dB | | | | |
| | 40 kHz bandwidth unweighted | - | 108 | - | dB | | | | |
| Total Harmonic Distortion + Noise | (Note 15) | THD+N | | | | | | | |
| | -1 dB | | | | | - | -100 | -92 | dB |
| | -20 dB | | | | | - | -91 | - | dB |
| | -60 dB | | | | | - | -51 | - | dB |
| | 40 kHz bandwidth | | | | | -1 dB | - | -97 | - |
| Dynamic Performance for All Modes | | | | | | | | | |
| Interchannel Isolation | | - | 110 | - | dB | | | | |
| Interchannel Phase Deviation | | - | 0.0001 | - | Degree | | | | |
| DC Accuracy | | | | | | | | | |
| Interchannel Gain Mismatch | | - | 0.1 | - | dB | | | | |
| Gain Error | | | - | ±5 | % | | | | |
| Gain Drift | | - | ±100 | - | ppm/°C | | | | |
| Offset Error | HPF enabled | - | 0 | - | LSB | | | | |
| | HPF disabled | - | 100 | - | LSB | | | | |
| Analog Input Characteristics | | | | | | | | | |
| Full-scale Input Voltage | | 1.07xVA | 1.13xVA | 1.19xVA | Vpp | | | | |
| Input Impedance (Differential) | (Note 16) | 37 | - | - | kΩ | | | | |
| Common Mode Rejection Ratio | CMRR | - | 82 | - | dB | | | | |

Notes: 15. Referred to the typical full-scale input voltage.

Notes: 16. Measured between AIN+ and AIN-

ADC DIGITAL FILTER CHARACTERISTICS (Note 19)

| Parameter | Symbol | Min | Typ | Max | Unit |
|---|----------|------|---------------------|--------|------|
| Single Speed Mode | | | | | |
| Passband (-0.1 dB). (Note 17) | | 0 | - | 0.47 | Fs |
| Passband Ripple. | | - | - | ±0.035 | dB |
| Stopband. (Note 17) | | 0.58 | - | - | Fs |
| Stopband Attenuation. | | -95 | - | - | dB |
| Group Delay. | t_{gd} | - | 12/Fs | - | s |
| Double Speed Mode | | | | | |
| Passband (-0.1 dB). (Note 17) | | 0 | - | 0.45 | Fs |
| Passband Ripple. | | - | - | ±0.035 | dB |
| Stopband. (Note 17) | | 0.68 | - | - | Fs |
| Stopband Attenuation. | | -92 | - | - | dB |
| Group Delay. | t_{gd} | - | 9/Fs | - | s |
| Quad Speed Mode | | | | | |
| Passband (-0.1 dB). (Note 17) | | 0 | - | 0.24 | Fs |
| Passband Ripple. | | - | - | ±0.035 | dB |
| Stopband. (Note 17) | | 0.78 | - | - | Fs |
| Stopband Attenuation. | | -97 | - | - | dB |
| Group Delay. | t_{gd} | - | 5/Fs | - | s |
| High Pass Filter Characteristics | | | | | |
| Frequency Response -3.0 dB. | | - | 1 | - | Hz |
| -0.13 dB. (Note 18) | | - | 20 | - | Hz |
| Phase Deviation @ 20 Hz. (Note 18) | | - | 10 | - | Deg |
| Passband Ripple. | | - | - | 0 | dB |
| Filter Settling Time. | | | 10 ⁵ /Fs | | s |

Notes: 17. The filter frequency response scales precisely with Fs.

18. Response shown is for Fs equal to 48 kHz. Filter characteristics scale with Fs.

19. Plots of this data are contained in the "Appendix" on page 47. See Figure 45 through Figure 56.

DC ELECTRICAL CHARACTERISTICS

(GND = 0 V, all voltages with respect to ground. MCLK=12.288 MHz; Master Mode)

| Parameter | Symbol | Min | Typ | Max | Unit | |
|---|---|--|-------------|------------------|-----------------|----------------|
| Power Supply | | | | | | |
| Power Supply Current (Normal Operation) | VA VL, VD = 5 V VL, VD = 3.3 V | I _A I _D I _D | - - - | 45 41.5 24 | 53 49 28 | mA mA mA |
| Power Supply Current (Power-Down Mode)(Note 20) | VA VL, VD=5 V | I _A I _D | - - | 0.025 1.76 | - - | mA mA |
| Power Consumption (Normal Operation) | VL, VD=5 V VL, VD = 3.3 V (Power-Down Mode) | - - - | - - - | 433 305 9 | 510 358 - | mW mW mW |
| Power Supply Rejection Ratio (1 kHz) (Note 21) | PSRR | - | 60 | - | - | dB |
| Common Mode | | | | | | |
| Nominal Common Mode Voltage | VCOM | - | 0.48xVA | - | - | VDC |
| Maximum DC Current Source/Sink from VCOM | | - | 1 | - | - | μA |
| VCOM Output Impedance | | - | 25 | - | - | kΩ |
| FILT+ | | | | | | |
| FILT+ Nominal Voltage | FILT+ | - | VA | - | - | VDC |
| MUTEC | | | | | | |
| MUTEC Low-Level Output Voltage | | - | 0 | - | - | V |
| MUTEC High-Level Output Voltage | | - | VA | - | - | V |
| Maximum MUTEC Drive Current | | - | 3 | - | - | mA |

Notes: 20. Power Down Mode is defined as $\overline{\text{RST}} = \text{Low}$ with all clocks and data lines held static.

21. Valid with the recommended capacitor values on FILT+ and VCOM as shown in the Typical Connection Diagram.

DIGITAL CHARACTERISTICS

| Parameter | Symbol | Min | Typ | Max | Units |
|--|-----------------|----------|-----|-----|-------|
| High-Level Input Voltage (% of VL) | V _{IH} | 70% | - | - | V |
| Low-Level Input Voltage (% of VL) | V _{IL} | - | - | 30% | V |
| High-Level Output Voltage at I _o = 2 mA | V _{OH} | VL - 1.0 | - | - | V |
| Low-Level Output Voltage at I _o = 2 mA | V _{OL} | - | - | 0.4 | V |
| Input Leakage Current | I _{in} | - | - | ±10 | μA |

SWITCHING CHARACTERISTICS - SERIAL AUDIO PORT (Logic "0" = GND = 0 V;
Logic "1" = VL, C_L = 20 pF)

| Parameter | | Symbol | Min | Typ | Max | Unit |
|--|-------------------|--------------------|----------------------|-----|--------|------|
| Sample Rate | Single Speed Mode | F _s | 4 | - | 50 | kHz |
| | Double Speed Mode | F _s | 50 | - | 100 | kHz |
| | Quad Speed Mode | F _s | 100 | - | 200 | kHz |
| MCLK Specifications | | | | | | |
| MCLK Frequency (note 22) | Stand-Alone Mode | f _{mclk} | 1.024 | - | 25.600 | MHz |
| | Control Port Mode | f _{mclk} | 1.024 | - | 51.200 | MHz |
| MCLK Input Pulse Width High/Low (note 22) | Stand-Alone Mode | t _{clkhl} | 16 | - | - | ns |
| | Control Port Mode | t _{clkhl} | 8 | - | - | ns |
| MCLK Output Duty Cycle | | | 45 | 50 | 55 | % |
| Master Mode | | | | | | |
| LRCK Duty Cycle | | | - | 50 | - | % |
| SCLK Duty Cycle | | | - | 50 | - | % |
| SCLK falling to LRCK edge | | t _{slr} | -10 | - | 10 | ns |
| SCLK falling to SDOOUT valid | | t _{sdo} | 0 | - | 32 | ns |
| SDIN valid to SCLK rising setup time | | t _{sdis} | 16 | - | - | ns |
| SCLK rising to SDIN hold time | | t _{sdiH} | 20 | - | - | ns |
| Slave Mode | | | | | | |
| LRCK Duty Cycle | | | 40 | 50 | 60 | % |
| SCLK Period (note 22) | Single Speed Mode | t _{sclkw} | $\frac{1}{(128)F_s}$ | - | - | s |
| | Double Speed Mode | t _{sclkw} | $\frac{1}{(128)F_s}$ | - | - | s |
| | Quad Speed Mode | t _{sclkw} | $\frac{1}{(64)F_s}$ | - | - | s |
| SCLK Pulse Width High | | t _{sclkh} | 30 | - | - | ns |
| SCLK Pulse Width Low | | t _{sclkl} | 48 | - | - | ns |
| SCLK falling to LRCK edge | | t _{slr} | -10 | - | 10 | ns |
| SCLK falling to SDOOUT valid | | t _{sdo} | 0 | - | 32 | ns |
| SDIN valid to SCLK rising setup time | | t _{sdis} | 16 | - | - | ns |
| SCLK rising to SDIN hold time | | t _{sdiH} | 20 | - | - | ns |
| Crystal Oscillator Specifications (XTI/XTO) | | | | | | |
| Crystal Frequency Range | | f _{osc} | 16.384 | - | 25.600 | MHz |

Notes: 22. In Control Port Mode, the Ratio[1:0] bits must be configured according to tables 8 and 9 on pages 28 and 29.

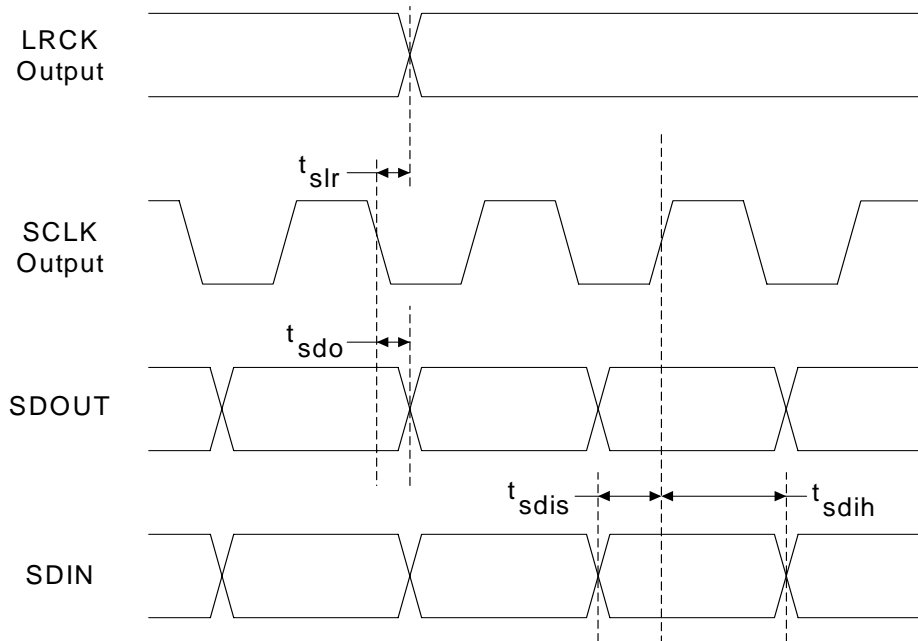


Figure 1. Master Mode Serial Audio Port Timing

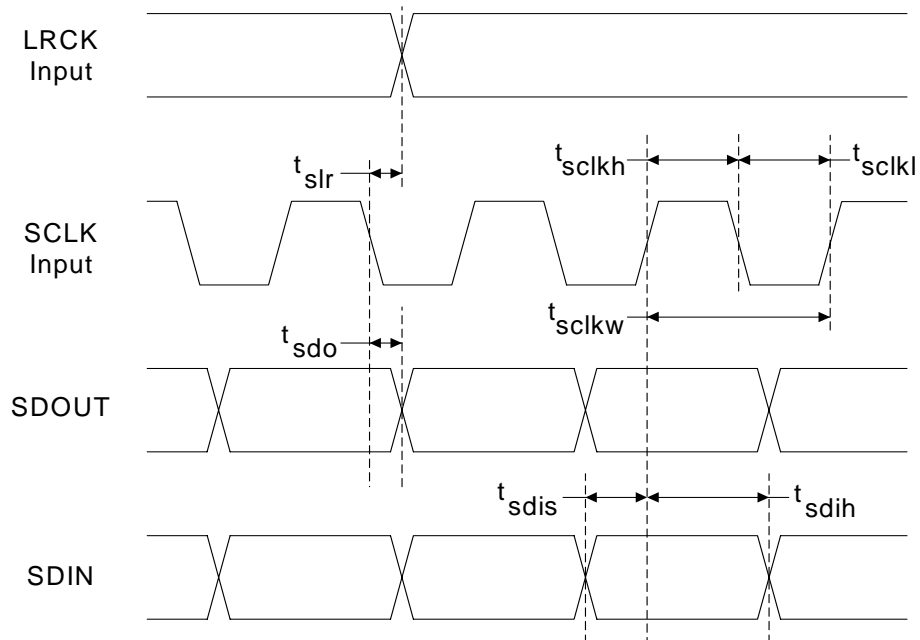


Figure 2. Slave Mode Serial Audio Port Timing

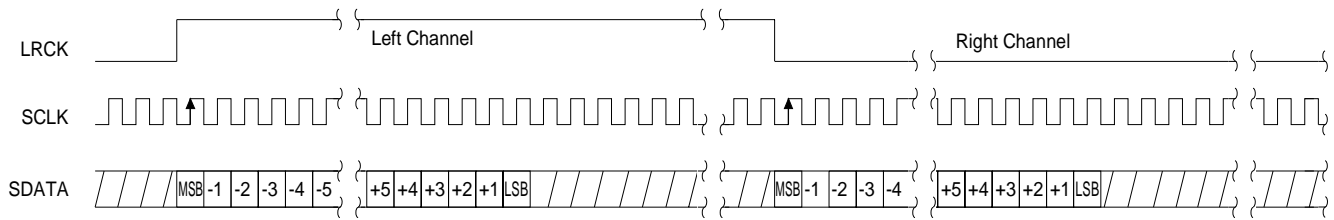


Figure 3. Format 0, Left Justified up to 24-Bit Data

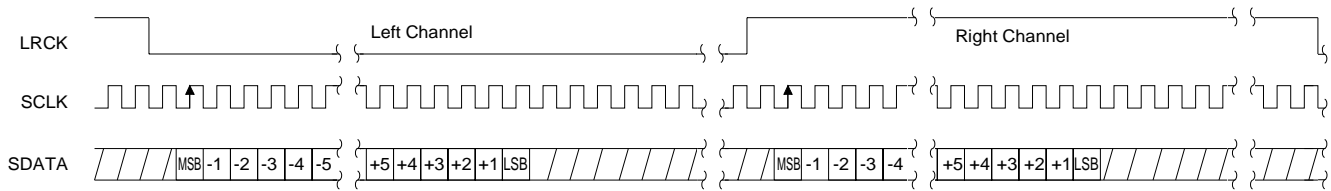


Figure 4. Format 1, I²S up to 24-Bit Data

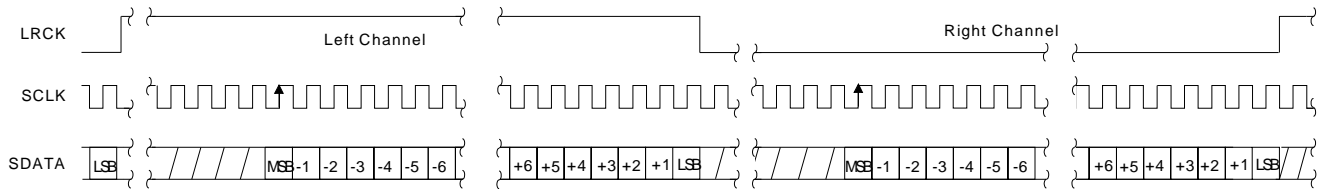


Figure 5. Format 2, Right Justified 16-Bit Data. (Available in Control Port Mode only)
Format 3, Right Justified 24-Bit Data. (Available in Control Port Mode only)
Format 4, Right Justified 20-Bit Data. (Available in Control Port Mode only)
Format 5, Right Justified 18-Bit Data. (Available in Control Port Mode only)

SWITCHING CHARACTERISTICS - I²C MODE CONTROL PORT

(Inputs: logic 0 = AGND, logic 1 = VL)

| Parameter | Symbol | Min | Max | Unit |
|---|------------|-----|-----|---------|
| I²C Mode | | | | |
| SCL Clock Frequency. | f_{scl} | - | 100 | KHz |
| \overline{RST} Rising Edge to Start. | t_{irs} | 500 | - | ns |
| Bus Free Time Between Transmissions. | t_{buf} | 4.7 | - | μ s |
| Start Condition Hold Time (prior to first clock pulse). | t_{hdst} | 4.0 | - | μ s |
| Clock Low time. | t_{low} | 4.7 | - | μ s |
| Clock High Time. | t_{high} | 4.0 | - | μ s |
| Setup Time for Repeated Start Condition. | t_{sust} | 4.7 | - | μ s |
| SDA Hold Time from SCL Falling. (Note 23) | t_{hdd} | 0 | - | μ s |
| SDA Setup time to SCL Rising. | t_{sud} | 250 | - | ns |
| Rise Time of Both SDA and SCL Lines. | t_r | - | 1 | μ s |
| Fall Time of Both SDA and SCL Lines. | t_f | - | 300 | ns |
| Setup Time for Stop Condition. | t_{susp} | 4.7 | - | μ s |

Notes: 23. Data must be held for sufficient time to bridge the 300 ns transition time of SCL.

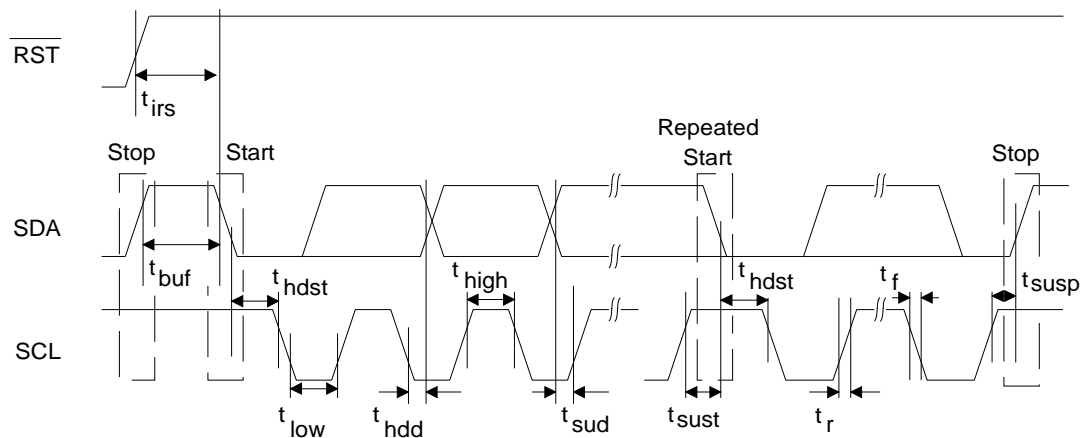


Figure 6. I²C Mode Control Port Timing

SWITCHING CHARACTERISTICS - SPI CONTROL PORT

(Inputs: logic 0 = AGND, logic 1 = VL)

| Parameter | Symbol | Min | Max | Unit |
|--|------------|-----|-----|---------|
| SPI Mode | | | | |
| CCLK Clock Frequency. | f_{sclk} | - | 6 | MHz |
| \overline{RST} Rising Edge to \overline{CS} Falling. | t_{srs} | 500 | - | ns |
| CCLK Edge to \overline{CS} Falling. (Note 24) | t_{spi} | 500 | - | ns |
| \overline{CS} High Time Between Transmissions. | t_{csh} | 1.0 | - | μ s |
| \overline{CS} Falling to CCLK Edge. | t_{css} | 20 | - | ns |
| CCLK Low Time. | t_{scl} | 82 | - | ns |
| CCLK High Time. | t_{sch} | 82 | - | ns |
| CDIN to CCLK Rising Setup Time. | t_{dsu} | 40 | - | ns |
| CCLK Rising to DATA Hold Time. (Note 25) | t_{dh} | 15 | - | ns |
| Rise Time of CCLK and CDIN. (Note 26) | t_{r2} | - | 100 | ns |
| Fall Time of CCLK and CDIN. (Note 26) | t_{f2} | - | 100 | ns |

Notes: 24. t_{spi} only needed before first falling edge of \overline{CS} after \overline{RST} rising edge. $t_{spi} = 0$ at all other times.

25. Data must be held for sufficient time to bridge the transition time of CCLK.

26. For $F_{SCK} < 1$ MHz

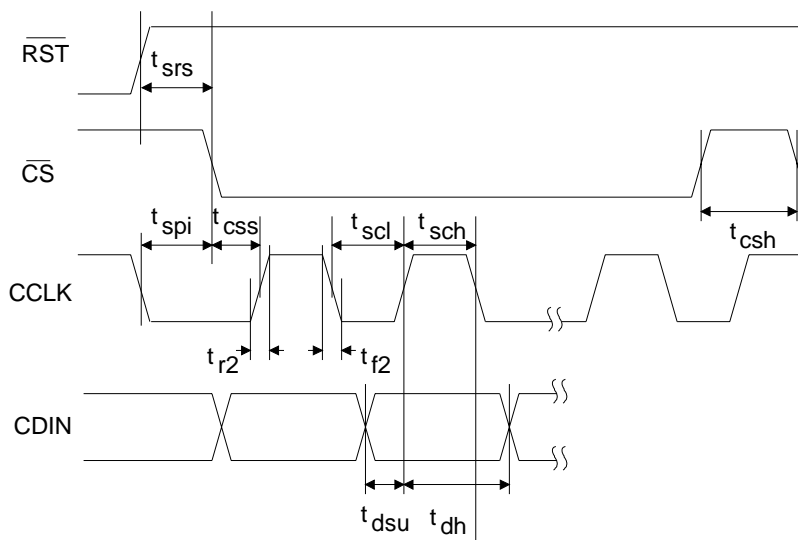


Figure 7. SPI Control Port Timing

4. TYPICAL CONNECTION DIAGRAM

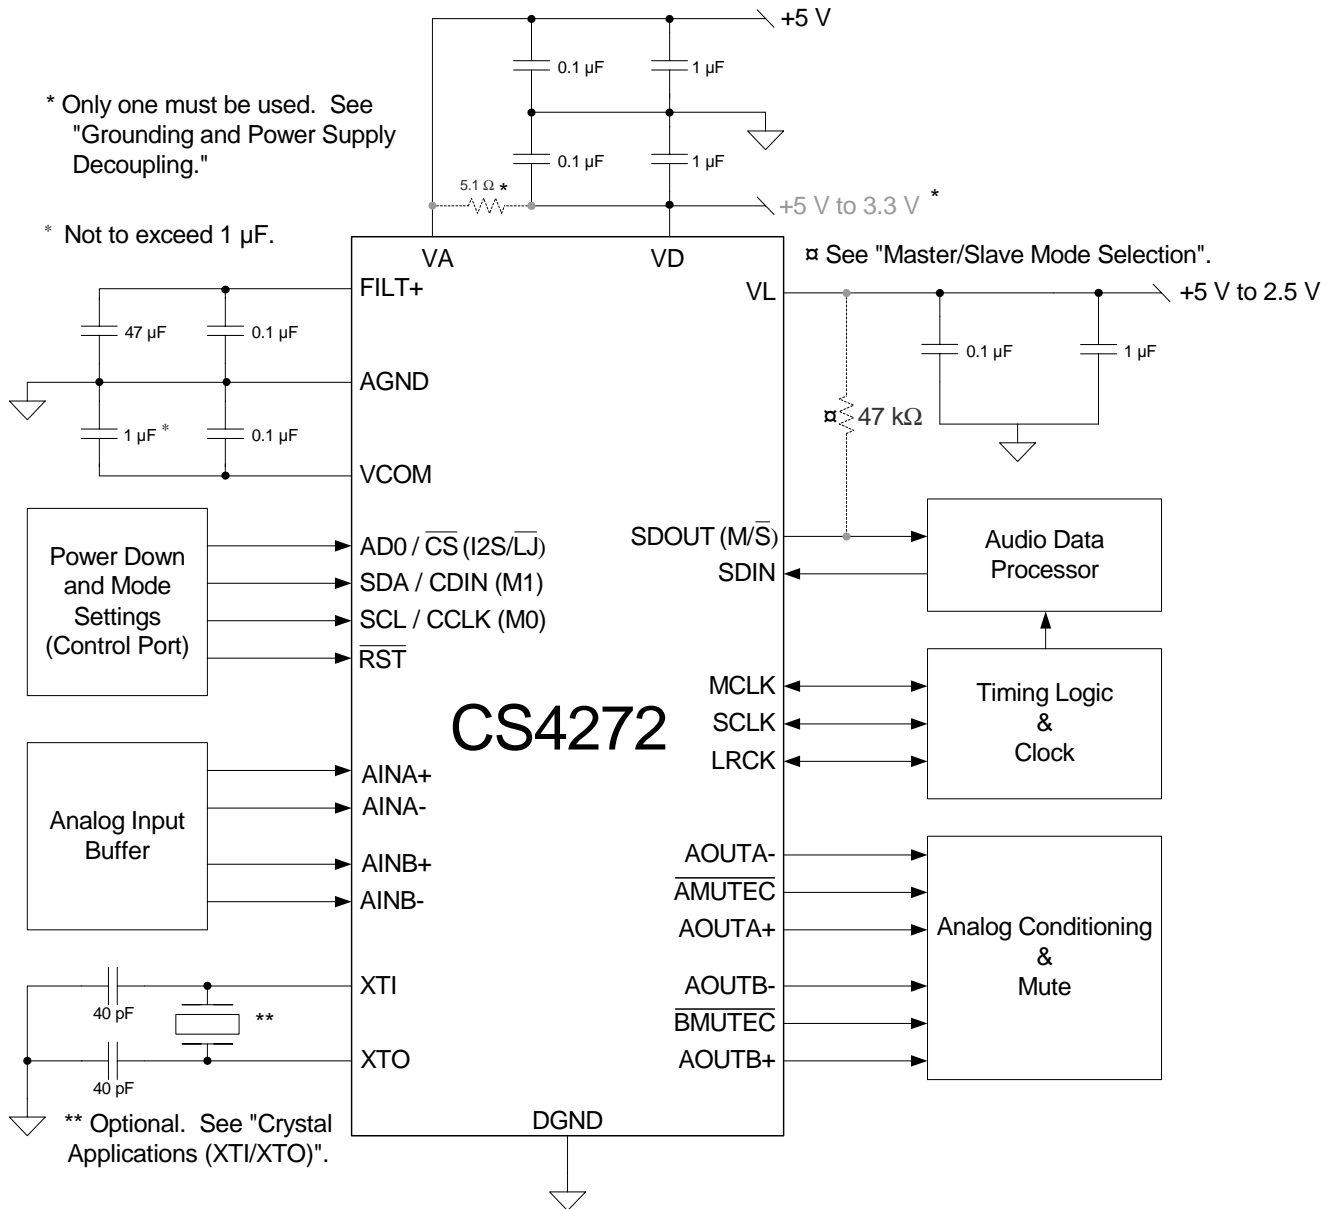


Figure 8. CS4272 Typical Connection Diagram

5. APPLICATIONS

5.1 Stand-Alone Mode

5.1.1 Recommended Power-Up Sequence

- 1) When using the CS4272 with an external MCLK, hold $\overline{\text{RST}}$ low until the power supply, MCLK, and LRCK are stable. When using the CS4272 with internally generated MCLK, hold $\overline{\text{RST}}$ low until the power supply is stable.
- 2) Bring $\overline{\text{RST}}$ high. If the internally generated MCLK is being used, it will appear on the MCLK pin prior to 1 ms from the release of $\overline{\text{RST}}$.

5.1.2 Master/Slave Mode

The CS4272 supports operation in either Master Mode or Slave Mode.

In Master Mode, LRCK and SCLK are outputs and are synchronously generated on-chip. LRCK is equal to F_s and SCLK is equal to $64x F_s$.

In Slave Mode, LRCK and SCLK are inputs, requiring external generation that is synchronous to MCLK. It is recommended that SCLK be $64x F_s$ to maximize system performance.

In Stand-Alone Mode, the CS4272 will default to Slave Mode. Master Mode may be accessed by placing a 47 k Ω pull-up to VL on the SDO $\overline{\text{S}}$ (M $\overline{\text{S}}$) pin.

Configuration of clock ratios in each of these modes will be outlined in the Tables 3 and 4.

5.1.3 System Clocking

The CS4272 will operate at sampling frequencies from 4 kHz to 200 kHz. This range is divided into three speed modes as shown in Table 1 below.

Table 1. Speed Modes

| Mode | Sampling Frequency |
|---------------------|--------------------|
| <i>Single Speed</i> | 4-50 kHz |
| <i>Double Speed</i> | 50-100 kHz |
| <i>Quad Speed</i> | 100-200 kHz |

5.1.3.1 Crystal Applications (XTI/XTO)

An external crystal may be used in conjunction with the CS4272 to generate the master clock signal. To accomplish this, a 20 pF fundamental mode parallel resonant crystal must be connected between the XTI and XTO pins as shown in the Typical Connection Diagram on page 23. This crystal must oscillate at the frequency shown in Table 2. In this configuration, MCLK is a buffered output and, as shown in the Typical Connection Diagram, nothing other than the crystal and its load capacitors should be connected to XTI and XTO. The MCLK signal will appear on the MCLK pin prior to 1 ms from the release of $\overline{\text{RST}}$.

Table 2. Crystal Frequencies

| Mode | Crystal Frequency |
|---------------------|-------------------|
| <i>Single Speed</i> | $512 x F_s$ |
| <i>Double Speed</i> | $256 x F_s$ |
| <i>Quad Speed</i> | $128 x F_s$ |

To operate the CS4272 with an externally generated MCLK signal, no crystal should be used, XTI should be connected to ground and XTO should be left unconnected. In this configuration, MCLK is an input and must be driven externally with an appropriate speed clock.

5.1.3.2 Clock Ratio Selection

Depending on the use of an external crystal, or whether the CS4272 is in Master or Slave Mode, different MCLK/LRCK and SCLK/LRCK ratios may be used. These ratios are shown in the Tables 3 and 4 below.

Table 3. Clock Ratios - Stand Alone Mode With External Crystal

| External Crystal Used, MCLK=Output | | | |
|------------------------------------|-----------|-------------|------|
| <i>Master Mode</i> | | | |
| | MCLK/LRCK | SCLK/LRCK | LRCK |
| <i>Single Speed</i> | 256 | 64 | Fs |
| <i>Double Speed</i> | 128 | 64 | Fs |
| <i>Quad Speed</i> | 128 | 64 | Fs |
| <i>Slave Mode</i> | | | |
| | MCLK/LRCK | SCLK/LRCK | LRCK |
| <i>Single Speed</i> | 256 | 32, 64, 128 | Fs |
| <i>Double Speed</i> | 128 | 32, 64 | Fs |
| <i>Quad Speed</i> | 128 | 32, 64 | Fs |

Table 4. Clock Ratios - Stand Alone Mode Without External Crystal

| External Crystal Not Used, MCLK=Input | | | |
|---------------------------------------|-----------|---------------------|------|
| <i>Master Mode</i> | | | |
| | MCLK/LRCK | SCLK/LRCK | LRCK |
| <i>Single Speed</i> | 256 | 64 | Fs |
| <i>Double Speed</i> | 128 | 64 | Fs |
| <i>Quad Speed</i> | 64 | 32 | Fs |
| <i>Slave Mode</i> | | | |
| | MCLK/LRCK | SCLK/LRCK | LRCK |
| <i>Single Speed</i> | 256 | 32, 64, 128 | Fs |
| | 384 | 32, 48, 64, 96, 128 | Fs |
| | 512 | 32, 64, 128 | Fs |
| <i>Double Speed</i> | 128 | 32, 64 | Fs |
| | 192 | 32, 48, 64 | Fs |
| | 256 | 32, 64 | Fs |
| <i>Quad Speed</i> | 64 | 32 | Fs |
| | 96 | 48 | Fs |
| | 128 | 32, 64 | Fs |

5.1.4 16-Bit Auto-Dither

The CS4272 will auto-configure to output properly dithered 16-bit data when placed in Slave Mode and a 32x SCLK to LRCK ratio is used. In this configuration, one half of a bit of dither is added to the LSB of the 16-bit word. This applies only to the serial audio output of the ADC and will not affect DAC performance. See Figure 9.

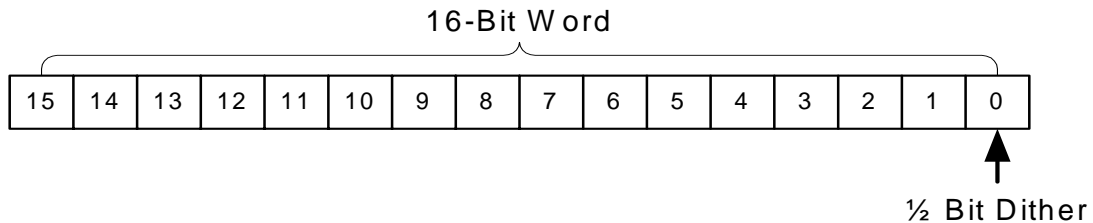


Figure 9. ADC 16-Bit Auto-Dither

5.1.5 Auto-Mute

The DAC output will mute following the reception of 8192 consecutive audio samples of static 0 or -1. A single sample of non-static data will release the mute. Detection and muting are done independently for each channel. The common mode on the output will be retained and the Mute Control pin for that channel will go active during the mute period.

5.1.6 High Pass Filter

The operational amplifiers in the input circuitry driving the CS4272 may generate a small DC offset into the ADC. The CS4272 includes a high pass filter after the decimator to remove any DC offset which could result in recording a DC level, possibly yielding "clicks" when switching between devices in a multichannel system.

In Stand-Alone Mode, the high pass filter continuously subtracts a measure of the DC offset from the output of the decimation filter. This function cannot be disabled in Stand-Alone Mode.

5.1.7 Interpolation Filter

In Stand-Alone Mode, the fast roll-off interpolation filter is used.

Filter specifications can be found in Section 3. Plots of the data are contained in the "Appendix" on page 47.

5.1.8 Mode Selection & De-Emphasis

The sample rate, F_s , can be adjusted from 4 kHz to 200 kHz. In Stand-Alone Mode, the CS4272 must be set to the proper mode via the mode pins, M1 and M0. De-emphasis, optimized for a 44.1 kHz sampling frequency, is available.

Table 5. CS4272 Stand-Alone Mode Control

| Mode 1 | Mode 0 | Mode | Sample Rate (F_s) | De-Emphasis |
|--------|--------|-------------------|-----------------------|-------------|
| 0 | 0 | Single Speed Mode | 4 kHz - 50 kHz | 44.1 kHz |
| 0 | 1 | Single Speed Mode | 4 kHz - 50 kHz | Off |
| 1 | 0 | Double Speed Mode | 50 kHz - 100 kHz | Off |
| 1 | 1 | Quad Speed Mode | 100 kHz - 200 kHz | Off |

5.1.9 Serial Audio Interface Format Selection

Either I²S or left justified serial audio data format may be selected in Stand-Alone Mode. The selection will affect both the input and output format. Placing a 10 k Ω pull-up to VL on the I2S/LJ pin will select the I²S format, while placing a 10 k Ω pull-down to DGND on the I2S/LJ pin will select the left justified format.

5.2 Control Port Mode

5.2.1 Recommended Power-Up Sequence - Access to Control Port Mode

- 1) When using the CS4272 with an external MCLK, hold $\overline{\text{RST}}$ low until the power supply, MCLK, and LRCK are stable. When using the CS4272 with internally generated MCLK, hold $\overline{\text{RST}}$ low until the power supply is stable. In this state, the Control Port is reset to its default settings.
- 2) Bring $\overline{\text{RST}}$ high. The device will remain in a low power state and the control port will be accessible. If internally generated MCLK is being used, it will appear on the MCLK pin prior to 1 ms from the release of $\overline{\text{RST}}$.
- 3) Write 03h to register 07h within 10 ms following the release of $\overline{\text{RST}}$. This sets the Control Port Enable (CPEN) and Power Down (PDN) bits, activating the Control Port and placing the part in power-down. When using the CS4272 with internally generated MCLK, it is necessary to wait 1 ms following the release of $\overline{\text{RST}}$ before initiating this Control Port write.
- 4) The desired register settings can be loaded while keeping the PDN bit set.
- 5) Clear the PDN bit to initiate the power-up sequence. This power-up sequence requires approximately 85 μs .

5.2.2 Master / Slave Mode Selection

The CS4272 supports operation in either Master Mode or Slave Mode.

In Master Mode, LRCK and SCLK are outputs and are synchronously generated on-chip. LRCK is equal to F_s and SCLK is equal to $64x F_s$.

In Slave Mode, LRCK and SCLK are inputs, requiring external generation that is synchronous to MCLK. It is recommended that SCLK be $64x F_s$ to maximize system performance.

Configuration of clock ratios in each of these modes will be outlined in the Tables 8 and 9.

In Control Port Mode the CS4272 will default to Slave Mode. The user may change this default setting by changing the status of the M/\overline{S} bit in the Mode Control 1 register (01h).

5.2.3 System Clocking

The CS4272 will operate at sampling frequencies from 4 kHz to 200 kHz. This range is divided into three speed modes as shown in Table 6 below.

Table 6. Speed Modes

| Mode | Sampling Frequency |
|---------------------|--------------------|
| <i>Single Speed</i> | 4-50 kHz |
| <i>Double Speed</i> | 50-100 kHz |
| <i>Quad Speed</i> | 100-200 kHz |

5.2.3.1 Crystal Applications (XTI/XTO)

An external crystal may be used in conjunction with the CS4272 to generate the MCLK signal. To accomplish this, a 20 pF fundamental mode parallel resonant crystal must be connected between the XTI and XTO pins as shown in the Typical Connection Diagram on page 23. This crystal must oscillate at the frequency shown in Table 7. In this configuration, MCLK is a buffered output and, as shown in the Typical Connection Diagram, nothing other than the crystal and its load capacitors should be connected to XTI and XTO. The MCLK signal will appear on the MCLK pin prior to 1 ms from the release of $\overline{\text{RST}}$.

Table 7. Crystal Frequencies

| Mode | Crystal Frequency |
|---------------------|-------------------|
| <i>Single Speed</i> | 512 x Fs |
| <i>Double Speed</i> | 256 x Fs |
| <i>Quad Speed</i> | 128 x Fs |

To operate the CS4272 with an externally generated MCLK signal, no crystal should be used, XTI should be connected to ground and XTO should be left unconnected. In this configuration, MCLK is an input and must be driven externally with an appropriate speed clock.

5.2.3.2 Clock Ratio Selection

Depending on the use of an external crystal, or whether the CS4272 is in Master or Slave Mode, different MCLK/LRCK and SCLK/LRCK ratios may be used. These ratios as well as the Control Port Register Bits that must be set in order to obtain them are shown in Tables 8 and 9 below.

Table 8. Clock Ratios - Control Port Mode With External Crystal

| External Crystal Used, MCLK=Output | | | | | |
|------------------------------------|-----------|-------------|------|-----------------|-----------------|
| <i>Master Mode</i> | | | | | |
| | MCLK/LRCK | SCLK/LRCK | LRCK | Ratio1 Bit | Ratio0 Bit |
| <i>Single Speed</i> | 256 | 64 | Fs | 0 | d ²⁷ |
| | 512 | 64 | Fs | 1 | d ²⁷ |
| <i>Double Speed</i> | 128 | 64 | Fs | 0 | d ²⁷ |
| | 256 | 64 | Fs | 1 | d ²⁷ |
| <i>Quad Speed</i> | 128 | 64 | Fs | d ²⁷ | d ²⁷ |
| <i>Slave Mode</i> | | | | | |
| | MCLK/LRCK | SCLK/LRCK | LRCK | Ratio1 Bit | Ratio0 Bit |
| <i>Single Speed</i> | 256 | 32, 64, 128 | Fs | 0 | d ²⁷ |
| | 512 | 32, 64, 128 | Fs | 1 | d ²⁷ |
| <i>Double Speed</i> | 128 | 32, 64 | Fs | 0 | d ²⁷ |
| | 256 | 32, 64 | Fs | 1 | d ²⁷ |
| <i>Quad Speed</i> | 128 | 32, 64 | Fs | d ²⁷ | d ²⁷ |

Notes: 27. For the Ratio1 and Ratio0 bits listed above, “d” indicates that any value may be written.

Table 9. Clock Ratios - Control Port Mode Without External Crystal

| External Crystal Not Used, MCLK=Input | | | | | |
|--|------------------|---------------------|-------------|-------------------|-------------------|
| Master Mode | | | | | |
| | MCLK/LRCK | SCLK/LRCK | LRCK | Ratio1 Bit | Ratio0 Bit |
| Single Speed | 256 | 64 | Fs | 0 | 0 |
| | 384 | 64 | Fs | 0 | 1 |
| | 512 | 64 | Fs | 1 | 0 |
| | 768 | 64 | Fs | 1 | 1 |
| Double Speed | 128 | 64 | Fs | 0 | 0 |
| | 192 | 64 | Fs | 0 | 1 |
| | 256 | 64 | Fs | 1 | 0 |
| | 384 | 64 | Fs | 1 | 1 |
| Quad Speed | 64 | 32 | Fs | 0 | 0 |
| | 96 | 32 | Fs | 0 | 1 |
| | 128 | 64 | Fs | 1 | 0 |
| | 192 | 64 | Fs | 1 | 1 |
| Slave Mode | | | | | |
| | MCLK/LRCK | SCLK/LRCK | LRCK | Ratio1 Bit | Ratio0 Bit |
| Single Speed | 256 | 32, 64, 128 | Fs | 0 | d ²⁸ |
| | 384 | 32, 48, 64, 96, 128 | Fs | 0 | d ²⁸ |
| | 512 | 32, 64, 128 | Fs | 0 | d ²⁸ |
| | 768 | 32, 48, 64, 96, 128 | Fs | 1 | d ²⁸ |
| | 1024 | 32, 64, 128 | Fs | 1 | d ²⁸ |
| Double Speed | 128 | 32, 64 | Fs | 0 | d ²⁸ |
| | 192 | 32, 48, 64 | Fs | 0 | d ²⁸ |
| | 256 | 32, 64 | Fs | 0 | d ²⁸ |
| | 384 | 32, 48, 64 | Fs | 1 | d ²⁸ |
| | 512 | 32, 64 | Fs | 1 | d ²⁸ |
| Quad Speed | 64 | 32 | Fs | 0 | d ²⁸ |
| | 96 | 48 | Fs | 0 | d ²⁸ |
| | 128 | 32, 64 | Fs | 0 | d ²⁸ |
| | 192 | 48 | Fs | 1 | d ²⁸ |
| | 256 | 32, 64 | Fs | 1 | d ²⁸ |

Notes: 28. For the Ratio0 bit listed above, "d" indicates that any value may be written.

5.2.4 Internal Digital Loopback

In Control Port Mode, the CS4272 supports an internal digital loopback mode in which the output of the ADC is routed to the input of the DAC. This mode may be activated by setting the LOOP bit in the Mode Control 2 register (07h).

When this bit is set, the status of the DAC_DIF(2:0) bits in register 01h will be disregarded by the CS4272. Any changes made to the DAC_DIF(2:0) bits while the LOOP bit is set will have no impact on operation until the LOOP bit is released, at which time the Digital Interface Format of the DAC will operate according to the format selected in the DAC_DIF(2:0) bits. While the LOOP bit is set, data will be present on the SDOUT pin in the format selected in the ADC_DIF bit in register 06h.

5.2.5 Dither for 16-Bit Data

The CS4272 may be configured to properly dither for 16-bit data. To do this, the Dither16 bit in the ADC Control Register (06h) must be set. When set, a half bit of dither is added to the least significant bit of the 16 most significant bits of the data word. The remaining bits should be disregarded. See Figure 10. This function is useful when 16-bit devices are downstream of the ADC. This bit should not be set when using word lengths greater than 16 bits.

It should be noted that this function is supported for all serial audio output formats, and may be activated in either Master or Slave Mode.

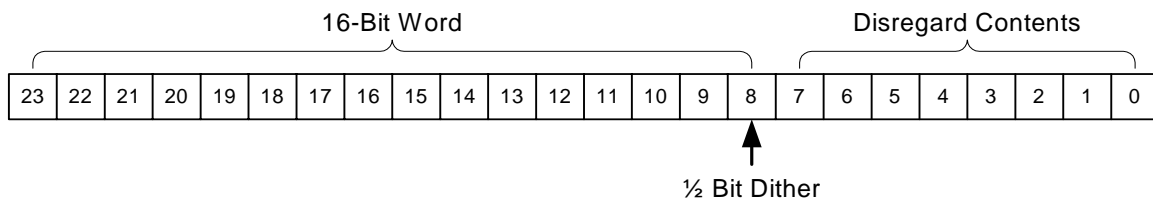


Figure 10. Example of Dither for 16-Bit Data with 24-Bit Left Justified Format

5.2.6 Auto-Mute

The Auto-Mute function is controlled by the status of the AMUTE bit in the DAC Control register. When set, the DAC output will mute following the reception of 8192 consecutive audio samples of static 0 or -1. A single sample of non-static data will release the mute. Detection and muting are done independently for each channel. Auto-Mute detection and muting can become dependent on either channel if the MUTECA=B function is enabled. The common mode on the output will be retained and the Mute Control pin for that channel will become active during the mute period. The muting function is effected, similar to volume control changes, by the Soft and ZeroCross bits in the DAC Volume and Mixing Control register. The AMUTE bit is set by default.

5.2.7 High Pass Filter and DC Offset Calibration

The operational amplifiers in the input circuitry driving the CS4272 may generate a small DC offset into the A/D converter. The CS4272 includes a high pass filter after the decimator to remove any DC offset which could result in recording a DC level, possibly yielding "clicks" when switching between devices in a multichannel system.

The high pass filter continuously subtracts a measure of the DC offset from the output of the decimation filter. The high pass filter can be independently enabled and disabled for channels A and B. If the HPFDisableA or HPFDisableB bit is set during normal operation, the current value of the DC offset for the corresponding channel is frozen and this DC offset will continue to be subtracted from the conversion result. This feature makes it possible to perform a system DC offset calibration by:

- 1) Running the CS4272 with the high pass filter enabled until the filter settles. See the Digital Filter Characteristics for filter settling time.
- 2) Disabling the high pass filter and freezing the stored DC offset.

A system calibration performed in this way will eliminate offsets anywhere in the signal path between the calibration point and the CS4272.

5.2.8 Interpolation Filter

To accommodate the increasingly complex requirements of digital audio systems, the CS4272 incorporates selectable interpolation filters for each mode of operation. Fast and slow roll-off filters are available in each of Single, Double, and Quad Speed modes. These filters have been designed to accommodate a variety of musical tastes and styles. The `FILT_SEL` bit in the DAC Control register (02h) is used to select which filter is used. By default, the fast roll-off filter is selected.

Filter specifications can be found in Section 3. Plots of the data are contained in the “Appendix” on page 47.

5.2.9 De-Emphasis

Three de-emphasis modes are available via the Control Port. The available filters are optimized for 32 kHz, 44.1 kHz, and 48 kHz sampling rates. See Table 13 for de-emphasis selection in Control Port Mode.

5.2.10 Oversampling Modes

The CS4272 operates in one of three oversampling modes based on the input sample rate. Mode selection is determined by the M1 and M0 bits in the Mode Control 1 register. Single-Speed mode supports input sample rates up to 50 kHz and uses a 128x oversampling ratio. Double-Speed mode supports input sample rates up to 100 kHz and uses an oversampling ratio of 64x. Quad-Speed mode supports input sample rates up to 200 kHz and uses an oversampling ratio of 32x. See Table 11 for Control Port Mode settings.

5.3 De-Emphasis Filter

The CS4272 includes on-chip digital de-emphasis. Figure 11 shows the de-emphasis curve for F_s equal to 44.1 kHz. The frequency response of the de-emphasis curve will scale proportionally with changes in sample rate, F_s . Please see section 5.1.8 for the desired de-emphasis control for Stand-Alone mode and section 5.2.9 for control port mode.

The de-emphasis feature is included to accommodate audio recordings that utilize 50/15 μ S pre-emphasis equalization as a means of noise reduction.

De-emphasis is only available in Single Speed Mode.

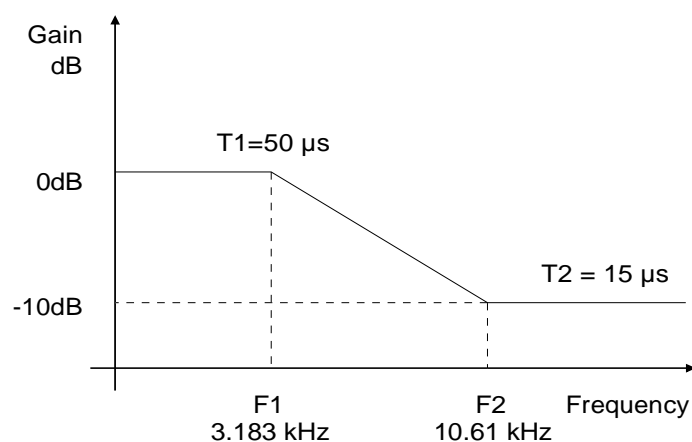


Figure 11. De-Emphasis Curve

5.4 Analog Connections

5.4.1 Input Connections

The analog modulator samples the input at 6.144 MHz (MCLK=12.288 MHz). The digital filter will reject signals within the stopband of the filter. However, there is no rejection for input signals which are $(n \times 6.144 \text{ MHz})$ the digital passband frequency, where $n=0,1,2,\dots$ Refer to Figure 12 for a recommended analog input buffer that will attenuate any noise energy at 6.144 MHz, in addition to providing the optimum source impedance for the modulators. The use of capacitors which have a large voltage coefficient (such as general purpose ceramics) must be avoided since these can degrade signal linearity. Figure 13 shows the full-scale analog input levels.

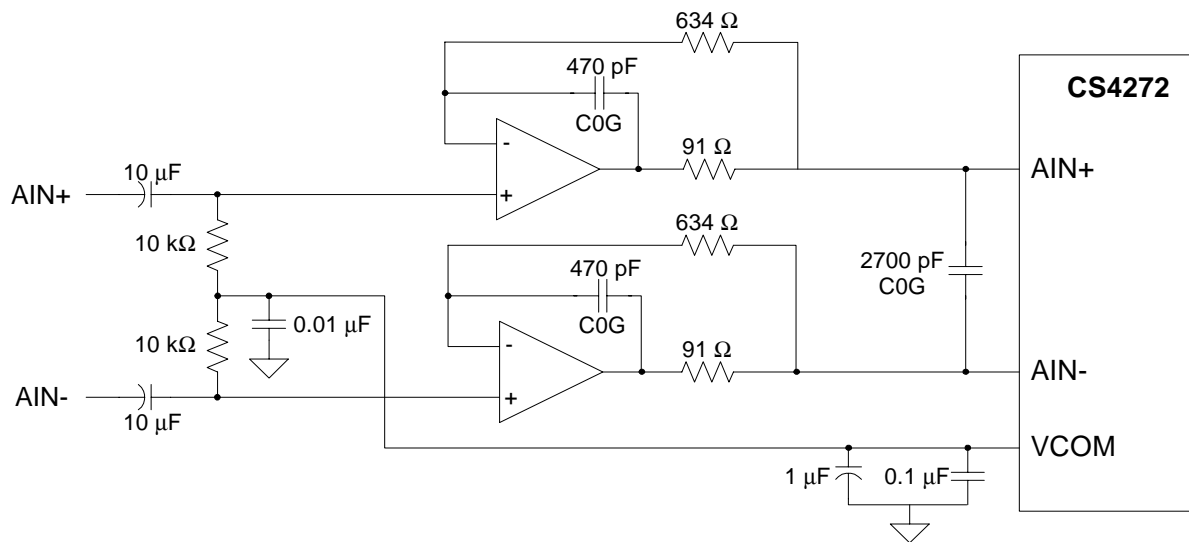


Figure 12. CS4272 Recommended Analog Input Buffer

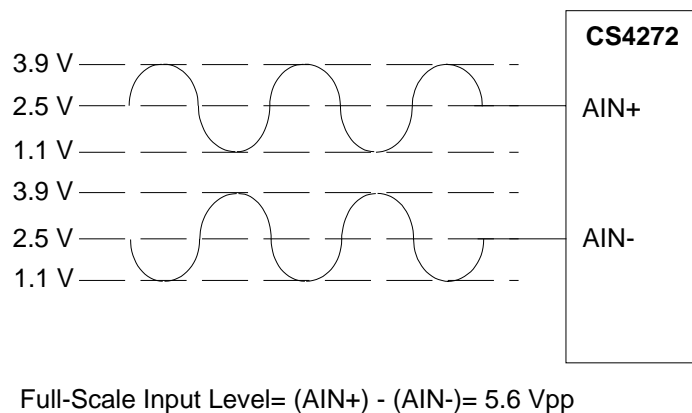


Figure 13. Full-Scale Analog Input

5.4.2 Output Connections

The recommended output filter configuration is shown in Figure 14. This filter configuration accounts for the normally differing AC loads on the AOUT+ and AOUT- differential output pins. It also shows an AC coupling configuration which minimizes the number of required AC coupling capacitors.

The CS4272 does not include phase or amplitude compensation for an external filter, and therefore the DAC system phase and amplitude response will be dependent on the external analog circuitry. Figure 15 shows the full-scale analog output levels.

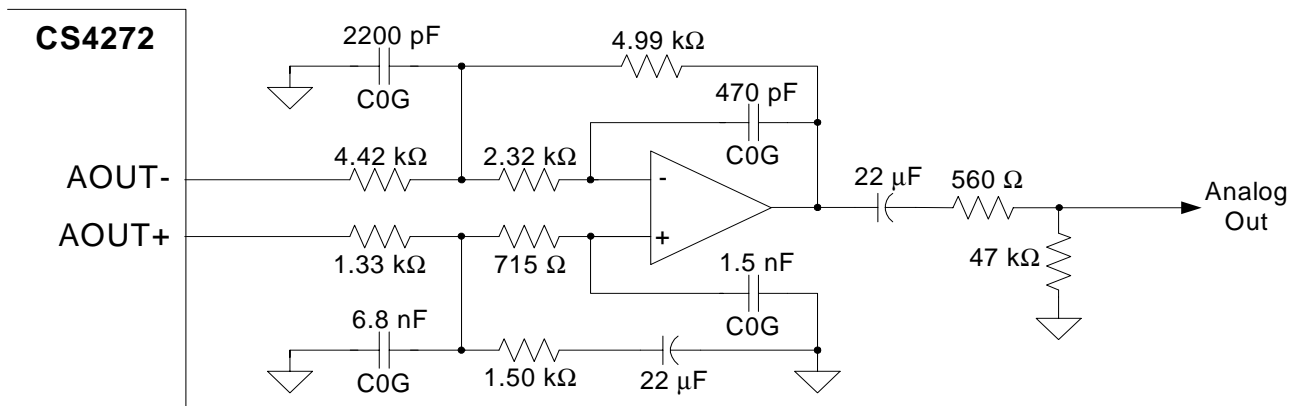
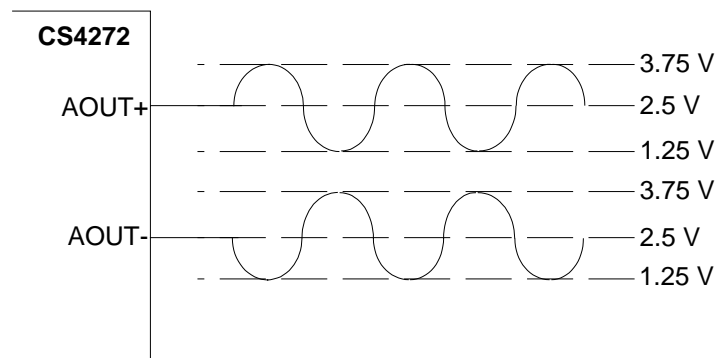


Figure 14. CS4272 Recommended Analog Output Filter



$$\text{Full-Scale Output Level} = (A_{IN+}) - (A_{IN-}) = 5 \text{ Vpp}$$

Figure 15. Full-Scale Analog Output

5.5 Mute Control

The Mute Control pins become active during power-up initialization, reset, muting, if the MCLK to LRCK ratio is incorrect, and during power-down. The Auto-Mute function causes the MUTE pin corresponding to an individual channel to activate following the reception of 8192 consecutive audio samples of static 0 or -1 on the respective channel. A single sample of non-zero data on this channel will cause the MUTE pin to deactivate. In Control Port Mode, however, auto-mute detection and muting can become dependent on either channel if the MuteB=A function is enabled. The MUTE pins are intended to be used as control for an external mute circuit in order to add off-chip mute capability.

Use of the Mute Control function is not mandatory but recommended for designs requiring the absolute minimum in extraneous clicks and pops. Also, use of the Mute Control function can enable the system designer to achieve idle channel noise/signal-to-noise ratios which are only limited by the external mute circuit. The MUTE pins are active-low. See Figure 16 below for a suggested active-low mute circuit.

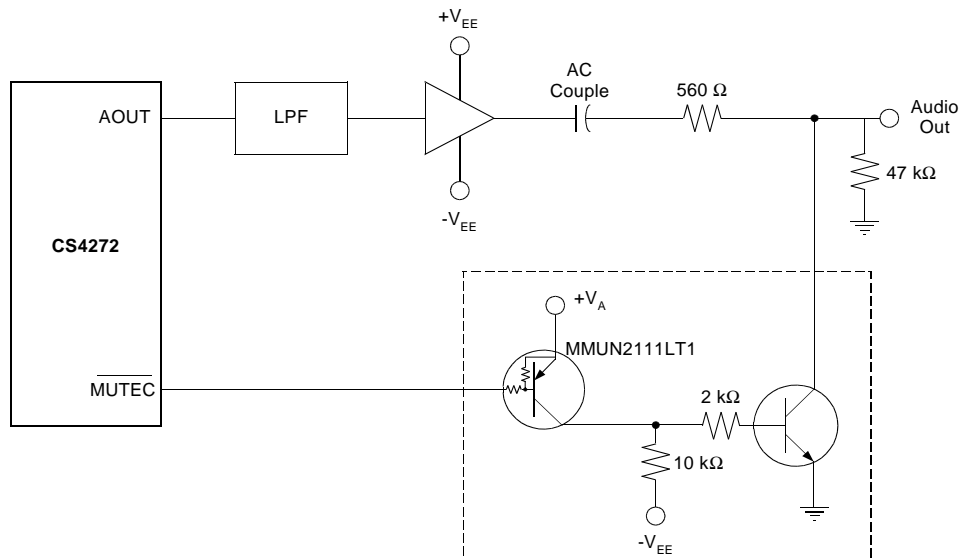


Figure 16. Suggested Active-Low Mute Circuit

5.6 Synchronization of Multiple Devices

In systems where multiple ADCs are required, care must be taken to achieve simultaneous sampling. To ensure synchronous sampling, the MCLK and LRCK must be the same for all of the CS4272's in the system. If only one MCLK source is needed, one solution is to place one CS4272 in Master Mode, and slave all of the other CS4272's to the one master. If multiple MCLK sources are needed, a possible solution would be to supply all clocks from the same external source and time the CS4272 reset with the inactive edge of MCLK. This will ensure that all converters begin sampling on the same clock edge.

5.7 Grounding and Power Supply Decoupling

As with any high resolution converter, the CS4272 requires careful attention to power supply and grounding arrangements if its potential performance is to be realized. Figure 8 shows the recommended power arrangements, with VA and VL connected to clean supplies. VD, which powers the digital filter, may be run from the system logic supply (VL) or may be powered from the analog supply (VA) via a resistor. In this case, no additional devices should be powered from VD. Power supply decoupling capacitors should be as near to the CS4272 as possible, with the low value ceramic capacitor being the nearest. All signals, especially clocks, should be kept away from the VREF and VCOM pins in order to avoid unwanted coupling into the modulators. The VREF and VCOM decoupling capacitors, particularly the 0.1 μ F, must be positioned to minimize the electrical path from VREF and AGND. The CDB4272 evaluation board demonstrates the optimum layout and power supply arrangements. To minimize digital noise, connect the CS4272 digital outputs only to CMOS inputs.

6. CONTROL PORT INTERFACE

The Control Port is used to load all the internal settings of the CS4272. The operation of the Control Port may be completely asynchronous to the audio sample rate. However, to avoid potential interference problems, the Control Port pins should remain static if no operation is required.

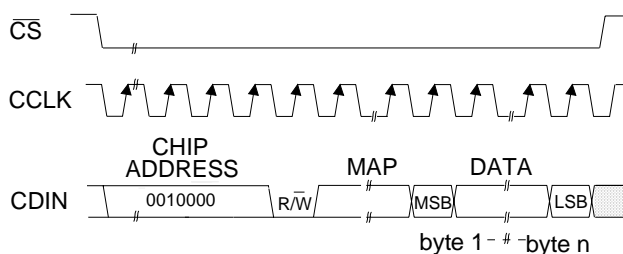
The Control Port has 2 modes: SPI and I²C, with the CS4272 operating as a slave to control messages in both modes. If I²C operation is desired, AD0/CS should be tied to VA or AGND. If the CS4272 ever detects a high to low transition on AD0/CS after power-up, SPI mode will be selected. The Control Port registers are write-only in SPI mode.

Upon release of the \overline{RST} pin, the CS4272 will wait approximately 10 ms before it begins its start-up sequence. The part defaults to Stand-Alone Mode, in which all operational modes are controlled as described under “Stand-Alone Mode” on page 24. The Control Port is active at all times, and if bit 1 of register 07h (CPEN) is set, the part enters Control-Port Mode and all operational modes are controlled by the Control Port registers. This bit can be set at any time, but to avoid unpredictable output noises, bit 1 (CPEN) and bit 0 (PDN) of register 07h should be set by writing 03h before the end of the 10 ms start-up wait period. All registers can then be set as desired before releasing the PDN bit to begin the start-up sequence. If system requirements do not allow writing to the control port immediately following the release of \overline{RST} , the SDIN line should be held at logic “0” until the proper serial mode can be selected.

6.1 SPI Mode

In SPI mode, \overline{CS} is the CS4272 chip select signal, CCLK is the control port bit clock, CDIN is the input data line from the microcontroller and the chip address is 0010000. All control signals are inputs and data is clocked in on the rising edge of CCLK.

Figure 17 shows the operation of the Control Port in SPI mode. To write to a register, bring \overline{CS} low. The first 7 bits on CDIN form the chip address, and must be 0010000. The eighth bit is a read/write indicator (R/W), which must be low to write. The next 8 bits form the Memory Address Pointer (MAP), which is set to the address of the register that is to be updated. The next 8 bits are the data which will be placed into the register designated by the MAP. See Table 10 on page 36.



MAP = Memory Address Pointer

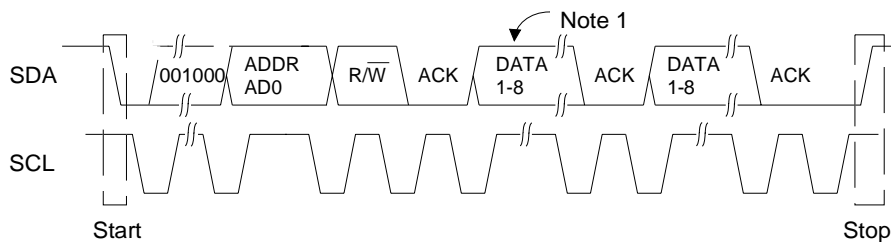
Figure 17. Control Port Timing, SPI mode

The CS4272 has MAP auto increment capability, enabled by the INCR bit in the MAP. If INCR is 0, then the MAP will stay constant for successive writes. If INCR is set, then MAP will auto increment after each byte is written, allowing block writes to successive registers.

6.2 I²C Mode

In I²C mode, SDA is a bi-directional data line. Data is clocked into and out of the part by the clock, SCL, with the clock to data relationship as shown in Figure 18. There is no CS pin. Pin AD0 forms the partial chip address and should be tied to VA or AGND as required. The upper 6 bits of the 7-bit address field must be 001000. To communicate with the CS4272, the LSB of the chip address field, which is the first byte sent to the CS4272, should match the setting of the AD0 pin. The eighth bit of the address byte is the R/W bit (high for a read, low for a write). If the operation is a write, the next byte is the Memory Address Pointer, MAP, which selects the register to be read or written. The MAP is then followed by the data to be written. If the operation is a read, then the contents of the register pointed to by the MAP will be output after the chip address.

The CS4272 has MAP auto increment capability, enabled by the INCR bit in the MAP. If INCR is 0, then the MAP will stay constant for successive writes. If INCR is set, then MAP will auto increment after each byte is written, allowing block reads or writes of successive registers.



Note: If operation is a write, this byte contains the Memory Address Pointer, MAP.

Figure 18. Control Port Timing, I²C Mode

Table 10. Memory Address Pointer (MAP)

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|----------|----------|----------|------|------|------|------|
| INCR | Reserved | Reserved | Reserved | MAP3 | MAP2 | MAP1 | MAP0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

INCR - Auto MAP Increment Enable

Default = '0'.

0 - Disabled

1 - Enabled

MAP(3:0) - Memory Address Pointer

Default = '0000'.

7. REGISTER QUICK REFERENCE

This table shows the register names and their associated default values.

| Addr | Function | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|-----------------------------|----------|----------|----------|-----------|----------|----------|-------------|-------------|
| 01h | Mode Control 1 | M1 | M0 | Ratio1 | Ratio0 | M/S | DAC_DIF2 | DAC_DIF1 | DAC_DIF0 |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 02h | DAC Control | AMUTE | FILT_SEL | DEM1 | DEM0 | RMP_UP | RMP_DN | INV_B | INV_A |
| | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 03h | DAC Volume & Mixing Control | Reserved | B=A | Soft | ZeroCross | ATAPI3 | ATAPI2 | ATAPI1 | ATAPI0 |
| | | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 1 |
| 04h | DAC Ch A Volume Control | MUTE | VOL6 | VOL5 | VOL4 | VOL3 | VOL2 | VOL1 | VOL0 |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 05h | DAC Ch B Volume Control | MUTE | VOL6 | VOL5 | VOL4 | VOL3 | VOL2 | VOL1 | VOL0 |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 06h | ADC Control | Reserved | Reserved | Dither16 | ADC_DIF0 | MUTEA | MUTEB | HPFDisableA | HPFDisableB |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 07h | Mode Control 2 | Reserved | Reserved | Reserved | LOOP | MUTECA=B | FREEZE | CPEN | PDN |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 08h | Chip ID | PART3 | PART2 | PART1 | PART0 | REV3 | REV2 | REV1 | REV0 |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

8. REGISTER DESCRIPTION

** All registers are read/write in I²C mode and write only in SPI mode, unless otherwise noted**

8.1 Mode Control 1 - Address 01h

| | | | | | | | |
|----|----|--------|--------|-----|----------|----------|----------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| M1 | M0 | Ratio1 | Ratio0 | M/S | DAC_DIF2 | DAC_DIF1 | DAC_DIF0 |

8.1.1 Functional Mode (Bits 7:6)

Function:

Selects the required range of input sample rates.

Table 11. Functional Mode Selection

| M1 | M0 | Mode |
|----|----|---|
| 0 | 0 | Single-Speed Mode: 4 to 50 kHz sample rates (default) |
| 0 | 1 | Single-Speed Mode: 4 to 50 kHz sample rates |
| 1 | 0 | Double-Speed Mode: 50 to 100 kHz sample rates |
| 1 | 1 | Quad-Speed Mode: 100 to 200 kHz sample rates |

8.1.2 Ratio Select (Bits 5:4)

Function:

These bits are used to select the clocking ratios in Control Port Mode. Please refer to Table 8, "Clock Ratios - Control Port Mode With External Crystal," on page 28 or Table 9, "Clock Ratios - Control Port Mode Without External Crystal," on page 29 for information on which of these bits to set to obtain specific clock ratios.

8.1.3 Master / Slave Mode (Bit 3)

Function:

This bit selects either master or slave operation. Setting this bit will select master mode, while clearing this bit will select slave mode.

8.1.4 DAC Digital Interface Format (Bits 2:0)

Function:

The required relationship between LRCK, SCLK and SDIN for the DAC is defined by the DAC Digital Interface Format and the options are detailed in Table 12 and Figures 3-5.

Table 12. DAC Digital Interface Formats

| DAC_DIF2 | DAC_DIF1 | DAC_DIF0 | Description | Format | Figure |
|----------|----------|----------|---|--------|--------|
| 0 | 0 | 0 | Left Justified, up to 24-bit data (default) | 0 | 3 |
| 0 | 0 | 1 | I ² S, up to 24-bit data | 1 | 4 |
| 0 | 1 | 0 | Right Justified, 16-bit Data | 2 | 5 |
| 0 | 1 | 1 | Right Justified, 24-bit Data | 3 | 5 |
| 1 | 0 | 0 | Right Justified, 20-bit Data | 4 | 5 |
| 1 | 0 | 1 | Right Justified, 18-bit Data | 5 | 5 |
| 1 | 1 | 0 | Reserved | | |
| 1 | 1 | 1 | Reserved | | |

8.2 DAC Control - Address 02h

| | | | | | | | |
|-------|----------|------|------|--------|--------|-------|-------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| AMUTE | FILT_SEL | DEM1 | DEM0 | RMP_UP | RMP_DN | INV_A | INV_B |

8.2.1 Auto-Mute (Bit 7)

Function:

When set, enables the Auto-Mute function. See “Auto-Mute” on page 30.

8.2.2 Interpolation Filter Select (Bit 6)

Function:

This Function allows the user to select whether the Interpolation Filter has a fast or slow roll off. When set, this bit selects the slow roll off filter, when cleared it selects the fast roll off filter. The - 3 dB corner is approximately the same for both filters, but the slope of the roll off is greater for the fast roll off filter.

8.2.3 De-Emphasis Control (Bits 5:4)

Function:

Implementation of the standard 50/15 μ s digital de-emphasis filter response, Figure 19, requires re-configuration of the digital filter to maintain the proper filter response for 32, 44.1 or 48 kHz sample rates. NOTE: De-emphasis is available only in Single-Speed Mode. See Table 13 below.

Table 13. De-Emphasis Mode Selection

| DEM1 | DEM0 | Description |
|------|------|----------------------|
| 0 | 0 | Disabled (default) |
| 0 | 1 | 44.1 kHz de-emphasis |
| 1 | 0 | 48 kHz de-emphasis |
| 1 | 1 | 32 kHz de-emphasis |

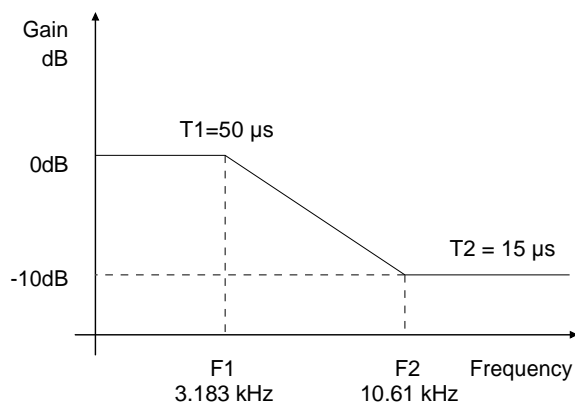


Figure 19. De-Emphasis Curve

8.2.4 Soft Volume Ramp-Up After Error (Bit 3)

Function:

An un-mute will be performed after executing a filter mode change, after a MCLK/LRCK ratio change or error, and after changing the Functional Mode. When this bit is set, this un-mute is effected, similar to attenuation changes, by the Soft and ZeroCross bits in the DAC Volume & Mixing Control register. When cleared, an immediate un-mute is performed in these instances.

Note: For best results, it is recommended that this feature be used with the RMP_DN bit.

8.2.5 Soft Ramp-Down Before Filter Mode Change (Bit 2)

Function:

A mute will be performed prior to executing a filter mode change. When this bit is set, this mute is effected, similar to attenuation changes, by the Soft and ZeroCross bits in the DAC Volume & Mixing Control register. When cleared, an immediate mute is performed prior to executing a filter mode change.

Note: For best results, it is recommended that this feature be used in conjunction with the RMP_UP bit.

8.2.6 Invert Signal Polarity (Bits 1:0)

Function:

When set, this bit activates an inversion of the signal polarity for the appropriate channel. This is useful if a board layout error has occurred, or other situations where a 180 degree phase shift is desirable.

8.3 DAC Volume & Mixing Control - Address 03h

| | | | | | | | |
|----------|-----|------|-----------|--------|--------|--------|--------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reserved | B=A | Soft | ZeroCross | ATAPI3 | ATAPI2 | ATAPI1 | ATAPI0 |

8.3.1 Channel B Volume = Channel A Volume (Bit 6)

Function:

The AOUTA and AOUTB volume levels are independently controlled by the A and the B Channel Volume Control Bytes when this function is disabled. The volume on both AOUTA and AOUTB are determined by the A Channel Volume Control Byte and the B Channel Byte is ignored when this function is enabled. Volume and muting functions are effected by the Soft Ramp and ZeroCross functions below.

8.3.2 Soft Ramp or Zero Cross Enable (Bits 5:4)

Function:

Soft Ramp Enable

Soft Ramp allows level changes, both muting and attenuation, to be implemented by incrementally ramping, in 1/8 dB steps, from the current level to the new level at a rate of 1 dB per 8 left/right clock periods. See Table 14 on page 41.

Zero Cross Enable

Zero Cross Enable dictates that signal level changes, either by attenuation changes or muting, will occur on a signal zero crossing to minimize audible artifacts. The requested level change will occur after a time-out period between 512 and 1024 sample periods (10.7 ms to 21.3 ms at 48 kHz sample rate) if the signal does not encounter a zero crossing. The zero cross function is independently mon-

itored and implemented for each channel. See Table 14 on page 41.

Soft Ramp and Zero Cross Enable

Soft Ramp and Zero Cross Enable dictate that signal level changes, either by attenuation changes or muting, will occur in 1/8 dB steps and be implemented on a signal zero crossing. The 1/8 dB level change will occur after a time-out period between 512 and 1024 sample periods (10.7 ms to 21.3 ms at 48 kHz sample rate) if the signal does not encounter a zero crossing. The zero cross function is independently monitored and implemented for each channel. See Table 14 on page 41.

Table 14. Soft Cross or Zero Cross Mode Selection

| Soft | ZeroCross | Mode |
|------|-----------|----------------------------------|
| 0 | 0 | Changes to affect immediately |
| 0 | 1 | Zero Cross enabled |
| 1 | 0 | Soft Ramp enabled (default) |
| 1 | 1 | Soft Ramp and Zero Cross enabled |

8.3.3 ATAPI Channel Mixing and Muting (Bits 3:0)

Function:

The CS4272 implements the channel mixing functions of the ATAPI CD-ROM specification. See Table 15 on page 42

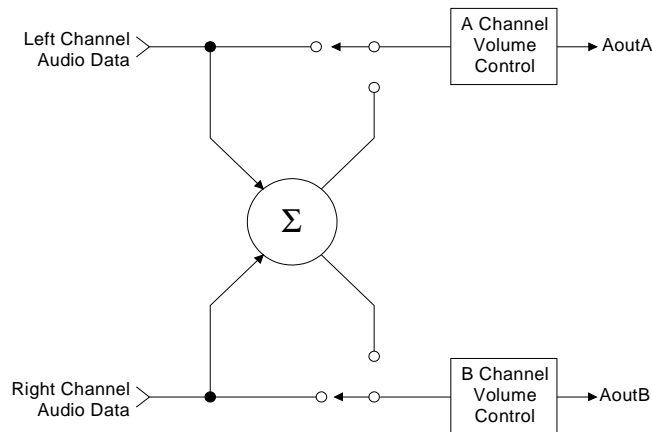


Figure 20. ATAPI Block Diagram

Table 15. ATAPI Decode

| ATAPI3 | ATAPI2 | ATAPI1 | ATAPI0 | AOUTA | AOUTB |
|--------|--------|--------|--------|------------|------------|
| 0 | 0 | 0 | 0 | MUTE | MUTE |
| 0 | 0 | 0 | 1 | MUTE | bR |
| 0 | 0 | 1 | 0 | MUTE | bL |
| 0 | 0 | 1 | 1 | MUTE | b[(L+R)/2] |
| 0 | 1 | 0 | 0 | aR | MUTE |
| 0 | 1 | 0 | 1 | aR | bR |
| 0 | 1 | 1 | 0 | aR | bL |
| 0 | 1 | 1 | 1 | aR | b[(L+R)/2] |
| 1 | 0 | 0 | 0 | aL | MUTE |
| 1 | 0 | 0 | 1 | aL | bR |
| 1 | 0 | 1 | 0 | aL | bL |
| 1 | 0 | 1 | 1 | aL | b[(L+R)/2] |
| 1 | 1 | 0 | 0 | a[(L+R)/2] | MUTE |
| 1 | 1 | 0 | 1 | a[(L+R)/2] | bR |
| 1 | 1 | 1 | 0 | a[(L+R)/2] | bL |
| 1 | 1 | 1 | 1 | a[(L+R)/2] | b[(L+R)/2] |

8.4 DAC Channel A Volume Control - Address 04h

See 8.5 DAC Channel B Volume Control - Address 05h

8.5 DAC Channel B Volume Control - Address 05h

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------|------|------|------|------|------|------|
| MUTE | VOL6 | VOL5 | VOL4 | VOL3 | VOL2 | VOL1 | VOL0 |

8.5.1 Mute (Bit 7)

Function:

The DAC output will mute when this bit is set. Though this bit is active high, it should be noted that the MUTE pins are active low. The common mode voltage on the output will be retained when this bit is set. The muting function is effected, similar to attenuation changes, by the Soft and ZeroCross bits in the Volume and Mixing Control register. The MUTE pin for the respective channel will become active during the mute period if the MUTE bit is set. Both the AMUTE pin and BMUTE pin will become active if either MUTE register is enabled and the MUTECA=A bit (register 7) is enabled.

8.5.2 Volume Control (Bits 6:0)

Function:

The digital volume control allows the user to attenuate the signal in 1 dB increments from 0 to -127 dB. Volume settings are decoded as shown in Table 16. The volume changes are implemented as dictated by the Soft and ZeroCross bits in the DAC Volume & Mixing Control register (see section 8.3.2).

Table 16. Digital Volume Control Example Settings

| Binary Code | Decimal Value | Volume Setting |
|-------------|---------------|----------------|
| 0000000 | 0 | 0 dB |
| 0010100 | 20 | -20 dB |
| 0101000 | 40 | -40 dB |
| 0111100 | 60 | -60 dB |
| 1011010 | 90 | -90 dB |

8.6 ADC Control - Address 06h

| | | | | | | | |
|----------|----------|----------|---------|-------|-------|-------------|-------------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reserved | Reserved | Dither16 | ADC_DIF | MUTEA | MUTEB | HPFDisableA | HPFDisableB |

8.6.1 Dither for 16-Bit Data (Bit 5)

Function:

When set, this bit activates the Dither for 16-Bit Data feature as described in “Dither for 16-Bit Data” on page 30.

8.6.2 ADC Digital Interface Format (Bit 4)

Function:

The required relationship between LRCK, SCLK and SDOUT for the ADC is defined by the ADC Digital Interface Format. The options are detailed in Table 17 and may be seen in Figure 3 and 4.

Table 17. ADC Digital Interface Formats

| ADC_DIF | Description | Format | Figure |
|---------|---|--------|--------|
| 0 | Left Justified, up to 24-bit data (default) | 0 | 3 |
| 1 | I ² S, up to 24-bit data | 1 | 4 |

8.6.3 ADC Channel A & B Mute (Bits 3:2)

Function:

When this bit is set, the output of the ADC for the selected channel will be muted.

8.6.4 Channel A & B High Pass Filter Disable (Bits 1:0)

Function:

When this bit is set, the internal high-pass filter for the selected channel will be disabled. The current DC offset value will be frozen and continue to be subtracted from the conversion result. See “High Pass Filter and DC Offset Calibration” on page 30.

8.7 Mode Control 2 - Address 07h

| | | | | | | | |
|----------|----------|----------|------|----------|--------|------|-----|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reserved | Reserved | Reserved | LOOP | MUTECA=B | FREEZE | CPEN | PDN |

8.7.1 Digital Loopback (Bit 4)

Function:

When this bit is set, an internal digital loopback from the ADC to the DAC will be enabled. Please refer to “Internal Digital Loopback” on page 30.

8.7.2 AMUTECA = BMUTECA (Bit 3)

Function:

When this function is enabled, the individual controls for AMUTECA and BMUTECA are internally connected through an AND gate prior to the output pins. Therefore, the external AMUTECA and BMUTECA pins will go active only when the requirements for both AMUTECA and BMUTECA are valid.

8.7.3 Freeze (Bit 2)

Function:

This function allows modifications to the control port registers without the changes taking effect until FREEZE is disabled. To make multiple changes in the Control Port registers take effect simultaneously, set the FREEZE bit, make all register changes, then clear the FREEZE bit.

8.7.4 Control Port Enable (Bit 1)

Function:

This bit is cleared by default, allowing the device to power-up in Stand-Alone Mode. Control Port Mode can be accessed by setting this bit. This will allow the operation of the device to be controlled by the registers and the pin definitions will conform to Control Port Mode. See “Recommended Power-Up Sequence - Access to Control Port Mode” on page 27.

8.7.5 Power Down (Bit 0)

Function:

The device will enter a low-power state whenever this bit is set. The power-down bit is set by default and must be cleared before normal operation in Control Port Mode can occur. The contents of the control registers are retained when the device is in power-down.

8.8 Chip ID - Register 08h

| B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
|-------|-------|-------|-------|------|------|------|------|
| PART3 | PART2 | PART1 | PART0 | REV3 | REV2 | REV1 | REV0 |

This is a Read-Only register.

8.8.1 Chip ID (Bits 7:4)

Function:

Chip ID code for the CS4272. Permanently set to 0000b (0h).

8.8.2 Chip Revision (Bits 3:0)

Function:

Chip Revision code for the CS4272.

Revision A is coded as 0000b (0h).

Revision B is coded as 0000b (0h).

9. PARAMETER DEFINITIONS

Dynamic Range

The ratio of the rms value of the signal to the rms sum of all other spectral components over the specified bandwidth. Dynamic Range is a signal-to-noise ratio measurement over the specified bandwidth made with a -60 dBFS signal. 60 dB is added to resulting measurement to refer the measurement to full-scale. This technique ensures that the distortion components are below the noise level and do not affect the measurement. This measurement technique has been accepted by the Audio Engineering Society, AES17-1991, and the Electronic Industries Association of Japan, EIAJ CP-307. Expressed in decibels.

Total Harmonic Distortion + Noise

The ratio of the rms value of the signal to the rms sum of all other spectral components over the specified bandwidth (typically 10 Hz to 20 kHz), including distortion components. Expressed in decibels. Measured at -1 and -20 dBFS as suggested in AES17-1991 Annex A.

Frequency Response

A measure of the amplitude response variation from 10 Hz to 20 kHz relative to the amplitude response at 1 kHz. Units in decibels.

Interchannel Isolation

A measure of crosstalk between the left and right channels. Measured for each channel at the converter's output with no signal to the input under test and a full-scale signal applied to the other channel. Units in decibels.

Interchannel Gain Mismatch

The gain difference between left and right channels. Units in decibels.

Gain Error

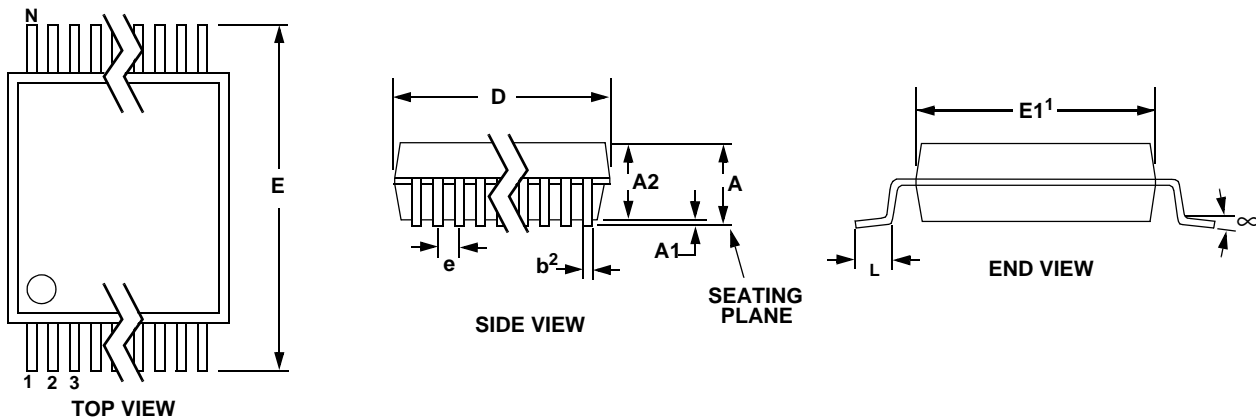
The deviation from the nominal full-scale analog output for a full-scale digital input.

Gain Drift

The change in gain value with temperature. Units in ppm/°C.

Offset Error

The deviation of the mid-scale transition (111...111 to 000...000) from the ideal. Units in mV.

10. PACKAGE DIMENSIONS
28L TSSOP (4.4 mm BODY) PACKAGE DRAWING


| DIM | INCHES | | | MILLIMETERS | | | NOTE |
|-----|-----------|-----------|-----------|-------------|----------|----------|------|
| | MIN | NOM | MAX | MIN | NOM | MAX | |
| A | -- | -- | 0.47 | -- | -- | 1.20 | |
| A1 | 0.002 | 0.004 | 0.006 | 0.05 | 0.10 | 0.15 | |
| A2 | 0.03150 | 0.035 | 0.04 | 0.80 | 0.90 | 1.00 | |
| b | 0.00748 | 0.0096 | 0.012 | 0.19 | 0.245 | 0.30 | 2,3 |
| D | 0.378 BSC | 0.382 BSC | 0.386 BSC | 9.60 BSC | 9.70 BSC | 9.80 BSC | 1 |
| E | 0.248 | 0.2519 | 0.256 | 6.30 | 6.40 | 6.50 | |
| E1 | 0.169 | 0.1732 | 0.177 | 4.30 | 4.40 | 4.50 | 1 |
| e | -- | 0.026 BSC | -- | -- | 0.65 BSC | -- | |
| L | 0.020 | 0.024 | 0.029 | 0.50 | 0.60 | 0.75 | |
| ∞ | 0° | 4° | 8° | 0° | 4° | 8° | |

JEDEC #: MO-153

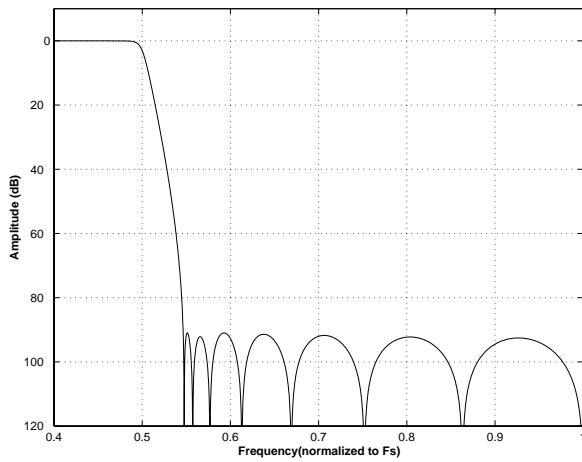
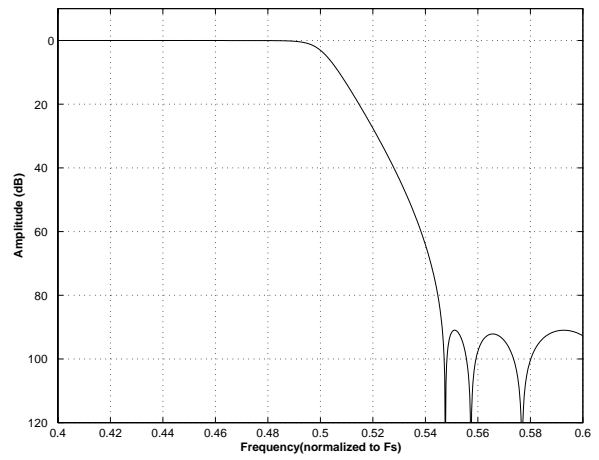
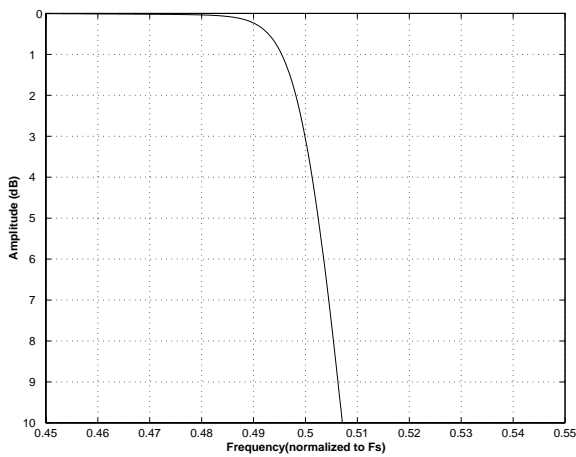
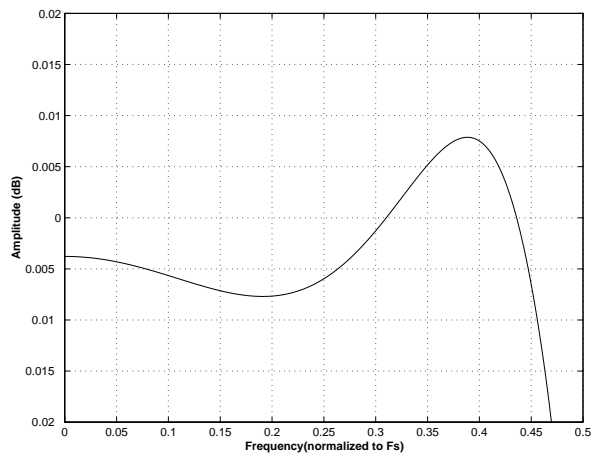
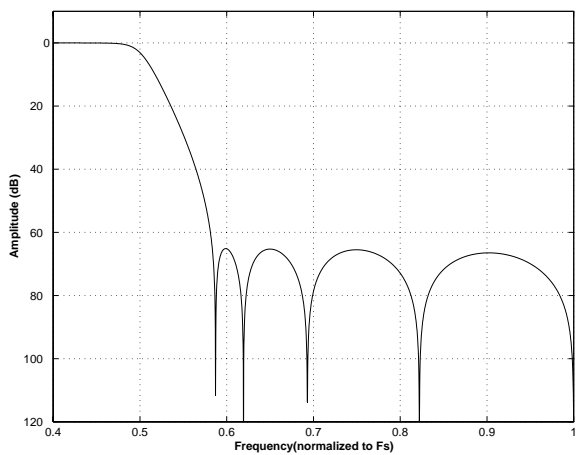
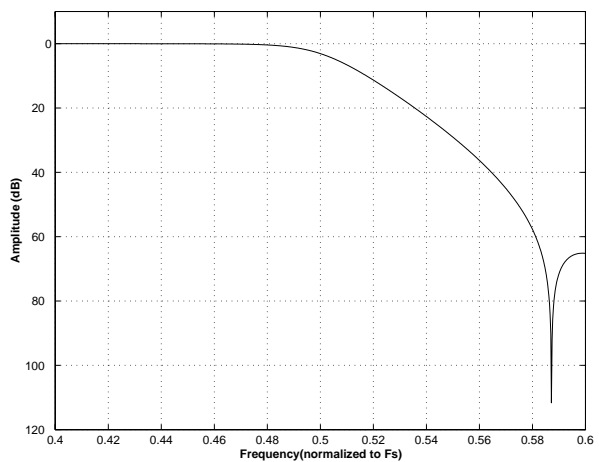
Controlling Dimension is Millimeters.

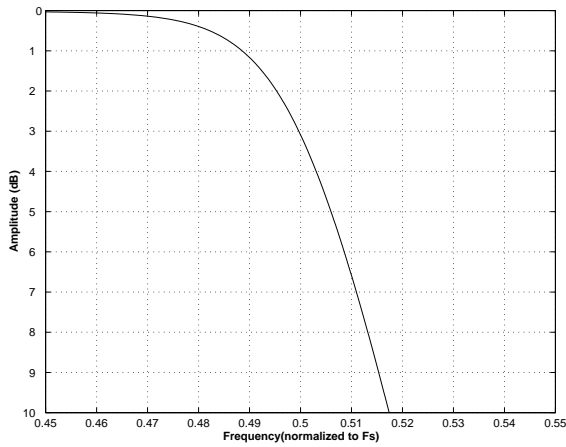
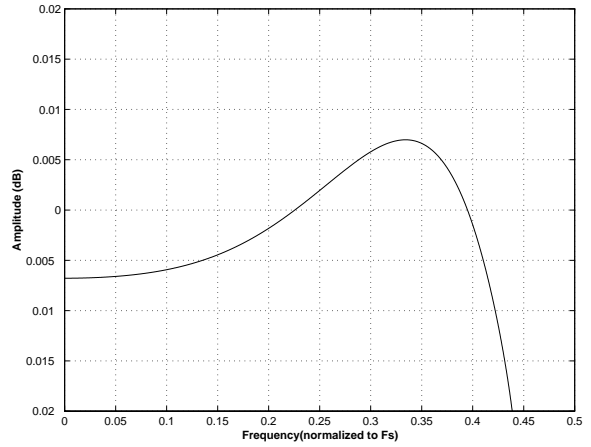
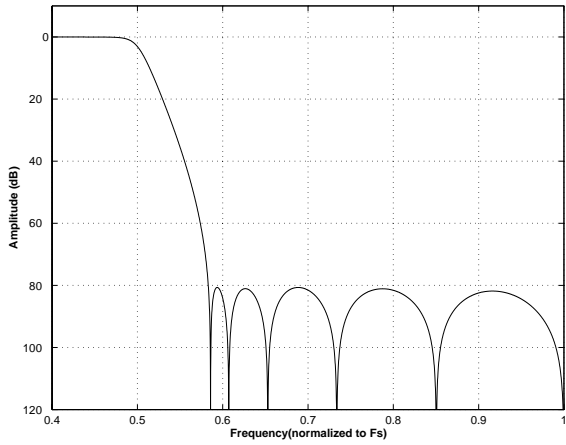
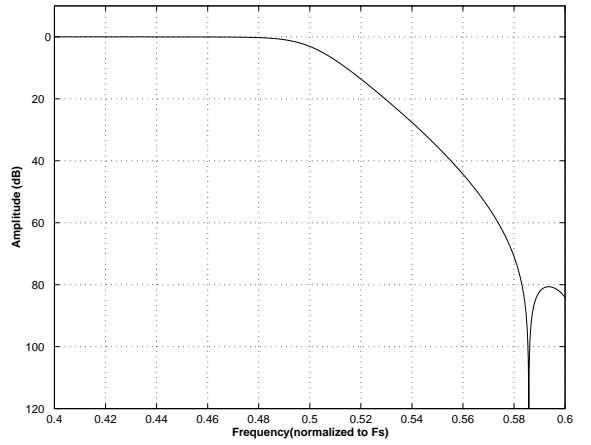
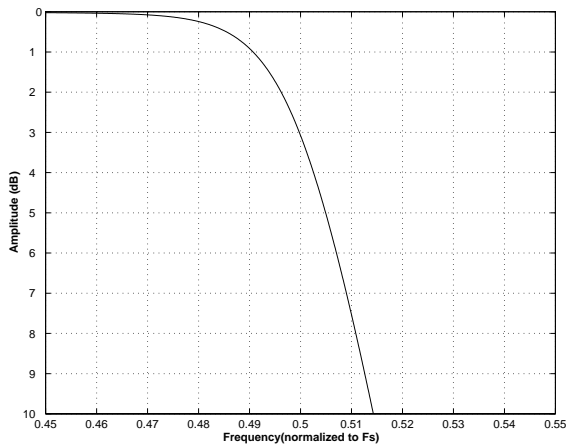
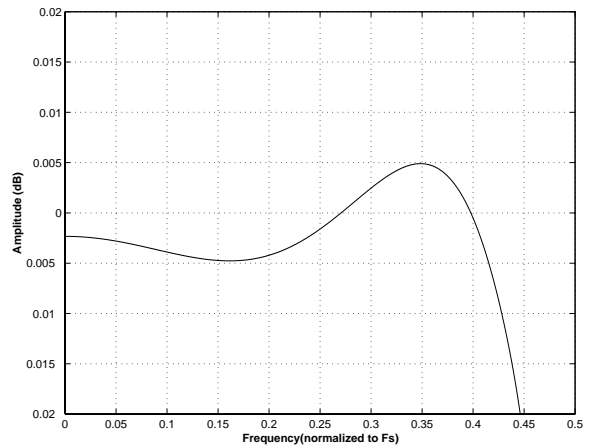
- Notes:
1. "D" and "E1" are reference datums and do not include mold flash or protrusions, but do include mold mismatch and are measured at the parting line, mold flash or protrusions shall not exceed 0.20 mm per side.
 2. Dimension "b" does not include dambar protrusion/intrusion. Allowable dambar protrusion shall be 0.13 mm total in excess of "b" dimension at maximum material condition. Dambar intrusion shall not reduce dimension "b" by more than 0.07 mm at least material condition.
 3. These dimensions apply to the flat section of the lead between 0.10 and 0.25 mm from lead tips.

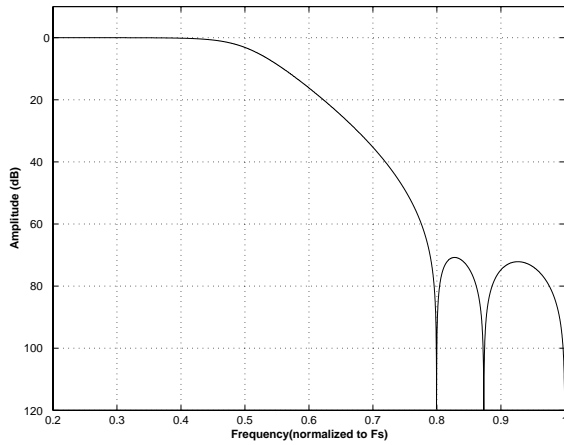
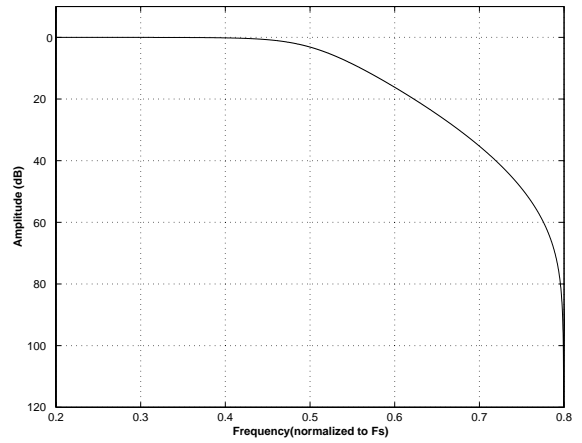
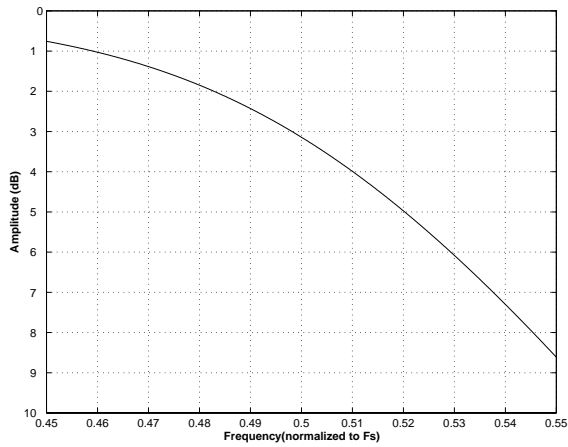
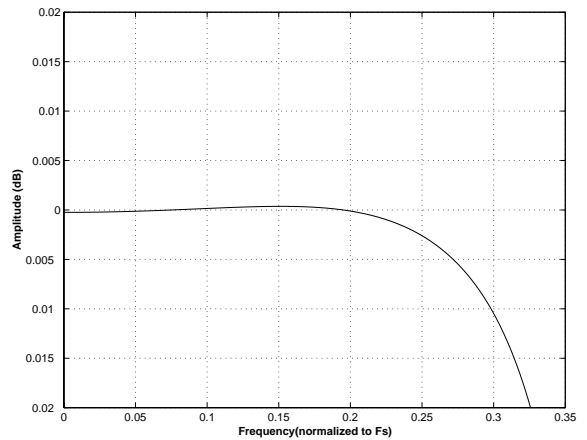
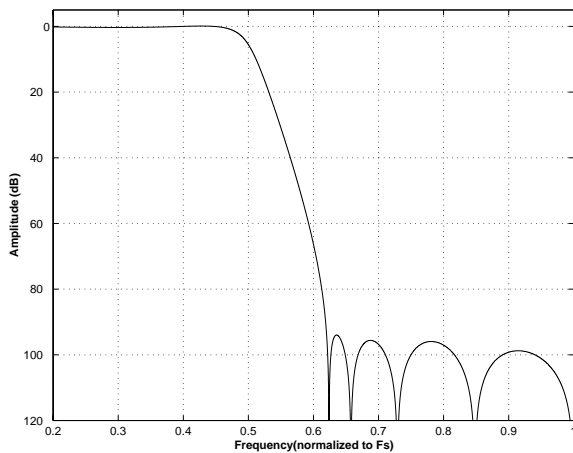
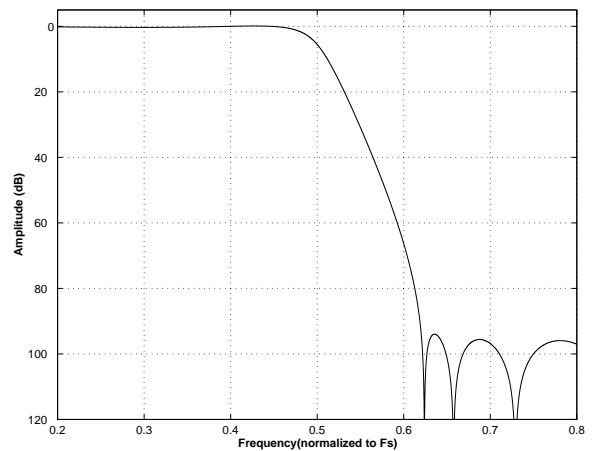
THERMAL CHARACTERISTICS AND SPECIFICATIONS

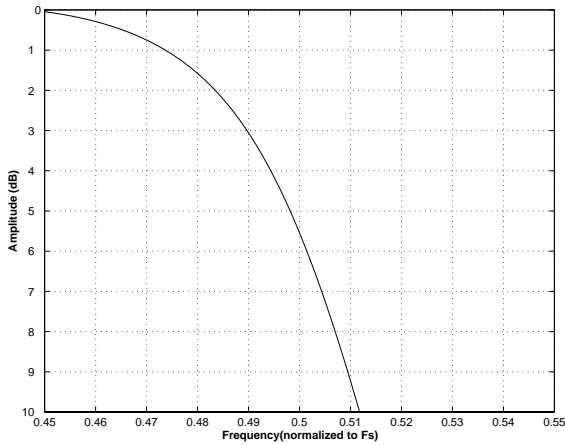
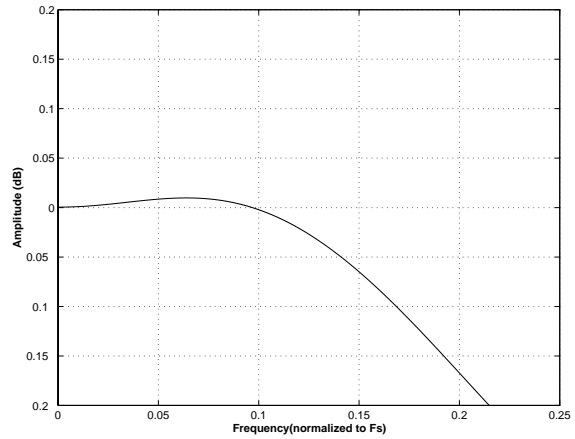
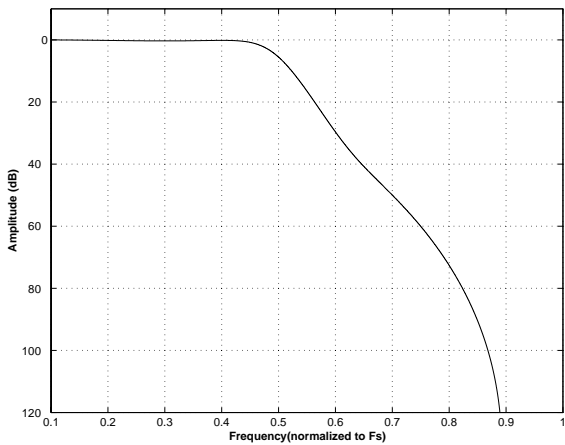
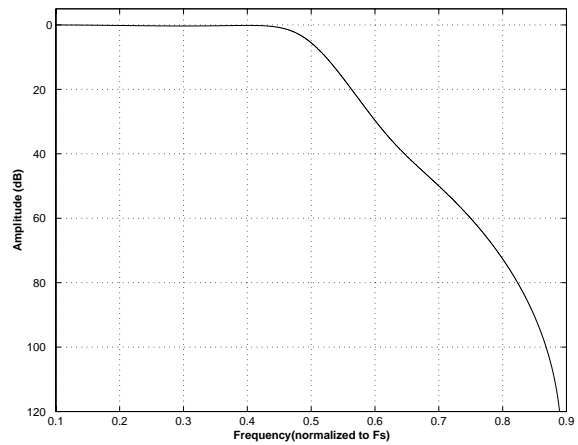
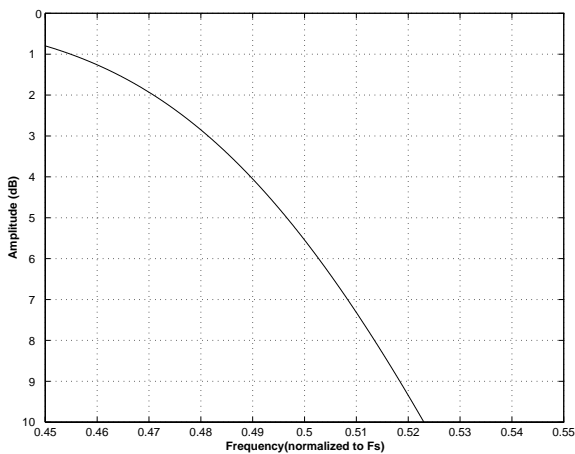
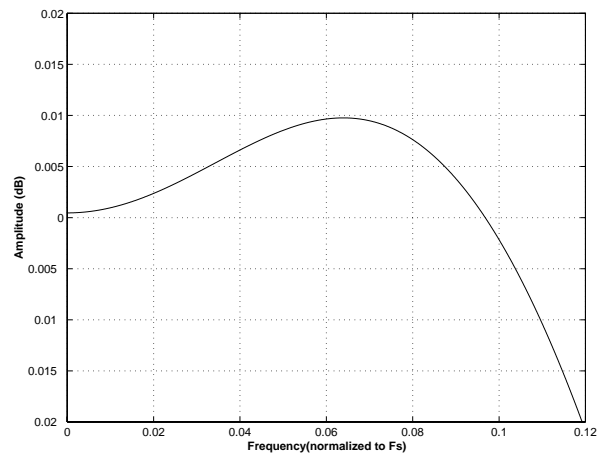
| Parameters | Symbol | Min | Typ | Max | Units | |
|-------------------------------------|----------|---------------|-----|-----|-------|---------|
| Package Thermal Resistance (Note 4) | 28-TSSOP | θ_{JA} | - | 37 | - | °C/Watt |
| | | θ_{JC} | - | 13 | - | °C/Watt |
| Allowable Junction Temperature | | - | - | 135 | °C | |

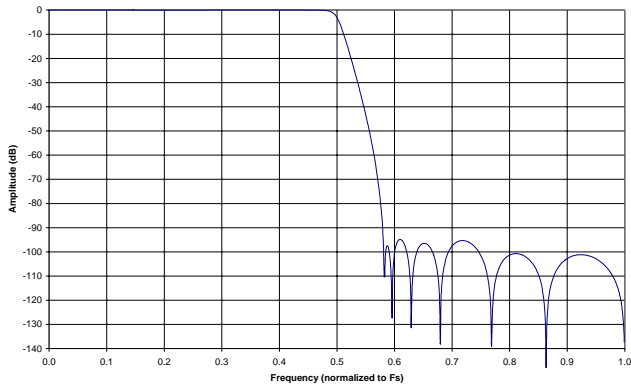
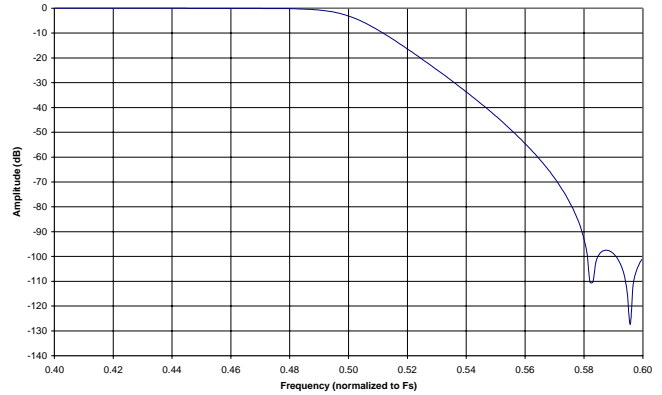
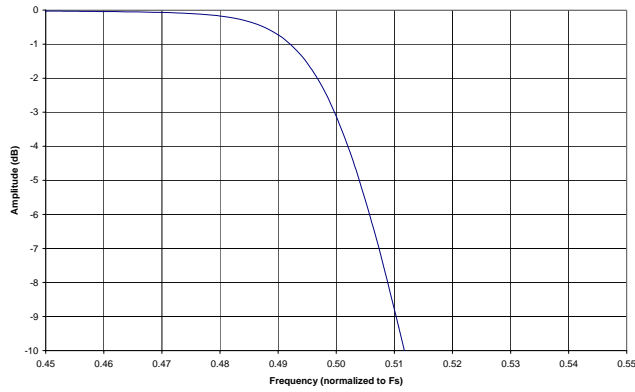
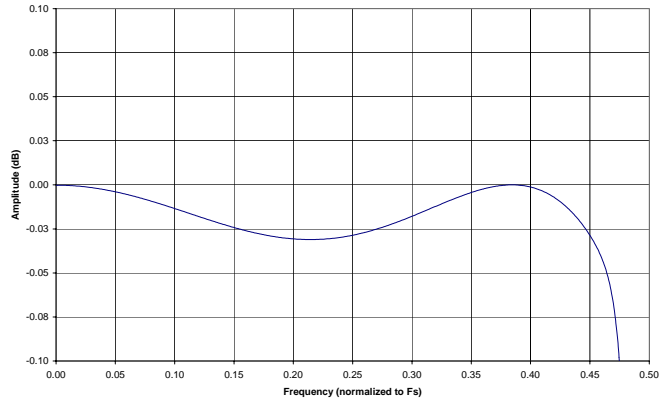
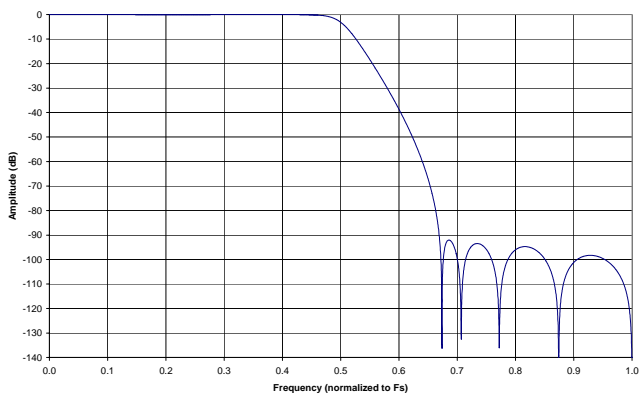
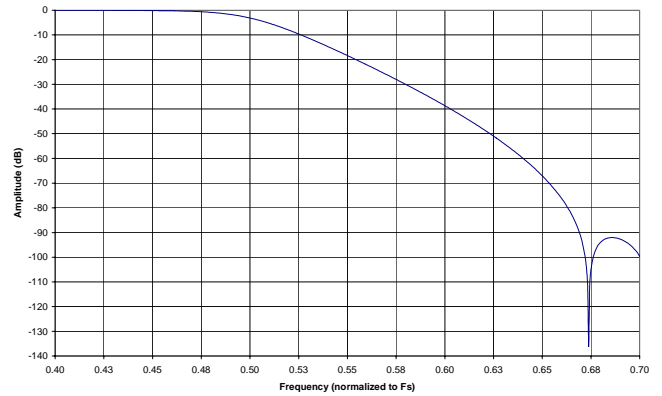
- Notes:
4. θ_{JA} is specified according to JEDEC specifications for multi-layer PCBs.

11.APPENDIX

Figure 21. DAC Single Speed (fast) Stopband Rejection

Figure 22. DAC Single Speed (fast) Transition Band

Figure 23. DAC Single Speed (fast) Transition Band (detail)

Figure 24. DAC Single Speed (fast) Passband Ripple

Figure 25. DAC Single Speed (slow) Stopband Rejection

Figure 26. DAC Single Speed (slow) Transition Band


Figure 27. DAC Single Speed (slow) Transition Band (detail)

Figure 28. DAC Single Speed (slow) Passband Ripple

Figure 29. DAC Double Speed (fast) Stopband Rejection

Figure 30. DAC Double Speed (fast) Transition Band

Figure 31. DAC Double Speed (fast) Transition Band (detail)

Figure 32. DAC Double Speed (fast) Passband Ripple


Figure 33. DAC Double Speed (slow) Stopband Rejection

Figure 34. DAC Double Speed (slow) Transition Band

Figure 35. DAC Double Speed (slow) Transition Band (detail)

Figure 36. DAC Double Speed (slow) Passband Ripple

Figure 37. DAC Quad Speed (fast) Stopband Rejection

Figure 38. DAC Quad Speed (fast) Transition Band


Figure 39. DAC Quad Speed (fast) Transition Band (detail)

Figure 40. DAC Quad Speed (fast) Passband Ripple

Figure 41. DAC Quad Speed (slow) Stopband Rejection

Figure 42. DAC Quad Speed (slow) Transition Band

Figure 43. DAC Quad Speed (slow) Transition Band (detail)

Figure 44. DAC Quad Speed (slow) Passband Ripple


Figure 45. ADC Single Speed Mode Stopband Rejection

Figure 46. ADC Single Speed Mode Transition Band

Figure 47. ADC Single Speed Mode Transition Band (Detail)

Figure 48. ADC Single Speed Mode Passband Ripple

Figure 49. ADC Double Speed Mode Stopband Rejection

Figure 50. ADC Double Speed Mode Transition Band

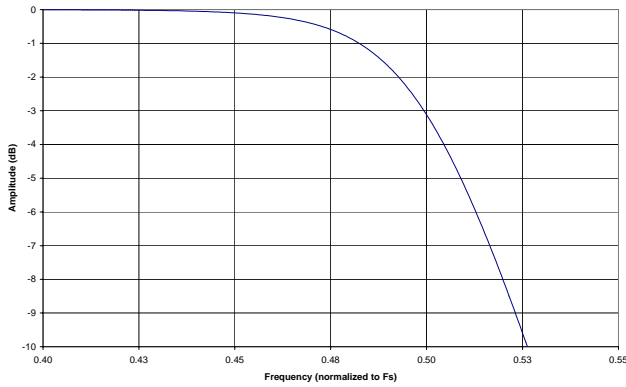
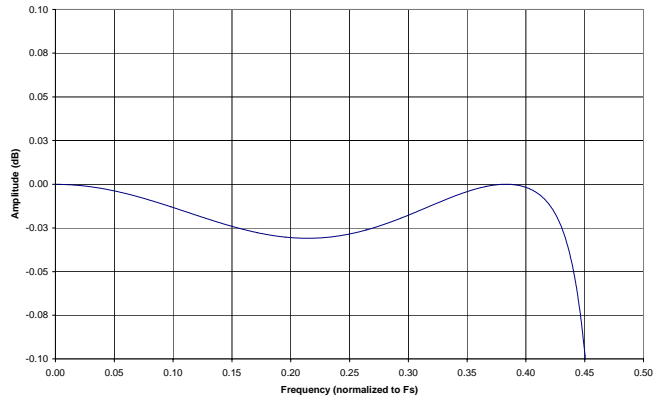
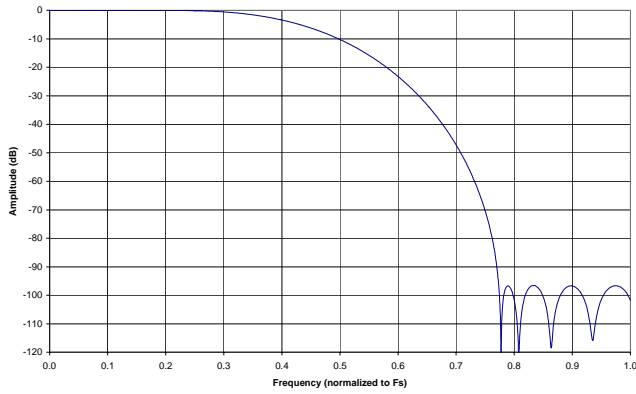
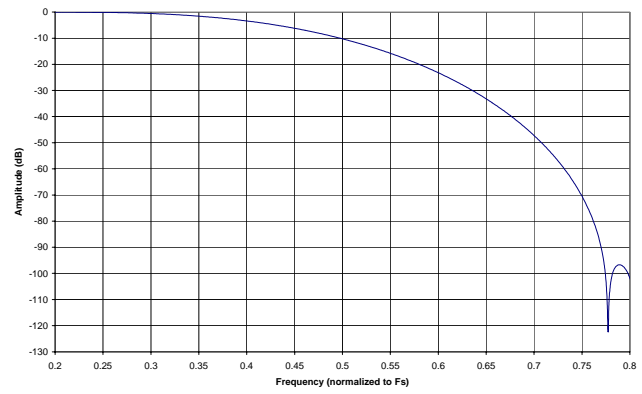
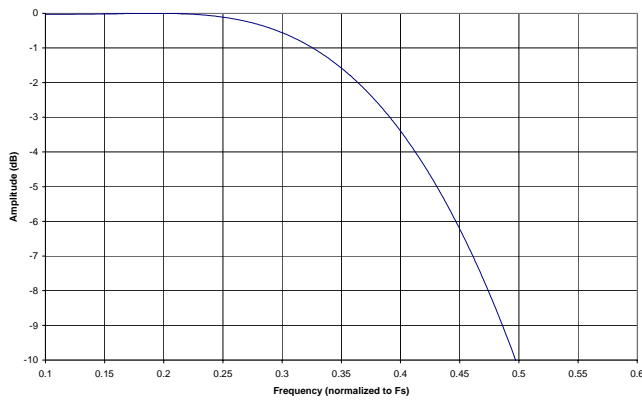
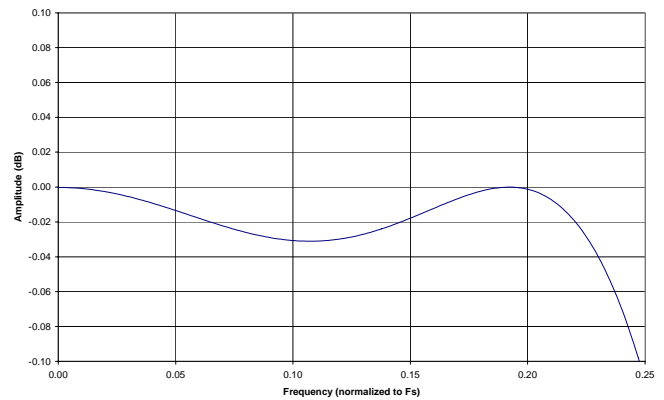

Figure 51. ADC Double Speed Mode Transition Band (Detail)

Figure 52. ADC Double Speed Mode Passband Ripple

Figure 53. ADC Quad Speed Mode Stopband Rejection

Figure 54. ADC Quad Speed Mode Transition Band

Figure 55. ADC Quad Speed Mode Transition Band (Detail)

Figure 56. ADC Quad Speed Mode Passband Ripple

Table 18. Revision History

| Release | Date | Changes |
|---------|----------------|--|
| A1 | January 2003 | Advance Release |
| PP1 | March 2003 | Preliminary Release |
| PP2 | October 2003 | <ul style="list-style-type: none"> - Updated Figure 8 on page 23. - Updated Table 9 on page 29. - Updated the DC Electrical Characteristics table on page 17. - Updated the DAC Analog Filter Response tables on pages 10 and 11. - Updated the ADC Digital Filter Characteristics table on page 16. - Updated the DAC Full Scale Differential Output Voltage specification on pages 10 and 11. |
| PP3 | September 2004 | Add lead-free device ordering info. |
| F1 | August 2005 | Final Release <ul style="list-style-type: none"> - Updated Ordering Information on page 2. - Updated Specified Operating Conditions table on page 9 to reflect ordering-suffix independent temperature grade information. - Updated DAC Analog Characteristics tables on pages 10 and 11 to reflect ordering-suffix independent temperature grade information. - Updated ADC Analog Characteristics tables on pages 14 and 15 to reflect ordering-suffix independent temperature grade information. - Updated the DC Electrical Characteristics table on page 17. - Corrected error in the SCLK Period units shown in the Switching Characteristics - Serial Audio Port table on page 18. - Corrected error in the Memory Address Pointer table on page 36. - Updated Chip ID register description on page 44. |

Contacting Cirrus Logic Support

For all product questions and inquiries contact a Cirrus Logic Sales Representative.

To find one nearest you go to www.cirrus.com

IMPORTANT NOTICE

Cirrus Logic, Inc. and its subsidiaries ("Cirrus") believe that the information contained in this document is accurate and reliable. However, the information is subject to change without notice and is provided "AS IS" without warranty of any kind (express or implied). Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. No responsibility is assumed by Cirrus for the use of this information, including use of this information as the basis for manufacture or sale of any items, or for infringement of patents or other rights of third parties. This document is the property of Cirrus and by furnishing this information, Cirrus grants no license, express or implied under any patents, mask work rights, copyrights, trademarks, trade secrets or other intellectual property rights. Cirrus owns the copyrights associated with the information contained herein and gives consent for copies to be made of the information only for use within your organization with respect to Cirrus integrated circuits or other products of Cirrus. This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). CIRRUS PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN AIRCRAFT SYSTEMS, MILITARY APPLICATIONS, PRODUCTS SURGICALLY IMPLANTED INTO THE BODY, AUTOMOTIVE SAFETY OR SECURITY DEVICES, LIFE SUPPORT PRODUCTS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF CIRRUS PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK AND CIRRUS DISCLAIMS AND MAKES NO WARRANTY, EXPRESS, STATUTORY OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, WITH REGARD TO ANY CIRRUS PRODUCT THAT IS USED IN SUCH A MANNER. IF THE CUSTOMER OR CUSTOMER'S CUSTOMER USES OR PERMITS THE USE OF CIRRUS PRODUCTS IN CRITICAL APPLICATIONS, CUSTOMER AGREES, BY SUCH USE, TO FULLY INDEMNIFY CIRRUS, ITS OFFICERS, DIRECTORS, EMPLOYEES, DISTRIBUTORS AND OTHER AGENTS FROM ANY AND ALL LIABILITY, INCLUDING ATTORNEYS' FEES AND COSTS, THAT MAY RESULT FROM OR ARISE IN CONNECTION WITH THESE USES.

Cirrus Logic, Cirrus, and the Cirrus Logic logo designs are trademarks of Cirrus Logic, Inc. All other brand and product names in this document may be trademarks or service marks of their respective owners.

SPI is a trademark of Motorola, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cirrus Logic:](#)

[CDB4272](#) [CS4272-CZZ](#) [CS4272-CZZR](#) [CS4272-DZZ](#) [CS4272-DZZR](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.