



LC75410E, 75410W

Electronic Volume Controller for Car Audio Systems



Overview

The LC75410E and 75410W are electronic volume controllers that enable control of volume, balance, fader, bass/treble/mid, loudness, input switching, and input gain using only a small number of external components.

Functions

- Volume: 0 dB to -79.5 dB in 0.5-dB steps, and $-\infty$ (161 positions) Balance function with separate L/R control
- Fader: rear output or front output can be attenuated across 16 positions (in 1-dB steps from 0 dB to -2 dB, 2-dB steps from -2 dB to -20 dB, 10-dB steps from -20 dB to -30 dB, and -45 dB, -60 dB, $-\infty$)
- Bass/treble/mid: Each band can be controlled in 1-dB steps from 0 dB to ± 6 dB, and in 2-dB steps from ± 8 dB to ± 12 dB.
- Input gain: 0 dB to +18.75 dB (1.25-dB steps)
amplification is possible for the input signal.
- Input switching: five input signals can be selected for Left and for Right (Four are single-ended inputs and one is a differential input.)
- Loudness: A tap is output from the -32 dB position of a 2 dB step volume control resistor ladder. A loudness function can be implemented by connecting an external RC circuit.

Features

- On-chip buffer amplifier cuts down number of external components
- Low switching noise generated by on-chip switch through use of silicon gate CMOS process, for low switching noise when there is no signal
- Low switching noise when there is a signal due to use of on-chip zero-cross switching circuit
- On-chip 1/2 VDD reference voltage circuit
- Controls performed with serial input (CCB)

- CCB is a trademark of SANYO ELECTRIC CO., LTD.
- CCB is SANYO's original bus format and all the bus addresses are controlled by SANYO.


■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

Equivalent Circuit Block Diagram/Sample Application Circuit

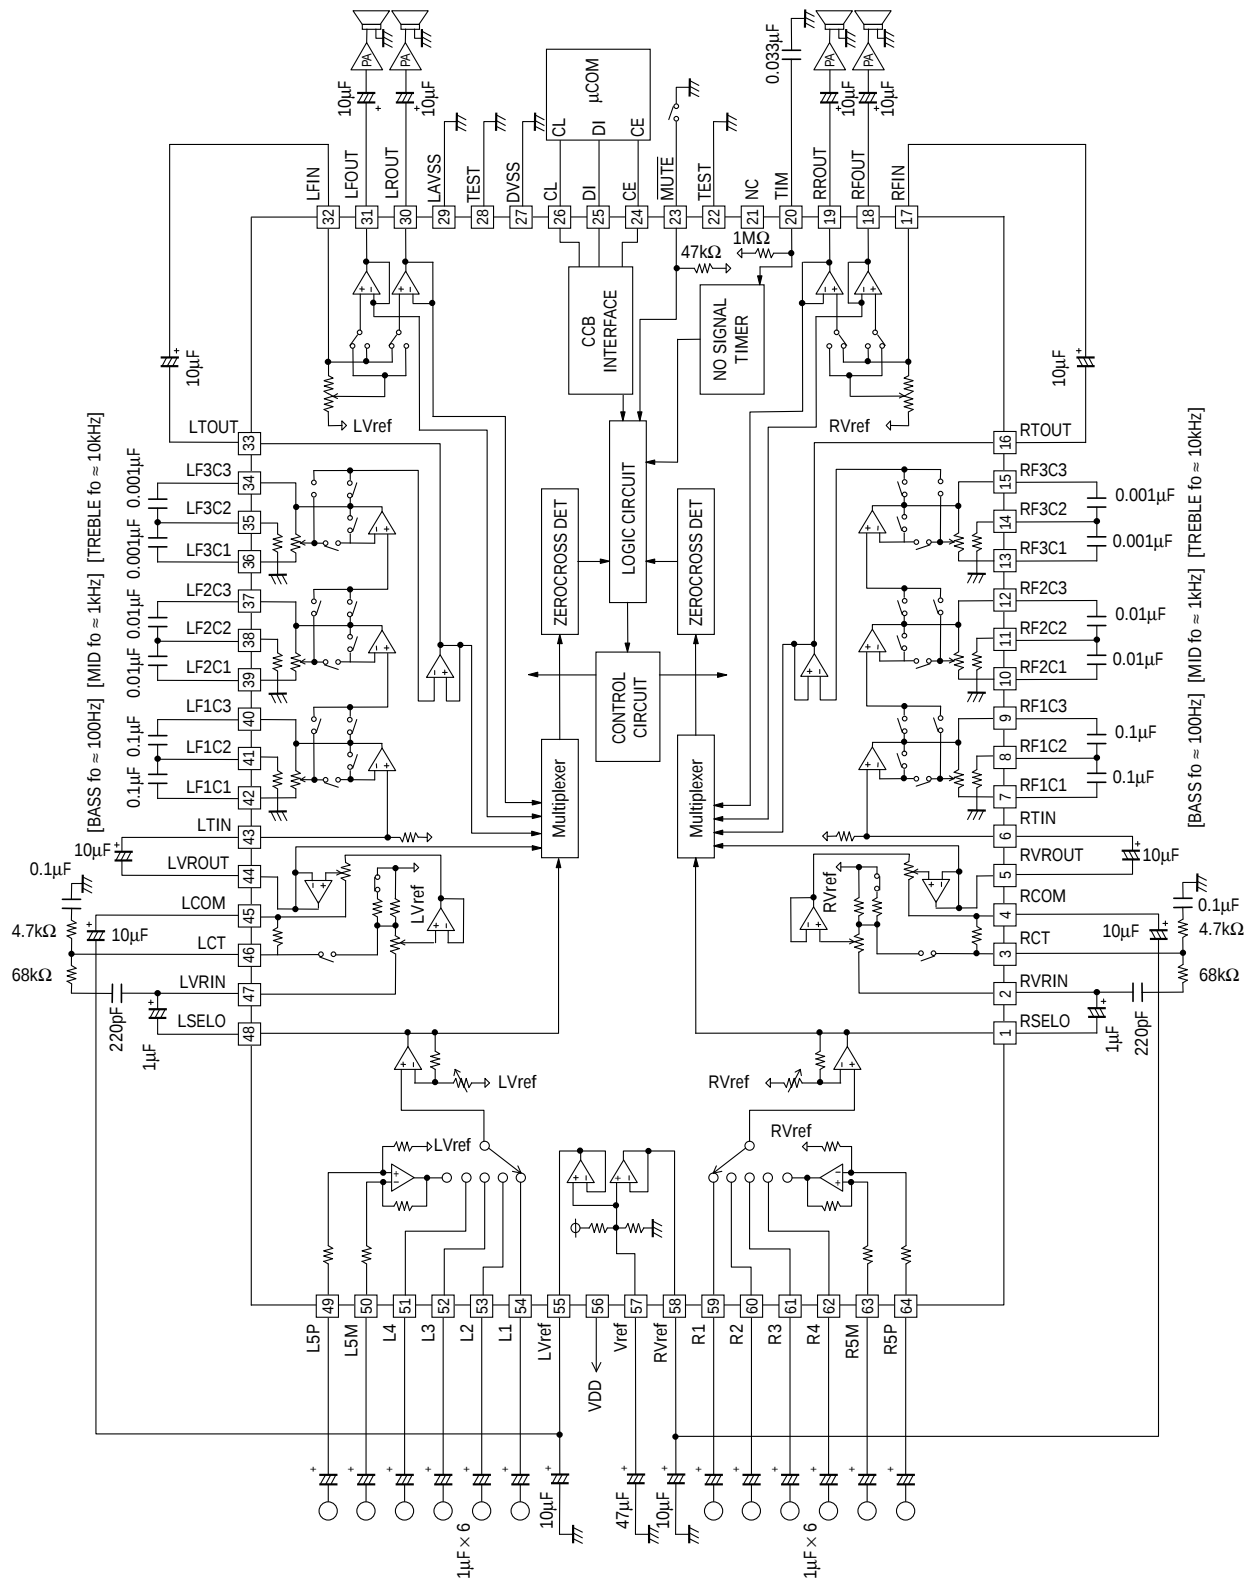

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$, $V_{SS} = 0\text{ V}$

Parameter	Symbol	Conditions		Ratings	Unit
Maximum supply voltage	V _{DD} max	V _{DD}		11	V
Maximum input voltage	V _{IN} max	All input pins		V _{SS} – 0.3 to V _{DD} + 0.3	V
Allowable power dissipation	Pd max	Ta ≤ 85°C, when mounted on board	QIP64E	680	mW
			SQFP64	800	
Operating temperature	Topr			–40 to +85	°C
Storage temperature	Tstg			–50 to +125	°C

Allowable Operating Ranges at $T_a = 25^\circ\text{C}$, $V_{SS} = 0\text{ V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Supply voltage	V_{DD}	V_{DD}	6.0		10.5	V
Input high-level voltage	V_{IH}	CL, DI, CE, MUTE	4.0		10.5	V
Input low-level voltage	V_{IL}	CL, DI, CE, MUTE	V_{SS}		1.0	V
Input amplitude voltage	V_{IN}		V_{SS}		V_{DD}	Vp-p
Input pulse width	$T_{\theta W}$	CL	1			μs
Setup time	T_{setup}	CL, DI, CE	1			μs
Hold time	T_{hold}	CL, DI, CE	1			μs
Operating frequency	fopg	CL			500	kHz

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{DD} = 9\text{ V}$, $V_{SS} = 0\text{ V}$

Parameter	Symbol	Pin Name	Conditions	Ratings			Unit
				min	typ	max	
[Input block]							
Input resistance	Rin	L1 to L4, R1 to R4		25	50	100	kΩ
Minimum input gain	Ginmin	L1 to L4, R1 to R4		−1	0	+1	dB
Maximum input gain	Ginmax			+16.5	+18.75	+21	dB
Step setting error	ATerr					±0.5	dB
L/R balance	BAL					±0.5	dB
[Volume Block]							
Input resistance	Rvr	LVRIN, RVRIN, loudness off		113	226	452	kΩ
Step setting error	ATerr					±0.5	dB
L/R balance	BAL					±0.5	dB
[Tone block]							
Step setting error	ATerr					±1.0	dB
Bass control range	Gbass		max. boost/cut	±9	±12	±15	dB
Mid control range	Gmid		max. boost/cut	±9	±12	±15	dB
Treble control range	Gtre		max. boost/cut	±9	±12	±15	dB
L/R balance	BAL					±0.5	dB

Continued on next page.

LC75410E, 75410W


Continued from preceding page.

Parameter	Symbol	Pin Name	Conditions	Ratings			Unit
				min	typ	max	
[Fader Block]							
Input resistance	Rfed	LFIN, RFIN		25	50	100	kΩ
Step setting error	ATerr		0dB to −2dB			±0.5	dB
			−2dB to −20dB			±1	dB
			−20dB to −30dB			±2	dB
			−30dB to −60dB			±3	dB
L/R balance	BAL					±0.5	dB
[General]							
Total harmonic distortion	THD (1)	V _{IN} = 0dBV, f = 1 kHz			0.004	0.01	%
	THD (2)	V _{IN} = −10dBV, f = 10 kHz			0.006	0.01	%
Input crosstalk	CT	V _{IN} = 1Vrms, f = 1 kHz		80	88		dB
L/R crosstalk	CT	V _{IN} = 1Vrms, f = 1 kHz		80	88		dB
Maximum attenuated output	Vomin (1)	V _{IN} = 1Vrms, f = 1 kHz		80	88		dB
	Vomin (2)	V _{IN} = 1Vrms, f = 1 kHz INMUTE, fader −∞		90	95		dB
Output noise voltage	V _N (1)	Flat overall, IHF-A filter			5	10	μV
	V _N (2)	Flat overall, 20 to 20 kHzBPF			7	15	μV
Current drain	I _{DD}				40	45	mA
Input high-level current	I _{IH}	CL, DI, CE, V _{IN} = 9 V				10	μA
Input low-level current	I _{IL}	CL, DI, CE, V _{IN} = 0 V		−10			μA
Maximum input voltage	V _{CL}	THD = 1%, R _L = 10 kΩ flat overall, f _{IN} = 1 kHz		2.3	2.8		Vrms
Common-mode rejection ratio	CMRR	V _{IN} = 0 dB, f = 1 kHz		45	70		dB

Control Timing and Data Format

To control the LC75410E and LC75410W input specified serial data to the CE, CL, and DI pins.

The data configuration consists of a total of 52 bits broken down into 8 address bits and 44 data bits.

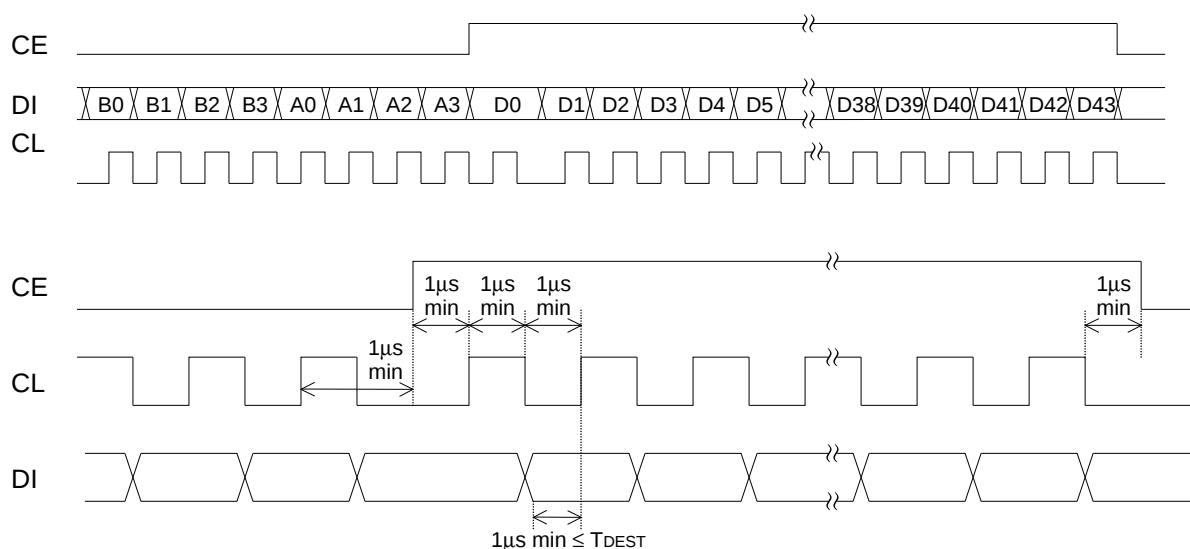

LC75410E, 75410W

Address code (B0 to A3)

The LC75410E and 75410W use 8-bit address code and can be used in common with ICs that support SANYO's CCB serial bus.

Address Code

(LSB)	B0	B1	B2	B3	A0	A1	A2	A3	(81HEX)
	1	0	0	0	0	0	0	1	

Control code allocation

Input Switching Control

D0	D1	D2	Setting	Setting
0	0	0	L1 (R1)	
1	0	0	L2 (R2)	
0	1	0	L3 (R3)	
1	1	0	L4 (R4)	
0	0	1	L5 (R5)	
0	1	1		For IC testing: Normally not used
1	1	1		

D3	Bit for IC testing: Normally set to 0
----	---------------------------------------

Input Gain Control

D4	D5	D6	D7	Operation
0	0	0	0	0dB
1	0	0	0	+1.25dB
0	1	0	0	+2.50dB
1	1	0	0	+3.75dB
0	0	1	0	+5.00dB
1	0	1	0	+6.25dB
0	1	1	0	+7.50dB
1	1	1	0	+8.75dB
0	0	0	1	+10.0dB
1	0	0	1	+11.25dB
0	1	0	1	+12.5dB
1	1	0	1	+13.75dB
0	0	1	1	+15.0dB
1	0	1	1	+16.25dB
0	1	1	1	+17.5dB
1	1	1	1	+18.75dB

LC75410E, 75410W

Volume Control (0 to -20.5dB)

D8	D9	D10	D11	D12	D13	D14	D15	Operation
0	0	0	0	0	0	0	0	0dB
0	0	0	0	0	0	0	1	-0.5dB
1	0	0	0	0	0	0	0	-1dB
1	0	0	0	0	0	0	1	-1.5dB
0	1	0	0	0	0	0	0	-2dB
0	1	0	0	0	0	0	1	-2.5dB
1	1	0	0	0	0	0	0	-3dB
1	1	0	0	0	0	0	1	-3.5dB
0	0	1	0	0	0	0	0	-4dB
0	0	1	0	0	0	0	1	-4.5dB
1	0	1	0	0	0	0	0	-5dB
1	0	1	0	0	0	0	1	-5.5dB
0	1	1	0	0	0	0	0	-6dB
0	1	1	0	0	0	0	1	-6.5dB
1	1	1	0	0	0	0	0	-7dB
1	1	1	0	0	0	0	1	-7.5dB
0	0	0	1	0	0	0	0	-8dB
0	0	0	1	0	0	0	1	-8.5dB
1	0	0	1	0	0	0	0	-9dB
1	0	0	1	0	0	0	1	-9.5dB
0	1	0	1	0	0	0	0	-10dB
0	1	0	1	0	0	0	1	-10.5dB
1	1	0	1	0	0	0	0	-11dB
1	1	0	1	0	0	0	1	-11.5dB
0	0	1	1	0	0	0	0	-12dB
0	0	1	1	0	0	0	1	-12.5dB
1	0	1	1	0	0	0	0	-13dB
1	0	1	1	0	0	0	1	-13.5dB
0	1	1	1	0	0	0	0	-14dB
0	1	1	1	0	0	0	1	-14.5dB
1	1	1	1	0	0	0	0	-15dB
1	1	1	1	0	0	0	1	-15.5dB
0	0	0	0	1	0	0	0	-16dB
0	0	0	0	1	0	0	1	-16.5dB
1	0	0	0	1	0	0	0	-17dB
1	0	0	0	1	0	0	1	-17.5dB
0	1	0	0	1	0	0	0	-18dB
0	1	0	0	1	0	0	1	-18.5dB
1	1	0	0	1	0	0	0	-19dB
1	1	0	0	1	0	0	1	-19.5dB
0	0	1	0	1	0	0	0	-20dB
0	0	1	0	1	0	0	1	-20.5dB

LC75410E, 75410W

Volume Control (–21 to –40.5dB)

D8	D9	D10	D11	D12	D13	D14	D15	Operation
1	0	1	0	1	0	0	0	–21dB
1	0	1	0	1	0	0	1	–21.5dB
0	1	1	0	1	0	0	0	–22dB
0	1	1	0	1	0	0	1	–22.5dB
1	1	1	0	1	0	0	0	–23dB
1	1	1	0	1	0	0	1	–23.5dB
0	0	0	1	1	0	0	0	–24dB
0	0	0	1	1	0	0	1	–24.5dB
1	0	0	1	1	0	0	0	–25dB
1	0	0	1	1	0	0	1	–25.5dB
0	1	0	1	1	0	0	0	–26dB
0	1	0	1	1	0	0	1	–26.5dB
1	1	0	1	1	0	0	0	–27dB
1	1	0	1	1	0	0	1	–27.5dB
0	0	1	1	1	0	0	0	–28dB
0	0	1	1	1	0	0	1	–28.5dB
1	0	1	1	1	0	0	0	–29dB
1	0	1	1	1	0	0	1	–29.5dB
0	1	1	1	1	0	0	0	–30dB
0	1	1	1	1	0	0	1	–30.5dB
1	1	1	1	1	0	0	0	–31dB
1	1	1	1	1	0	0	1	–31.5dB
0	0	0	0	0	1	0	0	–32dB
0	0	0	0	0	1	0	1	–32.5dB
1	0	0	0	0	1	0	0	–33dB
1	0	0	0	0	1	0	1	–33.5dB
0	1	0	0	0	1	0	0	–34dB
0	1	0	0	0	1	0	1	–34.5dB
1	1	0	0	0	1	0	0	–35dB
1	1	0	0	0	1	0	1	–35.5dB
0	0	1	0	0	1	0	0	–36dB
0	0	1	0	0	1	0	1	–36.5dB
1	0	1	0	0	1	0	0	–37dB
1	0	1	0	0	1	0	1	–37.5dB
0	1	1	0	0	1	0	0	–38dB
0	1	1	0	0	1	0	1	–38.5dB
1	1	1	0	0	1	0	0	–39dB
1	1	1	0	0	1	0	1	–39.5dB
0	0	0	1	0	1	0	0	–40dB
0	0	0	1	0	1	0	1	–40.5dB

LC75410E, 75410W

Volume Control (–41 to –59.5dB)

D8	D9	D10	D11	D12	D13	D14	D15	Operation
1	0	0	1	0	1	0	0	–41dB
1	0	0	1	0	1	0	1	–41.5dB
0	1	0	1	0	1	0	0	–42dB
0	1	0	1	0	1	0	1	–42.5dB
1	1	0	1	0	1	0	0	–43dB
1	1	0	1	0	1	0	1	–43.5dB
0	0	1	1	0	1	0	0	–44dB
0	0	1	1	0	1	0	1	–44.5dB
1	0	1	1	0	1	0	0	–45dB
1	0	1	1	0	1	0	1	–45.5dB
0	1	1	1	0	1	0	0	–46dB
0	1	1	1	0	1	0	1	–46.5dB
1	1	1	1	0	1	0	0	–47dB
1	1	1	1	0	1	0	1	–47.5dB
0	0	0	0	1	1	0	0	–48dB
0	0	0	0	1	1	0	1	–48.5dB
1	0	0	0	1	1	0	0	–49dB
1	0	0	0	1	1	0	1	–49.5dB
0	1	0	0	1	1	0	0	–50dB
0	1	0	0	1	1	0	1	–50.5dB
1	1	0	0	1	1	0	0	–51dB
1	1	0	0	1	1	0	1	–51.5dB
0	0	1	0	1	1	0	0	–52dB
0	0	1	0	1	1	0	1	–52.5dB
1	0	1	0	1	1	0	0	–53dB
1	0	1	0	1	1	0	1	–53.5dB
0	1	1	0	1	1	0	0	–54dB
0	1	1	0	1	1	0	1	–54.5dB
1	1	1	0	1	1	0	0	–55dB
1	1	1	0	1	1	0	1	–55.5dB
0	0	0	1	1	1	0	0	–56dB
0	0	0	1	1	1	0	1	–56.5dB
1	0	0	1	1	1	0	0	–57dB
1	0	0	1	1	1	0	1	–57.5dB
0	1	0	1	1	1	0	0	–58dB
0	1	0	1	1	1	0	1	–58.5dB
1	1	0	1	1	1	0	0	–59dB
1	1	0	1	1	1	0	1	–59.5dB

LC75410E, 75410W

Volume Control (−60 to −∞)

D8	D9	D10	D11	D12	D13	D14	D15	Operation
0	0	1	1	1	1	0	0	−60dB
0	0	1	1	1	1	0	1	−60.5dB
1	0	1	1	1	1	0	0	−61dB
1	0	1	1	1	1	0	1	−61.5dB
0	1	1	1	1	1	0	0	−62dB
0	1	1	1	1	1	0	1	−62.5dB
1	1	1	1	1	1	0	0	−63dB
1	1	1	1	1	1	0	1	−63.5dB
0	0	0	0	0	0	1	0	−64dB
0	0	0	0	0	0	1	1	−64.5dB
1	0	0	0	0	0	1	0	−65dB
1	0	0	0	0	0	1	1	−65.5dB
0	1	0	0	0	0	1	0	−66dB
0	1	0	0	0	0	1	1	−66.5dB
1	1	0	0	0	0	1	0	−67dB
1	1	0	0	0	0	1	1	−67.5dB
0	0	1	0	0	0	1	0	−68dB
0	0	1	0	0	0	1	1	−68.5dB
1	0	1	0	0	0	1	0	−69dB
1	0	1	0	0	0	1	1	−69.5dB
0	1	1	0	0	0	1	0	−70dB
0	1	1	0	0	0	1	1	−70.5dB
1	1	1	0	0	0	1	0	−71dB
1	1	1	0	0	0	1	1	−71.5dB
0	0	0	1	0	0	1	0	−72dB
0	0	0	1	0	0	1	1	−72.5dB
1	0	0	1	0	0	1	0	−73dB
1	0	0	1	0	0	1	1	−73.5dB
0	1	0	1	0	0	1	0	−74dB
0	1	0	1	0	0	1	1	−74.5dB
1	1	0	1	0	0	1	0	−75dB
1	1	0	1	0	0	1	1	−75.5dB
0	0	1	1	0	0	1	0	−76dB
0	0	1	1	0	0	1	1	−76.5dB
1	0	1	1	0	0	1	0	−77dB
1	0	1	1	0	0	1	1	−77.5dB
0	1	1	1	0	0	1	0	−78dB
0	1	1	1	0	0	1	1	−78.5dB
1	1	1	1	0	0	1	0	−79dB
1	1	1	1	0	0	1	1	−79.5dB
0	1	1	1	1	1	1	0	−∞

LC75410E, 75410W

Three-Band Equalizer Control

D16	D17	D18	D19	D40	f1 band
D20	D21	D22	D23	D41	f2 band
D24	D25	D26	D27	D42	f3 band
0	1	1	0	0	+12dB
1	0	1	0	0	+10dB
0	0	1	0	0	+8dB
1	1	0	0	0	+6dB
1	1	0	0	1	+5dB
0	1	0	0	0	+4dB
0	1	0	0	1	+3dB
1	0	0	0	0	+2dB
1	0	0	0	1	+1dB
0	0	0	0	0	0dB
1	0	0	1	1	-1dB
1	0	0	1	0	-2dB
0	1	0	1	1	-3dB
0	1	0	1	0	-4dB
1	1	0	1	1	-5dB
1	1	0	1	0	-6dB
0	0	1	1	0	-8dB
1	0	1	1	0	-10dB
0	1	1	1	0	-12dB

Fader Volume Control

D28	D29	D30	D31	Operation
0	0	0	0	0dB
1	0	0	0	-1dB
0	1	0	0	-2dB
1	1	0	0	-4dB
0	0	1	0	-6dB
1	0	1	0	-8dB
0	1	1	0	-10dB
1	1	1	0	-12dB
0	0	0	1	-14dB
1	0	0	1	-16dB
0	1	0	1	-18dB
1	1	0	1	-20dB
0	0	1	1	-30dB
1	0	1	1	-45dB
0	1	1	1	-60dB
1	1	1	1	-∞

Channel Selection Control

D32	D33	Operation
0	0	L/R simultaneously, Initial setting mode
1	0	RCH
0	1	LCH
1	1	L/R simultaneously

Fader Rear/Front Control

D34	Setting
0	Rear
1	Front

Loudness Control

D35	Setting
0	OFF
1	ON

Zero-Cross Control

D36	D37	Setting
0	0	Data write through zero-cross detection
1	1	Zero-cross detection stopped (data write at falling edge of CE)

Zero-Cross Signal Detection Block Control

D38	D39	Setting
0	0	Selector
1	0	Volume
0	1	Tone
1	1	Fader

Test Mode Control

D43	Setting
0	For IC testing. Always set to 0.

Pin Functions

Pin Name	Pin No.	Function	Equivalent circuit
L1 L2 L3 L4 R1 R2 R3 R4	54 53 52 51 59 60 61 62	• Single-end input pins	
L5M L5P R5M R5P	50 49 63 64	• Differential input pins	
LSEL0 RSEL0	48 1	• Input selector output pins	
LVRIN RVRIN	47 2	• 2-dB step volume input pins • Perform input at low-impedance.	
LCT RCT	46 3	• Loudness pins. Connect high-pass compensation RC between LCT (RCT) and LVRIN (RVRIN), and connect low-pass compensation RC between LCT (RCT) and GND.	
LCOM RCOM	45 4	• 2-dB stop volume output pins. • To reduce switching noise, each of these pins should be connected to Vref through a capacitor.	
LVROUT RVROUT	44 5	• 0.5-dB step volume output pin	

Continued on next page.

Continued from preceding page.

Pin Name	Pin No.	Function	Equivalent circuit
LTIN RTIN	43 6	• Equalizer input pin	
LF1C1 LF1C2 LF1C3 RF1C1 RF1C2 RF1C3	42 41 40 7 8 9	• Equalizer F1 band circuit filter configuration capacitor connection pins. Connect capacitor between LF1C1 (RF1C1) and LF1C2 (RF1C2) LF1C2 (RF1C2) and LF1C3 (RF1C3)	
LF2C1 LF2C2 LF2C3 RF2C1 RF2C2 RF2C3	39 38 37 10 11 12	• Equalizer F2 band circuit filter configuration capacitor connection pins. Connect capacitor between LF2C1 (RF2C1) and LF2C2 (RF2C2) LF2C2 (RF2C2) and LF2C3 (RF2C3)	
LF3C1 LF3C2 LF3C3 RF3C1 RF3C2 RF3C3	36 35 34 13 14 15	• Equalizer F3 band circuit filter configuration capacitor connection pins. Connect capacitor between LF3C1 (RF3C1) and LF3C2 (RF3C2) LF3C2 (RF3C2) and LF3C3 (RF3C3)	
LTOUT RTOUT	33 16	• Equalizer output pins	
LFIN RFIN	32 17	• Fader block input pins • Drive at low impedance.	
LFOUT LROUT RFOUT RROUT	31 30 18 19	• Fader output pins. Attenuation is possible separately for the front end and rear end. The attenuation amount is the same for L and R.	
Vref	57	• Connect a capacitor of a few tens of μF between Vref and AVSS (VSS) as a 0.55 VDD voltage generator, current ripple countermeasure.	
LVref RVref	55 58	• Internal analog system ground pins.	


Continued on next page.

LC75410E, 75410W


Continued from preceding page.

Pin Name	Pin No.	Function	Equivalent circuit
VDD	56	Power supply pin	
DVSS	27	Logic system ground pin	
LAVSS RAVSS	29 22	Analog system ground pins	
$\overline{\text{MUTE}}$	23	- External muting control pin - Setting this pin to V_{SS} level sets forcibly fader volume block to $-\infty$ level.	
TIM	20	- Timer pin when there is no signal in the zero-cross circuit. - Forcibly set data when there is no zero-cross signal, from the time the data is set until the timer ends.	
CL DI	26 25	Input pin for serial data and clock used for control	
CE	24	- Chip enable pin. Data is written to the internal latch and the analog switches are operated when the level changes from High to Low. - Data transfer is enabled when the level is High.	
TEST	28	- Dedicated IC test pin. - Normally this pin is used connected to GND.	
NC	21	No Connect pin.	

0.5-dB Volume Block Equivalent Circuit Block Diagram

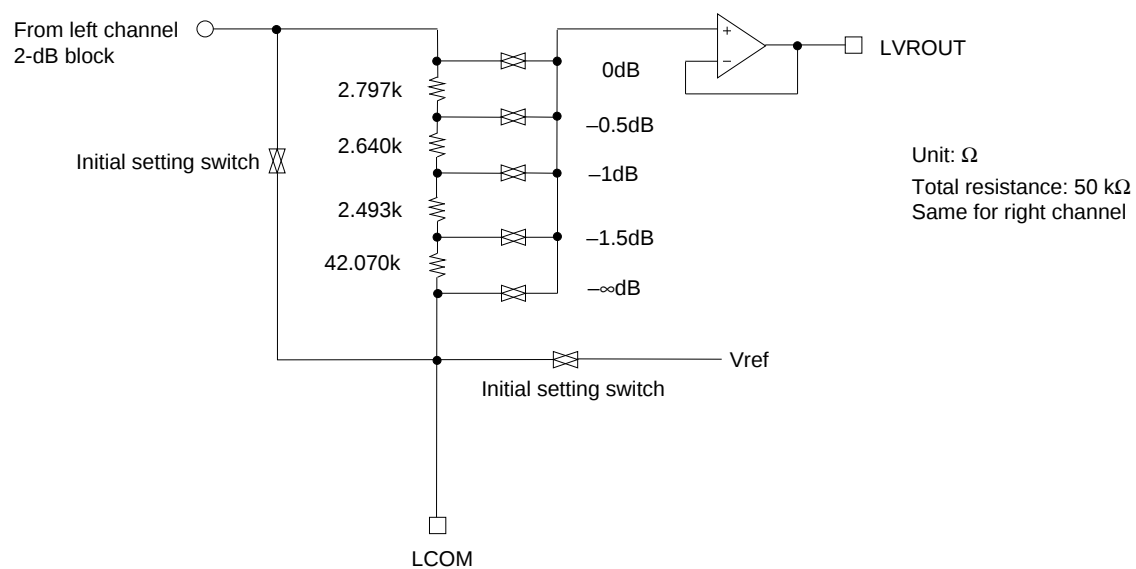

3-Band Graphic Equalizer Block Equivalent Circuit Diagram

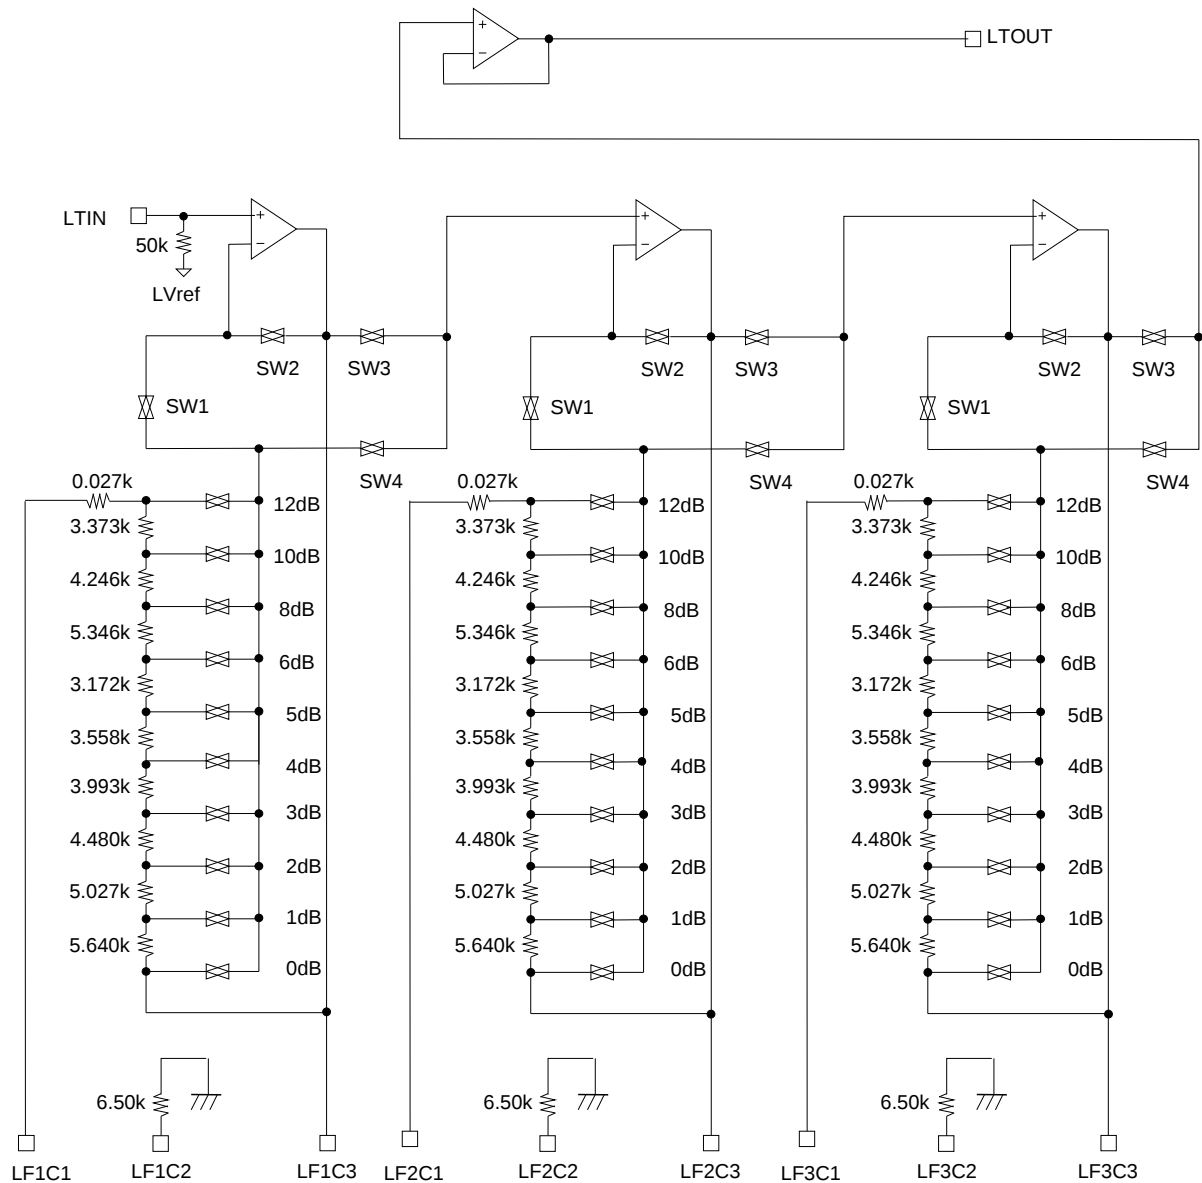


Unit: Ω
 Total resistance: 38.861 k Ω
 Same for right channel

During boost, SW 1 and SW 3 are ON, during cut SW 2 and SW 4 are ON,
 and when 0 dB, 0 dB SW and SW 2 and SW 3 are ON.

F1/F2/F3 Band Circuit

The equivalent circuit and the formula for calculating the external RC with a mean frequency of 1 kHz are shown below.

• F1/F2/F3 band equivalent circuit block diagram

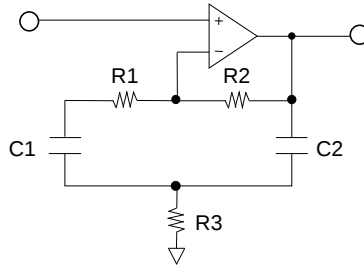

• Calculation example

Specification Mean frequency: $f_0 = 1 \text{ kHz}$

Gain during maximum boost: $G_{+12 \text{ dB}} = 12 \text{ dB}$

Let us use $R_1 = 0.027 \text{ k}\Omega$, $R_2 = 38.861 \text{ k}\Omega$ and $C_1 = C_2 = C$.

1. Calculate R_2 with $G_{+12 \text{ dB}} = 12 \text{ dB}$:

$$G_{+12 \text{ dB}} = 20 \times \text{LOG}_{10} \left(1 + \frac{R_2}{2R_3 + R_1} \right)$$

$$R_3 = \left(\frac{R_2}{10^{G/20} - 1} - R_1 \right) \div 2 \cong 6.5 \text{ k}\Omega$$

2. Calculate C with the center frequency $f_0 = 1 \text{ kHz}$


$$f_0 = \frac{1}{2\pi \sqrt{(R_1 + R_2)R_3 C_1 C_2}}$$

$$C = \frac{1}{2\pi f_0 \sqrt{(R_1 + R_2)R_3}} = \frac{1}{2\pi \times 1000 \sqrt{38888 \times 6500}} = 0.010 \times 10^{-6} \cong 0.01 \mu\text{F}$$

3. Calculate Q :

$$Q = \frac{1}{\sqrt{(R_1 + R_2)R_3}} \times \frac{R_3(R_1 + R_2)}{(2R_3 + R_1)} \cong 1.22$$

Fader Volume Block Equivalent Circuit Block Diagram

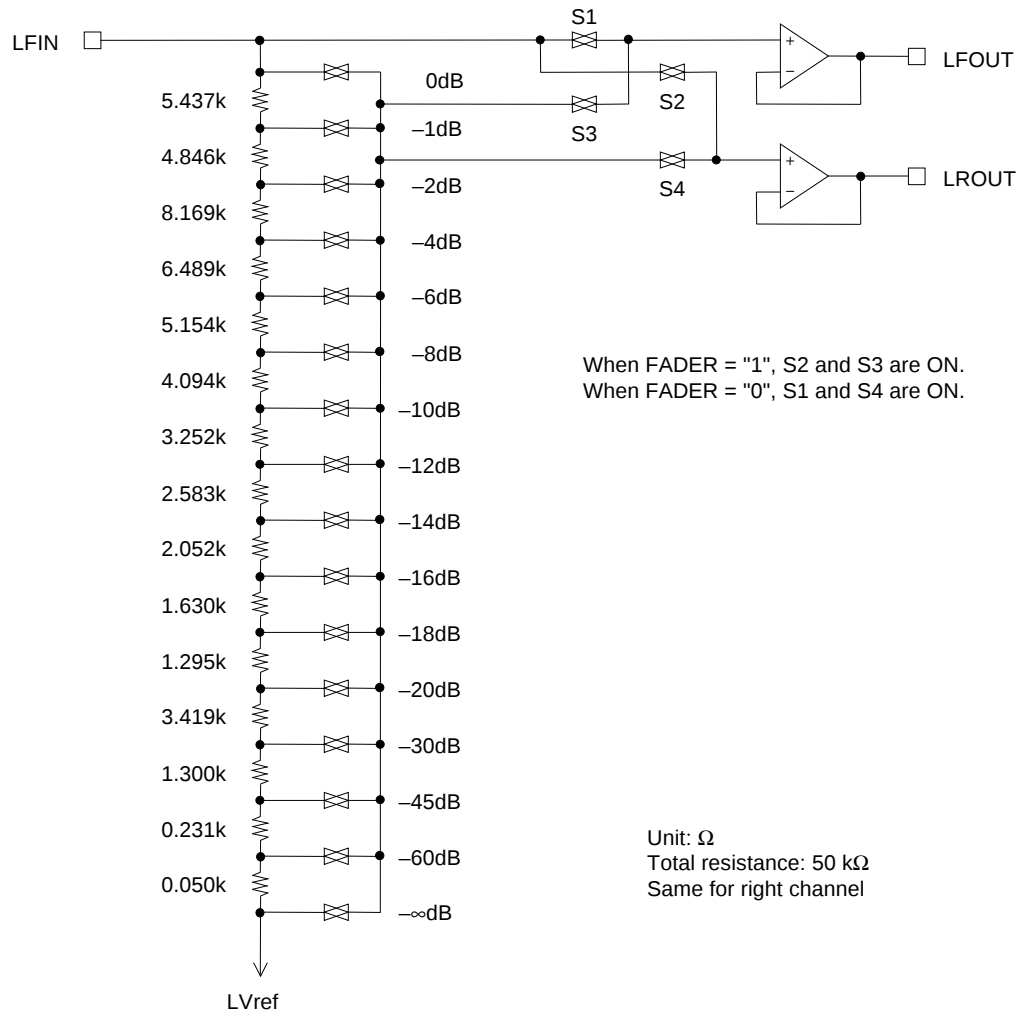

When $-\infty$ data is sent to the main volume, S1 and S2 become open, and S3 and S4 simultaneously become ON.


Usage Cautions

(1) Data transmission at power ON

- The status of internal analog switches is unstable at power ON. Therefore, perform muting or some other countermeasure until the data has been set.
- At power ON, initial setting data must be sent once in order to stabilize the bias of each block in a short time.

(2) Description of zero-cross switching circuit operation

The LC75410E and 75410W have a function to switch zero-cross comparator signal detection locations, enabling the selection of the optimum detection location for blocks whose data is to be updated. Basically, the switching noise can be minimized by inputting the signal immediately following the block whose data is to be updated to the zero-cross comparator, so it is necessary to switch the detection location every time.

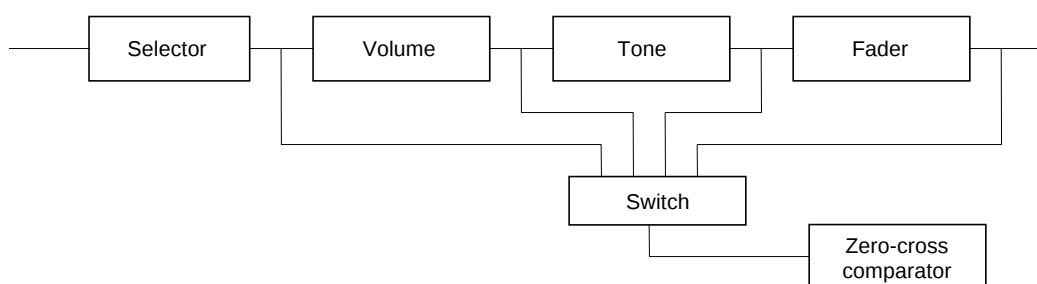

LC75410E, 75410W Zero-Cross Detection Circuit

(3) Zero-cross switching control method

The zero-cross switching control method consists of setting the zero-cross control bits to the zero-cross detection mode (D36, D37 = 0), and specifying the detection blocks (D38, D39) before transmitting the data. These control bits are latched immediately following data transfer, that is to say beforehand in sync with the falling edge of CE, so when updating data of volumes, etc., it is possible to perform mode setting and zero-cross switching with one data transfer. An example of control when updating the data of the volume block is shown below.

D36	D37	D38	D39
0	0	1	0

Zero-cross detection mode setting
Volume block setting

(4) Zero-cross timer setting

If the input signal becomes lower than the zero-cross comparator detection sensitivity, or if only low-frequency signals are input, zero-cross detection continues to be impossible, and data is not latched during this time.

The zero-cross timer can set a time for forcible latch during such a status when zero-cross detection is not possible.

For example, to set 25 ms,

using $T = 0.69CR$ and $C = 0.033 \mu\text{F}$,

we obtain

$$R = \frac{25 \times 10^{-3}}{0.69 \times 0.033 \times 10^{-6}} \approx 1.1 \text{ M}\Omega$$

Normally, a value between 10 ms and 50 ms is set.

(5) Cautions related to serial data transfer

1. To ensure that the high-frequency digital signals transferred to the CL, DI, and CE pins do not spill over to the analog signal block, either guard these signal lines with a ground pattern, or perform transmission using shielded wires.
2. The data format of the LC75410E and 75410W uses 8-bit addresses and 44-bit data. When sending data using multiples of 8 (when sending 48 bits), use the method described in Figure 1.

Method for Receiving Data Using Multiple of 8 of LC75410E and 75410W






























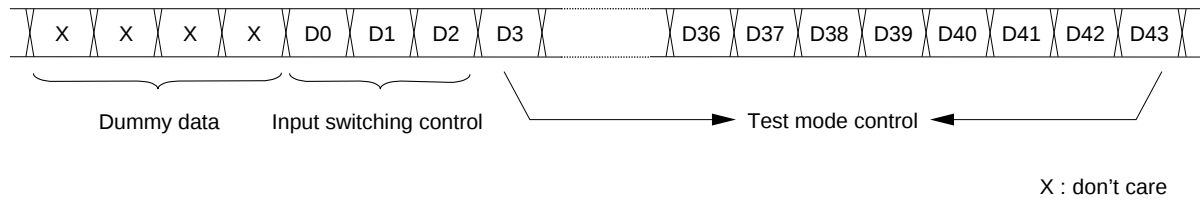




Figure 1

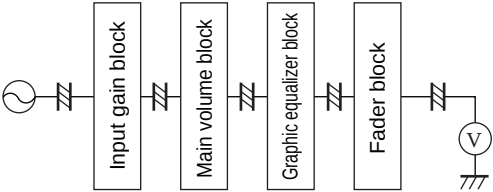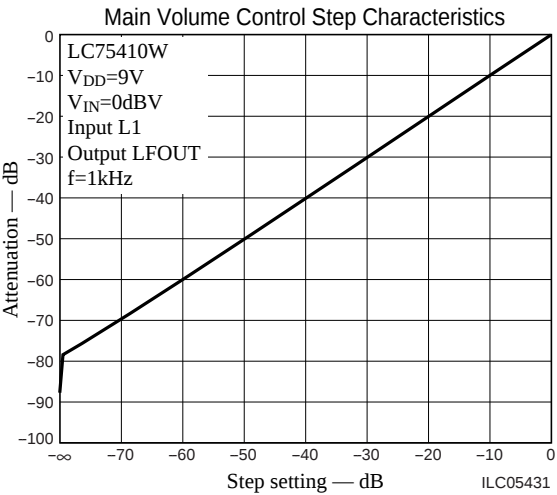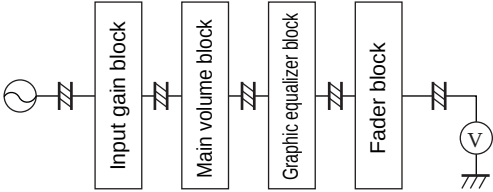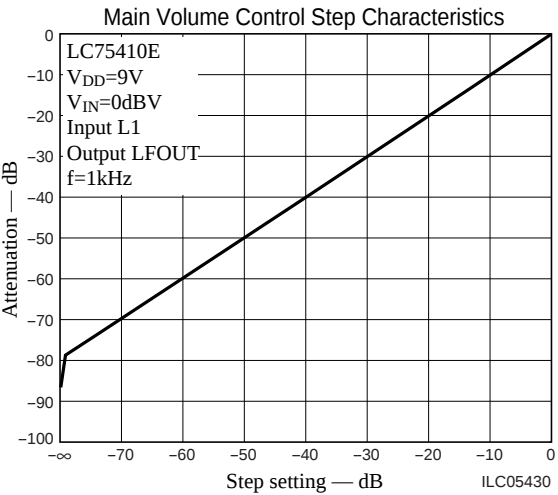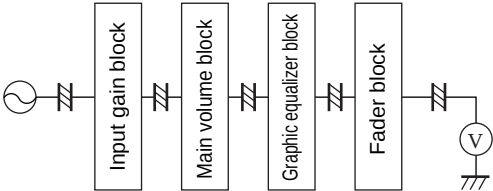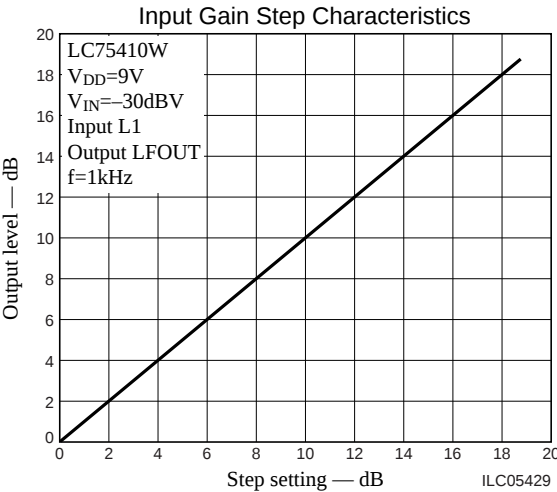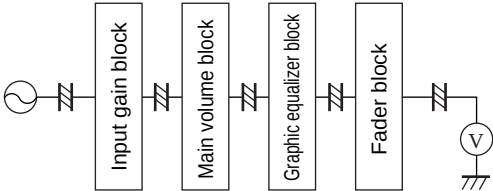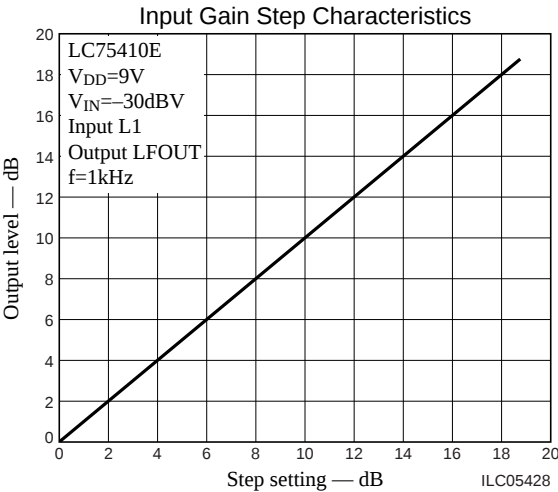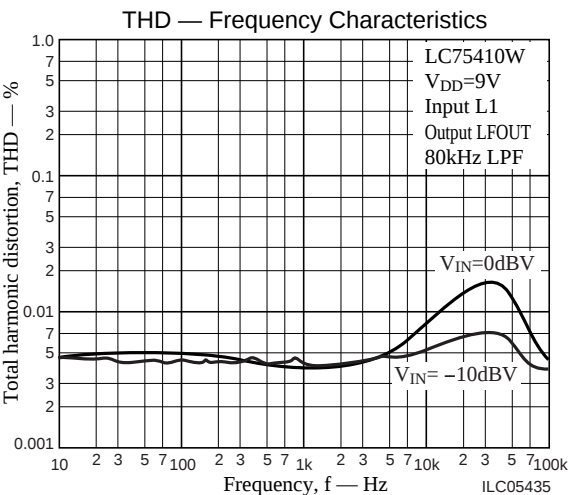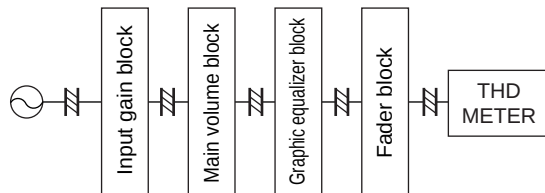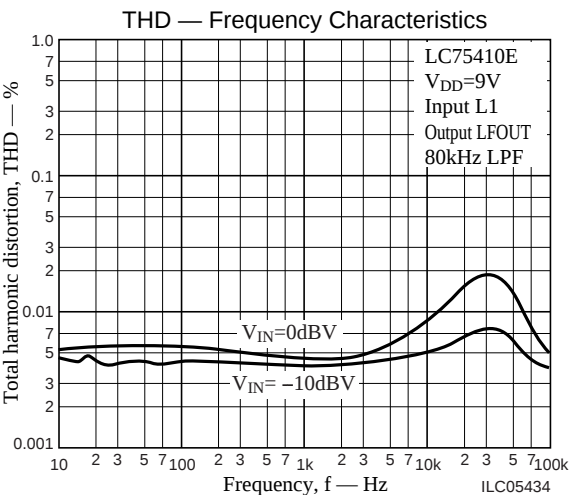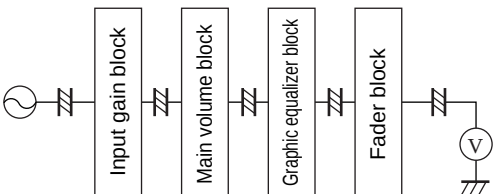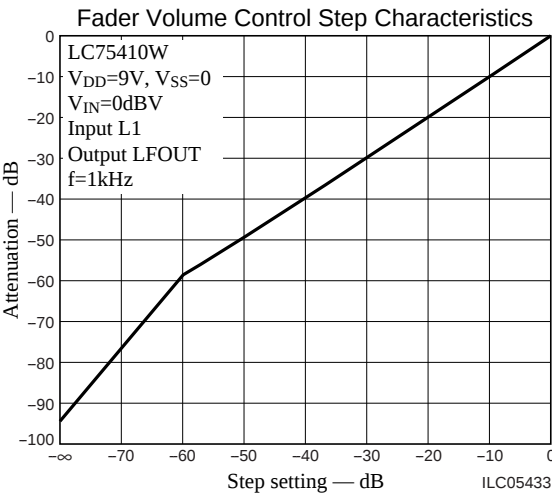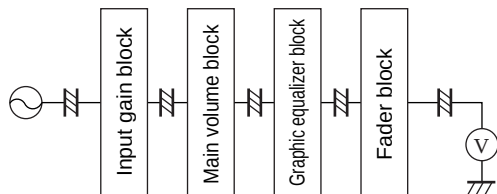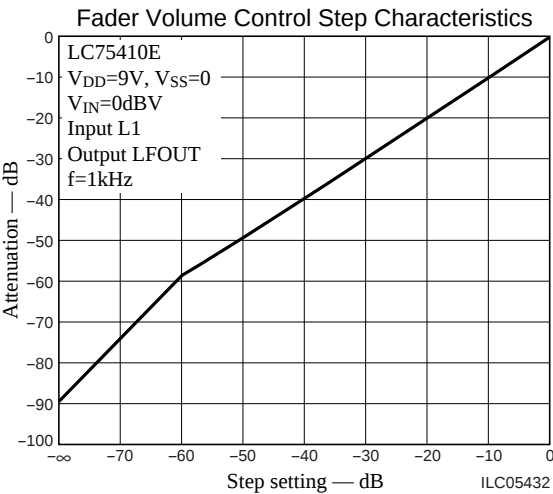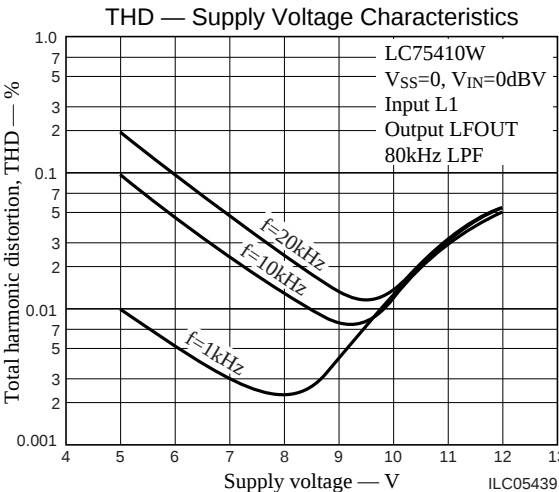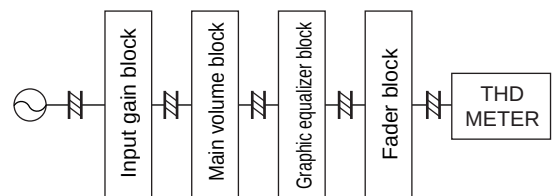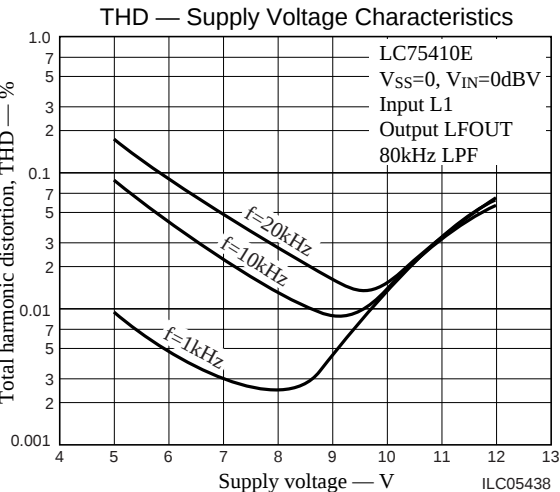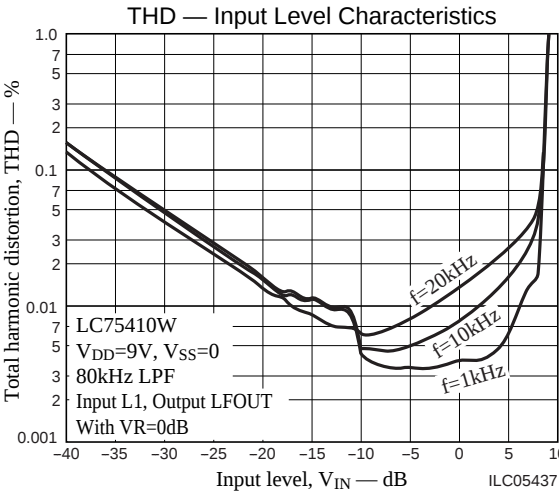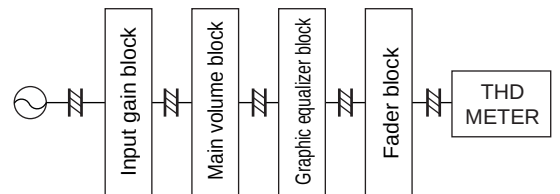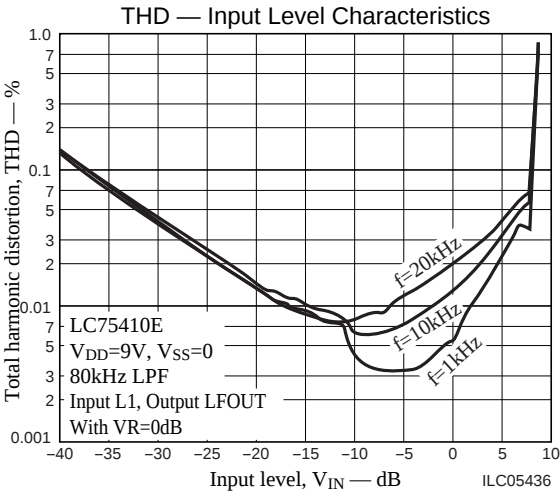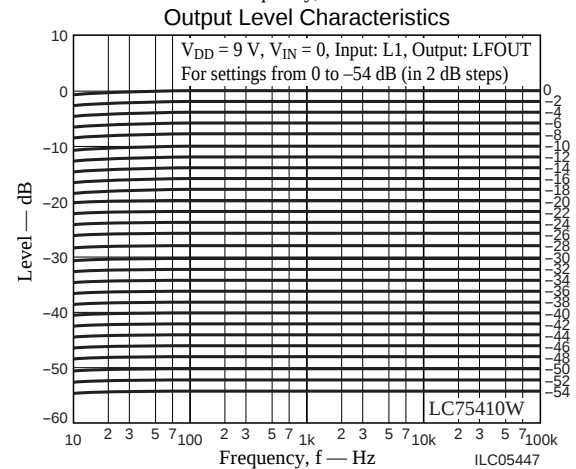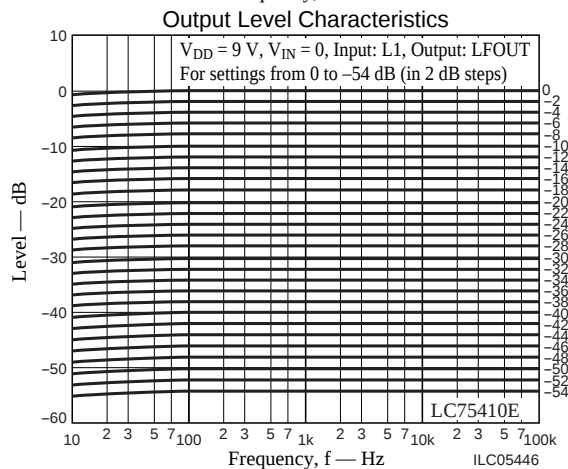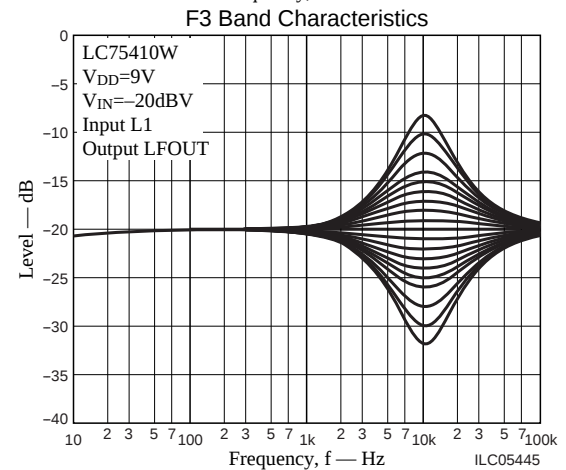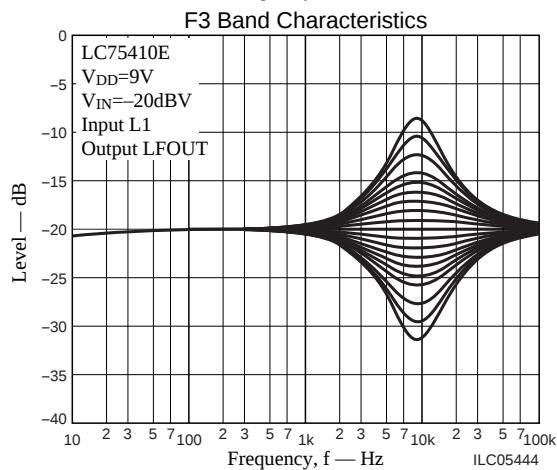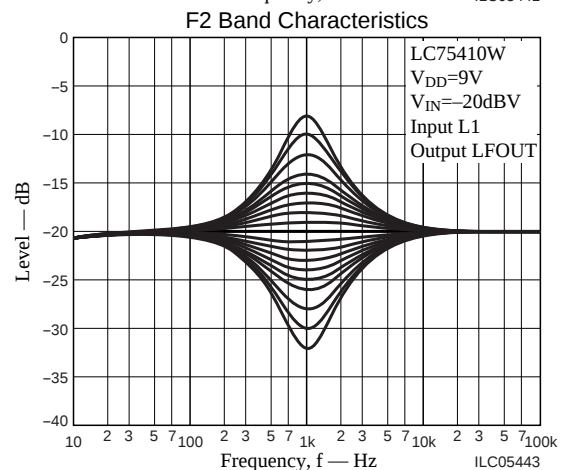

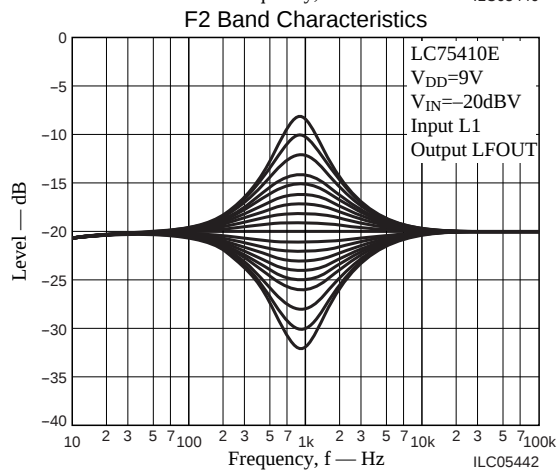

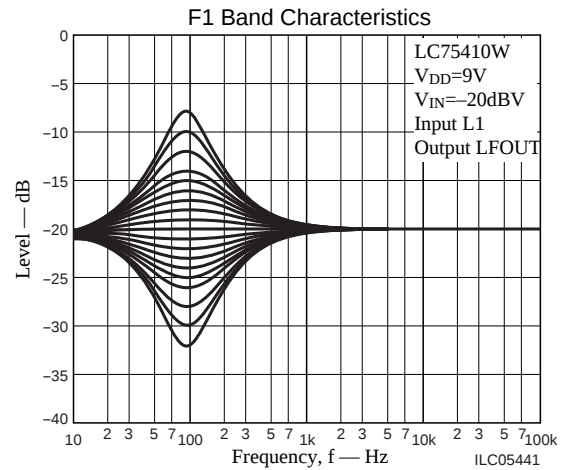

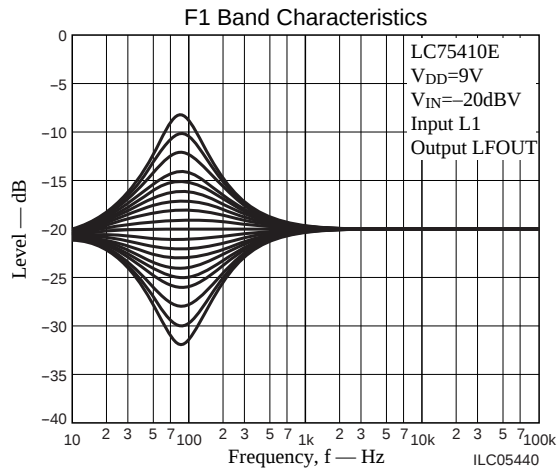

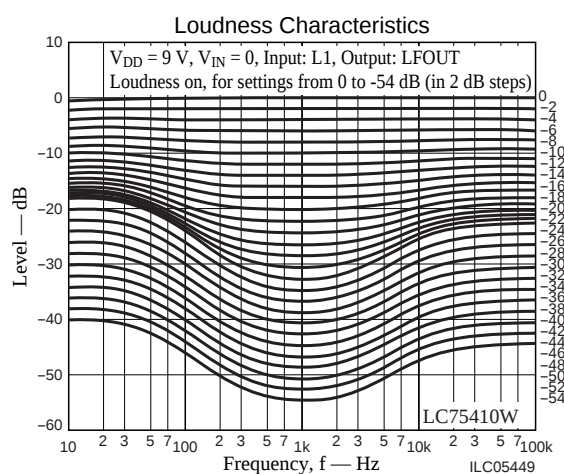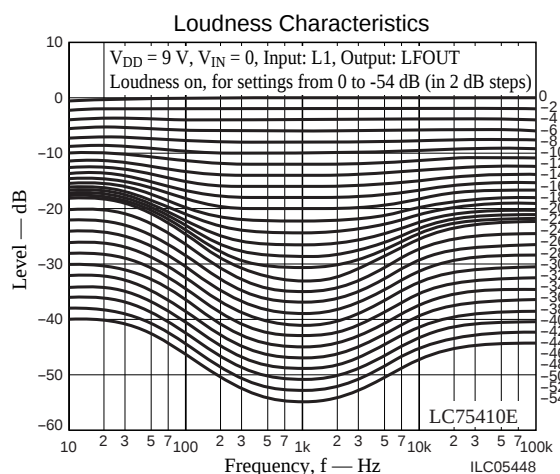

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of October, 2001. Specifications and information herein are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.